


TOP OF SILT FENCE MUST BE AT LEAST 1' ABOVE THE TOP OF THE WASHED STONE

4' MIN.

SILT FENCE

FRONT VIEW

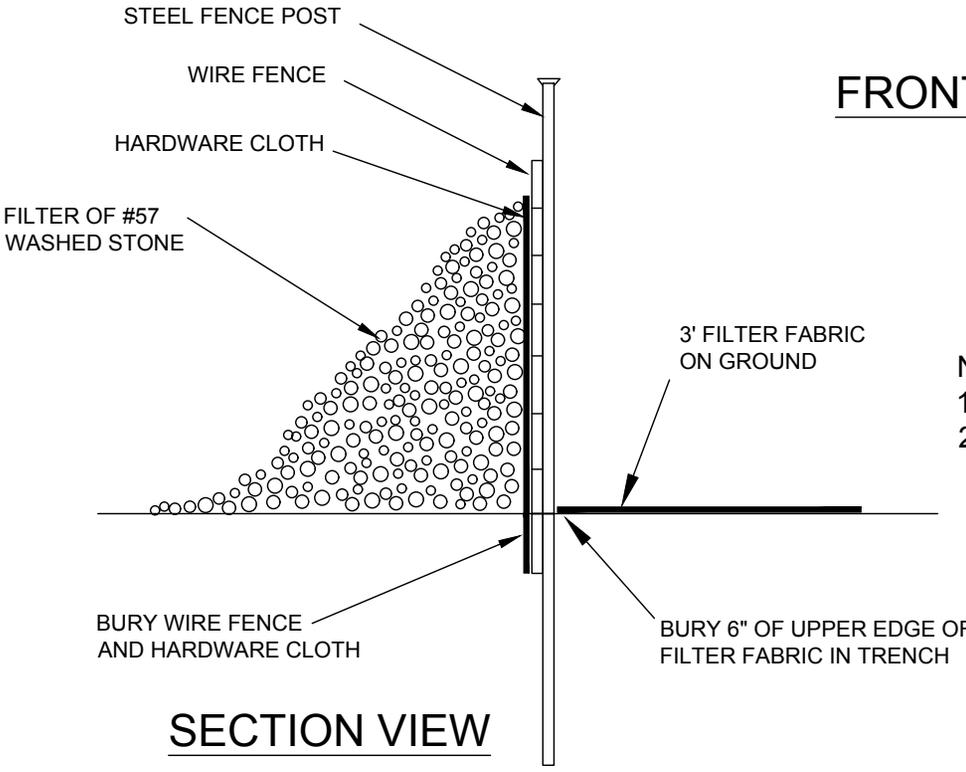

STEEL FENCE POST

WIRE FENCE

HARDWARE CLOTH

FILTER OF #57 WASHED STONE

3' FILTER FABRIC ON GROUND

BURY WIRE FENCE AND HARDWARE CLOTH

BURY 6" OF UPPER EDGE OF FILTER FABRIC IN TRENCH

SECTION VIEW

STEEL FENCE POST SET MAX 2' APART MIN. 18" INTO SOLID GROUND

BURY WIRE FENCE, FILTER FABRIC, AND HARDWARE CLOTH IN TRENCH

NOTES:

1. Hardware cloth and gravel should overlay the silt fence at least 12 inches.
2. Stone outlets should be placed on low elevation areas of silt fence and based on field conditions.

MAINTENANCE:

1. Per NCG-01, inspect outlet at least once a week and after each 1 inch or greater rainfall event. Complete any required repairs immediately. Freshen stone when sediment accumulation exceeds 6 inches. Keep mesh free of debris to provide adequate flow.
2. Remove sediment when half of stone outlet is covered.
3. Replace stone as needed to facilitate de-watering.