Coddle Creek Tributary (Indian Run) Stream Restoration EEP Project # 94 DENR Contract # 5360

Annual Monitoring Report Year 4 of 5 Cabarrus County, North Carolina



Prepared for:

North Carolina Department of Environmental Quality Division of Mitigation Services (DMS) 1652 Mail Service Center Raleigh, NC 27699-1652

Construction Completed: March 27, 2011 Data Collected: September & October 2015 Report Submission: December 2015



Coddle Creek Tributary (Indian Run) Stream Restoration Project # 94

Annual Monitoring Report Year 4 of 5 Cabarrus County, North Carolina

TABLE OF CONTENTS

1.0	EXECUTIVE SUMMARY	1
2.0	METHODOLOGY	3
3.0	REFERENCES	4
2.0		

APPENDICES

APPENDIX A PROJECT VICINITY MAPS AND BACKGROUND TABLES

Figure 1 – Restoration Site Vicinity Map

Figure 2 – USGS Concord SE Quad Map

Table 1a – Project Components

Table 1b – Component Summations

Table 2 – Project Activity and Reporting History

Table 3 – Project Contacts

Table 4 – Project Attributes

APPENDIX B VISUAL ASSESSMENT DATA

Figure 3 – Current Condition Plan View

Table 5a – Visual Stream Morphology Stability Assessment – Upper Reach

Table 5b – Visual Stream Morphology Stability Assessment – Lower Reach

Table 6 – Vegetation Condition Assessment

Photos – Permanent Photo Points

Photos – Vegetation Plots

APPENDIX C VEGETATION PLOT DATA

Table 7 – Vegetation Plot Mitigation Success Summary

Table 8 – CVS Vegetation Metadata

Table 9 – Planted and Total Stem Counts (Species by Plot with Annual Means)

APPENDIX D STREAM SURVEY DATA

Cross-Sections with Annual Overlays Longitudinal Profiles with Annual Overlays Pebble Count Plots with Annual Overlays

Table 10a – Baseline Stream Data Summary – Upper Reach

Table 10b – Baseline Stream Data Summary – Lower Reach

Table 11a – Monitoring Data – Dimensional Morphology Summary

Table 11b – Monitoring Data – Stream Reach Data Summary – Upper Reach

Table 11c – Monitoring Data – Stream Reach Data Summary – Lower Reach

APPENDIXE HYDROLOGIC DATA

Table 12 – Verification of Bankfull Events

1.0 EXECUTIVE SUMMARY

The Coddle Creek Tributary (Indian Run) Stream Restoration Project, completed in March 2011, enhanced (level 1) or restored a total of 2,270 linear feet of stream in the Upper Rocky River watershed including restoring 6.17 acres of riparian buffer. In addition, approximately 1,540 linear feet of stream was preserved within the 19.61 acre conservation easement. The project is located in the USGS Hydrologic Unit (HU) 03040105020010 of the Yadkin Pee-Dee River Basin. This HU is within the Division of Mitigation Service's (DMS) Upper Rocky River Local Watershed Plan and is also listed as a Targeted Local Watershed (TLW) in DMS's Lower Yadkin Pee-Dee River Basin Restoration Priorities Plan 2009. The project site, which is protected by a 19.61-acre permanent conservation easement held by the State of North Carolina, is situated in Cabarrus County in the Southern Outer Piedmont ecoregion of the Piedmont physiographic province. Coddle Creek, from 0.2 miles upstream of NC Highway 73 (NC-73) to Rocky River, is currently listed on the NC 303(d) List as impaired due to turbidity (NCDENR 2012). In addition to the current non-supporting use classification for the lower portions of Coddle Creek, anticipated high rates of development in the watershed pose critical challenges in managing the region's aquatic resources. The project goals and objectives are listed below.

Project Goals

- Improve local water quality by reestablishing stream stability and capacity to transport watershed flows and sediment load.
- Provide additional floodplain storage by increasing the capacity of the stream to mitigate flood flows.
- Restore aquatic and riparian habitat.
- Reducing non-point source sedimentation and nutrient inputs into the project reaches.

Project Objectives

- Restore/Enhance (level 1) 2,270 linear feet of stable stream channel morphology, supported by instream habitat and grade/bank stabilization structures.
- Preserve 852 linear feet of stream within the conservation easement.
- Eliminate accelerated bank erosion by creating a bankfull bench, floodplain, and laying back slopes.
- Reestablish a native riparian buffer.

Vegetation Assessment

The vegetative success of the restoration site is based on criteria established in the USACE Stream Mitigation Guidelines (2003). Vegetation monitoring will be considered successful if a minimum of 260 planted stems/acre are surviving at the end of five years. The interim measure of vegetative success for the site will be the survival of a minimum of 320 planted stems/acre in year three and 288 stems/acre at the end of year four. The Monitoring Year 4 (MY4) stem counts are located in Tables 7 and 9 in Appendix C. Currently, only Vegetation Plot 8 is not meeting the interim measure of success (283 stems/acre). However, when including volunteer stems, Plot 8 exceeds the interim success criteria (5,787 total stems/acre). Vegetation throughout the reach appears to be growing at acceptable rates and the mortality rate appears to be fairly low. Areas noted in previous monitoring years as having sparse vegetation or being bare now include herbaceous plants and small woody stems.

Cattails (*Typha latifolia*) growth has notably decreased throughout both reaches. Only one area of cattails was noted during monitoring. The location of the cattails are noted on the CCPV and represent

approximately 24 linear feet of the reach or 1 % of the total reach. The areas of current and historical cattails will continue to be monitored. Other invasive plant species noted include lespedeza (*Lespedeza* sp.), kudzu vine (*Pueraria lobata*), and mimosa (*Albizia julibrissin*). Kudzu vine is sporadic throughout the upper reach and some mimosa trees have reached the canopy. The species will be monitored for spread. The project site will be treated for invasive species until project closeout by a DMS invasive species contractor. Lespedeza is found commonly throughout both reaches, sometimes overtaking the established vegetation plots. Vegetation in these plots will be monitored for signs of stress due to competition with lespedeza. No new easement encroachments were noted.

Stream Assessment

The upper and lower reaches of the restoration project were observed to be in stable condition. The channel's profile and cross-sections adjusted minimally from the baseline conditions. The channel accesses its floodplain and evidence of bankfull events were observed during Year 4 monitoring. This evidence included the presence of wrack lines, sediment deposits, and a crest gauge reading of 10.5" above bankfull. The substrate continues to shows a gradual change to more coarse material in both reaches.

Two areas of bar formation were noted at Sta. 25+29-25+62 and Sta. 26+50-26+67 on the upper reach. The bar formation on the lower reach at Sta. 11+35 was not present this monitoring year. Areas of bank erosion noted in previous monitoring reports were stable this year and will continue to be monitored. The terrace rill at approximately Sta. 18+00 on the left bank of the upper reach was noted in the Monitoring Year 1 report, but appears to have stabilized. This area will continue to be monitored for erosion. One headcut was noted at Sta. 17+75 on the lower reach. The headcut is outside of the stream channel and seems to be due to overland flow. A debris jam noted at Sta. 15+60 on the lower reach in the previous monitoring year has been resolved. A small area of bare bank was noted just downstream of cross section 7 on the right bank. A relict beaver lodge was noted at the downstream section of the bare area. All problem areas are noted on the Current Conditions Plan View (CCPV) sheets in Appendix B.

In response to continued observations of beaver activity in the stream, DMS has placed the project site on a quarterly inspection schedule for beaver and beaver dam removal with the USDA Animal and Plant Health Inspection Service (USDA-APHIS).

Pebble count data for the cross sections indicate similar or coarser values compared to baseline except in cross sections 1 and 8. This indicates a good movement of material at least in the upstream parts of the upper reach. The smaller particle size at cross section 1 may be from the upstream terrace rill erosion. The lower reach riffle at cross section 8 still exhibits a small particle size making up the riffle section. Effects from the relict beaver dam upstream of this area may play a role in the type of bed material observed this monitoring year. The riffle at cross section 5 exhibits larger particle sizes. As the lower reach was constructed as an offline segment, these values are not unexpected. It will take longer for coarser material to progress to the lower reach from upstream areas. Since the cross section dimensions have remained relatively the same for the lower reach, the sections are stable despite the smaller bed material.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting documentation formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly the Restoration Plan) documents available on DMS's website. All raw data supporting the tables and figures in the appendices is available from DMS upon request.

2.0 METHODOLOGY


The following methods were utilized during the Year 4 monitoring for data collection and post-processing:

- Geomorphic topographic data collections were performed in the field using a survey grade GPS such that each survey point has three-dimensional coordinates, and is georeferenced (NAD83-State Plane Feet – FIPS3200).
- Longitudinal stationing was developed using the as-built survey thalweg as a baseline.
- The particle size distribution protocol used was the Modified-Wolman pebble count.
- The CVS Level 2 methodology was utilized for the vegetation plot data collection.

3.0 REFERENCES

- HDR Engineering, Inc. 2007. Final Stream Restoration Plan for Indian Run (Trib. to Coddle Creek).
- HDR Engineering, Inc. 2009. Indian Run Stream Restoration Final Plans (90%).
- HDR Engineering, Inc. 2011. Baseline Monitoring and As Built Baseline Report.
- HDR Engineering, Inc. 2012. Monitoring Report Year 1 of 5.
- Lee, Michael T., R. K. Peet, S. D. Roberts, and T. R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation. Version 4.0. (http://cvs.bio.unc.edu/methods.htm)
- North Carolina Ecosystem Enhancement Program. 2011. Procedure Guidance and Content Requirements for EEP Monitoring Reports. Version 1.4 (http://www.nceep.net/business/EEP_Mon_Rep_Temp_1.3_01-15-10.pdf)
- SEPI Engineering & Construction, Inc. 2013. Coddle Creek Tributary (Indian Run) Annual Monitoring Report Year 2 of 5.
- SEPI Engineering & Construction, Inc. 2014. Coddle Creek Tributary (Indian Run) Annual Monitoring Report Year 3 of 5.
- U.S. Army Corps of Engineers, Wilmington District. 2003. Stream Mitigation Guidelines. North Carolina Division of Water Quality (DWQ), U.S. Environmental Protection Agency, Region IV (EPA), Natural Resources Conservation Service (NRCS) and the North Carolina Wildlife Resources Commission (WRC).


Appendix A Project Vicinity Map and Background Tables

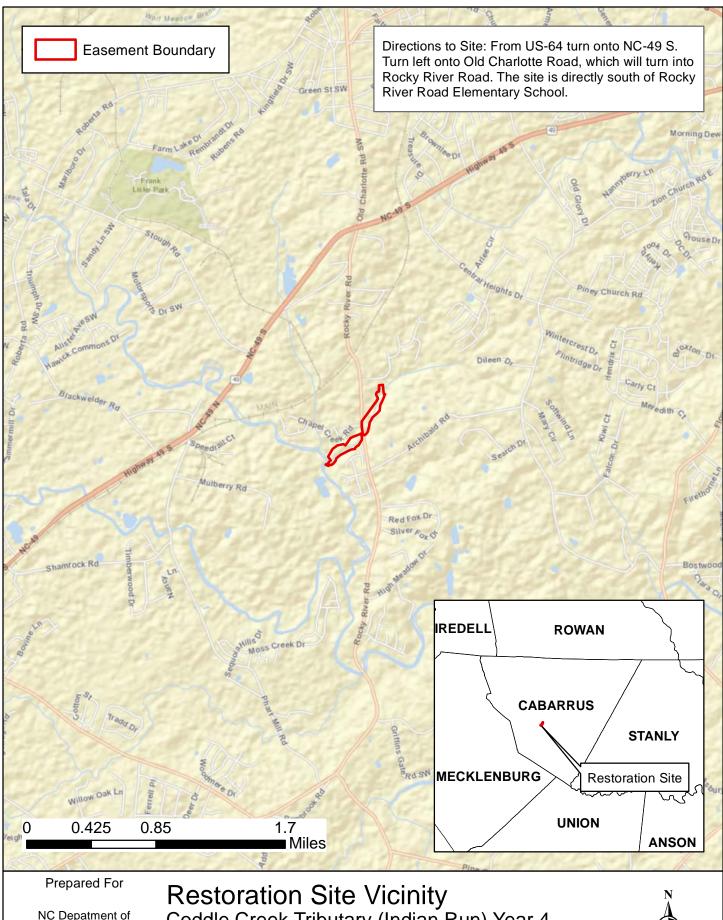

NC Depatment of **Environmental Quality**

Coddle Creek Tributary (Indian Run) Year 4 Division of Mitigation Services Cabarrus County, NC December 2015 Project #94 Figure 1



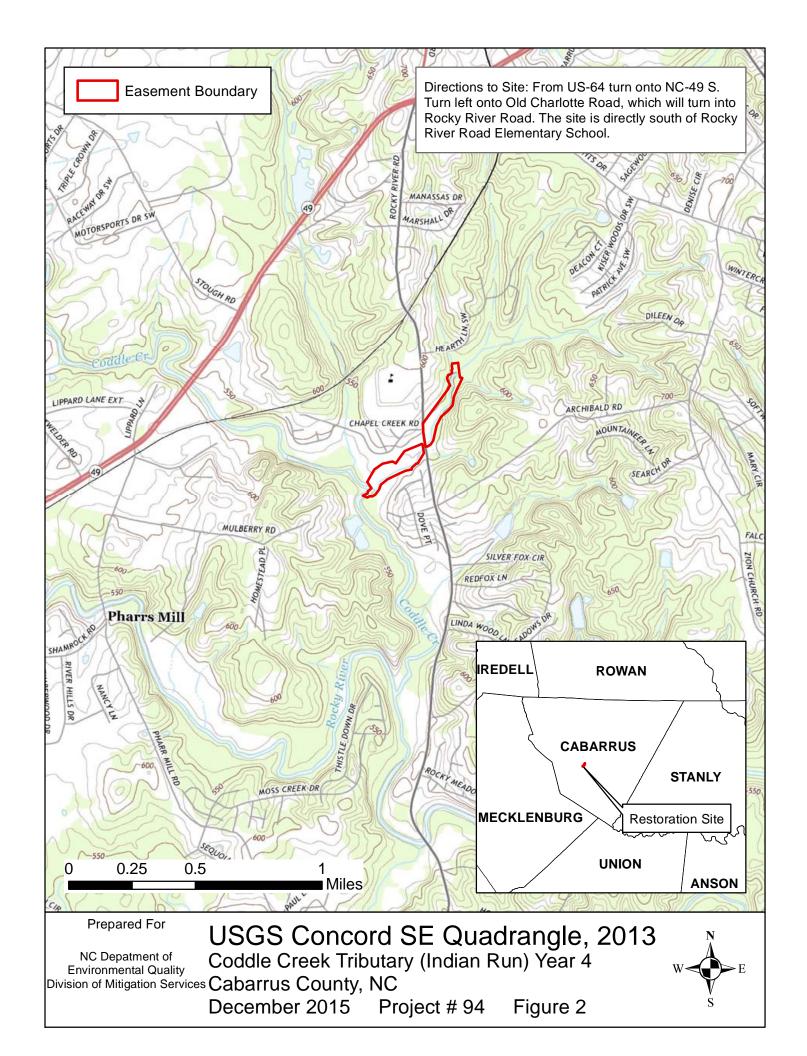

				Т	able 1a. Proj	ect Compone	nts		
				Coddl	e Creek Tribu	itary (Indian R	un) / 94		
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Mitigation Ratio	Mitigation Units	BMP Elements	Comment
Reach 1 - Upper	1275 lf	E (Level 1)	P3	1275 lf	15+00-26+26 & 26+46- 27+95	1.5:1	850		Restored bankfull dimension within the existing channel, utilized a partial floodplain bench to restore floodprone conditions, and enhanced existing pattern and profile.
Reach 1 - Upper	20 lf	E (Level 1)	P3	20 lf	26+26-26+46	3:1	7		Restored bankfull dimension within the existing channel, utilized a partial floodplain bench to restore floodprone conditions, and enhanced existing pattern and profile.
Reach 1 - Upper	415 lf	Р		415 lf	07+52-09+10 & 09+34- 11+72 & 14+45-14+64	10:1	42		Preserved channel in its existing condition within the conservation easement.
Reach 1 - Upper	327 lf	Р		297 lf*	09+10-9+34 & 11+72-14+45	20:1	15		Preserved channel in its existing condition within the utility easement. *30 feet of sanitary sewer easement will not receive mitigation credits
Reach 2 - Lower	735 lf	R	P2	975 lf	10+00-19+75	1:1	975		Fully restored pattern, dimension and profile, excavated a new channel within an adjoining floodplain bench to restore floodplain conditions.
Reach 2 - Lower	434 lf	Р		434 lf	21+72-23+58 & 24+45- 26+93	20:1	22		Preserved channel in its existing condition within the utility easement.
Reach 2 - Lower	394 lf	Р		394 lf	19+75-21+72 & 23+58- 24+45 & 26+93-28+03	10:1	39		Preserved channel in its existing condition within the conservation easement.


	Table 1b. Component Summations Coddle Creek Tributary (Indian Run) / 94										
		Stream	Riparian Wetland (Ac)			Potential	Total				
Restoration Level	Stream (If)	Mitigation Units	Riverine	Non- Riverine	Planted Area (Ac)	Buffer Area (Ac)	Conservation Area (Ac)	ВМР			
Restoration (Lower)	975	975			4.21	2.58	10.11				
Enhancement (Upper)	1295	857			4.30	3.59	9.50				
Preservation	1540	118				1.89					
Totals (Feet/Acres)					8.51	8.06	19.61				


	Table 2. Project Activity and Reporting His Coddle Creek Tributary (Indian Run) / 9	
	lapsed Time Since Grading Complete: 4 yrs lapsed Time Since Planting Complete: 4 yrs Number of Reporting Years: 4	
	Data Collection	Completion or
Activity or Deliverable	Complete	Delivery
Restoration Plan	Jun-07	Aug-07
Final Design – Construction Plans	Jun-07	Jul-09
Construction/Grading	NA	Mar-11
Planting	NA	Mar-11
Final Inspection	NA	Mar-11
Monitoring – baseline)	May-11	Aug-11
Year 1 Monitoring	5/29/2012 - 5/30/2012	Sep-12
Year 2 Monitoring	Nov-13	Mar-14
Year 3 Monitoring	Oct-14	Dec-14
Year 4 Monitoring	Oct-15	Nov-15
Year 5 Monitoring		

	Table 3. Project Contacts Table
	Coddle Creek Tributary (Indian Run) / 94
Designer	HDR Engineering Inc. of the Carolinas
	3733 National Drive, Suite 207, Raleigh, NC 27612
Primary project design POC	Jonathan Henderson, PE (919) 785-1118
Construction Contractor	Land Mechanic Designs, Inc.
	126 Circle G Lane, Willow Spring, NC 27592
Construction contractor POC	Lloyd Glover, (919) 639-6132
Survey Contractor	Stewart Proctor Pllc
	319 Chapanoke Road #106, Raleigh, NC 27603
Survey contractor POC	Herb Proctor, (919) 799-1855
Planting Contractor	HARP, Inc.
	301 McCullough Drive, 4th Floor, Charlotte, NC 28262
Planting contractor POC	Alan Peoples, (704) 841-2841
Seeding Contractor	Land Mechanic Designs, Inc.
	126 Circle G Lane, Willow Spring, NC 27592
Contractor point of contact	Lloyd Glover, (919) 639-6132
Seed Mix Sources	Green Resource, Charlotte, NC
	Phone: (704) 927-3100
Nursery Stock Suppliers	Cure Nursery, Pittsboro, NC - (919) 542-6186
	ArborGen, Blenheim, SC - (843) 528-3203
	Foggy Mountain Nursery Ilc, Creston, NC - (336) 384-5323
	Habitat and Restoration Plants, Lexington, NC - (336) 362-6776
	NC Division of Forest Resources, Greensboro, NC - (919) 731-7988
Monitoring Performers - Baseline & Year 1	HDR Engineering Inc. of the Carolinas
	3733 National Drive, Suite 207, Raleigh, NC 27612
Monitoring Performers - Year 2 - 4	SEPI Engineering & Construction, Inc.
	1025 Wade Avenue, Raleigh, NC 27605
Stream Monitoring POC	Phil Beach, PWS (919) 787-9977
Vegetation Monitoring POC	Kim Hamlin, Project Scientist (919) 787-9977

Table 4. Pro	oject Attribute Table					
	ibutary (Indian Run) / 94					
Project County	Cabarrus					
Physiographic Region	Piedmont					
Ecoregion	Southern Outer Piedmont					
Project River Basin	Yadkin / Pee Dee					
USGS HUC for Project (14 digit)	3040105020010					
NCDWQ Sub-basin for Project	03 - 07 - 11					
Within extent of EEP Watershed Plan?	Upper Rocky River					
WRC Hab Class (Warm, Cool, Cold)	Warm					
% of project easement fenced or demarcated	100% marked with EEP easement sig	gnage				
Beaver activity observed during design phase?	No					
Restoration Con	mponent Attribute Table					
	UPPER	LOWER				
Drainage area (ac)	1.5					
Stream order	2nd					
Restored length (feet)	1295	975				
Perennial or Intermittent	Per					
Watershed type (Rural, Urban, Developing etc.)	Deve	l.				
Watershed LULC Distribution (e.g.)						
Medium Density Residential	11					
Low Density Residential / Open Fields/ Lawns	34					
Forested	52					
Watershed impervious cover (%)	3					
NCDWQ AU/Index number	-					
NCDWQ classification	С					
303d listed?	No					
Upstream of a 303d listed segment?	Yes					
Reasons for 303d listing or stressor	Bio. Integ.	Turbidity				
Total acreage of easement	9.5	10.11				
Total vegetated acreage within the easement	9.5	10.11				
Total planted acreage as part of the restoration	4.3	4.21				
Rosgen classification of pre-existing	Imp. C4	Ditch				
Rosgen classification of As-built	C4	C4				
Valley type	VIII	VIII				
Valley slope	0.63%	0.61%				
Valley side slope range (e.g. 2-3.%)	-	-				
Valley toe slope range (e.g. 2-3.%)	-	-				
Cowardin classification	NA NA					
Trout waters designation	No					
Species of concern, endangered etc.? (Y/N)	No					
Dominant soil series and characteristics						
Series	Chewa	cla				
Depth	U	U				
Clay%	U	U				
К	U	U				
T	U	U				


Appendix B Visual Assessment Data

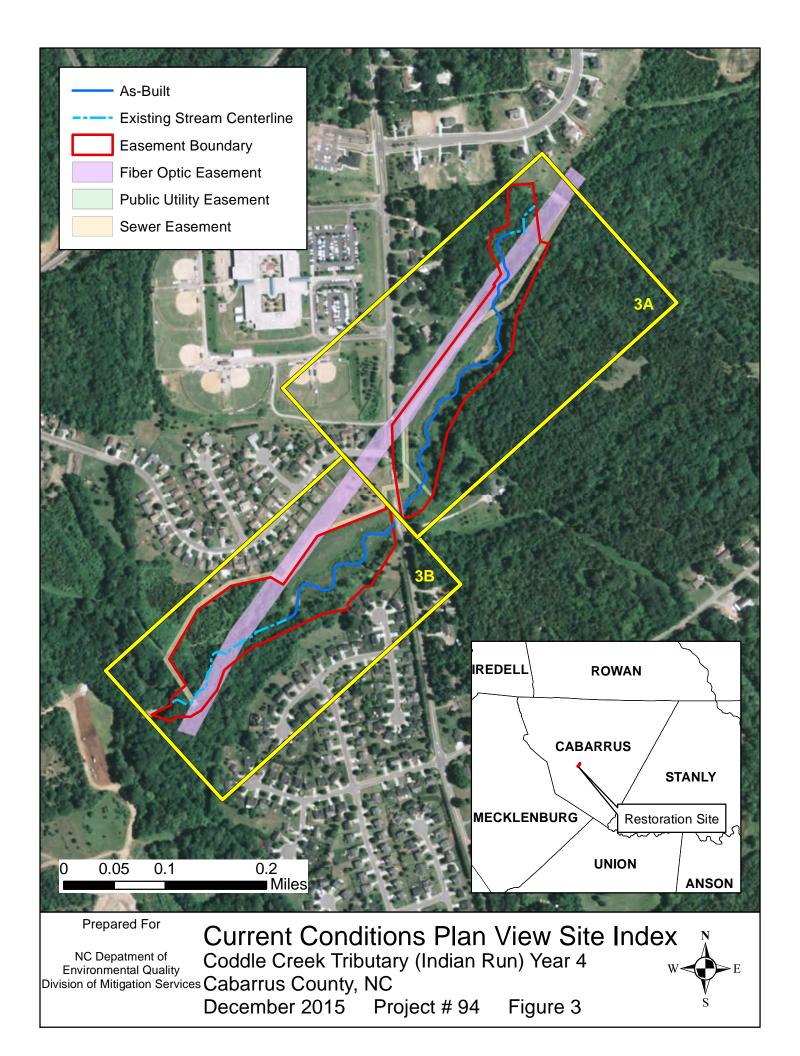

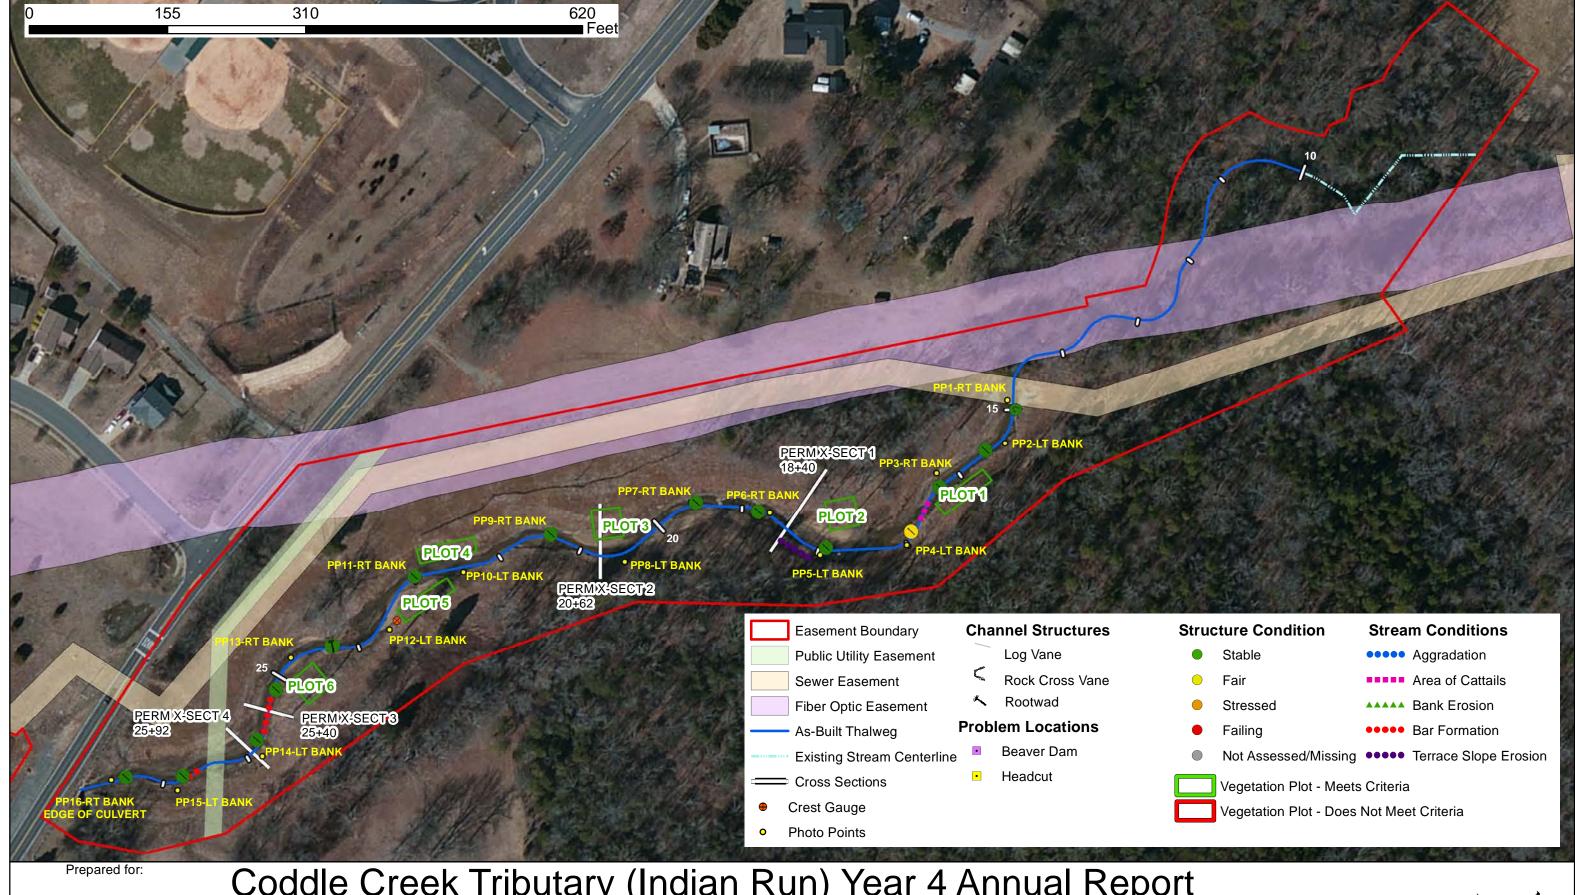

NC Department of Environmental Quality Division of Mitigation Services Coddle Creek Tributary (Indian Run) Year 4 Annual Report
Current Conditions Plan View - Upper Reach Cabarrus County, NC
December 2015 Project #94 Figure 3A



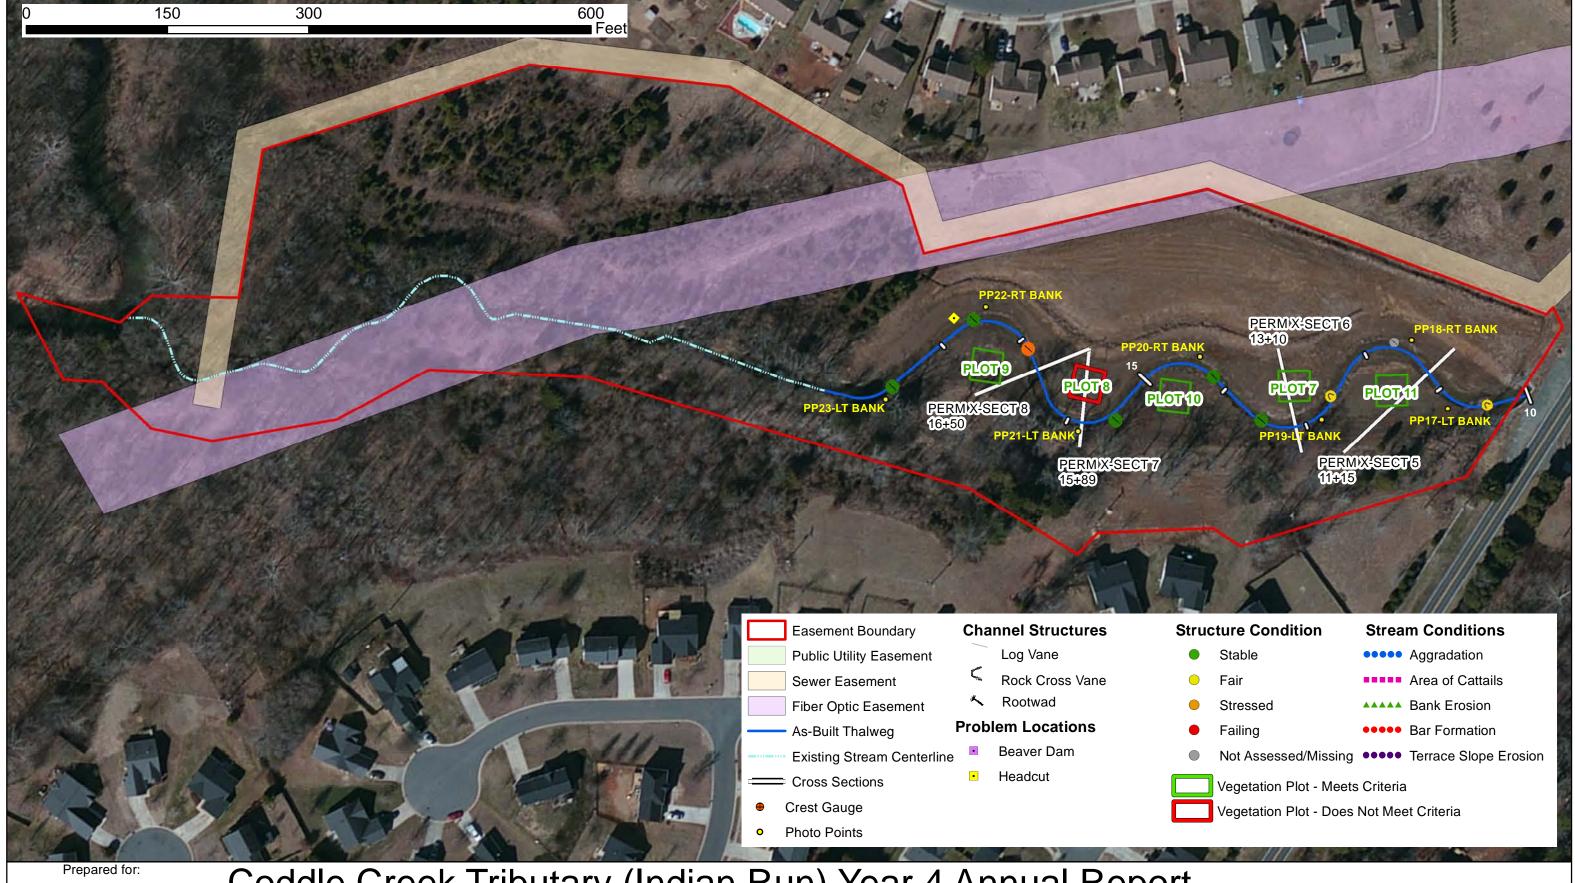

NC Department of Environmental Quality Division of Mitigation Services Coddle Creek Tributary (Indian Run) Year 4 Annual Report
Current Conditions Plan View - Lower Reach Cabarrus County, NC
December 2015 Project #94 Figure 3B



<u>Visual Stream Morphology Stability Assessment</u> Upper Reach 1295 Table 5a Reach ID

Assessed Length

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	-	Stabilizing Woody	Adjusted % for Stabilizing Woody Vegetation
1. Bed	Vertical Stability (Riffle and Run units)	Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
	(Killie and Kull ullis)	Degradation - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	11	11			100%			
	3. Meander Pool Condition	Depth Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	15	15			100%			
		Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle)	15	15			100%			
	4.Thalweg Position	Thalweg centering at upstream of meander bend (Run)	15	15			100%			
		Thalweg centering at downstream of meander (Glide)	15	15			100%			
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
				Totals	0	0	100%	0	0	100%
EngineeredStructures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	14	14			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	8	8			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	14	14			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	13	13			100%			
	4. Habitat	Pool forming structures maintaining \sim Max Pool Depth : Mean Bankfull Depth ratio \geq 1.6 Rootwads/logs providing some cover at base-flow.	13	13			100%			

Table 5b <u>Visual Stream Morphology Stability Assessment</u>
Reach ID Lower Reach

Assessed Length 975

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	-	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	Vertical Stability (Riffle and Run units)	Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars)			0	0	100%			
	(Rillie and Run units)	Degradation - Evidence of downcutting			0	0	100%			
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate	6	6	Ů	Ü	100%	1		
	3. Meander Pool Condition	Depth Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6)	7	7			100%			
		Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstrem riffle)	7	7			100%			
	4.Thalweg Position	Thalweg centering at upstream of meander bend (Run)	7	7			100%			
		Thalweg centering at downstream of meander (Glide)	7	7			100%			
	1	Bank lacking vegetative cover resulting simply from poor growth and/or					4000/			4000/
2. Bank	1. Scoured/Eroding	scour and erosion			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse			0	0	100%	0	0	100%
				Totals	0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	9	9			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	5	5			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	8	9			89%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>not</u> exceed 15%. (See guidance for this table in EEP monitoring guidance document)	9	9			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth ratio ≥ 1.6 Rootwads/logs providing some cover at base-flow.	9	9			100%			

^{*}Riffles were not supplied with coarse substrate in the as-built condition. Aside from minor aggradation, riffles remain stable.

Table 6 <u>Vegetation Condition Assessment</u>

Planted A	Acreage ¹	8.51

Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	Pattern and Color	0	0.00	0.0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1 acres	Pattern and Color	0	0.00	0.0%
			Total	0	0.00	0.0%
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 acres	Pattern and Color	0	0.00	0.0%
		Cu	mulative Total	0	0.00	0.0%

Easement Acreage² 19.61

Zadomont 7tordago		Manaina	CODY	Novelena	Cambinad	% of
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Acreage	Acreage
4. Invasive Areas of Concern ⁴	Areas or points (if too small to render as polygons at map scale).	1000 SF	Pattern and Color	0	0.00	0.0%
5. Easement Encroachment Areas ³	Areas or points (if too small to render as polygons at map scale).	none	Pattern and Color	0	0.00	0.0%



Photo Station 1 Downstream (Year 4 -10/21/2015)



Photo Station 1 Upstream (Year 4 -10/21/2015)



Photo Station 2 Downstream (Year 4 -10/21/2015)



Photo Station 2 Upstream (Year 4 -10/21/2015)



Photo Station 3 Downstream (Year 4 -10/21/2015)



Photo Station 3 Upstream (Year 4 -10/21/2015)



Photo Station 4 Downstream (Year 4 -10/21/2015)



Photo Station 4 Upstream (Year 4 -10/21/2015)



Photo Station 5 Downstream (Year 4 -10/21/2015)



Photo Station 5 Upstream (Year 4 -10/21/2015)



Photo Station 6 Downstream (Year 4 -10/21/2015)



Photo Station 6 Upstream (Year 4 -10/21/2015)



Photo Station 7 Downstream (Year 4 -10/21/2015)



Photo Station 7 Upstream (Year 4 -10/21/2015)



Photo Station 8 Downstream (Year 4 -10/21/2015)



Photo Station 8 Upstream (Year 4 -10/21/2015)



Photo Station 9 Downstream (Year 4 -10/21/2015)



Photo Station 9 Upstream (Year 4 -10/21/2015)



Photo Station 10 Downstream (Year 4 -10/21/2015)



Photo Station 10 Upstream (Year 4 -10/21/2015)



Photo Station 11 Downstream (Year 4 -10/21/2015)



Photo Station 11 Upstream (Year 4 -10/21/2015)



Photo Station 12 Downstream (Year 4 -10/21/2015)



Photo Station 12 Upstream (Year 4 -10/21/2015)



Photo Station 13 Downstream (Year 4 -10/21/2015)



Photo Station 13 Upstream (Year 4 -10/21/2015)



Photo Station 14 Downstream (Year 4 -10/21/2015)



Photo Station 14 Upstream (Year 4 -10/21/2015)



Photo Station 15 Downstream (Year 4 -10/21/2015)



Photo Station 15 Upstream (Year 4 -10/21/2015)



Photo Station 16 Downstream (Year 4 -10/21/2015)



Photo Station 16 Upstream (Year 4 -10/21/2015)



Photo Station 17 Downstream (Year 4 -10/21/2015)



Photo Station 17 Upstream (Year 4 -10/21/2015)

Coddle Creek Tributary (Indian Run) EEP Project #94 December 2015

SEPI Engineering and Construction Annual Final Monitoring Report Monitoring Year 4 of 5



Photo Station 18 Downstream (Year 4 -10/21/2015)



Photo Station 18 Upstream (Year 4 -10/21/2015)



Photo Station 19 Downstream (Year 4 -10/22/2015)



Photo Station 19 Upstream (Year 4 -10/22/2015)



Photo Station 20 Downstream (Year 4 -10/22/2015)



Photo Station 20 Upstream (Year 4 -10/22/2015)



Photo Station 21 Downstream (Year 4 -10/22/2015)



Photo Station 21 Upstream (Year 4 -10/22/2015)



Photo Station 22 Downstream (Year 4 -10/22/2015)



Photo Station 22 Upstream (Year 4 -10/22/2015)



Photo Station 23 Downstream (Year 4 -10/22/2015)



Photo Station 23 Upstream (Year 4 -10/22/2015)



Vegetation Plot $1 - 5m \times 20m$ (Year 4 of 5) 9/21/2015



Vegetation Plot $2 - 10m \times 10m$ (Year 4 of 5) 9/21/2015



Vegetation Plot 3 – 10m x 10m (Year 4 of 5) 9/21/2015



Vegetation Plot 4 – 5m x 20m (Year 4 of 5) 9/21/2015



Vegetation Plot 5 – 5m x 20m (Year 4 of 5) 9/22/2015



Vegetation Plot 6 – 10m x 10m (Year 4 of 5) 9/22/2015



Vegetation Plot 7 – 10m x 10m (Year 4 of 5) 9/22/2015



Vegetation Plot $8-10m \times 10m$ (Year 4 of 5) 9/22/2015



Vegetation Plot 9 – 10m x 10m (Year 4 of 5) 9/22/2015



Vegetation Plot $10 - 10m \times 10m$ (Year 4 of 5) 9/22/2015



Vegetation Plot 11 – 10m x 10m (Year 4 of 5) 9/22/2015

Appendix C Vegetation Plot Data

Table 7. Vegetation Plot Mitigation Success Summary						
Coddle Creek Tributary (Indian Run) - 94						
Plot	Planted Stems/Ac	Meeting Criteria				
1	1093	Yes				
2	486	Yes				
3	728	Yes				
4	607	Yes				
5	769	Yes				
6	769	Yes				
7	405	Yes				
8	283	No				
9	526	Yes				
10	607	Yes				
11	486	Yes				

Table 8. CVS Vegetation Plot Metadata Coddle Creek Tributary (Indian Run) - 94

Report Prepared By Kim Hamlin
Date Prepared 9/25/2015 11:07

database name CoddleCr(IndianRun)_94_MY4_2015_CVS.mdb

database location G:\Environmental\NCEEP Coddle Creek SMS\MY04\AnnualReport\Coddle_Cr(IndianRun)_94_MY4_2015_DRAFT\Support Files\3 - Vegetation Plot Data

computer name W93 file size 49975296

DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----

MetadataDescription of database file, the report worksheets, and a summary of project(s) and project data.Proj, plantedEach project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.

Proj, total stems Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.

Plots List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).

VigorFrequency distribution of vigor classes for stems for all plots.Vigor by SppFrequency distribution of vigor classes listed by species.

Damage List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.

Damage by SppDamage values tallied by type for each species.Damage by PlotDamage values tallied by type for each plot.

Planted Stems by Plot and Spp A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.

ALL Stems by Plot and spp A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.

PROJECT SUMMARY-----

Project Code 94

project Name Indian Run Tributary to Coddle Creek

DescriptionStream RestorationRiver BasinYadkin-Pee Dee

length(ft) 2270 stream-to-edge width (ft) 100 area (sq m) 42173.71 Required Plots (calculated) 11 Sampled Plots 11

Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)
EEP Project Code 94. Project Name: Indian Run Tributary to Coddle Creek

				Current Plot Data (MY2015 2015) Annual Means							j																									
			094-HDR-	DR-0001 094-HDR-0002 094-HDR-0003 094-HDR-0004 094-HDR-0005 094-HDR-0006 094-HDR-0007 094-HDR-0008 094			094-H	IDR-0009	094-HDR-0	MY2015 (2015) MY2014 (2014		(2014) MY2013 (2013)			M	MY2012 (2012)		MY	2011 (2011)																	
Scientific Name	Common Name	Species Type	PnoLS P-all	T	PnoLS	P-all T	PnoLS P-all	T	PnoLS	P-all T	PnoLS P-all	T	PnoLS	P-all T	PnoLS P-all	l T	PnoLS P-all	T	PnoLS	P-all T	PnoLS P-all	T I	PnoLS	P-all T	PnoLS P-al	l T	PnoLS	P-all T	P	noLS F	P-all T	PnoI	LS P-all	T	PnoL	S P-all T
Acer negundo	boxelder	Tree										2		Ģ		14	4			2		1				28			13			1		9	و	
Acer rubrum	red maple	Tree	10 10	10	3	3 3	3 4 4	4 4			5 5	5	3	3 3	1	1 1	1	3				4			26 2	26 33	26	26	26	23	23 2	24 2	28 28	3 3f	6 30	30 7
Albizia julibrissin	silktree	Exotic										1		3	8											4			1					Ī	1	
Alnus serrulata	hazel alder	Shrub	5 5	13		2		3	2	2 3	5 5	5	2	2 3	5	5 5	5	1	1	1 1	1 1	2		3	21 2	21 41	21	21	32	21	21	31 2	21 21	1 21	1 19) 19
Baccharis halimifolia	eastern baccharis	Shrub																											1			1]	
Betula nigra	river birch	Tree		112		3	8	6		8	3 3	4	3	3 3	B			2	4	4 6	2 2	4	7	7 12	19 1	19 160	19	19	194	19	19 86	65 2	20 20	0 674	4 28	8 28 2
Callicarpa americana	American beautybe	rr Shrub																									1	1	1	5	5	5	7 7	7	7 8	3 8
Calycanthus floridus	eastern sweetshrub	Shrub																												1	1	1	1 1	1 1	1 2	2 2
Carpinus caroliniana	American hornbean	Tree								1																1								Ī	1	
Celtis laevigata	sugarberry	Tree																	1	1 1					1	1 4			1	1	1	1 1	10 10) 10	0 15	5 15
Cephalanthus occidental	is common buttonbus	Shrub			-	1																				2								T		
Cornus amomum	silky dogwood	Shrub	1 1	1	3	3 3	3		8	8 8			4	4 4	3	3 3	3 3	4	6	6 7	1 1	4	1	1 1	30 3	35	30	30	39	29	29	31 3	34 34	4 34	4 37	2 32
Diospyros virginiana	common persimmo	n Tree					1	1 1			1 1	1	1	1					1	1 1	1 1	1			5	5 5	7	7	8	4	4	4 1	18 18	3 18	8 21	21 1
Fraxinus pennsylvanica	green ash	Tree	6 6	6	4	4 4	7 7	7 7	2	2 2	2 2	2		1		2	2								21 2	21 24	21	21	22	20	20	21 2	21 21	1 2!	1 21	21 1
Juglans nigra	black walnut	Tree										1	1	1											1	1 2	2	2	2	2	2	2	5 5	5 .5	5 f	5 6
Ligustrum sinense	Chinese privet	Exotic																								1			1			1		1	1	
Liquidambar styraciflua	sweetgum	Tree						4		2		11		(5											23			47		7	17		ç)	
Liriodendron tulipifera	tuliptree	Tree																				1				1			1					1	1	
Morella cerifera	wax myrtle	shrub								1												1				2			3			1		Ī	1	
Nyssa sylvatica	blackgum	Tree	1 1	1			3 3	3 3													1 1	2			5	5 6	3	3	4	3	3	3		T	1	
Pinus taeda	loblolly pine	Tree								1										1		2				4			1			2		T	1	
Platanus occidentalis	American sycamore	Tree		84		16	5	26	5	500		48		18	8					1		1				694			829		67	79		1536	5	
Populus deltoides	eastern cottonwood	Tree		44		3	8	2		41.67		4		4	l l	71	1	128		105		71		13	3	487			538		17	74		662	2	65
Prunus serotina	black cherry	Tree																								1								1	1	
Quercus lyrata	overcup oak	Tree																					1	1	1	1 1	1	1	1	1	1	2		1	1	
Quercus nigra	water oak	Tree					1	1 1			1 1	1	2	2 2	2						1 1	1			5	5 5	4	4	4	6	6	8	8 8	3 8	8 17	2 12
Quercus phellos	willow oak	Tree	4 4	4	2	2 2	2 2	2 2	3	3 3	1 1	2	1	1 3	3								3	3 3	16 1	16 19	14	14	18	16	16 1	16 2	21 21	1 2!	1 21	21 (
Quercus rubra	northern red oak	Tree				1																			Ī i	1								1	1	
Salix nigra	black willow	Tree				1				2	1	5		1	1	1 1	1 4 4	. 5			8 8	10		- 2	13 1	15 27	12	14	28	14	16 2	24 1	11 13	3 18	8 (<i>i</i> 8
Sambucus canadensis	Common Elderberr	Shrub						1					1	1	ı i										1	1 2	1	1	1	1	1	7	2 2	2 2	2 2	2 2
Ulmus	elm	Tree																														2		33	3	
Ulmus americana	American elm	Tree																								1								1	1	
Ulmus rubra	slippery elm	Tree																													1	31		1	1	
		Stem count	27 27	275	12	12 39	18 18	8 60	15	15 572.7	18 19	92	18	19 70	10 1	0 97	7 7 '	143	13	13 125	15 15	105	12	12 35	165 16	57 1614	162	164	1816	166	168 195	54 20	07 209	312:	5 223	3 225 88
		size (ares)	1			1	1		1	1	1			1	1		1			1	1			1	11			11			11		11		T	11
		size (ACRES)	0.02			0.02	0.02		1	0.02	0.02			0.02	0.02		0.02			0.02	0.02			0.02	0.27			0.27			0.27	\top	0.27		1	0.27
		Species count	6 6		4	4 11		6 12	4	4 12	7 8	14	9	10 21	4	4 7	7 2 3	. 6	5	5 9	7 7	14	4	4 3	7 14 1	_	14	14	25	16		26	14 14		9 14	
	St	ems per ACRE	1093 1093	11129	485.6	486 1578	728.4 728	8 2428	607	607 23175	728.4 769	3723	728 4		404.7 40	5 3925	5 283.3 283	5787	526.1	526 5059	607 607	4249	485.6	486 1416					6681							4 828 32

Coddle Creek Tributary (Indian Run) EEP Project #94 December 2015


Appendix D Stream Survey Data

Station	Elevation
0.00	547.61
2.20	547.19
3.56	546.98
6.42	545.88
11.07	542.78
13.61	542.66
16.22	542.63
17.82	542.94
20.14	542.8
20.20	542.79
21.84	542.48
24.58	540.35
26.50	540.36
28.22	540.43
29.22	540.88
31.74	541.48
32.26	541.6
34.87	541.82
38.35	542.74
45.35	542.97
48.56	542.62
50.00	542.8
52.84	543.37
58.66	543.37
67.14	543.41
80.11	543.14
87.64	543.25
94.36	543.5
99.38	544.66
104.04	545.73
107.49	546.53
110.14	549.73

Reach	Indian Run, Upper Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-1, Riffle, Upper Reach, 18+40
Drainage Area (Sq Mi)	1.5
Date	10/21/2015
Observers	P. Beach, C. Flowers

SUMMARY DATA				
Baseline Bankfull Datum, ft	542.62			
Bankfull Cross Sectional Area, ft ²	20.72			
Bankfull Width, ft	16.51			
Max Depth at Bankfull, ft	2.27			
Mean Depth at Bankfull, ft	1.25			
Width/Depth Ratio	13.16			
Flood Prone Width, ft	92			
Flood Prone Area Elevation	544.89			
Entrenchment Ratio	5.57			
Bank Height Ratio	0.94			



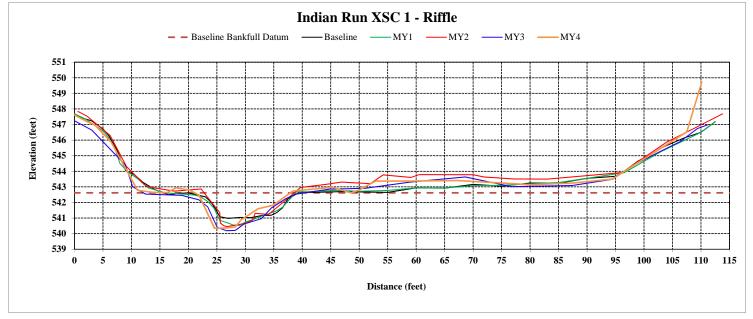


Station	Elevation
0	547.59
1.01	547.25
2.43	546.71
4.85	545.37
8.44	543.58
11.36	541.66
12.24	541.27
15.24	541.02
17.1	540.99
17.87	540.78
17.98	540.86
18.79	540.24
19.32	539.66
19.74	538.15
21.2	537.4
23.91	537.52
26.09	538.02
27.3	538.29
28.15	539.42
29.23	540.22
30.67	540.59
33.01	540.68
36.61	540.57
40.72	540.75
46.83	540.83
50.4	540.89
56.95	541.14
62.67	541.72
64.77	542.33
70.51	544.01
77.21	545.97
80.64	547.48
84.07	548.99

Reach	Indian Run, Upper Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-2, Pool, Upper Reach, 20+62
Drainage Area (Sq Mi)	1.5
Date	10/21/2015
Observers	P. Beach, C. Flowers

SUMMARY DATA					
Baseline Bankfull Datum, ft	541.18				
Bankfull Cross Sectional Area, ft ²	35.52				
Bankfull Width, ft	40				
Max Depth at Bankfull, ft	3.78				
Mean Depth at Bankfull, ft	0.89				
Width/Depth Ratio	45.05				
Flood Prone Width, ft	67.5				
Flood Prone Area Elevation	544.96				
Entrenchment Ratio	1.69				
Bank Height Ratio	0.95				



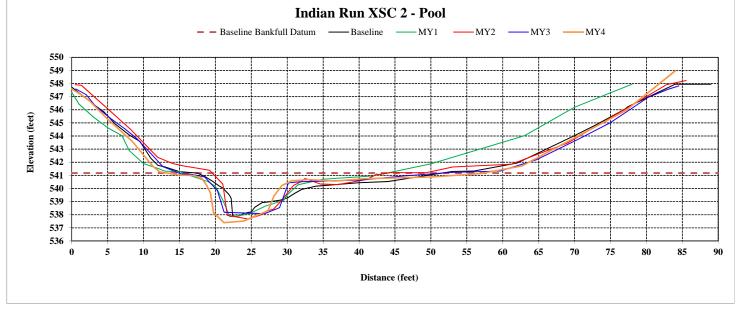


Station	Elevation
0	545.28
2.34	544.25
5.58	543.35
9.81	541.9
10.8	541.33
13.15	540.1
15.19	539.26
18.74	538.7
21.07	538.19
23.75	537.46
24.75	536.64
26.09	536.65
27.29	536.69
28.96	537.52
32.02	537.61
33.27	537.69
33.86	536.98
35.43	537.26
37.8	538.37
38.86	539.12
41.11	538.88
43.37	539.15
51.6	543.02
55.7	544.54
57.16	546.16

Reach	Indian Run, Upper Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-3, Riffle, Upper Reach, 25+40
Drainage Area (Sq Mi)	1.5
Date	10/21/2015
Observers	P. Beach, C. Flowers

SUMMARY DATA				
Baseline Bankfull Datum, ft	539.00			
Bankfull Cross Sectional Area, ft ²	34.75			
Bankfull Width, ft	21.86			
Max Depth at Bankfull, ft	2.36			
Mean Depth at Bankfull, ft	1.59			
Width/Depth Ratio	13.75			
Flood Prone Width, ft	37			
Flood Prone Area Elevation	541			
Entrenchment Ratio	1.69			
Bank Height Ratio	1.05			



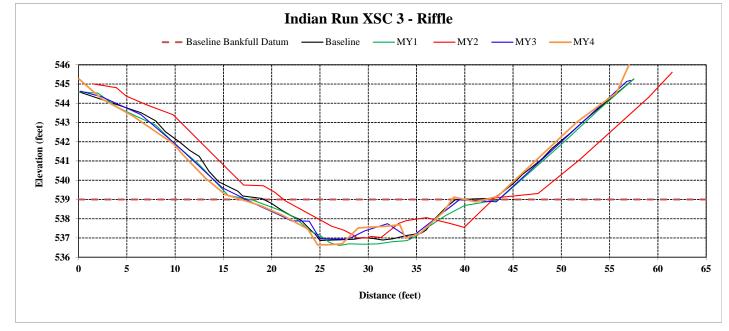


a	T
Station	Elevation
0	545.57
1.56	544.36
3.54	543.47
6.9	542.17
9.37	541.07
12.03	540.04
14.55	539.29
17.25	538.97
18.81	538.77
20.52	537.96
21.39	537.84
22.37	535.92
24.68	533.81
29.52	534.71
31.71	535.71
33.68	537.69
36.62	537.98
38.51	537.88
42.52	538.04
47.57	538.29
51.5	538.45
54.53	539.23
66.07	545.96

Reach	Indian Run, Upper Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-4, Pool, Upper Reach, 25+92
Drainage Area (Sq Mi)	1.5
Date	10/21/2015
Observers	P. Beach, C. Flowers

SUMMARY DATA	
Baseline Bankfull Datum, ft	538.77
Bankfull Cross Sectional Area, ft ²	57.6
Bankfull Width, ft	34
Max Depth at Bankfull, ft	4.96
Mean Depth at Bankfull, ft	1.69
Width/Depth Ratio	20.07
Flood Prone Width, ft	59
Flood Prone Area Elevation	543.73
Entrenchment Ratio	1.74
Bank Height Ratio	1





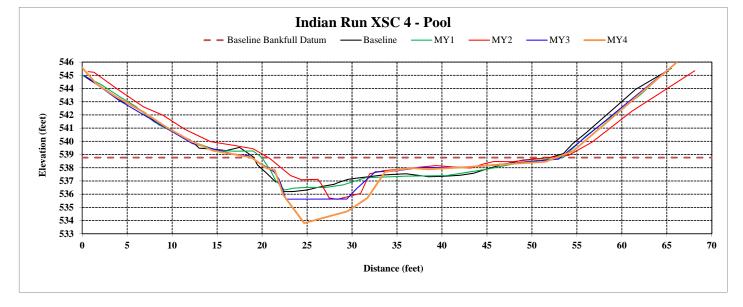


Station	Elevation
0	541.52
2.26	541.16
7.51	540.11
16.35	538.19
23.23	536.67
28.48	535.91
34.39	535.83
44.24	535.42
54.99	535.8
68	535.96
85.02	536.19
97.24	536.47
103.76	536.13
109.08	536.64
112.19	536.78
114.3	536.13
115.99	535.72
117.3	534.98
119.41	534.82
119.88	534.21
121.16	534.19
122.05	534.29
123.43	535.59
125.97	535.68
128.59	535.29
130.7	535.69
132.4	536.17
136.9	536.24
143.57	536.14
149.67	535.98
156.19	536.78
161.85	538.77

Reach	Indian Run, Lower Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-5, Riffle, Lower Reach, 11+15
Drainage Area (Sq Mi)	1.5
Date	10/22/2015
Observers	P. Beach, C. Flowers, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	536.34
Bankfull Cross Sectional Area, ft ²	17.21
Bankfull Width, ft	22.9
Max Depth at Bankfull, ft	2.15
Mean Depth at Bankfull, ft	0.75
Width/Depth Ratio	30.47
Flood Prone Width, ft	145.5
Flood Prone Area Elevation	538.5
Entrenchment Ratio	6.35
Bank Height Ratio	0.9



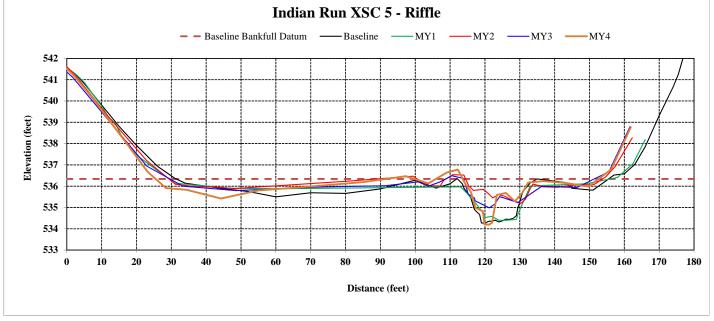


Station	Elevation
0	540.87
0.98	540.55
4.57	539.49
8.92	537.99
13.59	536.23
17.73	535.98
20.95	535.87
22.29	535.89
23.82	534.97
24.4	534.58
25.43	532.97
26.67	532.77
28.44	532.62
30.09	532.67
31.94	532.54
32.63	532.84
32.74	533.09
33.02	533.25
33.36	534.18
34.17	534.43
34.94	534.83
35.53	534.99
36.89	535.01
48.29	535.68
54.73	535.66
63.05	536.08
72.33	535.58
84.2	535.69
91.69	535.62
103.58	537.36
113.82	539.95

Reach	Indian Run, Lower Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-6, Pool, Lower Reach, 13+10
Drainage Area (Sq Mi)	1.5
Date	10/22/2015
Observers	P. Beach, C. Flowers, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	535.56
Bankfull Cross Sectional Area, ft ²	37.45
Bankfull Width, ft	26
Max Depth at Bankfull, ft	3.02
Mean Depth at Bankfull, ft	1.44
Width/Depth Ratio	18.05
Flood Prone Width, ft	100.5
Flood Prone Area Elevation	538.58
Entrenchment Ratio	3.87
Bank Height Ratio	1.04



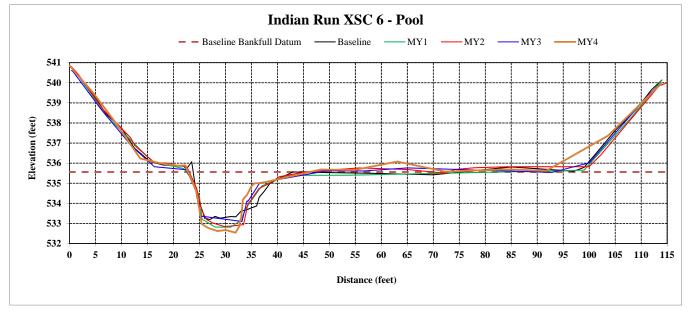


Station	Elevation
0	539.9
0.12	539.45
1.57	539.31
2.8	538.81
7.23	536.55
10.71	534.82
11.73	534.71
14.49	534.68
16.81	534.34
17.88	534.02
18.23	533.42
18.71	533.07
19.32	531.61
21.64	531.14
22.23	531.19
24.17	531.23
27.19	531.21
27.27	533.46
28.02	533.57
29.44	533.49
35.82	533.76
42.8	534.65
47.77	534.77
61.22	534.66
75.28	534.51
89.32	534.74
92.3	535.33
104.12	538.85
106.04	539

Reach	Indian Run, Lower Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-7, Pool, Lower Reach, 15+89
Drainage Area (Sq Mi)	1.5
Date	10/22/2015
Observers	P. Beach, C. Flowers, K. Hamlin

SUMMARY DATA	
Baseline Bankfull Datum, ft	534.62
Bankfull Cross Sectional Area, ft ²	39.5
Bankfull Width, ft	28.31
Max Depth at Bankfull, ft	3.48
Mean Depth at Bankfull, ft	1.40
Width/Depth Ratio	20.29
Flood Prone Width, ft	98
Flood Prone Area Elevation	538.1
Entrenchment Ratio	3.46
Bank Height Ratio	1



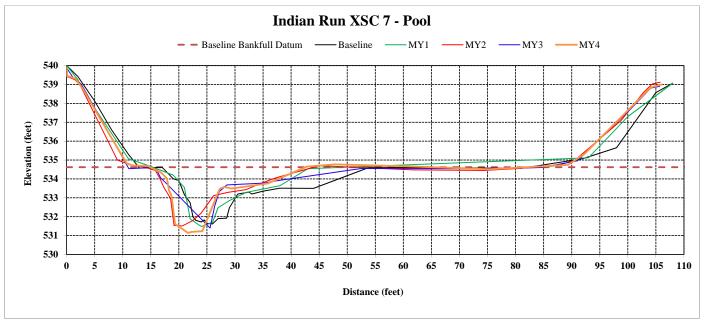


Station	Elevation
0	538.91
2.54	537.9
4.48	537.44
6.27	537.17
26.17	534.42
38.71	534.35
47.7	534.22
55.04	533.95
58.91	534.18
62.11	533.72
63.01	533.24
64.24	532.75
64.98	532.01
66.93	531.07
68.84	531.16
70.07	532.74
70.52	532.77
73.07	532.54
74.37	533.08
77.16	533.88
80.63	534.17
86.18	534.29
97.72	534.18
108.43	534.52
112.18	535.11
121.76	537.02
130.82	538.94


Reach	Indian Run, Lower Reach
River Basin	Yadkin/Pee Dee
Cross Section ID	XSC-8, Riffle, Lower Reach, 16+50
Drainage Area (Sq Mi)	1.5
Date	10/22/2015
Observers	P. Beach, C.Flowers, K. Hamlin


SUMN	MARY DATA
Baseline Bankfull Datum, ft	534.36
Bankfull Cross Sectional Area, ft ²	29.3
Bankfull Width, ft	38.48
Max Depth at Bankfull, ft	3.29
Mean Depth at Bankfull, ft	0.76
Width/Depth Ratio	50.54
Flood Prone Width, ft	121
Flood Prone Area Elevation	537.65
Entrenchment Ratio	3.14
Bank Height Ratio	0.95



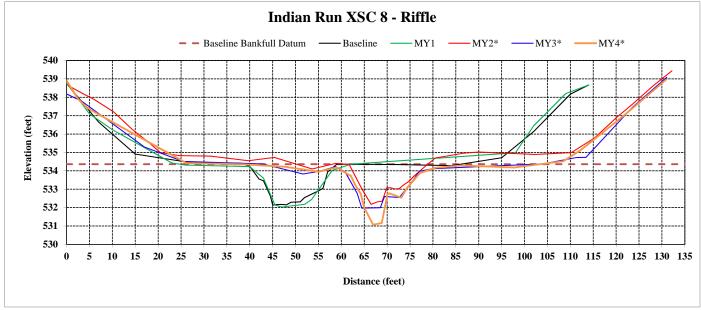

*The pins for XS8 were not located in the field. The location of the cross section for MY4 is approximate and was set during MY2.

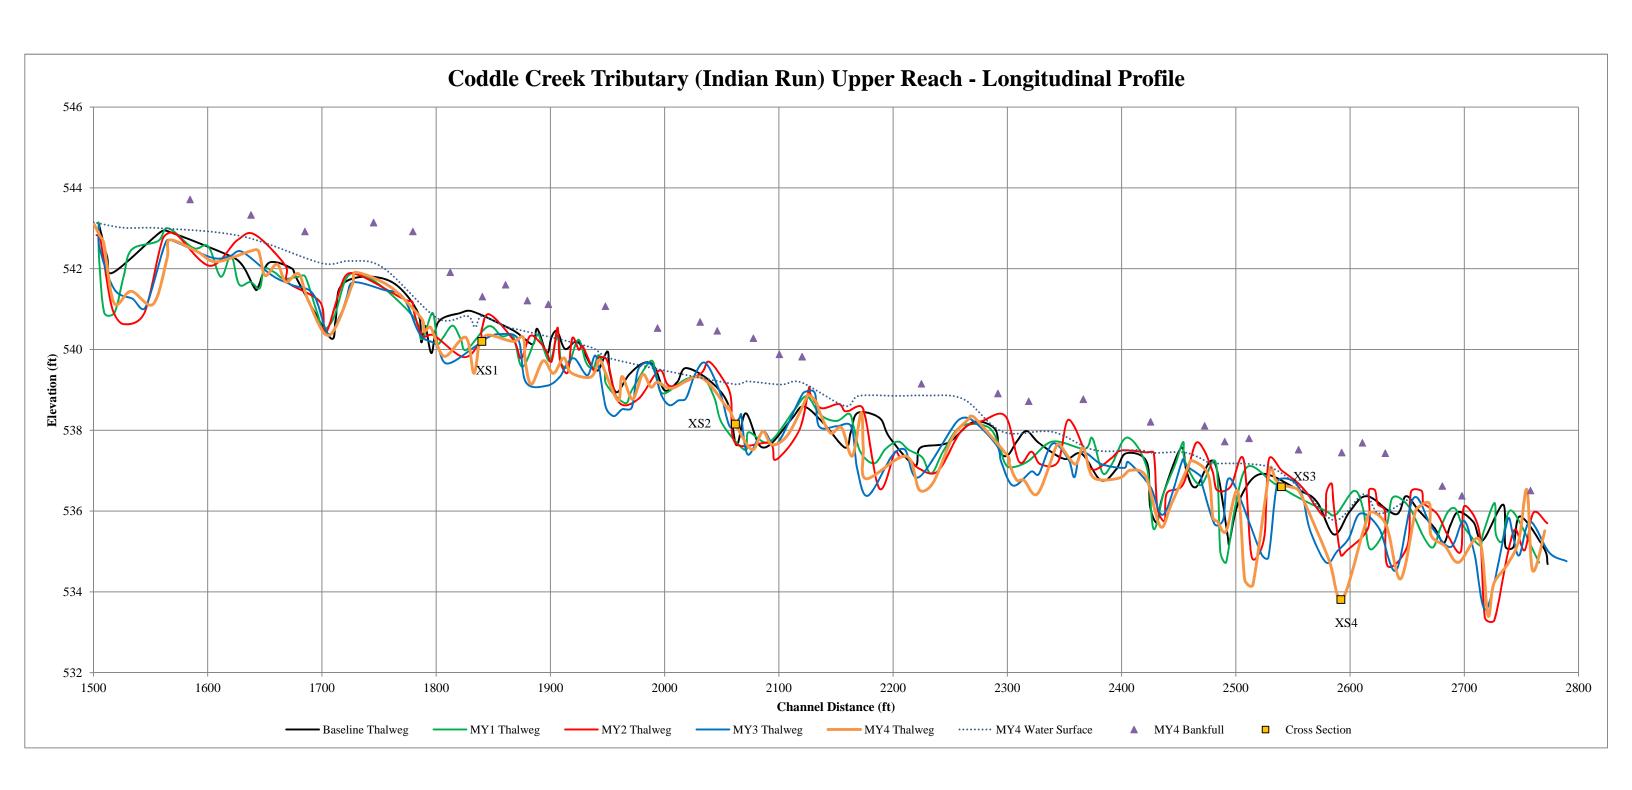

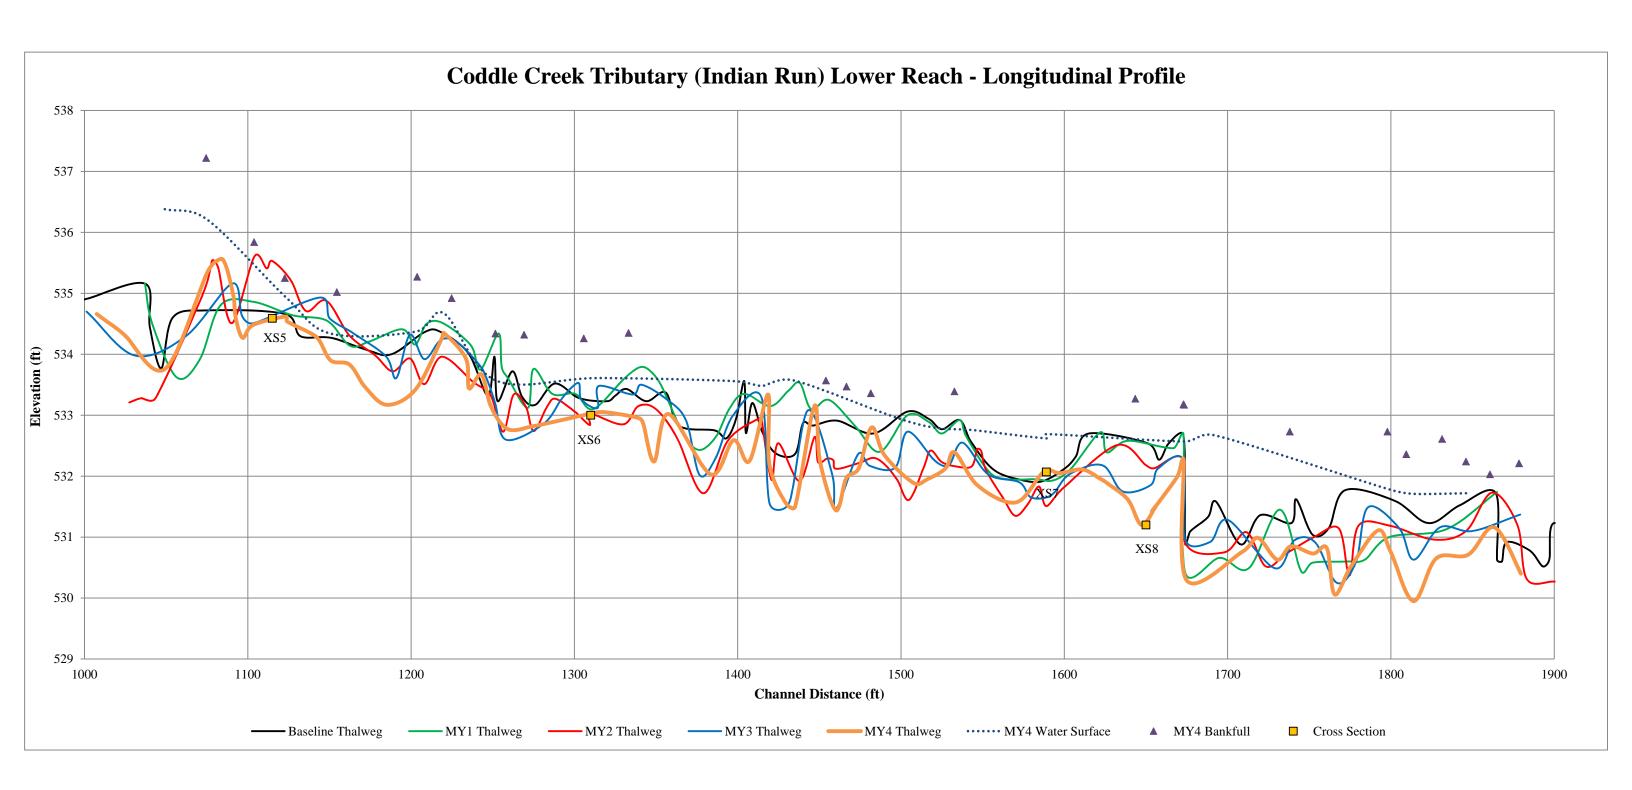



Coddle Creek Triburaty - Indian Run - UR - XS1 Riffle Pebble Count

Location: STA 18+40

Inches	Particle	Millimeters	_	Count	% Total	% Cum.
	Silt/Clay	< 0.062		20	20	20
	Very Fine	0.062-0.125	S	2	2	22
	Fine	0.125-0.25	A	0	0	22
	Medium	0.25-0.50	N	0	0	22
	Coarse	0.50-1.0	D	23	23	45
0.04-0.08	Very Coarse	1.0-2		7	7	52
0.08-0.16	Very Fine	2-4		1	1	53
0.16-0.22	Fine	4-5.7	C	4	4	57
0.22-0.31	Fine	5.7-8	G R	2	2	59
0.31-0.44	Medium	8-11.3	A	6	6	65
0.44-0.63	Medium	11.3-16	A V	8	8	73
0.63-0.89	Coarse	16-22.6	v E	14	14	87
0.89-1.26	Coarse	22.6-32	L	5	5	92
1.26-1.77	Very Coarse	32-45	L	1	1	93
1.77-2.5	Very Coarse	45-64		5	5	98
2.5-3.5	Small	64-90	C O	1	1	99
3.5-5.0	Small	90-128	В	0	0	99
5.0-7.1	Medium	128-180	B L	1	1	100
7.1-10.1	Large	180-256	E E	0	0	100
10.1-14.3	Small	256-362	B O	0	0	100
14.3-20	Small	362-512	U	0	0	100
20-40	Medium	512-1024	L D	0	0	100
40-80	Large	1024-2048	E R	0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
		Tota	Counted	100		

Summa	ry Data
D50	2
D84	21
D95	50

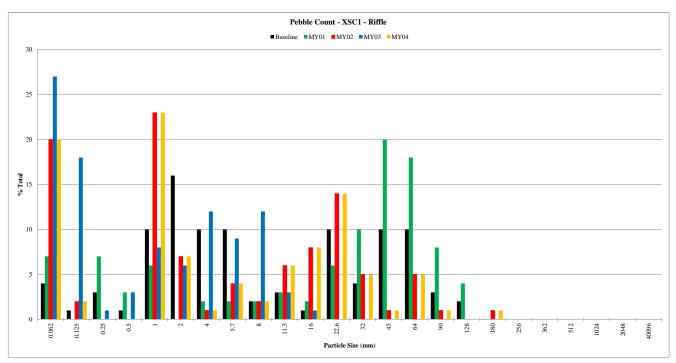

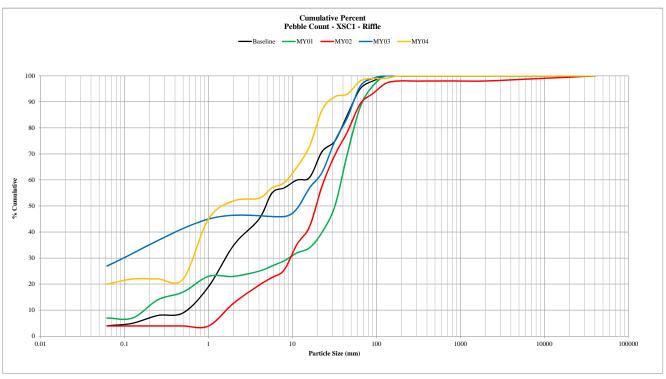



Coddle Creek Tributary - Indian Run -UR - XS3 Riffle Pebble Count

Location: STA 25+40

Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	< 0.062		0	0	0
	Very Fine	0.062-0.125	S	0	0	0
	Fine	0.125-0.25	Α	0	0	0
	Medium	0.25-0.50	N	0	0	0
	Coarse	0.50-1.0	D	4	4	4
0.04-0.08	Very Coarse	1.0-2		5	5	9
0.08-0.16	Very Fine	2-4		10	10	19
0.16-0.22	Fine	4-5.7	C	7	7	26
0.22-0.31	Fine	5.7-8	G R	10	10	36
0.31-0.44	Medium	8-11.3	A A	20	20	56
0.44-0.63	Medium	11.3-16	A V	17	17	73
0.63-0.89	Coarse	16-22.6	v E	18	18	91
0.89-1.26	Coarse	22.6-32	L	4	4	95
1.26-1.77	Very Coarse	32-45	L	3	3	98
1.77-2.5	Very Coarse	45-64		0	0	98
2.5-3.5	Small	64-90	C 0	2	2	100
3.5-5.0	Small	90-128	В	0	0	100
5.0-7.1	Medium	128-180	B L	0	0	100
7.1-10.1	Large	180-256	E E	0	0	100
10.1-14.3	Small	256-362	B O	0	0	100
14.3-20	Small	362-512	U	0	0	100
20-40	Medium	512-1024	L D	0	0	100
40-80	Large	1024-2048	E R	0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
		Tota	100			

Summary Data									
D50	10								
D84	20								
D95	32								

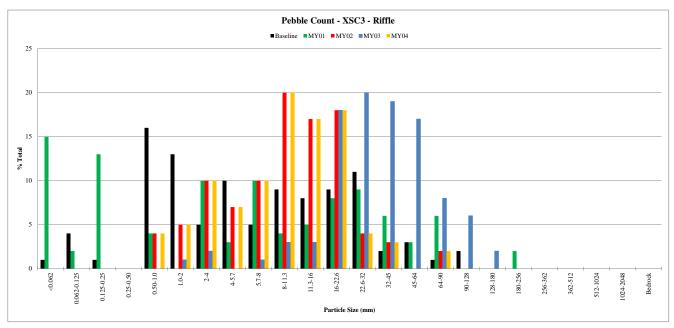

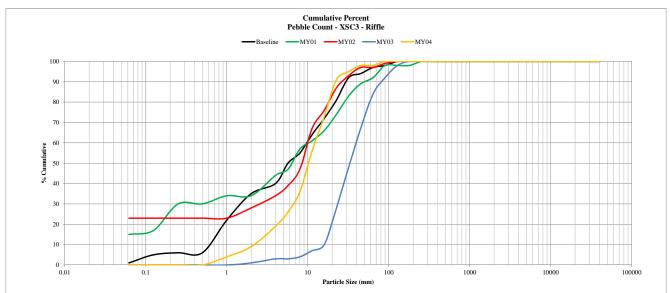



Coddle Creek Tributary - Indian Run - LR - XS5 Riffle Pebble Count

Location: STA 11+15

Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	< 0.062		0	0	0
	Very Fine	0.062-0.125	S	0	0	0
	Fine	0.125-0.25	Α	0	0	0
	Medium	0.25-0.50	N	0	0	0
	Coarse	0.50-1.0	D	18	18	18
0.04-0.08	Very Coarse	1.0-2		2	2	20
0.08-0.16	Very Fine	2-4		16	16	36
0.16-0.22	Fine	4-5.7		9	9	45
0.22-0.31	Fine	5.7-8	G	6	6	51
0.31-0.44	Medium	8-11.3	R A	11	11	62
0.44-0.63	Medium	11.3-16	A V	9	9	71
0.63-0.89	Coarse	16-22.6	E E	13	13	84
0.89-1.26	Coarse	22.6-32	L	9	9	93
1.26-1.77	Very Coarse	32-45		4	4	97
1.77-2.5	Very Coarse	45-64		1	1	98
2.5-3.5	Small	64-90	C O	2	2	100
3.5-5.0	Small	90-128	В	0	0	100
5.0-7.1	Medium	128-180	B L	0	0	100
7.1-10.1	Large	180-256	E E	0	0	100
10.1-14.3	Small	256-362	В	0	0	100
14.3-20	Small	362-512	U	0	0	100
20-40	Medium	512-1024	L D	0	0	100
40-80	Large	1024-2048	E R	0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
		Tota	l Counted	100		

Summa	ry Data
D50	8
D84	22.6
D95	35

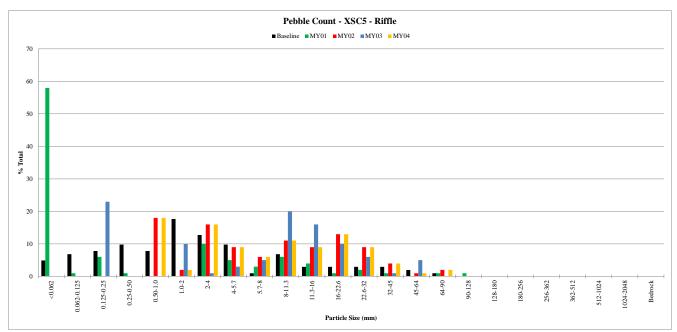

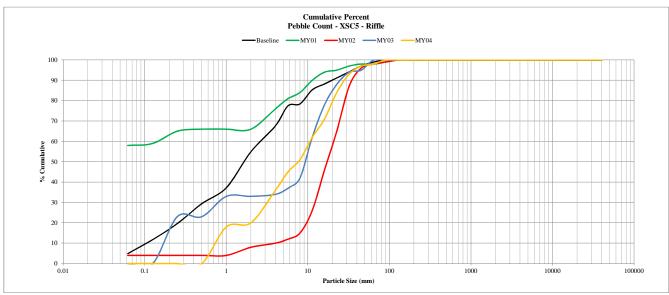



Coddle Creek Tributary - Indian Run - LR - XS8 Riffle Pebble Count

Location: STA 16+50

Inches	Particle	Millimeters		Count	% Total	% Cum.
	Silt/Clay	< 0.062		28	28	28
	Very Fine	0.062-0.125	S	36	36	64
	Fine	0.125-0.25	Α	0	0	64
	Medium	0.25-0.50	N	0	0	64
	Coarse	0.50-1.0	D	6	6	70
0.04-0.08	Very Coarse	1.0-2		0	0	70
0.08-0.16	Very Fine	2-4		1	1	71
0.16-0.22	Fine	4-5.7	C	3	3	74
0.22-0.31	Fine	5.7-8	G R	2	2	76
0.31-0.44	Medium	8-11.3	A A	13	13	89
0.44-0.63	Medium	11.3-16	V A	8	8	97
0.63-0.89	Coarse	16-22.6	E E	2	2	99
0.89-1.26	Coarse	22.6-32	L	1	1	100
1.26-1.77	Very Coarse	32-45	L	0	0	100
1.77-2.5	Very Coarse	45-64		0	0	100
2.5-3.5	Small	64-90	C O	0	0	100
3.5-5.0	Small	90-128	В	0	0	100
5.0-7.1	Medium	128-180	B L	0	0	100
7.1-10.1	Large	180-256	E E	0	0	100
10.1-14.3	Small	256-362	B O	0	0	100
14.3-20	Small	362-512	U L	0	0	100
20-40	Medium	512-1024	D	0	0	100
40-80	Large	1024-2048	E R	0	0	100
	Bedrock	Bedrock	Bedrock	0	0	100
		Tota	100			

Summary Data										
D50	0.09									
D84	10									
D95	15									

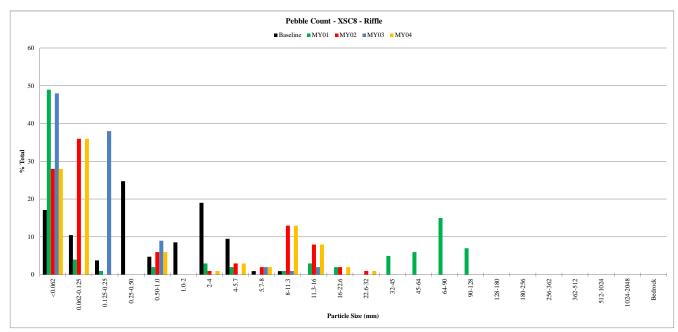

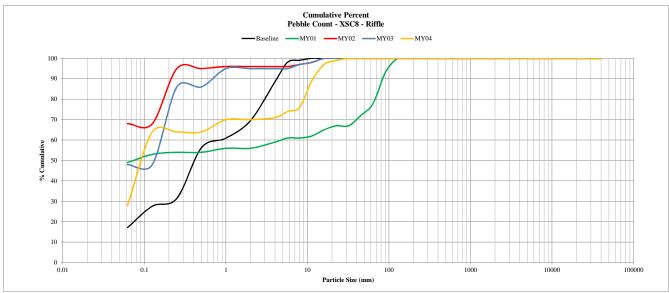

				Co	oddle C	reek T						ita Sum		Jpper (1295 fe	eet)									
Parameter	Gauge ²	Reg	ional C					g Cond			Reference Reach(es) Data							Design		Monitoring Baseline					
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Bankfull Width (ft)							20.0				8.0			9.2				20.0		19.3	20.1		20.8		2
Floodprone Width (ft)							53.7				20.0			92.0				35.0		35.4	62.1		88.7		2
Bankfull Mean Depth (ft)							3.1				1.2			1.5				1.6		1.0	1.2		1.4		2
¹ Bankfull Max Depth (ft))						4.6				1.3			1.9				1.8		1.6	1.9		2.1		2
Bankfull Cross Sectional Area (ft ²))						61.3				11.3			12.3				29.3		19.9	24.7		29.5		2
Width/Depth Ratio							6.5				5.3			7.5				12.0		14.7	16.8		18.8		2
Entrenchment Ratio							2.7				2.5			10.0				1.8		1.7	3.2		4.6		2
¹ Bank Height Ratio											1.6			1.7				1.0		1.0	1.0		1.0		2
Profile	-										_														
Riffle Length (ft)							11.5													11.0	27.9	24.5	62.0	16.2	8
Riffle Slope (ft/ft)							0.027				0.017			0.033				0.0117		0.006	0.013	0.011	0.031	0.008	8
Pool Length (ft)							40				10.8			14.0						18.0	31.6	30.0	55.0	12.2	7
Pool Max depth (ft))						4.79				2.0			2.7				2.85		2.6	3.3	3.3	3.8	0.5	6
Pool Spacing (ft))						10				4.4			47.2			52.0		101.0	47.0	91.4	91.0	126.0	25.4	7
Pattern																									
Channel Beltwidth (ft)							130.0				20.0			69.0			50.0		173.0	50.0	55.6	54.0	67.0	6.7	5
Radius of Curvature (ft)							25.0				6.0			37.0			20.0		60.0	30.0	44.9	50.0	65.0	9.0	16
Rc:Bankfull width (ft/ft)							1.3				0.7			4.6			0.7		4.6	1.6	2.2		3.1		
Meander Wavelength (ft)							115.0				48.0			85.0			104.0		213.0	135.0	168.4	171.5	208.0	21.3	8
Meander Width Ratio	,						5.8				2.5			8.6			2.5		8.6	2.6	2.8		3.2		
Transport parameters																									
Reach Shear Stress (competency) lb/f	2				1		0.	53										0.47				0.	42		
Max part size (mm) mobilized at bankful					ì		38	3.7									ì	35.4				32	2.0		
Stream Power (transport capacity) W/m2	2																								
Additional Reach Parameters																									
Rosgen Classification					I		Impai	red C4			I		C	24			Ι	C4				(24		
Bankfull Velocity (fps)								.4										3.49							
Bankfull Discharge (cfs)								8.4																	
Valley length (ft)								38										1548				11	22		
Channel Thalweg length (ft)							19	000										1796				12	295		
Sinuosity (ft)								16					1	.3				1.16					15		
Water Surface Slope (Channel) (ft/ft)					0.0051							- 0.0130)			0.0047					056				
BF slope (ft/ft)							0.0	051										0.0047				0.0	057		
³ Bankfull Floodplain Area (acres)					5.555																				
⁴ % of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Other																									
Shaded cells indicate that these will typically not be filled in																									

Shaded cells indicate that these will typically not be filled in.

^{1 =} The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

^{3.} Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

^{4 =} Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

					Coddle	e Cree							Summa		ver (97	5 feet)	1								
Parameter	Gauge ²	Reg	jional C		Coddic			g Conc		turij i	Reference Reach(es) Data							Design			Me	onitorin	g Baseli	ne	
Dimension and Substrate - Riffle Only		LL	UL	Eq.	Min	Mean	Med	Max	SD ⁵	n	Min	Mean	Med	Max	SD ⁵	n	Min	Med	Max	Min	Mean	Med	Max	SD ⁵	n
Bankfull Width (ft)							20.0				8.0			9.2				20.0		20.4	21.7		22.9		2
Floodprone Width (ft)							75.0				20.0			92.0				100.0		96.4	123.4		150.3		2
Bankfull Mean Depth (ft)						3.7				1.2			1.5				1.7		1.3	1.3		1.3		2
¹ Bankfull Max Depth (ft)						5.1				1.3			1.9				1.8		2.1	2.2		2.2		2
Bankfull Cross Sectional Area (ft ²)							74.5				11.3			12.3				29.3		27.1	28.0		28.8		2
Width/Depth Ratio							5.4				5.3			7.5				12.0		15.3	16.8		18.2		2
Entrenchment Ratio							3.8				2.5			10.0				5.0		4.7	5.7		6.6		2
¹ Bank Height Ratio											1.6			1.7				1.1		1.0	1.0		1.0		2
Profile																									
Riffle Length (ft)							6.0													18.0	32.0	31.0	48.0	12.3	5
Riffle Slope (ft/ft)							0.035				0.017			0.033				0.0114		0.0057	0.0090	0.0076	0.0150	0.0042	4
Pool Length (ft)							81.0				10.8			14.0						14.0	47.4	35.0	48.0	30.5	7
Pool Max depth (ft)							5.8				2.0			2.7				2.85		2.4	3.0	3.1	3.5	0.4	6
Pool Spacing (ft)							7.5				4.4			47.2			52		101	92.0	112.8	114.0	131.0	19.7	4
Pattern																									
Channel Beltwidth (ft)		I								20.0			69.0			50.0		173.0	67.0	77.2	75.0	89.0	9.1	5
Radius of Curvature (ft)											6.0			37.0			35.0		56.0	45.0	48.9	50.0	50.0	3.9	7
Rc:Bankfull width (ft/ft)											0.7			4.6			0.7		4.6	2.2	2.3		2.2		
Meander Wavelength (ft)											48.0			85.0			104.0		213.0	190.0	204.2	210.0	211.0	9.4	5
Meander Width Ratio											2.5			8.6			2.5		8.6	3.3	3.6		3.9		
Transport parameters																									
Reach Shear Stress (competency) lb/f	2						0.	53										0.36		I		0.	34		
Max part size (mm) mobilized at bankfu							38	3.7									27.3		25.4						
Stream Power (transport capacity) W/m²																									
Additional Reach Parameters					•												•								
Rosgen Classification							Modified	l Channe	el				C	24				C4		i		C	:4		
Bankfull Velocity (fps						'		.9										3.49							
Bankfull Discharge (cfs								2.9										5.45							
Valley length (ft								550										1550				70	63		
Channel Thalweg length (ft								700										1922					75		
Sinuosity (ft								.1					1	.3				1.24					28		
Water Surface Slope (Channel) (ft/ft)								052			1		0.0061)			0.0035				0.0			
BF slope (ft/ft)								052						2.2.00				0.0035					042		
³ Bankfull Floodplain Area (acres								Ė									0.0000								
4% of Reach with Eroding Banks																									
Channel Stability or Habitat Metric																									
Biological or Othe																									
Shaded cells indicate that these will typically not be filled in.																									

Shaded cells indicate that these will typically not be filled in.

^{1 =} The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile. 2 = For projects with a proximal USGS gauge in-line with the project reach (added bankfull verification - rare).

^{3.} Utilizing survey data produce an estimate of the bankfull floodplain area in acres, which should be the area from the top of bank to the toe of the terrace riser/slope.

^{4 =} Proportion of reach exhibiting banks that are eroding based on the visual survey for comparison to monitoring data; 5. Of value/needed only if the n exceeds 3

					Table	11a.	Moni	itoring	Data -	Dime	nsion	al Mo	rphol	ogy S	Summ	ary (Di	mensi	onal P	arame	eters -	– Cro	ss Se	ctions)										
					Cod	dle Cı	reek	Tribut	ary (In	dian R	un)/	94 S	egme	nt/Re	ach:	Upper	(1295',	XS 1-	4) and	d Low	er (9	75', XS	5 5-8)											
		Cross Section 1 (Riffle)						Cross Section 2 (Pool)								ross Sec		_				_	Cross Se	(Pool)										
Based on fixed baseline bankfull elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4 I	MY5 MY
Record elevation (datum) used	542.62	542.62	542.62	542.62	542.6			541.18	541.18	541.18	541.18	541.2			539.00	539.00	539.00	539.00	539.00			538.77	538.77	538.77	538.77	538.77								
Bankfull Width (ft)	19.31	22.90	16	19.93	16.51			34.10	35.59	23	30.49	40			20.80	25.86	21.66	21.9	21.86			33.00	33.51	29.34	33.96	34								
Floodprone Width (ft)	88.70	92.50	91	96	92			56.20	60.70	65	64.5	67.5			35.40	37.80	36.9	35.2	37			45.70	47.90	51.5	55	59								
Bankfull Mean Depth (ft)	1.03	0.99	1.71	1.12	1.25			1.20	1.16	1.82	0.94	0.89			1.40	1.31	1.13	1.02	1.59			1.30	1.30	1.06	1	1.69								
Bankfull Max Depth (ft)	1.60	2.09	2.16	2.43	2.27			3.30	3.32	3.5	3.1	3.78			2.10	2.39	2	2.06	2.36			2.60	2.46	3.16	3.15	4.96								
Bankfull Cross Sectional Area (ff)	19.90	22.60	27.3	22.3	20.72			39.43	41.46	41.97	28.8	35.52			29.50	33.89	24.53	22.34	34.75			43.50	43.72	30.99	33.86	57.6								
Bankfull Width/Depth Ratio	18.80	23.20	7.41	17.81	13.16			29.50	30.55	12.6	32.28	45.05			14.70	19.73	19.13	21.47	13.75			25.00	25.68	27.78	34.06	20.07								
Bankfull Entrenchment Ratio	4.60	4.04	5.69	4.82	5.57			1.60	1.71	2.83	2.12	1.69			1.70	1.46	1.7	1.61	1.69			1.40	1.43	1.76	1.62	1.74								
Bankfull Bank Height Ratio	1.00	0.98	1.16	0.93	0.94			1.00	1.00	1	0.9	0.95			1.00	1.00	1.04	0.85	1.05			1.00	1.00	0.96	0.96	1.00								
Cross Sectional Area between end pins (ff)	421.80	411.70	429.37	433.7	458.5			457.50	471.20	455.94	451.7	458.9			248.40	262.10	264.04	232.26	289.8			358.10	361.90	349.78	362.21	416.8								
d50 (mm)	4.90	32.00	19	11.3	2			12.00	27.00						6.00	6.50	8.5	33	10			0.34	4.40											
		Cr	oss Sect	ion 5 (R	tiffle)				С	ross Se	ction 6	(Pool)				C	ross Se	ction 7	(Pool)				C	ross Se	ction 8	(Riffle)								
Based on fixed baseline bankfull elevation	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+	Base	MY1	MY2	MY3	MY4	MY5	MY+					\Box	
Record elevation (datum) used	536.34	536.34	536.34	536.34	536.3			535.56	535.56	535.56	535.56	535.6			534.62	534.62	534.62	534.62	534.62			534.36	534.36	534.36	534.36	534.36								
Bankfull Width (ft)	22.90	19.98	18.49	37	22.9			19.30	19.03	22.11	26.48	26			69.30	34.53	31.01	36.4	28.31			20.40	22.02	16.78	32.52	38.48								
Floodprone Width (ft)	150.30	150.10	138	139.5	145.5			95.20	104.40	100.4	99	100.5			93.00	99.00	96	96	98			96.40	95.60	89.5	112	121								
Bankfull Mean Depth (ft)	1.30	1.40	0.97	0.61	0.75			1.50	1.40	1.58	1.16	1.44			0.70	1.07	1.20	0.9	1.4			1.30	1.30	1.18	0.81	0.76								
Bankfull Max Depth (ft)	2.10	1.94	1.15	1.36	2.15			2.40	2.75	2.71	2.46	3.02			3.00	3.14	3.11	3.22	3.48			2.20	2.33	2.18	2.39	3.29								
Bankfull Cross Sectional Area (ft)	28.80	27.92	18	22.7	17.21			28.20	26.71	34.9	30.82	37.45			48.90	37.08	37.17	32.89	39.5			27.10	28.64	19.78	26.2	29.3								
Bankfull Width/Depth Ratio	18.20	14.30	18.99	60.31	30.47			13.10	13.56	14.01	22.75	18.05			96.30	32.16	25.87	40.28	20.29			15.30	16.93	14.28	40.36	50.54								
Bankfull Entrenchment Ratio	6.60	7.51	7.46	3.77	6.35			5.00	5.49	4.54	3.74	3.87			1.30	2.87	3.1	2.64	3.46			4.70	4.34	5.33	3.44	3.14								
Bankfull Bank Height Ratio	1.00	0.83	0.79	1.01	0.9			1.00	0.94	1.00	1.02	1.04			1.00	1.00	1.03	0.96	1.00			1.00	0.94	0.99	0.95	0.95								
Cross Sectional Area between end pins (ft)	823.40	870.60	807.93	780.65	805.4			467.00	467.40	540.64	520.1	533.6			458.80	441.30	480.99	423.02	529.8			442.50	431.60	444.59	442.99	530.4								
d50 (mm)	1.60	0.062	17	9	8			0.30	0.29						0.82	0.15						0.42	0.074	0.062	0.125	0.09								

^{1 =} Widths and depths for monitoring resurvey will be based on the baseline bankfull datum regardless of dimensional/depositional development. Input the elevation used as the datum, which should be consistent and based on the baseline datum established. If the performer has inherited the project and cannot acquire the datum used for prior years this must be discussed with EEP. If this cannot be resolved in time for a given years report submission a floothote in this bould be included that states: "It is uncertain if the monitoring datum has been consistent over the monitoring history, which may influence calculated values. Additional data from a prior performer is being acquired to provide confirmation. Values will be reacculated in a future subhin based on a consistent datum if determined to be necessary."

																						a Summa Upper (12		24)											
Parameter	Baseline						MY		Coddie	Orec	K III	butai		Y-2	uii) /	3 4 - 0	giiic	HUINE	MY		33 160	MY- 4							MY- 5						
Dimension and Substrate - Riffle only	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Bankfull Width (ft)	19.3	20.1		20.8		2	22.9	24.4		25.9		2	16	18.8		21.6		2	19.9	20.92		21.9	2	16.5	19.2		21.9		2						
Floodprone Width (ft)	35.4	62.1		88.7		2	37.8	65.2		92.5		2	36.9	63.9		91		2	35.2	65.6		96	2	37	64.5		92		2						
Bankfull Mean Depth (ft)	1.0	1.2		1.4		2	1.0	1.2		1.3		2	1.71	1.42		1.13		2	1.02	1.07		1.12	2	1.25	1.42		1.59		2						
¹ Bankfull Max Depth (ft)	1.6	1.9		2.1		2	1.7	2.1	2.1	2.4	0.2	10	2	2.1		2.16		2	2.06	2.25		2.43	2	2.27	2.32		2.36		2						
Bankfull Cross Sectional Area (ft 2)	19.9	24.7		29.5		2	22.6	28.2		33.9		2	24.53	25.9		27.3		2	22.3	22.32		22.3	2	20.7	27.7		34.8		2						
Width/Depth Ratio	14.7	16.8		18.8		2	19.7	21.5		23.2		2	7.41	13.27		19.13		2	17.8	19.64		21.5	2	13.2	13.5		13.8		2						
Entrenchment Ratio	1.7	3.2		4.6		2	1.5	2.8		4.0		2	1.7	3.7		5.69		2	1.61	3.22		4.82	2	1.69	3.63		5.57		2						
¹ Bank Height Ratio	1.0	1.0		1.0		2	1.0	1.0		1.0		2	1.04	1.1		1.16		2	0.85	0.89		0.93	2	0.94	1		1.05		2						
Profile																																			
Riffle Length (ft)	11.0	27.9	24.5	62.0	16.2	8	4	13.1	12	23	6.6	11	12.1	25.2	26	39	19	5	13.6	28.2	27.8	45.5 12.5	6	10.4	18.2	15.4	29.6	7.29	6			Ī			
Riffle Slope (ft/ft)			0.0107			8	0.0077				0.0124	11	0.02	0.02			0.01	5	0.01	0.015	0.013	0.03 0.01	6			0.02				†					
Pool Length (ft)	18.0	31.6	30.0	55.0	12.2	7	13	25.2	20	63	13.3	15	25	48.7				5	25	33.14	32.2	45.3 6.92	6				68.8		7	†					
Pool Max depth (ft)	2.6	3.3	3.3	3.8	0.5	6	2.37	3.23	3.3	4.33	0.63	15	2.3	3.3	3.4	4.3	1	5	2.01	2.01 2.35 2.22 3.18 0.44 6				2.52	3.36	0.72	7								
Pool Spacing (ft)	47.0	91.4	91.0	126.0	25.4	7	35	80.9	80	122.5	30.3	10	83.8	125.9		158.8	37.6	5	47.1	84.6	72.9	159.8 43.1	6			86.9	103	_	7						
Pattern				•																															
Channel Beltwidth (ft)	50.0	55.6	54.0	67.0	6.7	5																													
Radius of Curvature (ft)	30.0	44.9	50.0	65.0	9.0	16																													
Rc:Bankfull width (ft/ft)	1.6	2.2		3.1												Pat	tern dat	a will no				nless visual da ant shifts from b			data or	profile o	data								
Meander Wavelength (ft)	135.0	168.4	171.5	208.0	21.3	8																													
Meander Width Ratio	2.6	2.8		3.2																															
Additional Reach Parameters																																			
Rosgen Classification			С	4					С	4					C	24			C4					С	:4										
Channel Thalweg length (ft)			129	95					12	95					12	295			1295					12	95										
Sinuosity (ft)			1.1	15					1.1	15					1.	.15			1.15					1.	15										
Water Surface Slope (Channel) (ft/ft)			0.00)56					0.00)58					0.0	054				0.0057				0.0	062										
BF slope (ft/ft)			0.00)57					0.00)55					0.0	054			0.006					0.0	061										
³ Ri% / Ru% / P% / G% / S%																																			
3SC% / Sa% / G% / C% / B% / Be%																																			
3d16 / d35 / d50 / d84 / d95 /																																			
² % of Reach with Eroding Banks									2.	3					-	0			3 0						0										
Channel Stability or Habitat Metric																																			
Biological or Other																																			

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = Proportion of reach exhibiting baths that are eroding based on the visual survey from visual assessment table

3 = Riffle, Rw, Pool, Glide, Step: Sitt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

4. = Of value/needed only if the n exceeds 3

																						a Sun														\neg
											Coddl	e Cre	ek Tri	butar	y (In	dian F	Run) /	94 - 3	Segn	nent/R			r (975	feet)							,					
Parameter		Baseline				MY-1							M)	Y-2					MY	'- 3			MY- 4							MY- 5						
Dimension and Substrate - Riffle only	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n	Min	Mean	Med	Max	SD ⁴	n
Bankfull Width (ft)	20.4	21.7		22.9		2	20.0	21.0		22.0		2	16.78	17.64		18.49		2	32.5	34.76		37		2	22.9	30.7		38.5		2				\Box		
Floodprone Width (ft)	96.4	123.4		150.3		2	95.6	122.9		150.1		2	89.5	113.8		138		2	112	125.8		139.5		2	121	133		146		2						
Bankfull Mean Depth (ft)	1.3	1.3		1.3		2	1.3	1.4		1.4		2	0.97	1.07		1.18		2	0.61	0.71		0.81		2	0.75	0.76		0.76		2						
¹ Bankfull Max Depth (ft)	2.1	2.2		2.2		2	1.9	2.2	2.2	2.4	0.2	7	1.15	1.66		2.18		2	1.36	1.875		2.39		2	2.15	2.72		3.29		2						
Bankfull Cross Sectional Area (ft 2)	27.1	28.0		28.8		2	27.9	28.3		28.6		2	18	18.89		19.78		2	22.7	24.45		26.2		2	17.2	23.3		29.3		2						
Width/Depth Ratio	15.3	16.8		18.2		2	14.3	15.6		16.9		2	14.28	16.63		18.99		2	40.4	50.34		60.31		2	30.5	40.5		50.5		2						
Entrenchment Ratio	4.7	5.7		6.6		2	4.3	5.9		7.5		2	5.33	6.39		7.46		2	3.44	3.605		3.77		2		3.46		3.77		2						
¹ Bank Height Ratio	1.0	1.0		1.0		2	0.8	0.9		0.9		2	0.79	0.89		0.99		2	0.95	0.98		1.01		2	0.95	0.98		1.01		2						
Profile																																				
Riffle Length (ft)	18.0	32.0	31.0	48.0	12.3	5	4.0	13.5	14.5	24.0	7.2	6	10.78	18.17	17.8	27.19	6.16	6	15.5	17.35	17.1	19.46	1.83	5	6.44	12.4	13.5	16.5	4.01	5				$\overline{}$	\Box	
Riffle Slope (ft/ft)	0.0057	0.0090	0.0076	0.0150	0.0042	4	0.0088	0.0141	0.0152	0.0188	0.0036	6	0.004	0.012	0.012	0.021	0.007	6	0.016	0.030	0.029	0.033	0.010	5	0.01	0.03	0.02	0.09	0.03	5				$\overline{}$		
Pool Length (ft)	14.0	47.4	35.0	48.0	30.5	7	26.0	45.6	48.0	71.0	17.6	7	16.41	41.3	45.6	66.8	18.7	5					16.1	35.5	37.4	53.1	13.6	5				$\overline{}$				
Pool Max depth (ft)	2.4	3.0	3.1	3.5	0.4	6	2.4	3.0	2.8	3.9	0.5	7	14.79	18.1	18.4	20.7	2.17	5	2.41 2.84 3.07 3.21 0.39 5				1.76	1.98	1.93	2.42	0.26	5				\neg				
Pool Spacing (ft)	92.0	112.8	114.0	131.0	19.7	4	45.0	93.1	107.0	141.0	38.0	6	67.6	122.2	123	176.1	44.7	4	40.6	50.48	47.13	66.96	10.7	5	23.9	41.7	47.5	62.8	17	5				\neg		
Pattern																																				
Channel Beltwidth (ft)	67.0	77.2	75.0	89.0	9.1	5																														
Radius of Curvature (ft)	45.0	48.9	50.0	50.0	3.9	7										Ī.,,																				
Rc:Bankfull width (ft/ft)	2.2	2.3		2.2												Pattern	data wii	I not ty	pically i			s visual of			ai data	or prori	ie data i	ndicate								
Meander Wavelength (ft)	190.0	204.2	210.0	211.0	9.4	5										Ĺ											_									
Meander Width Ratio	3.3	3.6		3.9																																
Additional Reach Parameters																																				
Rosgen Classification			C						С							24			C4							С										
Channel Thalweg length (ft)			97						97						9				975 1.28						97											
Sinuosity (ft)			1.2						1.2						1.:												1.:	_								
Water Surface Slope (Channel) (ft/ft)			0.00						0.00						0.0				0.0051 0.005						0.0											
BF slope (ft/ft)			0.00)42					0.00)46					0.0	054			0.005							0.0)45									
³ Ri% / Ru% / P% / G% / S%																																		لـــــا	-	
³ SC% / Sa% / G% / C% / B% / Be%																																		-	ш	
³ d16 / d35 / d50 / d84 / d95 /			<u> </u>																														ш		ш	
² % of Reach with Eroding Banks									C)					-	U					()														
Channel Stability or Habitat Metric																																				
Biological or Other																																				

Shaded cells indicate that these will typically not be filled in.

1 = The distributions for these parameters can include information from both the cross-section surveys and the longitudinal profile.

2 = Proportion of reach exhibiting banks that are eroding based on the visual survey from visual assessment table

3 = Riffle, Run, Pool, Clide, Spr.; Sitt/Clay, Sand, Gravel, Cobble, Boulder, Bedrock; dip = max pave, disp = max subpave

4, = Of value/needed only if the n exceeds 3

Appendix E Hydrologic Data

Table 12. Verification of Bankfull Events														
	Coddle Creek Tributary (Indian Run)/ 94 Segment/Reach: 2270 feet Date of Data Collection Date of Occurrence Method Photo													
5/30/2012	Between 5/11/2011 - 5/30/2012	Visual observation of wrack lines; stream gauge												
11/4/2013	Between 5/30/2012 - 11/04/2013	Visual observation of wrack lines; stream gauge	Photo in MY2 Report											
9/19/2014	Between 11/04/2013 - 9/19/2014	Visual observation of wrack lines; stream gauge reading at 35" above bankfull	Photo in MY3 Report											
9/22/2015	Between 9/19/2014 - 9/22/2015	Visual observation of wrack lines; stream gauge reading at 10.5" above bankfull	Photo below											

