### **Glade Creek Stream Restoration**

NCEEP Project Number: 854
Monitoring Contract Number: D08033S
Monitoring Very 3

**Monitoring Year 3 2013 Final Report** 




Submitted to
North Carolina Ecosystem Enhancement Program
North Carolina Department of Environment and Natural Resources
November 2013



1652 Mail Service Center Raleigh, NC 27699

## **Monitoring Firm**

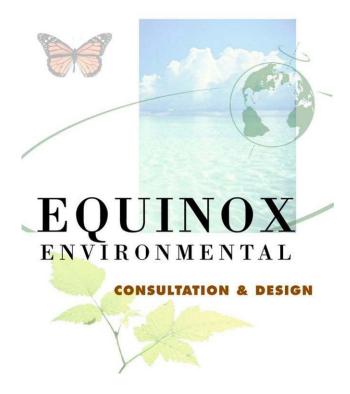

37 Haywood Street, Suite 100 Asheville, North Carolina 28801 Phone: 828-253-6856

Project Contact: Hunter Terrell Email: Hunter@equinoxenvironmental.com

## **Glade Creek Stream Restoration 2013 Monitoring Report (MY 3)**

#### **Table of Contents**

1.0	Executive Summary/Project Abstract	Page 1
2.0	Methodology	Page 3
3.0	References	Page 4

#### **Appendices**

#### Appendix A. Project Vicinity Map and Background Tables

Figure 1. Vicinity Map and Directions

Table 1a. Project Components

Table 1b. Component Summations

Table 2. Project Activity and Reporting History

Table 3. Project Contacts

Table 4. Project Attributes

#### Appendix B. Visual Assessment Data

Figure 2. Integrated Current Condition Plan View

Table 5. Visual Stream Morphology Stability Assessment

Table 6. Vegetation Condition Assessment

**Photo Station Photos** 

#### Appendix C. Vegetation Plot Data

Table 7. Vegetation Plot Criteria Attainment

**Vegetation Monitoring Plot Photos** 

Table 8. CVS Vegetation Plot Metadata

Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)

#### Appendix D. Stream Survey Data

Cross-Sections with Annual Overlays and Photos

Longitudinal Profiles with Annual Overlays

Pebble Count Plots with Annual Overlays

Table 10a. Baseline Stream Data Summary

Table 10b. Baseline Stream Data Summary (Substrate, Bed, Bank, and Hydrologic Containment Parameter Distributions)

Table 11a. Monitoring Data – Dimensional Morphology Summary (Dimensional Parameters – Cross-Sections)

Table 11b. Monitoring Data – Stream Reach Data Summary

#### Appendix D. Hydrological Data

Table 12. Verification of Bankfull Events

#### 1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT

The goals and objectives stated in the Glade Creek Restoration Plan (NCEEP 2007) are as follows:

#### Project Goals

- Rapidly stabilize the channel of Glade Creek relative to natural processes;
- Rapidly stabilize and preserve the channel of the Unnamed Tributary relative to natural processes;
- Restore and rehabilitate channel features and aquatic habitat in Glade Creek and the Unnamed Tributary;
- Rehabilitate the riparian buffer along both streams; and
- Preserve the existing wetlands onsite.

#### **Project Objectives**

- Restore approximately 2,430 linear feet of stream channel on Glade Creek;
- Restore approximately 275 linear feet of the Unnamed Tributary;
- Preserve 570 linear feet of the Unnamed Tributary; and
- Preserve the existing 0.33 acre wetlands within the project site.

The monitoring year three (MY3) vegetation plot data revealed the average planted stem density to be 505 stems/acre; meeting the 320 stems/acre minimum density criterion that must be achieved by the end of MY3. Stem densities were found to have declined by approximately 7% from the previous year due to dead or missing stems. Additionally, 16 isolated patches of high threat invasive plants are distributed throughout the project area. Multiflora rose *Rosa multiflora* and oriental bittersweet *Celastrus orbiculatus* are the most dominant species present, while secondary species found included Japanese honeysuckle *Lonicera japonica*, Japanese barberry *Berberis thunbergii*, and Japanese spiraea *Spiraea japonica*. EEP has initiated treatment of these invasive plants in fall of 2013 and are scheduled to be treated in spring and summer of 2014.

Stream longitudinal profiles remained stable between monitoring years. While three areas of bed aggradation were present, no other areas of significant instability in the stream channel were identified. Two bankfull events were documented in MY3. One bankfull event, measuring 1.7 feet above bankfull, was documented using crest gauge height. Using precipitation data, the date of occurrence was determined to be 1/18/2013. Another event, documented using wrack lines, occurred sometime between 6/19/2013 - 10/30/2013.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the restoration plan on EEP's website (NCEEP 2007). All raw data supporting tables and figures in the appendices are available from EEP upon request.

1

#### 2.0 Methodology

The stream monitoring methodologies utilized in MY3 replicate those employed during the previous monitoring year and are based on standard guidance and procedures documents (Rosgen 1996; USACE 2003). Vegetation monitoring data were collected following the standard CVS-EEP Protocol for Recording Vegetation, Level II, Version 4.2 (Lee et al. 2008).

#### 3.0 References

- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. The University of North Carolina at Chapel Hill, Department of Biology.
- NCEEP (North Carolina Ecosystem Enhancement Program). 2007. Restoration Plan. Glade Creek Stream Restoration. Alleghany County, North Carolina. Raleigh.
- Rosgen, D.L. 1996. Applied River Morphology. Wildland Hydrology Books, Pagosa Springs, Colorado.
- USACE (U.S. Army Corps of Engineers). 2003. Stream Mitigation Guidelines. U.S. Army Corps of Engineers, U.S. Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Department of Environment and Natural Resources-Division of Water Quality. Wilmington District.

# Appendix A Project Vicinity Map and Background Tables

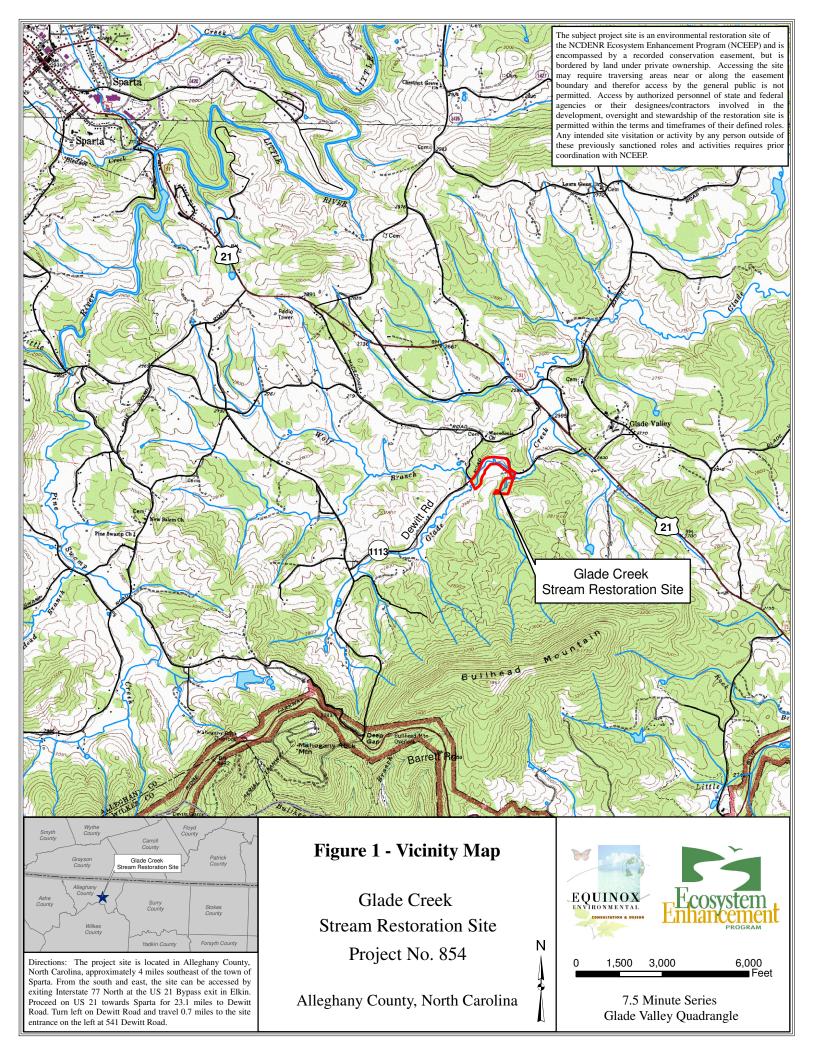


	Table 1a. Project Components Glade Creek / Project No. 854									
Project Component or Reach ID	Existing Feet/Acres	Restoration Level	Approach	Footage or Acreage	Stationing	Buffer Acres	BMP Elements	Comment		
Glade Creek	2,569 lf	R	P2	2,513 lf*	0+00 - 25+58					
Unnamed Tributary Downstream	300 lf	R	P2	265 lf	0+00 - 2+65					
Unnamed Tributary Upstream	784 lf	P		784 lf	Not Established					
Wetlands	0.26 ac	P		0.26 ac	N/A					

<sup>\*</sup>Excludes the 45 linear feet of stream associated with the private drive access location.

<sup>=</sup>Non-Applicable

	Table 1b. Component Summations Glade Creek / Project No. 854								
Restoration Level	Stream (lf)	Riparian Wetland (Ac)		Non- Riparian (ac)	Upland (ac)	Buffer (ac)	ВМР		
		Riverine	Non-Riverine						
Restoration	2,778*	0.00	0.00						
Enhancement		0.00	0.00						
Enhancement I	0								
Enhancement II	0								
Creation		0.00	0.00						
Preservation	784	0.00	0.26						
HQ Preservation	0	0.00	0.00						
		0.00	0.00						
Totals	3,562		0.26	0	0	0	0		

<sup>\*</sup>Excludes the 45 linear feet of stream associated with the private drive access location. =Non-Applicable

Table 2. Project Activity and Reporting History Glade Creek / Project No. 854					
Activity or Report	Data Collection Complete	Completion or Delivery			
Mitigation Plan	June 2007	Dec 2007			
Final Design - Construction Plans	Aug 2007	Dec 2008			
Construction	N/A	April 2011			
Temporary S&E mix applied to entire project area	N/A	Sept - Nov 2010 March - April 2011			
Permanent seed mix applied	N/A	Sept - Nov 2010 March - April 2011			
Planting	May 2011	May 2011			
Baseline Monitoring Document (Year 0 Monitoring - Baseline)	May 2011	Dec 2011			
Year 1 Monitoring	Dec 2011	Feb 2012			
Year 2 Monitoring	Nov 2012	Jan 2013			
Year 3 Monitoring	Nov 2013	Dec 2013			
Year 4 Monitoring					
Year 5 Monitoring					


Table	3. Project Contacts
	reek / Project No. 854
Designer	Biohabitats Southeast Bioregion Inc.
Designer	8218 Creedmoor Road, Suite 200
	Raleigh, North Carolina 27613
Primary Project Decim POC	Kevin Nunnery (919) 518-0313
Primary Project Design POC	Yadkin Valley Construction
Construction Contractor	
	2961 Old 60 Highway
	Ronda, North Carolina 28670
Construction Contractor POC	Terry Benton (336) 984-2219
Planting Contractor	Foggy Mountain Nursery
	2251 Ed Little Road
	Creston, North Carolina 28615
Planting Contractor POC	Glen Sullivan (336) 384-5323
Seeding Contractor	Yadkin Valley Construction
	2961 Old 60 Highway
	Ronda, North Carolina 28670
Seeding Contractor POC	Terry Benton (336) 984-2219
Seed Mix Sources	Hanes Geo
	(336) 747-1600
Nursery Stock Suppliers	Foggy Mountain Nursery
7 11	Glen Sullivan (336) 384-5323
Monitoring Performers (Y0) - 2011	Equinox Environmental Consultation & Design, Inc.
intolmig Tellormers (10) 2011	37 Hay wood Street, Suite 100
	Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
<b>Monitoring Performers (Y1) - 2011</b>	Equinox Environmental Consultation & Design, Inc.
	37 Hay wood Street, Suite 100
	Asheville, North Carolina 28801
Stream Monitoring POC	Win Taylor (828) 253-6856
Vegetation Monitoring POC	Win Taylor (828) 253-6856
<b>Monitoring Performers (Y2) - 2012</b>	Equinox Environmental Consultation & Design, Inc.
	37 Haywood Street, Suite 100
	Asheville, North Carolina 28801
Stream Monitoring POC	Kevin Mitchell (828) 253-6856
Vegetation Monitoring POC	Kevin Mitchell (828) 253-6856
<b>Monitoring Performers (Y3)- 2013</b>	Equinox Environmental Consultation & Design, Inc.
	37 Hay wood Street, Suite 100
0. 16.5.1.700	Asheville, North Carolina 28801
Stream Monitoring POC	Hunter Terrell (828) 253-6856
Vegetation Monitoring POC	Hunter Terrell (828) 253-6856
Monitoring Performers (Y4)- 2014	
Stream Monitoring POC	
Vegetation Monitoring POC	
Monitoring Performers (Y5)- 2015	
Stream Monitoring POC	
Vegetation Monitoring POC	

	•	line Informatio	on and Attribut	es	
		ect Information			
Project Name	ĺ		Glade	Creek	
County			Alles	ghany	
Project Area (acres)				5.86	
Project Coordinates (latitude and longitude)		Lat	itude 36.468090 /	Longitude -	81.066384
	oject Waters	hed Summary Inf		<u>U</u>	
Physiographic Province		·		Ridge	
River Basin				River	
USGS Hydrologic Unit 8-dgit				50001	
USGS Hydrologic Unit 14-dgit				01000801	
NCDWQ Sub-Basin				07-03	
Project Drainage Area (acres)				443	
Project Drainage Area Percentage of Impervious	Cover			1%	
CGIA Land Use Classification	S COVEI		Deciduous		1
COLA LAHU USE CIASSIFICATION	Pageh C.	mmary Informati		roiest Lanc	1
Parameters	Neacii 30	Glade Creek		Lower	UT-Upper
Length of Reach (linear feet)		2,558		65	784
Valley Classification		*	+		+
		2,022		- 21	520
Drainage Area (acres)		2,922		21	520
NCDWQ Stream Identification Score		59		0.5 T	50.5
NCDWQ Water Quality Classification		C-Tr		-Tr	C-Tr
Morphological Description (stream type)		С		С	-
Evolutionary Trend		-			-
Underlying Mapped Soils		Alluvial	Allı	uvial	Alluvial
Drainage Class		-		-	-
Soil Hydric Status		-		-	-
Slope		0.0075	0.0	075	0.0075
FEMA Classification		-		-	-
Native Vegetatation Community		North	ern Hardwood Fo	rest & Rich	Cove Forest
Percent Composition of Exotic Invasive Vegetat	ion		14	.5%	
	Wetland S	ummary Informa	tion		
Parameters		Wetland 1	(Glade Ck)	7	Wetland 2 (UT)
Size of Wetland (acres)		0.1	78		0.085
Wetland Type		Ripa	ırian		Riparian
Soil Series			Tox	away	
Soil Hydric Status				dric	
Source of Hydrology					-
Hydrologic Impairment		-	-		-
Native Vegetatation Community			High Elev	ation Seep	
Percent Composition of Exotic Invasive Vegetat	ion	100			0%
		ory Consideration			
Regulation	Applic		Resolved?	Suppor	rting Documentation
Waters of the United States - Section 404	Ye		N/A	111	-
Waters of the United States - Section 401	Ye		N/A		_
Endangered Species	No		N/A		N/A
Historic Preservation Act	No		N/A		N/A
Coastal Zone Management Act (CZMA)	1				
Coastal Area Management Act (CAMA)	No	)	N/A		N/A
FEMA Floodplain Compliance	No	,	N/A		N/A
Essential Fisheries Habitat	No		N/A	<u> </u>	N/A
Information unqueilable		,	1 W/ /A	L	11/71

<sup>-</sup> Information unavailable.

N/A - Item does not apply.

Figure 2. Integrated Current Condition Plan View - Draft

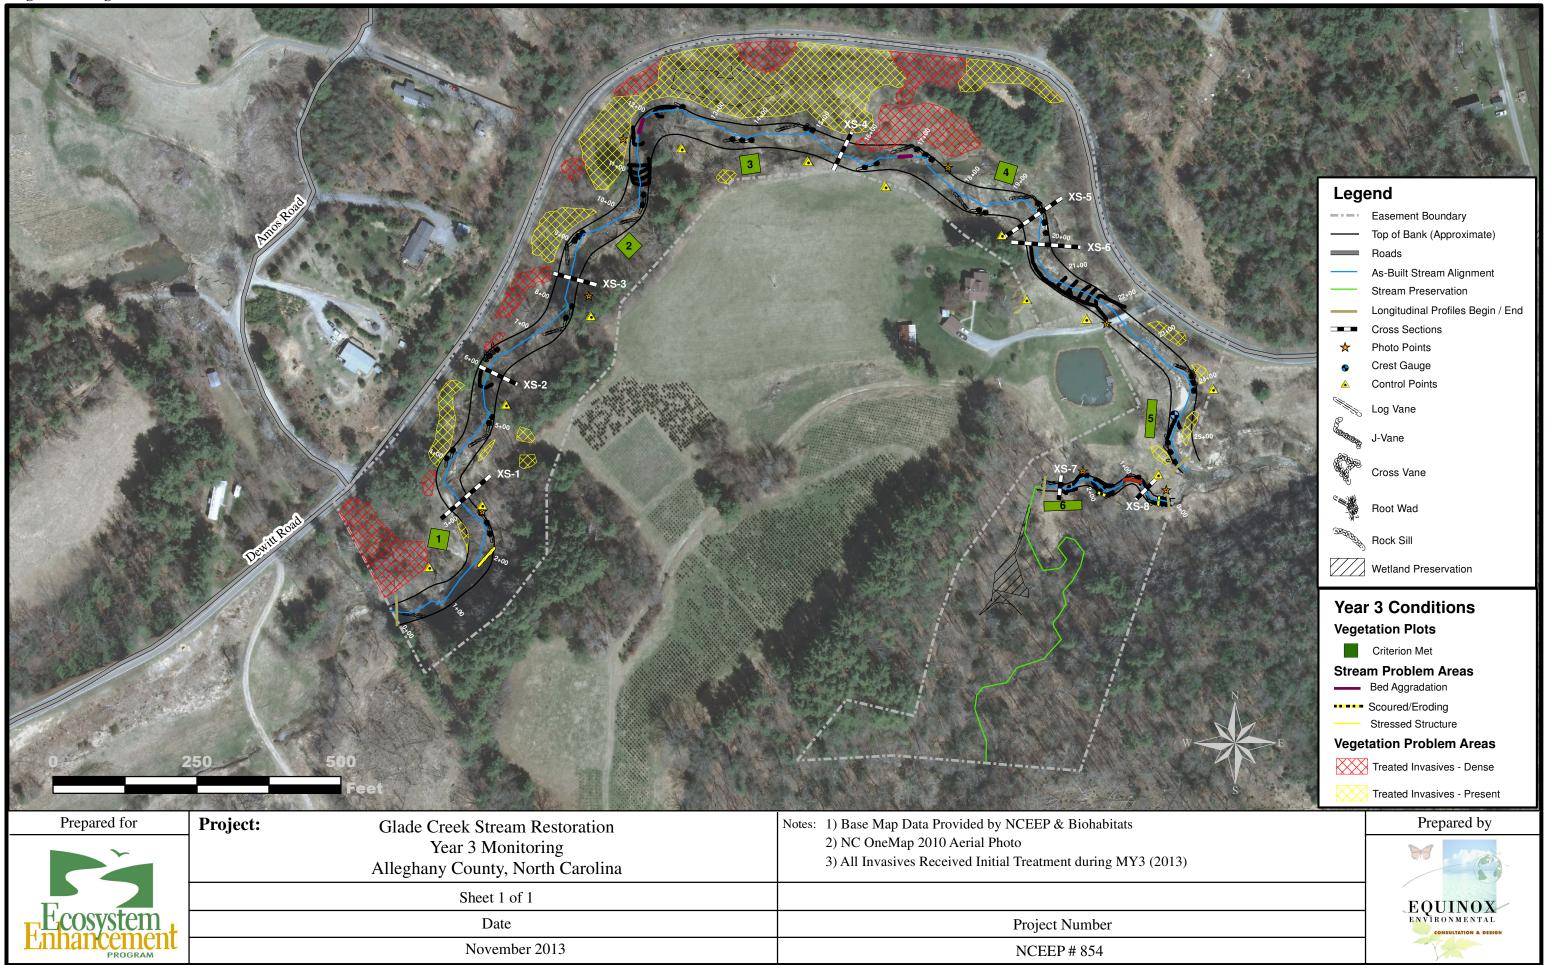

#### Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Glade Creek Assessed Length 2,558 feet Number Footage Adjusted % Number Total Number of % Stable, Amount of with with **Major Channel** Channel Stable, Number in Stabilizing Stabilizing Metric Unstable Unstable Performing Stabilizing Performing Category Sub-Category As-built Segments as Intended Woody Woody Woody Footage as Intended Vegetation Vegetation Vegetation 1. Bed Aggradation - Bar formation/growth sufficient to significantly 2 45 98% 1. Vertical Stability deflect flow laterally (not to include point bars). (Riffle and Run Units Degradation - Evidence of downcutting. 0 0 100% 2. Riffle Condition . Texture/Substrate - Riffle maintains coarser substrate. 100% Depth Sufficient (Max Pool Depth: Mean Bankfull Depth ≥ 1.6). 17 17 100% 3. Meander Pool Condition 2. Length appropriate (>30% of centerline distance between tail of 17 17 100% upstream riffle and head of downstream riffle). . Thalweg centering at upstream of meander bend (Run). 15 17 88% 4. Thalweg Position 2. Thalweg centering at downstream of meander bend (Glide). 16 16 100% 2. Bank Bank lacking vegetative cover resulting simply from poor growth 1. Scoured / Eroding 0 0 100% N/A N/A N/A and/or scour and erosion. Banks undercut/overhanging to the extent that mass wasting appears 2. Undercut likely. Does NOT include undercuts that are modest, appear 0 0 100% N/A N/A N/A sustainable and are providing habitat 3. Mass Wasting Bank slumping, calving, or collapse. 0 0 100% N/A N/A N/A Totals 0 100% N/A N/A N/A 3. Engineered 1. Overall Integrity Structures physically intact with no dislodged boulders or logs. 40 100% Structures Grade control structures exhibiting maintenance of grade across the sill 2. Grade Control 13 13 100% 2a. Piping Structures lacking any substantial flow underneath sills or arms. 13 13 100% Bank erosion within the structures extent of influence does NOT 3. Bank Protection 18 18 100% Pool forming structures maintaining ~ Max Pool Depth : Mean 4. Habitat Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at 22 22 100% base-flow.

## Table 5. Visual Stream Morphology Stability Assessment Glade Creek / Project No. 854 - Unnamed Tributary - Downstream Assessed Length 265 feet

	Assessed Length 265 leet									
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed		Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			1	29	89%			
	(Riffle and Run Units)	2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate.	4	4			100%			
	3. Meander Pool	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	4	5			80%			
	Condition	Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	4	5			80%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run).	5	5			100%			
		2. Thalweg centering at downstream of meander bend (Glide).	5	5			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			1	18	97%	0	0	97%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
				Totals	1	18	97%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	13	13			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	6	6			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	6			83%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	9	9			100%			
N/A - Item does not a		Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	6	6			100%			

Table 6. Vegetation Condition Assessment Glade Creek / Project No. 854 Planted Acreage 4.31								
Vegetation Category	N							
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	0	0.00	0%			
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%			
		Totals	0	0.00	0%			
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%			
		<b>Cumulative Totals</b>	0	0.00	0%			
Easement Acreage 15.86								
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage			
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present)	16	2.34	15%			
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	N/A	0	0.00	0%			



Glade Creek – Permanent Photo Station 1 Upstream



Glade Creek – Permanent Photo Station 2 Upstream



Glade Creek – Permanent Photo Station 3 Upstream



Glade Creek – Permanent Photo Station 4 Upstream



Glade Creek – Permanent Photo Station 5 Upstream



Glade Creek – Permanent Photo Station 5 Downstream



Unnamed Tributary Lower – Permanent Photo Station 6 Upstream



Unnamed Tributary Lower – Permanent Photo Station 7 Upstream

Table 7. Vegetation Plot Criteria Attainment											
Glade Creek / Project No. 854											
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean									
1	Yes										
2	Yes										
3	Yes	100%									
4	Yes	10070									
5	Yes										
6	Yes										



Vegetation Monitoring Plot 1 Monitoring Year 3 – Aug 5, 2013



Vegetation Monitoring Plot 2 Monitoring Year 3 – Aug 5, 2013



Vegetation Monitoring Plot 3 Monitoring Year 3 – Aug 5, 2013



Vegetation Monitoring Plot 4 Monitoring Year 3 – Aug 5, 2013



Vegetation Monitoring Plot 5 Monitoring Year 3 – Aug 5, 2013



Vegetation Monitoring Plot 6 Monitoring Year 3 – Aug 5, 2013


	Table 8. CVS Vegetation Plot Metadata
Report Prepared By	Glade Creek/Project No. 854 Hunter Terrell
Date Prepared	8/13/2013 10:36
Date Frepareu	0/13/2013 10.30
database name	Equinox-2013-A-GladeCreek-MY3.mdb
database location	Z:\ES\NRI&M\EEP Monitoring\Glade Creek\Glade-MY3-2013\Data\Veg
computer name	SENIORSCIENTIST
file size	51527680
	DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT
	Description of database file, the report worksheets, and a summary of project(s)
Metadata	and project data.
	Each project is listed with its PLANTED stems per acre, for each year. This
Proj, planted	excludes live stakes.
	Each project is listed with its TOTAL stems per acre, for each year. This
Proj, total stems	includes live stakes, all planted stems, and all natural/volunteer stems.
	List of plots surveyed with location and summary data (live stems, dead stems,
Plots	missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
	List of most frequent damage classes with number of occurrences and percent
Damage	of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot	A matrix of the count of PLANTED living stems of each species for each plot;
and Spp	dead and missing stems are excluded.
ALL Stems by Plot and	A matrix of the count of total living stems of each species (planted and natural
spp	volunteers combined) for each plot; dead and missing stems are excluded.
	PROJECT SUMMARY
Project Code	854
project Name	Glade Creek
Description	
River Basin	New
length(ft)	
stream-to-edge width (ft)	
area (sq m)	4)
Required Plots (calculate Sampled Plots	<b>a</b> ) 6
Sampled Flots	U


Appendix C Vegetation Assessment Data

	Table 9. Planted and Total Stem Counts (Species by Plot with Annual Means)																															
Glade Creek / Project No. 854																																
				Current Plot Data (MY3 2013)										Annual Means																		
			E85	E854-01-0001 E854-01-0002 E854-01-0003 E854-01-0004 E854-01-0005 E854-01-0006				006	M	Y3 (20:	13)	М	Y2 (201	12)	М	Y1 (201	1)	M	YO (201	1)												
Scientific Name	Common Name	Species Type	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	Т
Alnus serrulata	hazel alder	Shrub												27	1	1	3				1	1	30	1	1	12			7	1		
Aronia arbutifolia	Red Chokeberry	Shrub	2	2	2	4	4	4	2	2	2	2	2	2	1	1	1				11	11	11	11	11	11	11	11	11	11	11	11
Betula nigra	river birch	Tree							2	2	2										2	2	2	2	2	2	1	1	1	1		
Callicarpa americana	American beautyber	Shrub																									1	1	1	4	4	4
Calycanthus floridus	eastern sweetshrub	Shrub													1	1	1				1	1	1	1	1	1	4	4	4	3	3	3
Carpinus caroliniana	American hornbeam	Tree				2	2	2	1	1	1	2	2	2				2	2	2	7	7	7	7	7	7	8	8	8	13	13	13
Carpinus caroliniana var.	Coastal American Ho	Tree						2															2							i I		
Cephalanthus occidentali	common buttonbush	Shrub				5	5	5													5	5	5	5	5	5	2	2	2	3	3	3
Cercis canadensis	eastern redbud	Tree	1	1	1				1	1	1				1	1	1	2	2	2	5	5	5	7	7	7	7	7	7	7	7	7
Cornus amomum	silky dogwood	Shrub														1	1					1	1		1	2				i I		
Diospyros virginiana	common persimmon	Tree				1	1	1	1	1	1				3	3	3				5	5	5	5	5	5	5	5	5	5	5	5
Hamamelis virginiana	American witchhazel	Tree	1	1	1	. 1	1	1													2	2	2	2	2	2	3	3	3	3	3	3
Hydrangea arborescens	wild hydrangea	Shrub																						1	1	1	1	1	1	8	8	8
Kalmia latifolia	mountain laurel	Shrub Tree	1	1	1													1	1	1	2	2	2	2	2	2	3	3	3	3	3	3
Lindera benzoin	northern spicebush	Shrub																												4	4	4
Lindera benzoin var. benz	northern spicebush	Shrub			1																		1							i I		
Liriodendron tulipifera	tuliptree	Tree	2	2	2				1	1	1	1	1	1							4	4	4	4	4	4	5	5	5	5	5	5
Malus angustifolia	southern crabapple	Tree	1	1	1	. 1	1	1	1	1	1							3	3	3	6	6	6	6	6	6	6	6	6	6	6	6
Platanus occidentalis	American sycamore	Tree	2	2	2	. 3	3	3	2	2	2	2	2	2	1	1	1	3	3	3	13	13	13	14	14	14	14	14	14	14	14	14
Quercus alba	white oak	Tree																								1						
Quercus rubra	northern red oak	Tree	2	2	2				1	1	1	1	1	1	3	3	3	2	2	2	9	9	9	11	11	11	12	12	12	12	12	12
Rhododendron	rhododendron								1	1	1	1	1	1							2	2	2	2	2	2	3	3	3	3	3	3
Salix	willow	Shrub or Tree																										3	3	i I	3	3
Salix nigra	black willow	Tree														2	2					2	2		2	9				i I		
Unknown		Shrub or Tree																												2	2	2
		Stem count	12	12	13	17	17	19	13	13	13	9	9	36	11	14	16	13	13	13	75	78	110	81	84	104	86	89	96	106	109	109
		size (ares)		1			1			1			1			1			1		6			6				6			6	
		size (ACRES)		0.02			0.02		0.02				0.02			0.02			0.02		0.15			0.15			0.15				0.15	
		Species count	8	8	9	7	7	8	10	10	10	6	6	7	7	9	9	6	6	6	15	17	19	16	18	19	16	17	18	17	18	18
	St	tems per ACRE	485.6	485.6	526.1	688	688	768.9	526.1	526.1	526.1	364.2	364.2	1457	445.2	566.6	647.5	526.1	526.1	526.1	505.9	526.1	741.9	546.3	566.6	701.5	580	600.3	647.5	714.9	735.2	735.2

Exceeds requirements by 10%

## Appendix D Stream Survey Data



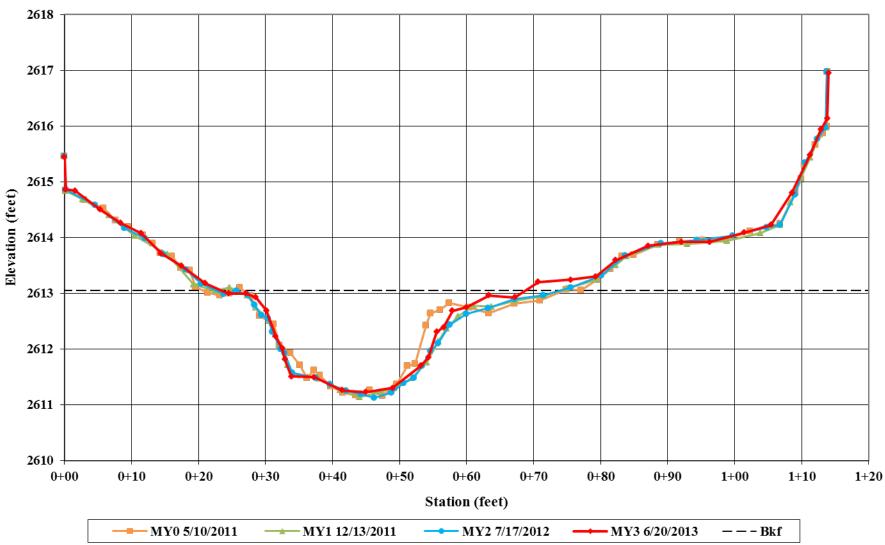



Glade Creek – Cross-Section 1 – Riffle Left Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 1 – Riffle Right Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 1 – Riffle Downstream Monitoring Year 3 – June 19, 2013



Glade Creek – Cross-Section 1 – Riffle Upstream Monitoring Year 3 – June 19, 2013



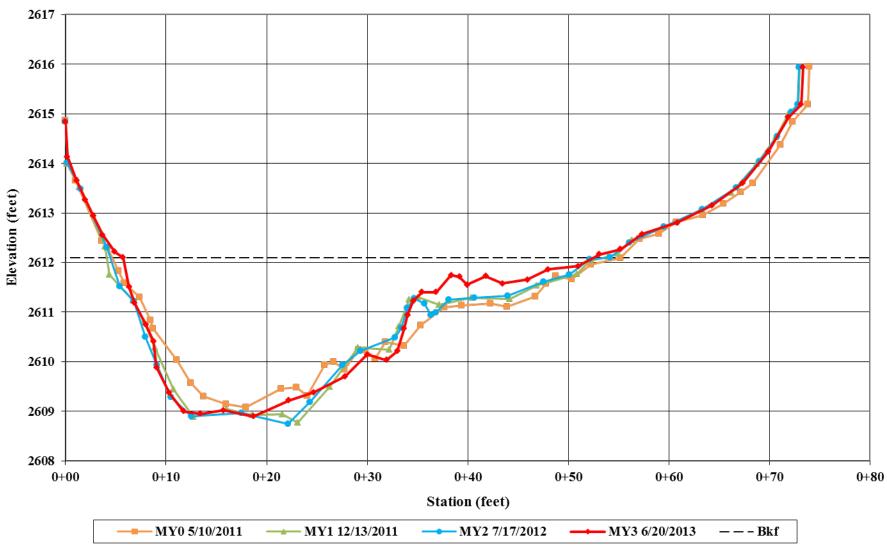



Glade Creek – Cross-Section 2 – Pool Left Bank Descending Monitoring Year 3 – June 19, 2013



Glade Creek – Cross-Section 2 – Pool Right Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 2 – Pool Downstream Monitoring Year 3 – June 19, 2013



Glade Creek – Cross-Section 2 – Pool Upstream Monitoring Year 3 – June 19, 2013

Glade Creek Cross-Section 3 - Riffle Station 8 + 39.86

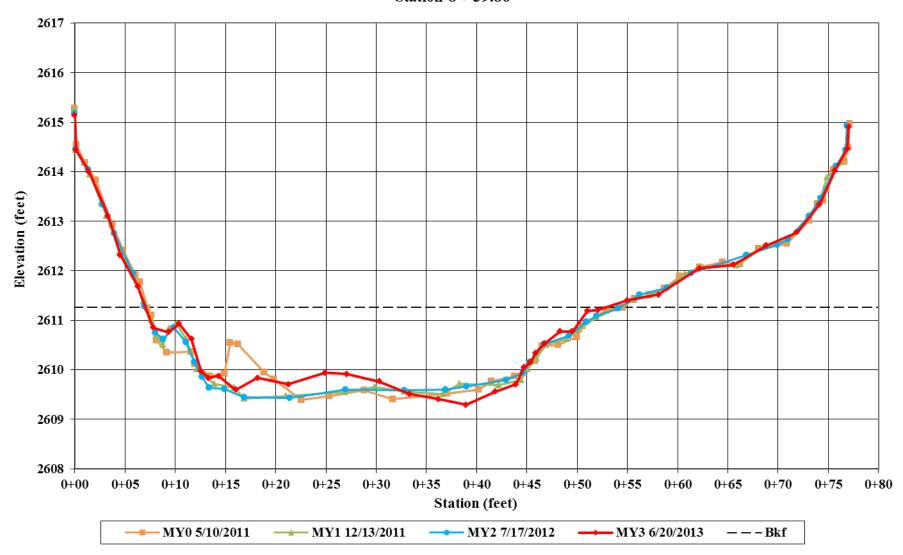



Glade Creek – Cross-Section 3 – Riffle Left Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 3 – Riffle Right Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 3 – Riffle Downstream Monitoring Year 3 – June 19, 2013



Glade Creek – Cross-Section 3 – Riffle Upstream Monitoring Year 3 – June 19, 2013



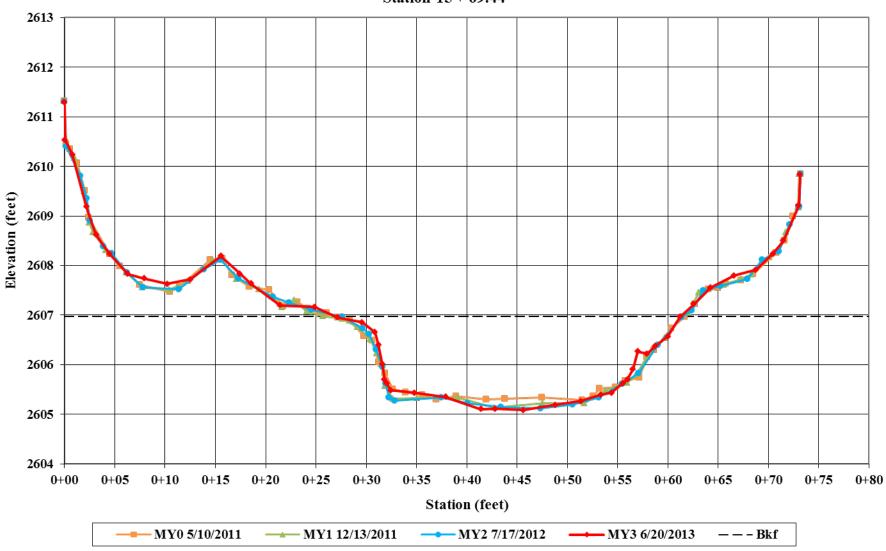



Glade Creek – Cross-Section 4 – Riffle Left Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 4 – Riffle Right Bank Descending Monitoring Year 3 – June 19, 2013




Glade Creek – Cross-Section 4 – Riffle Downstream Monitoring Year 3 – June 19, 2013



Glade Creek – Cross-Section 4 – Riffle Upstream Monitoring Year 3 – June 19, 2013



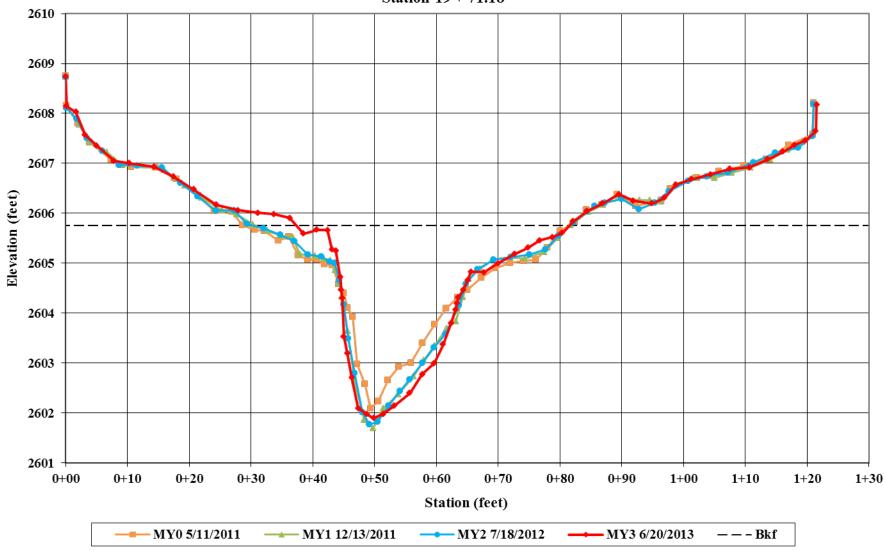



Glade Creek – Cross-Section 5 – Pool Left Bank Descending Monitoring Year 3 – June 20, 2013




Glade Creek – Cross-Section 5 – Pool Right Bank Descending Monitoring Year 3 – June 20, 2013




Glade Creek – Cross-Section 5 – Pool Downstream Monitoring Year 3 – June 20, 2013



Glade Creek – Cross-Section 5 – Pool Upstream Monitoring Year 3 – June 20, 2013



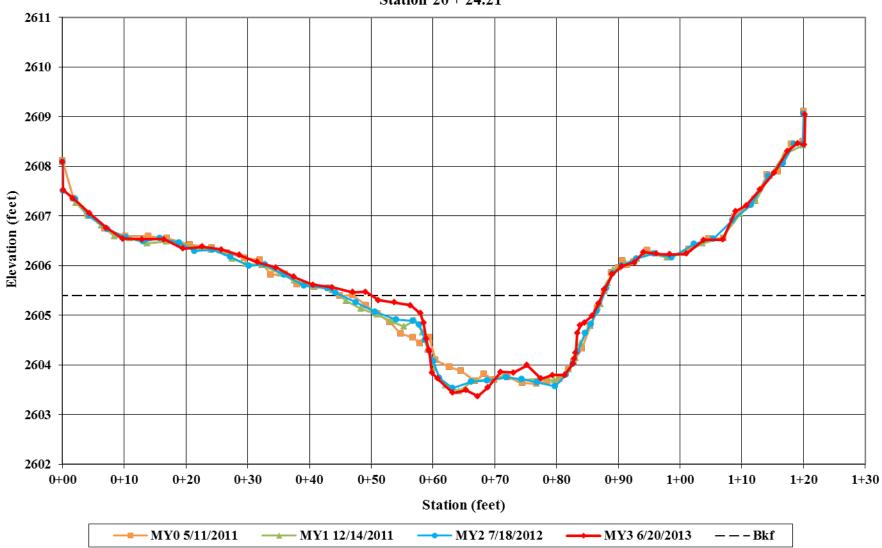



Glade Creek – Cross-Section 6 – Riffle Left Bank Descending Monitoring Year 3 – June 20, 2013




Glade Creek – Cross-Section 6 – Riffle Right Bank Descending Monitoring Year 3 – June 20, 2013




Glade Creek – Cross-Section 6 – Riffle Downstream Monitoring Year 3 – June 20, 2013



Glade Creek – Cross-Section 6 – Riffle Upstream Monitoring Year 3 – June 20, 2013



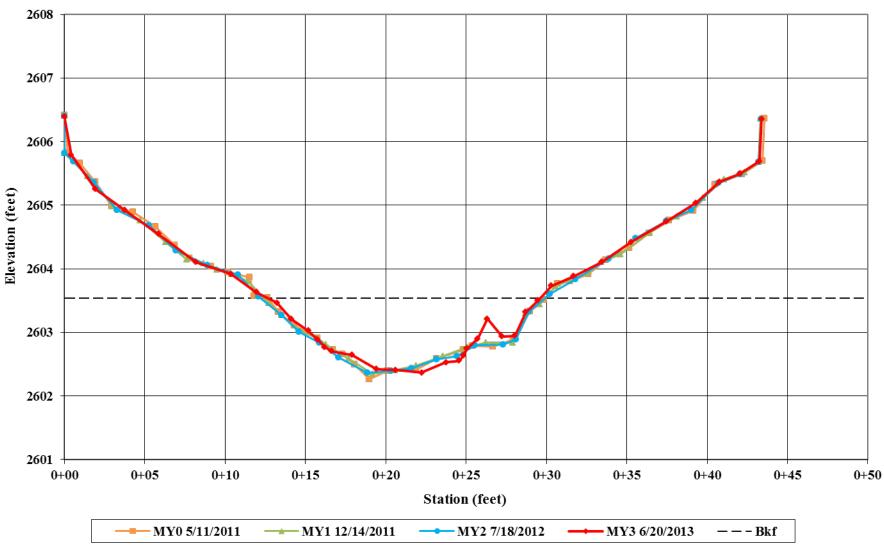



Unnamed Tributary – Cross-Section 7 – Riffle Left Bank Descending Monitoring Year 3 – June 20, 2013




Unnamed Tributary – Cross-Section 7 – Riffle Right Bank Descending Monitoring Year 3 – June 20, 2013




Unnamed Tributary – Cross-Section 7 – Riffle Downstream Monitoring Year 3 – June 20, 2013



Unnamed Tributary – Cross-Section 7 – Riffle
Upstream
Monitoring Year 3 – June 20, 2013



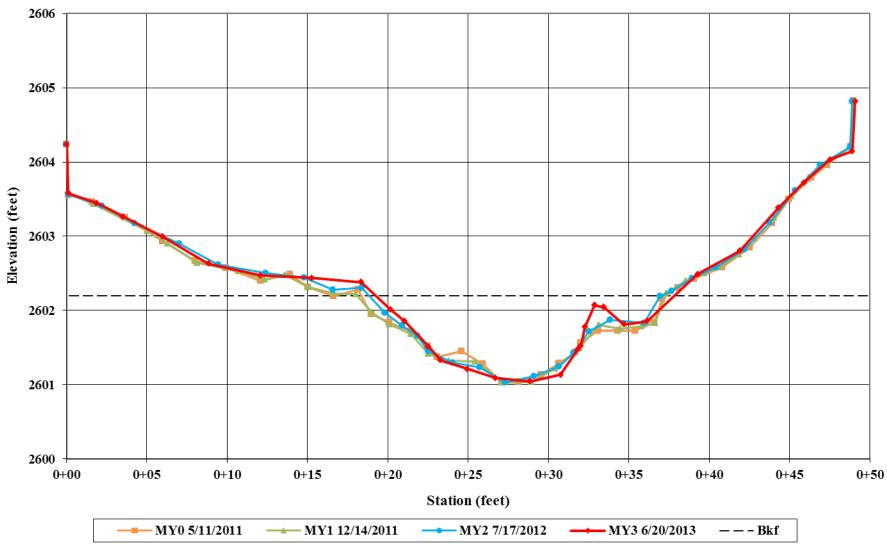



Unnamed Tributary – Cross-Section 8 – Riffle Left Bank Descending Monitoring Year 3 – June 20, 2013




Unnamed Tributary – Cross-Section 8 – Riffle Right Bank Descending Monitoring Year 3 – June 20, 2013





Unnamed Tributary – Cross-Section 8 – Riffle Downstream Monitoring Year 3 – June 20, 2013




Unnamed Tributary – Cross-Section 8 – Riffle
Upstream
Monitoring Year 3 – June 20, 2013



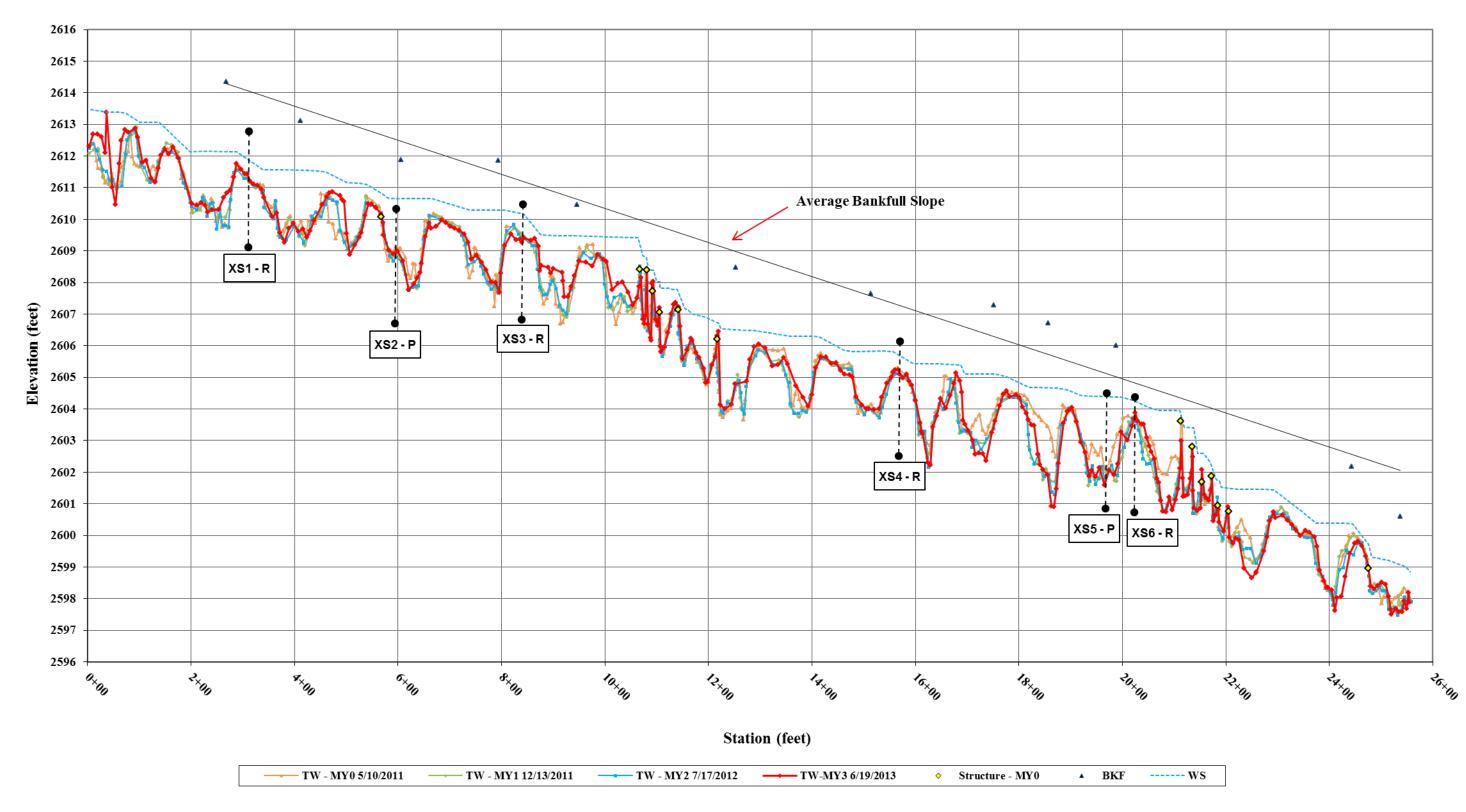




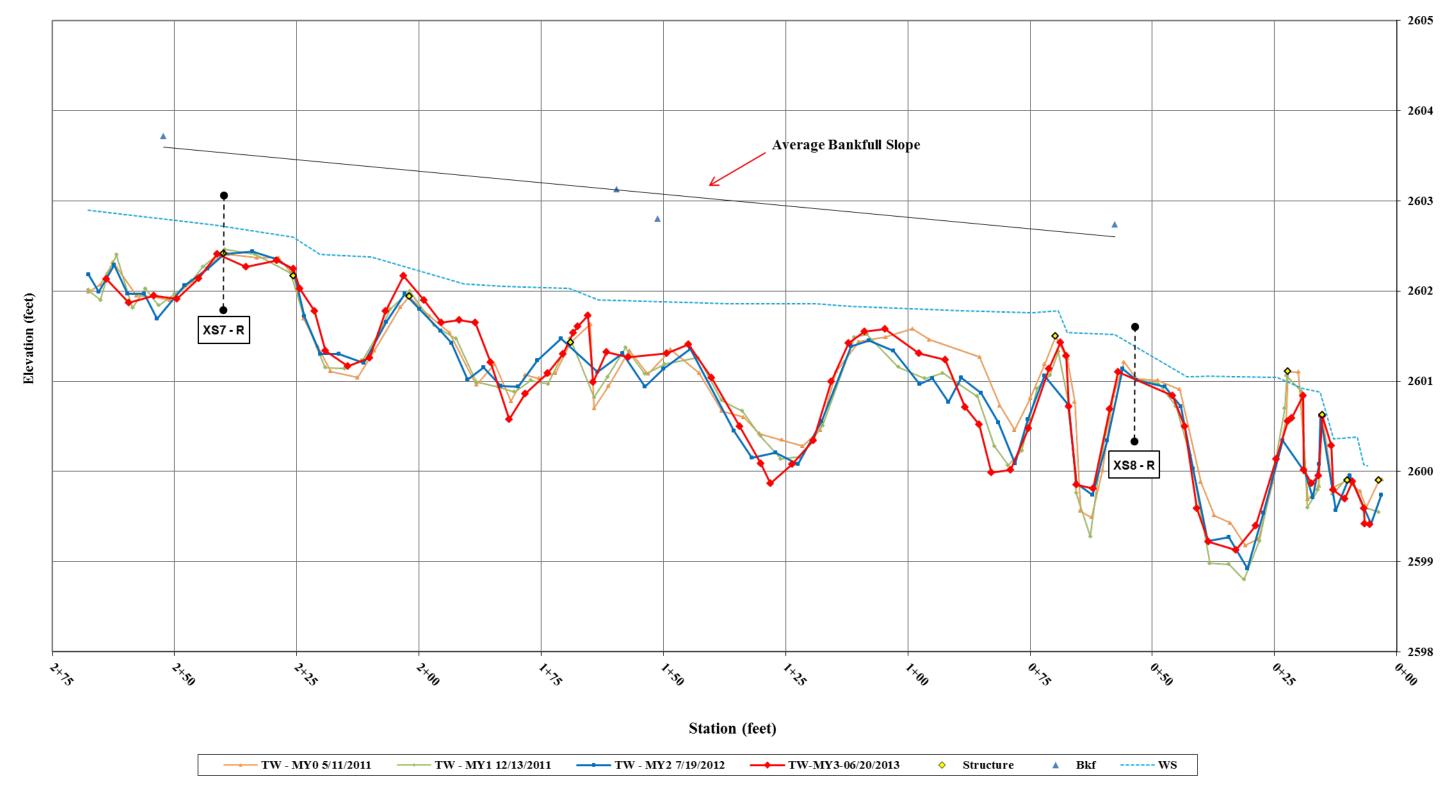


Glade Creek / Project No. 854					
Glade Creek - Cross-Section 1 - Riffle					
Pebble Count Summary					
Monitoring Year 3					ar 3
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062		0%	0%
	very fine sand	0.125		0%	0%
	fine sand	0.25		0%	0%
Sand	medium sand	0.50	3	3%	3%
	coarse sand	1.00		0%	3%
	very coarse sand	2.00	10	10%	13%
	very fine gravel	4.0	1	1%	14%
	fine gravel	5.7		0%	14%
	fine gravel	8.0		0%	14%
	medium gravel	11.3	7	7%	21%
Gravel	medium gravel	16.0	7	7%	28%
	coarse gravel	22.3	8	8%	36%
	coarse gravel	32	13	13%	49%
	very coarse gravel	45	17	17%	65%
	very coarse gravel	64	18	18%	83%
	small cobble	90	14	14%	97%
Cobble	medium cobble	128	3	3%	100%
Copple	large cobble	180		0%	100%
	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			101	101%	100%

Summary Data		
D50	33	
D84	65	
D95	86	

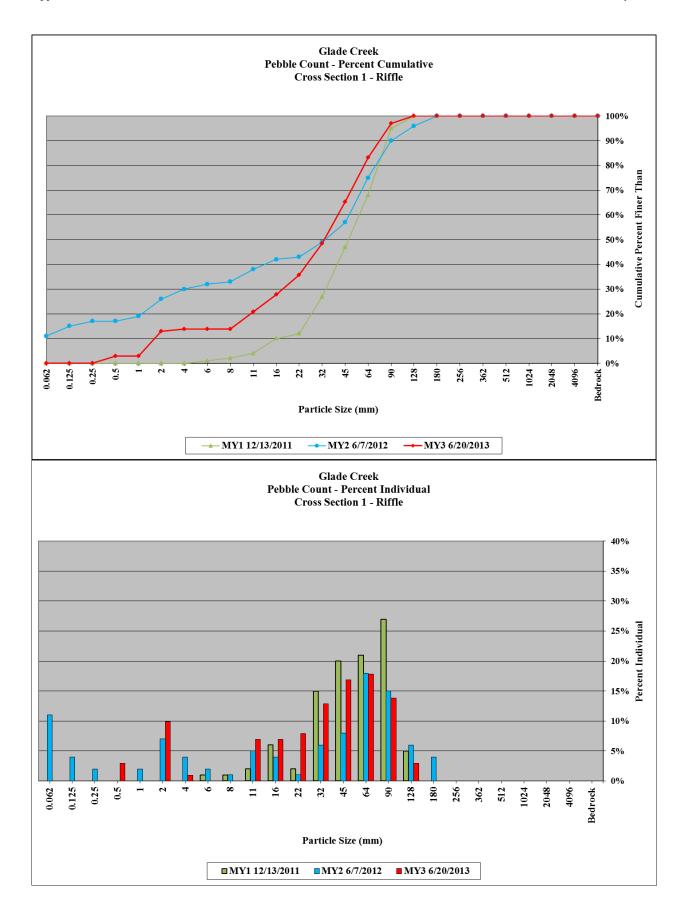


Glade Creek / Project No. 854					
Glade Creek - Cross-Section 2 - Pool					
Pebble Count Summary					
Monitoring Year 3				ar 3	
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	7	7%	7%
	very fine sand	0.125	5	5%	12%
	fine sand	0.25	4	4%	16%
Sand	medium sand	0.50	14	14%	30%
	coarse sand	1.00	18	18%	48%
	very coarse sand	2.00	22	22%	69%
	very fine gravel	4.0		0%	69%
	fine gravel	5.7	2	2%	71%
	fine gravel	8.0	1	1%	72%
	medium gravel	11.3	5	5%	77%
Gravel	medium gravel	16.0	5	5%	82%
	coarse gravel	22.3	2	2%	84%
	coarse gravel	32	5	5%	89%
	very coarse gravel	45	4	4%	93%
	very coarse gravel	64	4	4%	97%
	small cobble	90	2	2%	99%
Cobble	medium cobble	128		0%	99%
Copple	large cobble	180	1	1%	100%
	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			101	101%	100%

Summary Data		
D50	1.1	
D84	21	
D95	53	

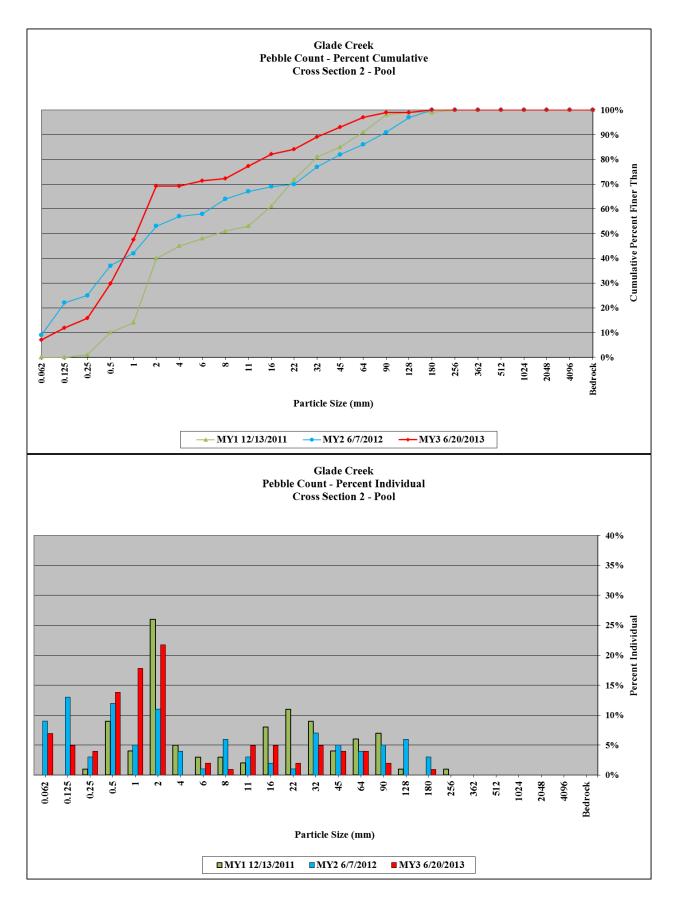


Glade Creek / Project No. 854					
Glade Creek - Cross-Section 3 - Riffle					
Pebble Count Summary					
Monitoring Year 3					ar 3
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	6	6%	6%
	very fine sand	0.125		0%	6%
	fine sand	0.25	1	1%	7%
Sand	medium sand	0.50	2	2%	9%
	coarse sand	1.00		0%	9%
	very coarse sand	2.00	2	2%	11%
	very fine gravel	4.0		0%	11%
	fine gravel	5.7		0%	11%
	fine gravel	8.0	1	1%	12%
	medium gravel	11.3	2	2%	14%
Gravel	medium gravel	16.0	2	2%	16%
	coarse gravel	22.3	2	2%	18%
	coarse gravel	32	10	10%	27%
	very coarse gravel	45	36	35%	63%
	very coarse gravel	64	22	22%	84%
	small cobble	90	10	10%	94%
Cobble	medium cobble	128	4	4%	98%
Copple	large cobble	180	2	2%	100%
	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			102	102%	100%

Summary Data		
D50	40	
D84	64	
D95	97	

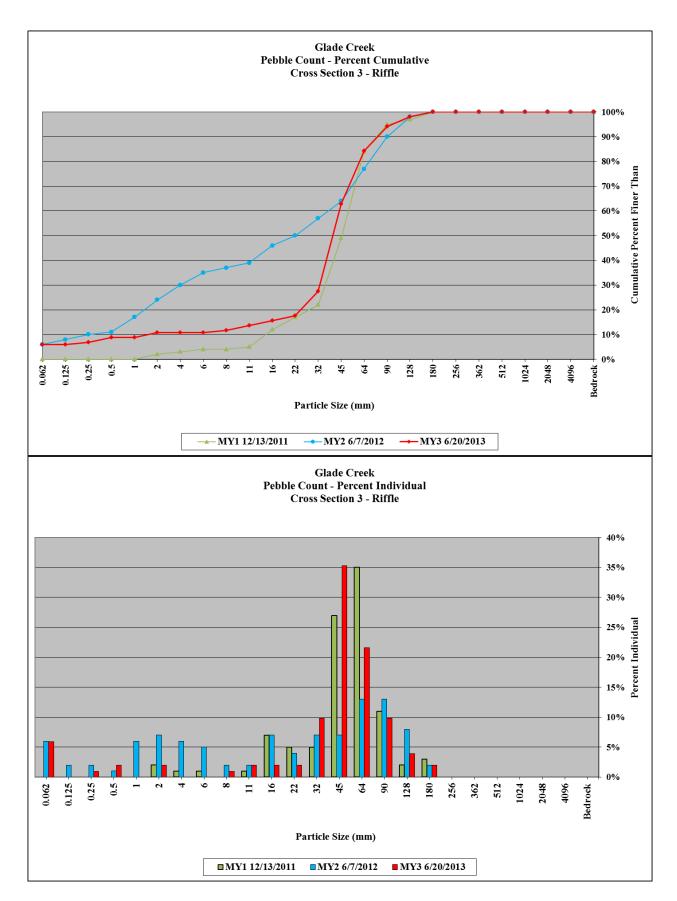


Glade Creek / Project No. 854					
Glade Creek - Cross-Section 4 - Riffle					
Pebble Count Summary					
			Monitoring Year 3		
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	1	1%	1%
	very fine sand	0.125		0%	1%
	fine sand	0.25	2	2%	3%
Sand	medium sand	0.50	3	3%	6%
	coarse sand	1.00		0%	6%
	very coarse sand	2.00	8	8%	14%
	very fine gravel	4.0	1	1%	15%
	fine gravel	5.7	1	1%	16%
	fine gravel	8.0	1	1%	17%
	medium gravel	11.3	1	1%	18%
Gravel	medium gravel	16.0	5	5%	23%
	coarse gravel	22.3	9	9%	32%
	coarse gravel	32	11	11%	43%
	very coarse gravel	45	15	15%	58%
	very coarse gravel	64	28	28%	86%
	small cobble	90	6	6%	92%
Cobble	medium cobble	128	6	6%	98%
Copple	large cobble	180	2	2%	100%
	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			100	100%	100%

Summary Data		
D50	38	
D84	62	
D95	110	

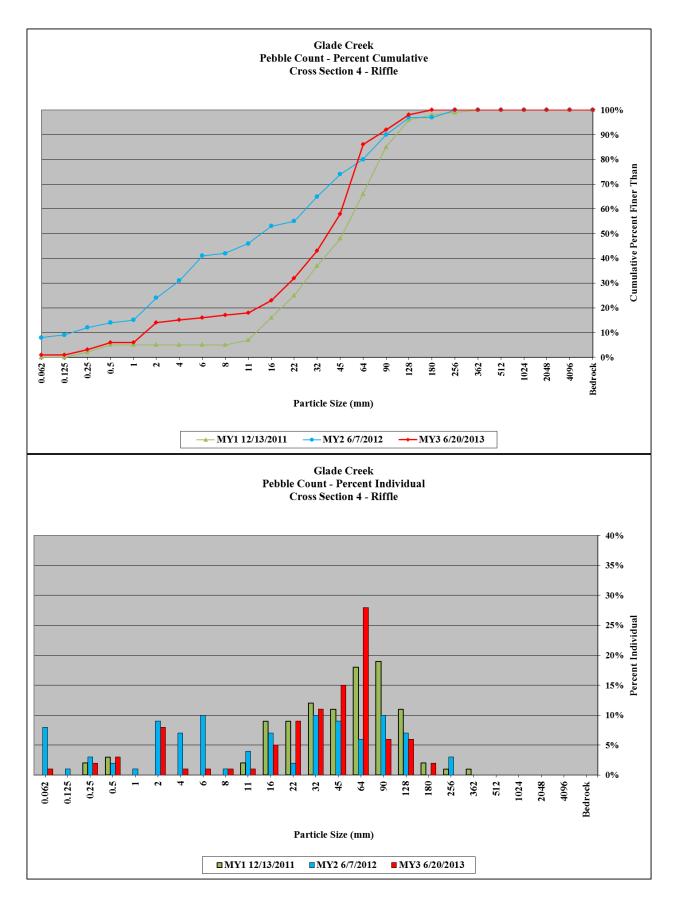


Glade Creek / Project No. 854					
Glade Creek - Cross-Section 5 - Pool					
Pebble Count Summary					
Monitoring Year 3					ar 3
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062	39	39%	39%
	very fine sand	0.125	5	5%	44%
	fine sand	0.25	3	3%	47%
Sand	medium sand	0.50	6	6%	53%
	coarse sand	1.00	7	7%	60%
	very coarse sand	2.00	18	18%	78%
	very fine gravel	4.0	3	3%	81%
	fine gravel	5.7		0%	81%
	fine gravel	8.0		0%	81%
	medium gravel	11.3	1	1%	82%
Gravel	medium gravel	16.0	2	2%	84%
	coarse gravel	22.3	3	3%	87%
	coarse gravel	32	1	1%	88%
	very coarse gravel	45	2	2%	90%
	very coarse gravel	64	4	4%	94%
	small cobble	90	5	5%	99%
Cobble	medium cobble	128	1	1%	100%
Copple	large cobble	180		0%	100%
	very large cobble	256		0%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			100	100%	100%

Summary Data		
D50	0.062	
D84	16	
D95	69	

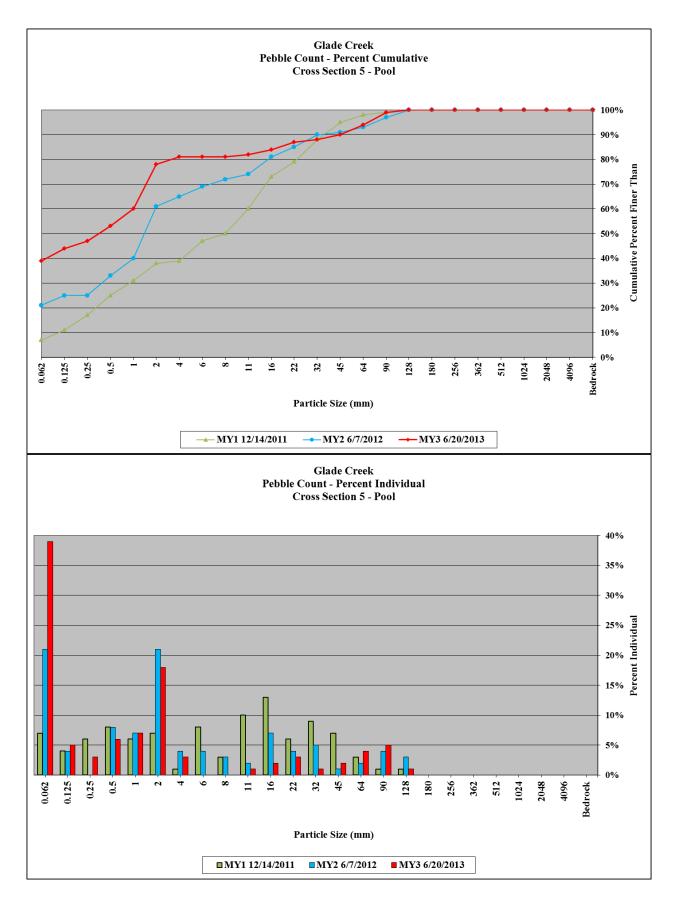


	Glade Cre	ek / Projec	t No. 854		
	Glade Creek -	Cross-Sec	tion 6 - R	iffle	
	Pebble	Count Sun	mary		
			Mo	nitoring Ye	ar 3
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062		0%	0%
	very fine sand	0.125		0%	0%
	fine sand	0.25	2	2%	2%
Sand	medium sand	0.50	1	1%	3%
	coarse sand	1.00		0%	3%
	very coarse sand	2.00		0%	3%
	very fine gravel	4.0		0%	3%
	fine gravel	5.7	1	1%	4%
	fine gravel	8.0	1	1%	5%
	medium gravel	11.3	2	2%	7%
Gravel	medium gravel	16.0	2	2%	9%
	coarse gravel	22.3	8	8%	17%
	coarse gravel	32	20	20%	37%
	very coarse gravel	45	6	6%	43%
	very coarse gravel	64	21	21%	64%
	small cobble	90	14	14%	78%
Cobble	medium cobble	128	16	16%	94%
Copple	large cobble	180	5	5%	99%
	very large cobble	256	1	1%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			100	100%	100%

Sum	mary Data
D50	51
D84	100
D95	140

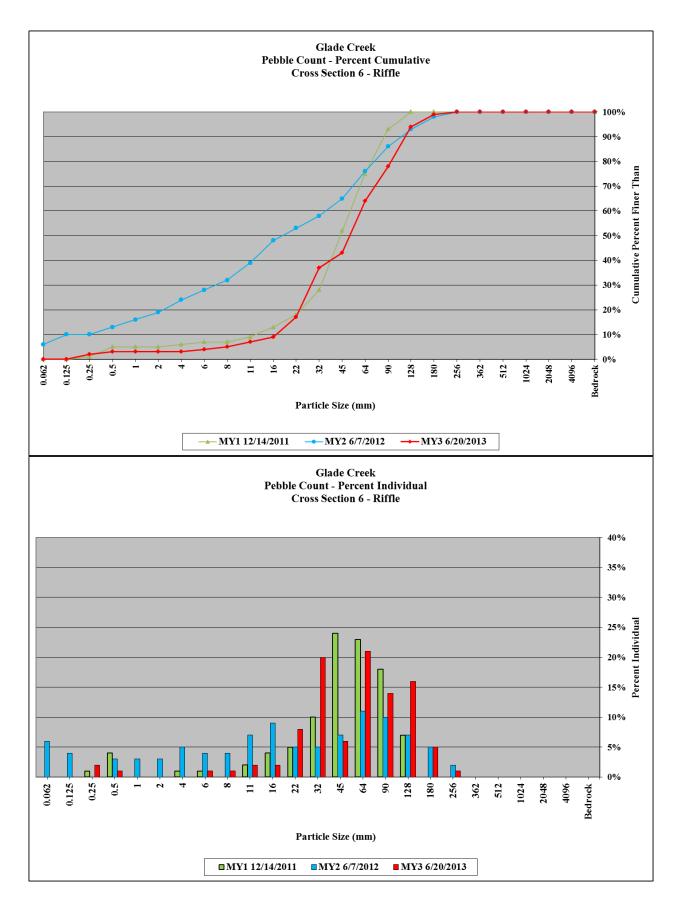


	Glade Cre	ek / Projec	t No. 854		
	<b>Unnamed Tributa</b>	ry - Cross-	Section 7	- Riffle	
	Pebble	<b>Count Sun</b>	mary		
			Mo	nitoring Ye	ar 3
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062		0%	0%
	very fine sand	0.125		0%	0%
	fine sand	0.25	3	3%	3%
Sand	medium sand	0.50	5	5%	8%
	coarse sand	1.00	1	1%	9%
	very coarse sand	2.00	4	4%	13%
	very fine gravel	4.0		0%	13%
	fine gravel	5.7		0%	13%
	fine gravel	8.0	2	2%	15%
	medium gravel	11.3	4	4%	19%
Gravel	medium gravel	16.0	8	8%	27%
	coarse gravel	22.3	11	11%	38%
	coarse gravel	32	19	19%	56%
	very coarse gravel	45	22	22%	78%
	very coarse gravel	64	13	13%	91%
	small cobble	90	5	5%	96%
Cobble	medium cobble	128	1	1%	97%
Copple	large cobble	180	2	2%	99%
	very large cobble	256	1	1%	100%
	small boulder	362		0%	100%
	small boulder	512		0%	100%
Boulder	medium boulder	1024		0%	100%
	large boulder	2048		0%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			101	101%	100%

Sum	mary Data
D50	28
D84	53
D95	84

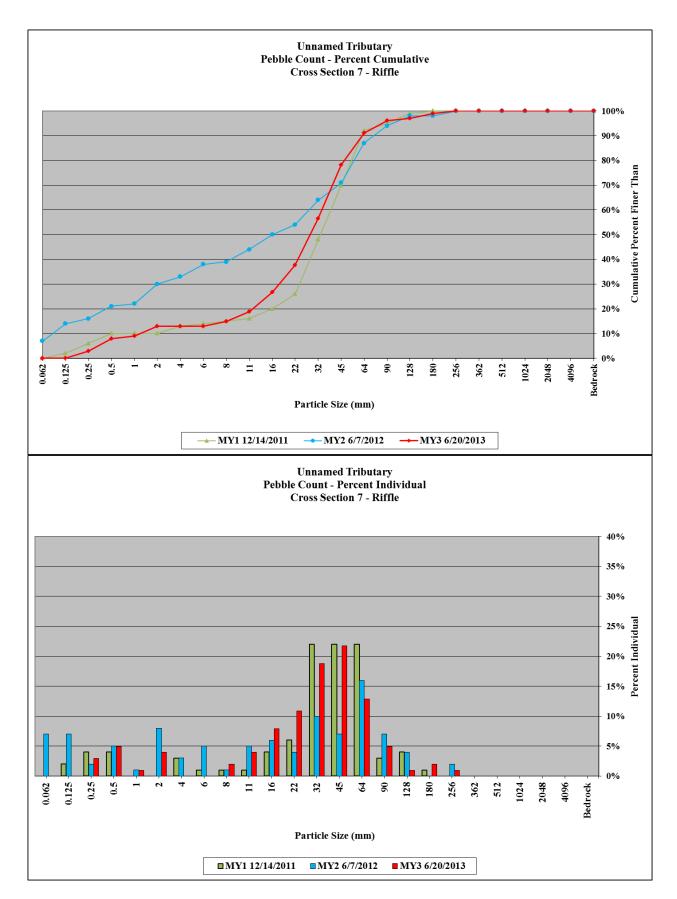

	Glade Cre	ek / Projec	t No. 854		
	<b>Unnamed Tributa</b>	ry - Cross-	Section 8	- Riffle	
	Pebble	Count Sun	ımary		
			Mo	nitoring Ye	
Description	Material	Size (mm)	Total #	Item %	Cum %
Silt/Clay	silt/clay	0.062		0%	0%
	very fine sand	0.125		0%	0%
	fine sand	0.25	5	5%	5%
Sand	medium sand	0.50	1	1%	6%
	coarse sand	1.00		0%	6%
	very coarse sand	2.00	3	3%	9%
	very fine gravel	4.0		0%	9%
	fine gravel	5.7		0%	9%
	fine gravel	8.0	3	3%	11%
	medium gravel	11.3	9	9%	20%
Gravel	medium gravel	16.0	12	11%	31%
	coarse gravel	22.3	1	1%	32%
	coarse gravel	32	15	14%	47%
	very coarse gravel	45	14	13%	60%
	very coarse gravel	64	18	17%	77%
	small cobble	90	12	11%	89%
Cobble	medium cobble	128	7	7%	95%
Copple	large cobble	180	3	3%	98%
	very large cobble	256		0%	98%
	small boulder	362		0%	98%
	small boulder	512		0%	98%
Boulder	medium boulder	1024	1	1%	99%
	large boulder	2048	1	1%	100%
	very large boulder	4096		0%	100%
Bedrock	bedrock	>4096		0%	100%
TOTALS			105	105%	100%

Sum	mary Data
D50	35
D84	79
D95	130

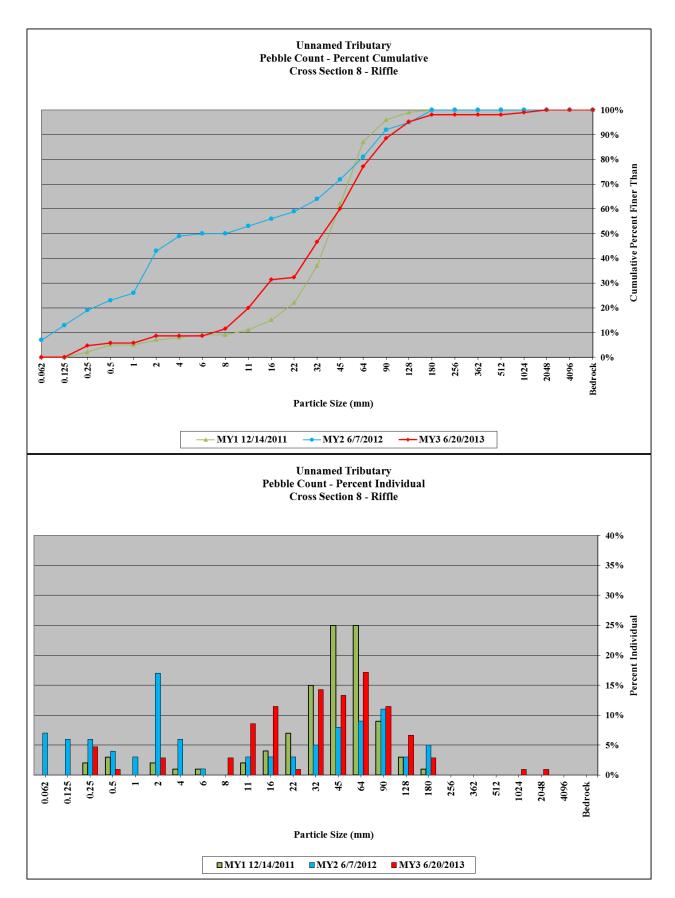

				Glad			0a. B Proje							8 fee	t)									
Parameter	Regi	ional C	Curve		Pre-I	Existin	g Con	dition			Refe	rence	Reach	Data		]	Desigr	1		Mon	itorin	g Base	eline	
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	-	-	-	44.7	-	-	-	-	-	30.7	-	-	-	-	-	34.0	-	35.2	43.2	44.9	47.7	5.9	4
Floodprone Width (ft)				-	45	-	-	-	-	-	70	-	-	-	-	-	>76	-	68.8	89.1	89.0	109.4	22.5	4
Bankfull Mean Depth (ft)	-	-	-	-	1.41	-	-	-	-	-	1.90	-	-	-	-	-	1.56	-	0.9	1.2	1.2	1.3	0.2	4
Bankfull Max Depth (ft)				-	2.3	-	-	-	-	-	2.5	-	-	-	-	-	2.2	-	1.7	1.8	1.9	1.9	0.1	4
Bankfull Cross Sectional Area (ft <sup>2</sup> )		-		-	63.0	-	-	-	-	-	57.4	-	-	-	-	-	53.0	-	41.6	49.1	46.3	62.2	9.1	4
Width/Depth Ratio				-	31.7	-	-	-	-	-	16.4	-	-	-	-	-	22.0	-	27.6	39.0	36.9	62.2	11.3	4
Entrenchment Ratio				-	6.0	-	-	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.5	2.1	2.2	2.6	0.5	4
Bank Height Ratio				1.2	-	-	3.0	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	4
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	14.6	35.3	31.8	54.9	13.1	18
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.002	0.011	0.010	0.025	0.006	18
Pool Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	7.2	41.7	44.6	74.9	22.8	30
Pool Max Depth (ft)				-	5.7	-	-	-	-	-	3.1	-	-	-	-	-	4.4	-	3.2	4.1	4.1	5.6	0.7	31
Pool Spacing (ft)				110	-	-	228	-	7	-	224	-	-	-	-	91	-	155	10.7	84.5	98.5	162.5	51.0	29
Pattern		•				-	-						•			-								
Channel Belt Width (ft)				77	-	-	184	-	8	90	-	-	104	-	-	55	-	134	59.3	76.7	74.5	92.1	11.22	12
Radius of Curvature (ft)				34	-	-	118	-	8	76	-	-	135	-	-	53	-	172	41.7	57.9	50.3	101.0	17.80	15
Rc: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
Meander Wavelength (ft)				66	-	-	403	-	10	-	350	-	-	-	-	136	-	261	163.9	223.6	230.7	259.1	28.34	13
Meander Width Ratio				3.6	-	-	18.7	-	-	2.9	-	-	3.4	-	-	1.6	-	4.0	1.6	1.8	1.7	2.1	0.26	4
Transport Parameters																								
Reach Shear Stress (Competency) lb/ft <sup>2</sup>						0.	41						_				0.39				0.	36		
Max Part Size (mm) Mobilized at Bankfull							1						_				10				2			
Stream Power (Transport Capacity) W/m <sup>2</sup>							-						_				-				_	_		
Additional Reach Parameters																								
Rosgen Classification						Сг4/І	F4/G4					(	24				C4				(	2		
Bankfull Velocity (fps)		-					.3					N					3.8							
Bankfull Discharge (cfs)	-	267-35	2				00						75				200							
Valley Length (ft)							180						_				2,180							
Channel Thalweg Length (ft)							569						-				2,555				2,5	558		
Sinuosity							18						10				1.17				1.			
Water Surface Slope (Channel) (ft/ft)							-						-				-				0.0			
Bankfull Slope (ft/ft)						0.0	005					0.0	014				0.004				0.0			
Bankfull Floodplain Area (acres)							-						-				-				2.10			
% of Reach with Eroding Banks							-						-											
Channel Stability or Habitat Metric							-						_											
Biological or Other							-						-											
- Information unavailable.																								

<sup>-</sup> Information unavailable. N/A - Item does not apply.

Non-Applicable.

			Gl	ade (						re am Unna			•	(265 f	feet)									
Parameter	Regi	onal C	urve		Pre-I	xistin	g Con	dition			Refe	rence	Reach	Data		]	Desigr	1		Mon	itorin	g Bas	eline	
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	-	-	-	12.6	-	-	-	-	-	30.7	-	-	-	-	-	12.0	-	17.3	18.1	18.1	18.9	N/A	2
Floodprone Width (ft)				13	ı	1	25	1	-	-	70	-	-	-	-	-	>44	1	33.5	37.7	37.7	41.8	N/A	2
Bankfull Mean Depth (ft)	-	-	-	-	0.8	-	-	-	-	-	1.9	-	-	-	-	-	0.7	-	0.7	0.8	0.8	0.8	N/A	2
Bankfull Max Depth (ft)				-	1.0	-	-	-	-	-	2.5	-	-	-	-	-	1.0	-	1.2	1.3	1.3	1.3	N/A	2
Bankfull Cross Sectional Area (ft <sup>2</sup> )		-		-	9.9	-	-	-	-	-	57.4	-	-	-	-	-	8.2	-	12.7	13.0	13.0	13.2	N/A	2
Width/Depth Ratio				-	16.0	-	-	-	-	-	16.4	-	-	-	-	-	18.0	-	22.7	25.5	25.5	28.3	N/A	2
Entrenchment Ratio				1.1	-	-	2.0	-	-	-	2.3	-	-	-	-	-	>2.2	-	1.9	2.1	2.1	2.2	N/A	2
Bank Height Ratio				-	≥2.0	-	-	-	-	-	1.0	-	-	-	-	-	1.0	-	1.0	1.0	1.0	1.0	N/A	2
Profile										•						•				•	•			
Riffle Length (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	5.8	10.3	10.3	14.6	4.0	6
Riffle Slope (ft/ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	0.001	0.017	0.015	0.034	0.011	6
Pool Length (ft)				-	-	-	-	-	-	-	-	_	-	-	-	-	-	_	3.6	13.3	10.8	29.5	8.5	9
Pool Max Depth (ft)				-	3.5	-	-	-	-	-	3.1	-	-	-	-	-	2.2	_	1.8	2.7	2.6	3.4	0.5	7
Pool Spacing (ft)				-	-	-	-	-	-	-	224	-	-	-	-	31	-	56	5.5	34.1	31.5	59.8	20.8	7
Pattern																								
Channel Belt Width (ft)				57	-	-	79	-	7	90	-	-	104	-	-	30	-	45	28.6	34.3	36.1	37.1	3.51	5
Radius of Curvature (ft)				17	-	-	71	-	10	76	-	_	135	-	-	27	-	33	17.1	19.8	19.5	22.5	2.21	5
Rc: Bankfull Width (ft/ft)				-	-	-	-	-	-	-	-	_	-	-	-	-	-	_	-	-	-	-	-	
Meander Wavelength (ft)				66	-	-	93	-	6	-	350	_	-	-	-	75	-	84	66.4	77.7	82.7	83.9	9.78	3
Meander Width Ratio				4.5	-	-	6.3	-	-	2.9	-	-	3.4	-	-	2.5	-	3.8	1.9	2.0	2.0	2.1	N/A	2.0
Transport Parameters																								
				l		0	52			Г			-			Г	0.17		T .		0	30		_
Reach Shear Stress (Competency) lb/ft <sup>2</sup> Max Part Size (mm) Mobilized at Bankfull							5										3					55		$\longrightarrow$
							<u>.</u>						_				-					).)		
Stream Power (Transport Capacity) W/m <sup>2</sup> Additional Reach Parameters													-				-							
							:4						24				C4		l					
Rosgen Classification																						L		
Bankfull Velocity (fps)		-					2					N.					2.4							
Bankfull Discharge (cfs)		76 - 98					0						75				20							
Valley Length (ft)							75						-				226					- 1		
Channel Thalweg Length (ft)							00						-				275					64		
Sinuosity				ļ		1.				<u> </u>			10			<u> </u>	1.22		ļ			17		
Water Surface Slope (ft/ft)							-						-				-					064		
Bankfull Slope (ft/ft)						0.0	)11					0.0	)14				0.006				0.0	058		
Bankfull Floodplain Area (acres)													-				-							
% of Reach with Eroding Banks													-											
Channel Stability or Habitat Metric							-						-											
Biological or Other							-						-											

<sup>-</sup> Information unavailable. N/A - Item does not apply. Non-Applicable.

					(Sub			, Bank	k, and	Hydr	eline S ologic No. 85	Cont	ainme	nt Par	ramet			ions)										
Parameter		P	re-Exis	sting C	onditio	n			I	Referer	ice Rea	ch Dat	a					Design	1					Monito	ring B	aseline	!	
Ri% / Ru% / P% / G% / S%	-	-	-	-	-			-	-	-	-	-			-	-	-	-	-	-	-	25%	9%	49%	16%	2%		
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-		-		-	-	-	-															
d16 / D35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)	0.136	0.87	12.5	114	-	1	-	0.17	29	58	180	300	-															
Entrenchment Class <1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	_	-	-	-	-			-	-	-	-	-																
Incision Class <1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	_	-	-	-				-	-	-	-																	

Information unavailable.
 Non-Applicable.

							, Bank	k, and	Hydr		Cont	ainme	nt Pa	rame t	er Dis n (265											
Parameter		P	re-Exis	sting (	Conditio	n		I	Referer	ice Rea	ch Dat	a					Design	1					Monito	ring B	aseline	
Ri% / Ru% / P% / G% / S%	-	-	-	-	-		-	-	-	-	-			-	-	-	-	-	-	-	24%	11%	47%	16%	2%	
SC% / Sa% / G% / C% / B% / Be%	-	-	-	-	-	-	-	-	-	-	-	-														
d16 / D35 / d50 / d84 / d95 / di <sup>p</sup> / di <sup>sp</sup> (mm)	0.3	11	27	85	115.0	-	0.17	29	58	180	300	-														
Entrenchment Class <1.5 / 1.5 - 1.99 / 2 - 4.9 / 5.0 - 9.9 / >10	-	-	-	-	-		-	-	-	-	-															
Incision Class <1.2 / 1.2 - 1.49 / 1.5 - 1.99 / >2.0	_	-	-	-			-	-	-	-																

<sup>-</sup> Information unavailable. N/A - Item does not apply. Non-Applicable.

Tal	ble 11	la. B	aselin	e Mo	rphol	ogy &	& Hyo	drauli	c Moi	nitorin	ng Su	mmai	y					
	Gla					o. 854	4 - Gl			(2,55		t)		_		_		
		C	ross-S Rif		1				Cross-S Po	ection ool	2			C	Cross-S Rif	ection ffle	3	
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,613	2,613	2,613	2,613			2,612	2,612	2,612	2,612			2,611	2,611	2,611	2,611		
Bankfull Width (ft)	47.7	48.8	51.3	45.3			50.4	49.3	49.1	46.7			47.6	47.6	47.6	46.5		
Floodprone Width (ft)	109.0	109.4	109.4	109.4			69.1	69.1	69.1	69.1			70.4	70.4	70.4	70.4		
Bankfull Mean Depth (ft)	0.9	0.9	0.9	0.9			1.6	1.7	1.7	1.7			1.3	1.3	1.3	1.3		
Bankfull Max Depth (ft)	1.9	1.9	1.9	1.8			3.0	3.3	3.3	3.2			1.9	1.9	1.9	2.0		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	41.6	45.6	45.9	42.4			78.3	83.0	83.6	78.1			62.2	64.1	63.9	59.5		
Bankfull Width/Depth Ratio	54.7	52.2	57.4	48.4			32.5	29.3	28.9	27.9			36.5	35.3	35.5	36.3		
Bankfull Entrenchment Ratio	2.3	2.2	2.1	2.4			1.4	1.4	1.4	1.5			1.5	1.5	1.5	1.5		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	41.8	45.6	45.9	48.4			78.3	83.0	83.6	78.1			62.2	64.1	63.9	59.5		
d50 (mm)	N/A	47	33	33			N/A	7.3	1.7	1.1			N/A	45	22	40		
		C	ross-S		4			C		ection	5			C	Cross-S		6	
			Rif	fle					Po	ool					Rif	ffle		
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,607	2,607	2,607	2,607			2,606	2,606	2,606	2,606			2,605	2,605	2,605	2,605		
Bankfull Width (ft)	35.2	36.3	34.9	34.8			53.2	51.5	51.9	44.4			42.1	42.9	42.4	37.4		
Floodprone Width (ft)	68.8	68.8	68.8	68.8			117.9	117.9	117.9	117.9			107.6	107.6	107.6	107.6		
Bankfull Mean Depth (ft)	1.3	1.3	1.4	1.3			1.3	1.5	1.4	1.6			1.1	1.1	1.1	1.2		
Bankfull Max Depth (ft)	1.7	1.9	1.9	1.9			3.7	4.1	4.0	3.9			1.8	1.9	1.9	2.0		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	44.9	46.9	47.5	46.1			68.7	75.0	74.1	72.1			47.7	49.0	48.4	44.1		
Bankfull Width/Depth Ratio	27.6	28.1	25.6	26.3			41.1	35.3	36.3	27.3			37.2	37.5	37.1	31.7		
Bankfull Entrenchment Ratio	2.0	1.9	2.0	2.0			2.2	2.3	2.3	2.7			2.6	2.5	2.5	2.9		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0			1.0	1.0	1.0	1		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	44.9	46.9	47.5	46.1			68.7	75.0	74.1	72.1			47.7	49.0	48.4	44.1		
d50 (mm)	N/A	47	14	38			N/A	8	1.4	0.062			N/A	44	18	51		

N/A - Item does not apply.

Table 11a. Baseline	Mor	pholo	ogy &	Hyd	raulio	e Mo	nitori	ng Su	ımma	ry		
Glade Creek / Pr	oject	No. 8	354 -	Unna	med '	Tribu	ıtary	(264	feet)			
		C		ection ffle	7			C	ross-S Rif	ection ffle	18	
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	2,604	2,604	2,604	2,604			2,602	2,602	2,602	2,602		
Bankfull Width (ft)	17.3	17.5	17.7	16.9			18.9	19.1	18.1	18.5		
Floodprone Width (ft)	33.5	33.5	33.5	33.5			41.8	41.8	41.8	41.8		
Bankfull Mean Depth (ft)	0.8	0.7	0.8	0.7			0.7	0.7	0.7	0.7		
Bankfull Max Depth (ft)	1.3	1.2	1.2	1.2			1.2	1.2	1.2	1.1		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	13.2	13.0	13.4	12.4			12.7	13.0	12.2	12.1		
Bankfull Width/Depth Ratio	22.7	23.6	23.4	23.1			28.3	28.1	27.0	28.4		
Bankfull Entrenchment Ratio	1.9	1.9	1.9	2.0			2.2	2.2	2.3	2.3		
Bankfull Bank Height Ratio	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0		
Cross Sectional Area between End Pins (ft <sup>2</sup> )	13.2	13.0	13.4	12.4			12.7	13.0	12.2	12.1		
d50 (mm)	N/A	33	16	28			N/A	38	6	35		

N/A - Item does not apply.

	Table 11b. Monitoring Data - Stream Reach Data Summary Glade Creek / Project No. 854 - Glade Creek (2,558 feet)																																				
Parameter	l		Rac	seline			<u> </u>		MY	·_ 1		nauc	CICCK	/ 110,		7 - 2	- Gia	ue Cr	CK (2)	330 IC	MY-3 MY-4										MY - 5						
Dimension & Substrate - Riffle	Min	Mean		Max	SD	n	Min	Mean			SD	n	Min	Mean		Max	SD	n	Min	Mean			SD	n	Min	Mean			SD	n	Min	Mean			SD	n	
Bankfull Width (ft)		43.2			5.91	4	36.3		45.3	48.8	5.67	4	34.9	44.1	45.0	51.3	7.11	4		41.0	41.4	46.5		4	14111	Mean	Med	IVIUA	) D	**	171111	Mean	Micu	IVIUA	SD.		
Floodprone Width (ft)		89.1			22.48	4	68.8	89.1	89.0	109.4	22.48	4		89.1	89.2		22.47	4		89.1	89.0		22.48												$\overline{}$		
Bankfull Mean Depth (ft)		1.2		1.3	0.19	4	0.9	1.2	1.2	1.3	0.19	4	0.9	1.2	1.2	1.4	0.22		0.9	1.2	1.3	1.3		4													
Bankfull Max Depth (ft)		1.8		1.9	0.10	4	1.9	1.9	1.9	1.9	0.00	4	1.9	1.9	1.9	1.9	0.00	4	1.8	1.9	2.0	2.0	0.10	4											-		
Bankfull Cross-Sectional Area (ft <sup>2</sup> )		49.1		_		4	45.6	51.4	48.0	64.1	8.58	4		51.4	48.0	63.9	8.38	4	42.4	48.0	45.1	59.5		4												$\overline{}$	
Width/Depth Ratio			36.9		11.34	4	28.1	38.3	36.4	52.2	10.11	4	25.6	38.9	36.3	57.4	13.34			35.7	34.0	48.4	9.42	4													
Entrenchment Ratio		2.1		2.6	0.47	4	1.5	2.0	2.1	2.5	0.43	4	1.5	2.0	2.1	2.5	0.41	4	1.5	2.2	2.2	2.9	0.59	4													
Bank Height Ratio		1.0	_	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4	1.0	1.0	1.0	1.0	0.00	4	0.0	0.8	1.0	1.0	0.50	4													
Profile																																					
Riffle Length (ft)	14.6	35.3	31.8	54.9	13.12	18	11.0	30.2	25.4	58.0	14.94	19	8.3	27.4	23.5	52.3	14.7	18	13.2	30.4	28.1	57.2	15.1	19											$\overline{}$		
Riffle Slope (ft/ft)						18		0.010			0.005	19	0.002		0.012		0.005				0.010			19													
Pool Length (ft)	7.2	41.7	44.6	74.9	22.75	30	7.7	40.2	43.1	76.8	23.59	30	7.8	41.1	44.8	76.3	23.6	30	6.7	42.2	44.3	90.7	25.0	30													
Pool Max Depth (ft)	3.2	4.1	4.1	5.6	0.65	31	2.8	4.0	3.9	5.4	0.65	30	2.5	3.7	3.6	4.9	0.6	30	2.7	3.9	3.9	5.2	0.7	30													
Pool Spacing (ft)	10.7	84.5	98.5	162.5	51.03	29	9.3	84.2	81.2	155.4	53.03	29	11.3	84.4	84.8	170.3	53.3	29	9.8	81.2	91.9	172.6	54.1	30													
Pattern																																					
Channel Belt Width (ft)	59.3	76.7	74.5	92.1	11.22	12																															
Radius of Curvature (ft)	41.7	57.9	50.3	101.0	17.81	15																															
Rc: Bankfull Width (ft/ft)	0.84	0.92	0.92	1.00	N/A	2																															
Meander Wavelength (ft)	163.9	223.6	230.7	259.1	28.34	13																															
Meander Width Ratio	1.6	1.8	1.7	2.1	0.26	4																															
Additional Reach Parameters																																					
Rosgen Classification				C					C							C4			C4																		
Channel Thalweg Length (ft)				548					2,5	558					2,	555						556															
Sinuosity (ft)				.17					1.							18						18															
Water Surface Slope (Channel) (ft/ft)				0055					0.0							053						053															
Bankfull Slope (ft/ft)				0050					0.0							052		0.0054																			
Ri% / Ru% / P% / G% / S%	25%	9%	49%	16%	2%		23%	12%	48%	15%	2%			11%	49%	17%	3%						3%														
SC% / SA% / G% / C% / B% / Be%*							1%	14%	65%	20%	<1%	0%	10%	24%	47%	19%	0%	0%	9%	23%		17%															
d16 / d35 / d50 / d84 / d95 (mm)													0.504	7.25	21.75	78.25	125		13.2	27.5	40.5	72.75	108.3														
% of Reach with Eroding Banks				0%					0		·					%																	•				
Channel Stability or Habitat Metric				V/A					N						N																						
Biological or Other			N	V/A					N.	/A					N	/A																					
N/A - Information does not apply.																																					

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock

\*Percentages based on riffle and pool pebble counts.

Table 11b. Monitoring Data - Stream Reach Data Summary Glade Creek / Project No. 854 - Unnamed Tributary (265 feet)																																			
Parameter			Bas	eline					MY	<b>'-1</b>						7 - 2				/	MY	7-3					M	7 - 4					MY	- 5	
Dimension & Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD n
Bankfull Width (ft)			18.1	18.9	N/A	2		18.3	18.3	19.1	N/A	2	17.7	17.9	17.9	18.1	N/A	2	16.9	17.7	17.7	18.5	N/A	2											
Floodprone Width (ft)	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2	33.5	37.7	37.7	41.8	N/A	2											
Bankfull Mean Depth (ft)	0.7	0.8	0.8	0.8	N/A	2	0.7	0.7	0.7	0.7	N/A	2	0.7	0.8	0.8	0.8	N/A	2	0.7	0.7	0.7	0.7	N/A	2											
Bankfull Max Depth (ft)	1.2		1.3	1.3	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.2	1.2	1.2	1.2	N/A	2	1.1	1.2	1.2	1.2	N/A	2											
Bankfull Cross-Sectional Area (ft <sup>2</sup> )	12.7	13.0	13.0	13.2	N/A	2	13.0	13.0	13.0	13.0	N/A	2	12.2	12.8	12.8	13.4	N/A	2	12.1	12.3	12.3	12.4	N/A	2											
Width/Depth Ratio	22.7	25.5	25.5	28.3	N/A	2	23.6	25.9	25.9	28.1	N/A	2	23.4	25.2	25.2	27.0	N/A	2	23.1	25.8	25.8	28.4	N/A	2											
Entrenchment Ratio	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.2	N/A	2	1.9	2.1	2.1	2.3	N/A	2	2.0	2.2	2.2	2.3	N/A	2											
Bank Height Ratio	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2	1.0	1.0	1.0	1.0	N/A	2											
Profile																																			
Riffle Length (ft)		10.3			4.0	6	3.6	10.1	10.5	16.0	4.9	6	6.18	11.1	10.1	19.2	4.4	6	3.2	10.5	11.8	19.1	6.0	6											
Riffle Slope (ft/ft)	0.001	0.017	0.015	0.034	0.011	6	0.001	0.013	0.011	0.024	0.009	6	0.003	0.013	0.016	0.021	0.008	6	0.002	0.012	0.009	0.031	0.011	6											
Pool Length (ft)	3.6	13.3	10.8	29.5	8.5	9	3.2	13.4	14.1	26.8	7.8	9	3.1	12.2	12.5	26.8	7.2	9	2.4	12.7	13.1	25.8	7.8	9											
Pool Max Depth (ft)	1.8	2.7	2.6	3.4	0.5	7	2.1	2.7	2.6	3.3	0.4	6	2.2	2.6	2.5	2.9	0.3	6	1.8	2.6	2.7	3.3	0.5	8											
Pool Spacing (ft)	5.5	34.1	31.5	59.8	20.8	7	5.3	30.7	35.2	54.6	17.4	8	5.1	30.2	31.5	57.3	17.8	8	6.6	31.0	31.0	53.4	16.3	8											
Pattern	-		•	-	•		-			•			•			•													•	-			·		•
Channel Belt Width (ft)				37.1		5																													
Radius of Curvature (ft)	17.1	19.8	19.5	22.5	2.2	5																													
Rc: Bankfull Width (ft/ft)			N/A	N/A	N/A	N/A																													
Meander Wavelength (ft)				83.9	9.8	3																													
Meander Width Ratio	1.9	2.0	2.0	2.1	N/A	N/A																													
Additional Reach Parameters																																			
Rosgen Classification				C						74					(	C4						24													
Channel Thalweg Length (ft)				63						64						64					26														
Sinuosity (ft)				.17					1.	18					1.	18					1.2	20													
Water Surface Slope (Channel) (ft/ft)				064					0.0	068					0.0	068					0.0	051													
Bankfull Slope (ft/ft)				058					0.0	066				0.0066 0.0065																					
Ri% / Ru% / P% / G% / S%	24%	11%	47%	16%	2%		24%	15%	47%	12%	2%		26%	14%	43%	15%	3%			14%	46%	12%	2%												
SC% / SA% / G% / C% / B% / Be%*							0%	8%	81%	11%	0%	0%	7%	29%	48%	16%	0%	0%	3.4%	20.0%	60.6%	15.5%	0.5%	0.0%											
d16 / d35 / d50 / d84 / d95 (mm)													0.215	3.05	11.0	65.0	114.0		9.15	22.0	31.5	66.0	107.0												
% of Reach with Eroding Banks			0	)%					0	%					0	%											-								
Channel Stability or Habitat Metric		N/A N/A									N	/A																							
Biological or Other		N/A N/A N/A																																	
N/A - Information does not apply																																			

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

SC = Silt-Clay / SA = Sand / G = Gravel / C = Cobble / B = Boulder / Be = Bedrock

\*Percentages based on riffle and pool pebble counts.

## Appendix E Hydrological Data

Table 12. Verification of Bankfull Events Glade Creek / Project No. 854											
Date of Collection	Date of Occurrence	Method	Feet Above Average Bankfull Elevation								
3/25/2013	1/18/2013	Crest gauge & wrack lines	1.7								
10/31/2013	Unknown	Wrack Lines	NA								