Annual Monitoring Report

Monitoring Year 4 of 5

FINAL

Middle South Muddy Stream Restoration Site NCDMS Contract No.: 6783 NCDMS Project No.: 93875

McDowell County, North Carolina
Data Collected: February - October 2019
Date Submitted: March 5, 2020



Submitted to:
North Carolina Division of Mitigation Services
NCDEQ-DMS, 1652 Mail Service Center Raleigh NC 27699-1652



February 18, 2020

Matthew Reid Western Project Manager NCDENR – Division of Mitigation Services 5 Ravenscroft Dr., Suite 102 Asheville, NC 28801 (828)231-7912 Mobile matthew.reid@ncdenr.gov

Re: DMS Draft Monitoring Year 4 Report

Review for the Middle South Muddy Stream Restoration Site

Catawba River Basin – CU# 03050101 McDowell County, North Carolina

NCEEP Project #93875 Contract No. 6783

Dear Mr. Reid,

I have outlined our responses to the comments on the Draft Monitoring Year 4 report for the Middle South Muddy Stream Restoration Site in (Blue).

1.4.2. Stream Geomorphology

 The structure at STA 108+83 was noted in previous monitoring efforts as being stressed and removed in subsequent years because it has remained stable. DMS will continue to monitor this structure throughout the upcoming year to document any changes. Additional live stakes and seeding may be installed to help stabilize the erosional areas this winter. Additional text added to clarify this option.

1.4.1. Vegetation

☑ Invasive treatment occurred at the site in July and October 2019. Please update this section to include these dates. Text added

Table 2

Update table to include the invasive treatments that occurred in July and October 2019. Tableupdated

Table 9

☐ Table 9 indicates the MY4 annual mean is 467; however, section 1.4.1 Vegetation and the digital files show 453 as the MY4 annual mean. Please verify and update as necessary. Table 9 and text updated.



Appendix F:

Please include the attached invasive species treatment logs in a new Appendix F. Attached

Digital Deliverable File Review:

DMS is conducting digital file audits on all projects. Below are missing or incomplete digital deliverables for the project. If you have any questions or need clarification regarding these items, please contact Greg Melia.

☐ Digital files are up to date for Middle South Muddy. Please submit updated files with final deliverable. Attached

Prepared by:



balance through proper planning

37 Haywood Street, Suite 100 Asheville, North Carolina 28801

Contents

1.0	Project Summary	1
1.1.	Goals and Objectives	1
1.2.	Success Criteria	1
1.3.	Project Setting and Background	2
1.4.	Project Performance	3
2.0	Methods	5
3.0	References	6
Appen	dix A General Tables and Figures	7
Appen	dix B Visual Assessment Data	17
Appen	dix C Vegetation Plot Data	477
	dix D Stream Geomorphology Data	
Appen	dix E Hydrologic Data	910
	dix F Invasive Vegetation Treatment	

1.0 PROJECT SUMMARY

1.1. Goals and Objectives

The following goals were established to guide the restoration process for the project as outlined in the Final Mitigation Plan:

- Improve local water quality within the restored channel reaches as well as the downstream watercourses through: (a) the reduction of current channel sediment loads by restoring appropriately sized channels with stable beds and banks, (b) the reduction of nutrient loads from adjacent agricultural fields with a restored riparian buffer, and (c) the reduction of water temperatures provided through shading of the channel by canopy species along with the resultant increase in oxygen content.
- Improve local aquatic and terrestrial habitat and diversity within the restored channels and their vicinity through: (a) the restoration of appropriate bed form to provide habitat for fish, amphibian, and benthic species, (b) the restoration of a suitable riparian buffer corridor in order to provide both vertical and horizontal structure and connectivity with adjacent upland areas, and (c) the restoration of understory and canopy species in order to provide forage, cover, and nesting for a variety of mammals, reptiles, and avian species.
- Preclude land disturbing activities including the construction of additional infrastructure, future
 mining activities, and agricultural practices including cattle grazing and the application of
 pesticides and fertilizer within the riparian buffer area by providing a permanent conservation
 easement.

The following objectives were proposed for accomplishing the above listed goals as outlined in the Final Mitigation Plan:

- Provide approximately 3,281 stream mitigation units (SMU's) through Priority I and II restoration of approximately 1,989 linear feet of stream, enhancement of approximately 196 linear feet of stream, and preservation of approximately 5,836 linear feet of stream threatened by mining activities
- Restore natural stable channel morphology and proper sediment transport capacity.
- Create and/or improve bed form diversity and improve aquatic and benthic macroinvertebrate habitat.
- Construct a floodplain bench that is accessible at the proposed bankfull discharge.
- Improve channel and stream bank stabilization by integrating in-stream structures and native bank vegetation.
- Provide approximately 5.87 acres of riparian buffer restoration by establishing a native forested and herbaceous riparian buffer plant community with a minimum width of 30 feet from the edge of the restored channels. This new community will be established in conjunction with the eradication of any existing exotic and/or undesirable plant species.
- Construct barricades on an existing dirt road network on the Haney Tract to prevent future vehicular trespassing.

1.2. Success Criteria

1.2.1. Morphological Parameters and Channel Stability

Restored and enhanced streams should demonstrate morphologic stability to be considered successful. Stability does not equate to an absence of change, but rather to sustainable rates of change or stable patterns of variation. Restored streams often demonstrate some level of initial adjustment in the several months that follow construction and some change/variation subsequent to that period is also to be

expected. However, the observed change should not be unidirectional such that it represents a robust trend. If some trend is evident, it should be very modest or indicate migration to a stable form.

Dimension - Cross-section measurements should indicate little change from the as-built cross-sections. If changes do occur, they will be evaluated to determine whether the adjustments are associated with increased stability or whether they indicate movement towards an unstable condition.

Pattern and Profile – Measurements and calculated values should indicate stability with little deviation from as-built conditions and established morphological ranges from the restored stream type. Annual measurements should indicate stable bed form features with little change from the as-built survey. The pools should maintain their depth with flatter water surface slopes, while riffles should remain shallower and steeper.

Substrate - Calculated D_{50} and D_{84} values should indicate coarser size class distribution of bed materials in riffles and finer size class distribution in pools. Generally, it is anticipated that the bed material will coarsen over time.

Sediment Transport - Depositional features should be consistent with a stable stream that is effectively managing its sediment load. Point bar and inner berm features, if present, should develop without excessive encroachment of the channel. Lateral and mid-channel bar features should typically not be present and if so only in isolated instances. Bar features may be more prevalent in sand bed channels but should be transient in nature and should occupy no more than 20% of the cross-sectional area.

1.2.2. Surface Water Hydrology

Monitoring of stream surface water stages should indicate recurrence of bankfull flows on average every 1 to 2 years. At a minimum, throughout the monitoring period, the surface water stage should achieve bankfull or greater elevations at least twice. The bankfull events must occur during separate monitoring years.

1.2.3. Vegetation

Riparian vegetation monitoring shall be conducted for a minimum of five years to ensure that success criteria are met per USACE guidelines. Accordingly, success criteria will consist of a minimum survival of 320 stems per acre by the end of the Year 3 monitoring period and a minimum of 260 stems per acre at the end of Year 5. If monitoring indicates either that the specified survival is not being met or the development of detrimental conditions (i.e., invasive species, diseased vegetation), appropriate corrective actions will be developed and implemented.

1.3. Project Setting and Background

The Middle South Muddy Stream Restoration Site (MSM) is located in the Catawba River Basin (NCDWQ sub-basin 03-08-30 and HUC 03050101040020) approximately 9.5 miles southeast of Marion, NC in southeast McDowell County at latitude 35.5635° N and longitude 81.9249° W. MSM is composed of two tracts, the Middle South Muddy Creek tract, which encompasses approximately 5.87 acres of predominately agricultural and forested land, and the 41.05 acre Haney Preservation Tract, which is predominately forested. The Middle South Muddy Creek Tract consists of portions of three streams, Iva Branch (462 feet), Sprouse Branch (635 feet), and South Muddy Creek (1,088 feet). The Haney Tract consists of approximately 5,836 linear feet of stream. The tract is comprised of portions of South Muddy Creek and approximately four tributaries, including Jackson Branch and Moores Branch. MSM is located within the Muddy Creek Local Watershed planning area and the Site's watershed was identified as a

Targeted Local Watershed (TLW) in DMS' 2009 Upper Catawba River Basin Restoration Priority report (RBRP).

Historic land use at MSM consisted primarily of agriculture, livestock grazing, and mining operations. Livestock previously had unrestricted access to the majority of the streams on site, resulting in significant local disturbance to stream banks (Table 4). Additional land use practices, including the maintenance and removal of riparian vegetation, and the relocating, dredging, and straightening of on-site streams contributed to the degraded water quality and unstable channel characteristics on the site.

During the As-built Baseline Monitoring Report, stream lengths in the Haney Tract was increased by 3,960 LF from the approved Mitigation Plan length of 5,836 LF to a total of 9,796 LF. The increase in length was due to mapping of streams within the conservation easement during the As-built Baseline Monitoring field work data collection stage. Upon verification, DMS determined that many of the included streams have been highly manipulated by past land use (mining) and were not candidates for preservation credit. These streams (UT1-8 and UT-10) were removed by DMS from credit calculations. DMS and IRT viewed the remaining streams within the easement (UT9, UT11, Jackson Branch, Moores Branch and South Muddy Creek). These streams were impacted less by past use and both DMS and IRT agreed they would be suitable for preservation credit. In lieu of breaking out stream reaches and applying different ratios for preservation credit based on quality and function, the IRT and DMS agreed that reverting to the approved Mitigation Plan preservation length assets would be acceptable. The MY2 Monitoring Report has been updated to reflect the change in the preservation assets for the Haney Tract to 5,836 LF at a 5:1 ratio for a total of 1,167 SMUs as found in the Mitigation Plan. The total number of SMUs for the Middle South Muddy site has also been changed to 3,281 SMUs to reflect the Mitigation Plan as well.

1.4. Project Performance

Monitoring Year 4 (MY4) data was collected from February to October 2019. Monitoring activities included visual assessment of all reaches and the surrounding easement, collection of images at 31 permanent photo stations, inventory of five permanent vegetation monitoring plots, surveying of 10 cross-sections, conducting three pebble counts, and collection of longitudinal profile survey data for approximately 2,166 linear feet of stream channel.

Summary information/data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly Restoration Plan) documents available on the NCDMS website (http://portal.NCDEQ.org/web/eep). All raw data supporting the tables and figures in the appendices is available from DMS upon request.

1.4.1. Vegetation

Visual assessment of vegetation outside of the monitoring plots (Appendix B – Table 6) indicates that the herbaceous vegetation is becoming established throughout the project. Small areas of invasive exotic vegetation noted (n = 3) totaling 0.01 acre in the MY3 report were treated. Carolina Silvics, Inc. treated the described areas during two visits, July 25 and October 16, 2019. Carolina Silvics pesticide application log is located in Appendix F. The site will continue to be monitored for invasive exotic vegetation. Monitoring of the permanent vegetation plots (n = 5; VP) was completed in October 2019. Summary tables and photographs associated with MY4 vegetation monitoring are located in Appendix C. MY4 monitoring data indicates that all vegetation plots met the MY3 interim success criteria of 320 planted stems per acre. Planted stem densities among plots ranged from 364 to 607 planted stems per acre with

an annual mean of 453 planted stems per acre across all plots. A total of 10 species were documented within the plots. When volunteer stems are included, the mean annual total stems per acre rose to 769 and ranged between 364 and 1,376 stems per acre.

1.4.2. Stream Geomorphology

Visual assessment of the stream channel was performed to document signs of instability, such as eroding banks, structural instability, or excessive sedimentation. One problem area was noted on South Muddy Creek during MY3 associated with the structure at STA 108+83. Displacement of backfill material exposed the backer log and filter fabric which resulted in piping through the structure. The structure has remained stable into MY4, but some bank failure occurring immediately downstream on the right bank and scouring of the bankfull bench approximately 25 feet downstream (Table 5). Additional seeding and live staking of erosional zones is an option for this area if deemed necessary. On Iva Branch, the boulder step structure at STA 303+67, has failed. High flows with contributing runoff from the BMP just upstream have scoured around the LDB of the arm of the top 3 boulder arches undermining the structure. Material from the pools of the boulder steps has migrated downstream to fill in the riffle at STA 303+75 (Appendix D: Iva Branch Longitudinal Profile). The boulder arches located at STA 301+94 and 303+07 in the upstream portions of Iva Branch remain relatively intact however, the material from these structures has also migrated into the downstream riffle, causing aggradation at STA 302+25 and 303+25 (Appendix D: Iva Branch Longitudinal Profile). These problem areas on Iva Branch occurred prior to MY3 as a result of intermittent, flashy flows. Problem areas on Iva Branch noted in the MY3 report remain but have not worsened in MY4. All of these areas listed above will be monitored during future site visits for signs of deterioration.

Geomorphic data for MY4 was collected from March through October 2019. Summary tables and cross-section data plots related to stream morphology are located in Appendix D. Little noticeable change in the cross-section data between MY3 and MY4 occurred at cross-sections four through seven located on South Muddy Creek (Appendix D, Table 11a/b). The pool at cross section 6 has filled in some, but the bed material is sand size and highly mobile. Overall, the stream dimensions indicate channel stability. Riffle dimensions remained relatively similar between MY3 and MY4 on Sprouse Branch. The most notable change was that the width/depth ratio decreased by 4.5. Riffle dimensions on Iva Branch also remained stable from MY3 to MY4. No notable changes for Iva Branch can be reported, please refer to Table 11b and cross-sectional overlays for cross-sectional data.

Generally, South Muddy Creek longitudinal profile data (Appendix B, Table 11b) indicated relatively little change in riffle and pool dimensions between MY3 and MY4. The debris jam at STA 103+01 noted in MY3, has continued to increase the pool depth. This change has created great habitat and this section of stream appears in a stable condition. The filling in of the pool at XS 6 resulted in one (1) additional riffle. Profile dimensions for Sprouse Branch changed very little between MY3 and MY4. It should be noted that vegetation within the channel may have obscured some structures and features, preventing them from being depicted within the longitudinal profile survey. Iva Branch again had surface water present in the channel upstream of the culvert beginning at STA 304+34. Structures at STA 305+30 and 305+35 are present but were not included in the longitudinal profile as this section of the reach did not have surface water present at the time of the survey. A water surface slope was not generated for Upper Iva Branch.

1.4.3. Stream Hydrology

Since project completion in December 2015, five bankfull events have been documented on South Muddy Creek and Sprouse Branch and four bankfull events have been documented on Iva Branch. Based on precipitation data, the suspected dates are February 2nd, 2016 (MY1), October 23rd, 2017 (MY2), February 11th, 2018 (MY3), October 18th, 2018 (MY3), and May 9th, 2019 (MY4). The crest gauge on South Muddy Creek was damaged during multiple events during MY3. The crest gauge was reconfigured during the MY3 final walkthrough in November and seems to be functioning but did not capture bankfull event which was evidenced by wrack lines.

Two continuous stage recorders were installed during MY0 on Iva Branch to document surface flow. One gauge was installed in the perennial section and another was installed on the intermittent section to document 30 consecutive days of flow. The gauge in the perennial section has successfully demonstrated continuous flow, while the gauge in the intermittent section does not show signs of surface flow. During the MY4 monitoring year the intermittent section only saw approximately seven days of consecutive surface flow while the perennial section shows multiple stretches of 30+ days of flow during MY4 monitoring (Appendix E). The continuous stage recorders will be monitored in subsequent site visits.

2.0 METHODS

The visual assessment of the project was performed at the beginning and end of each monitoring year. Permanent photo station photos were taken during the initial visual assessment when leaf-off conditions exist. Additional photos of vegetation or stream problem areas were taken as needed.

Geomorphic measurements were taken during low flow conditions using a Nikon® NPR 332 Total Station. Three-dimensional coordinates associated with cross-section and profile data were collected in the field and geo-referenced (NAD83 State Plane feet FIPS 3200). Morphological data were collected at 10 cross-sections. Survey data was imported into CAD, ArcGIS®, and Microsoft Excel® for data processing and analysis. Channel substrate was characterized using a Wolman Pebble Count as outlined in Harrelson et al. (1994) and processed using Microsoft Excel.

Vegetation success is being monitored at 5 permanent monitoring plots. Vegetation monitoring follows the CVS-EEP Level 2 Protocol for Recording Vegetation, version 4.2 (Lee et al. 2008) and includes analysis of species composition and density of planted species. Data is processed using the CVS data entry tool. In the field, the four corners of each plot were permanently marked with rebar and photos of each plot are taken from the origin each monitoring year.

Precipitation data was reported from the NCCRONOS station NGRF in Marion, NC. Bankfull events were documented with two crest gauges, one located on South Muddy Creek and another on Sprouse Branch. Crest gauges will be monitored semi-annually. The height of the corklines was recorded and cross-referenced with known bankfull elevations at each crest gauge.

3.0 REFERENCES

- Equinox Environmental. 2008. Muddy Creek Local Watershed Plan. Report prepared for North Carolina Department of Environment and Natural Resources, Division of Water Quality. September.
- Harrelson, Cheryl, C. Rawlins and J. Potyondy. 1994. Stream Channel Reference Sites: An Illustrated Guide to Field Technique. Gen. Tech. Rep. RM-245. Rocky Mountain Forest and Range Experiment Station. USDA Forest Service. Fort Collins, Colorado
- North Carolina Ecosystem Enhancement Program (EEP). February 2009. Upper Catawba River Basin Restoration Priorities 2009. https://ncdenr.s3.amazonaws.com/s3fs-public/PublicFolder/Work%20With/Watershed%20Planners/Upper_Catawba_RBRP_2009.pdf.
- Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. http://cvs.bio.unc.edu/methods.htm; accessed November 2008.
- Wolf Creek Engineering. 2012. Final Mitigation Plan Middle South Muddy Creek Restoration. Prepared for North Carolina Department of Environment and Natural Resources, Ecosystem Enhancement Program. Final Mitigation Plan, Middle South Muddy Restoration, McDowell County. EEP Project No: 93875

Appendix A General Tables and Figures

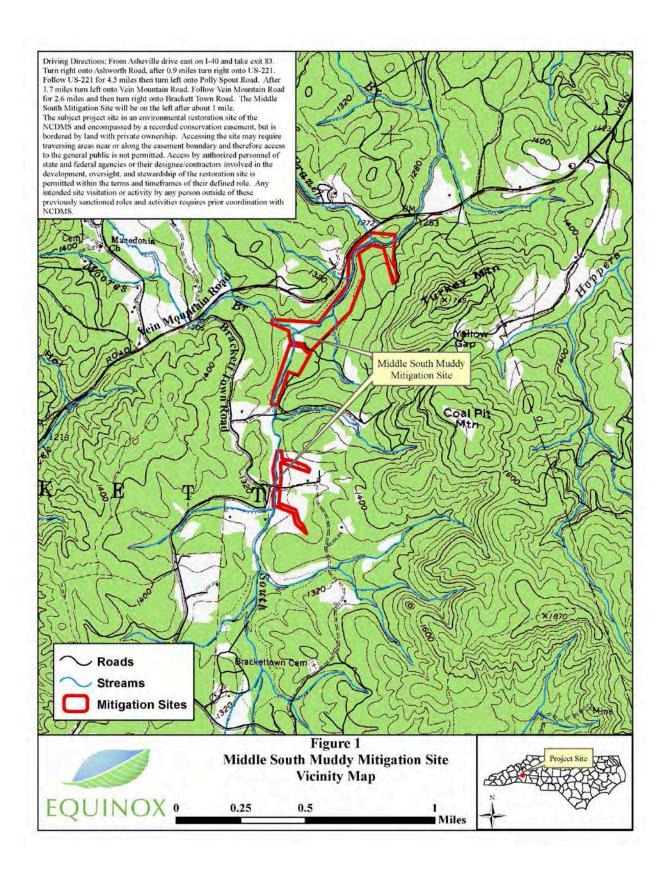


Figure 2. Integrated Current Condition Plan View


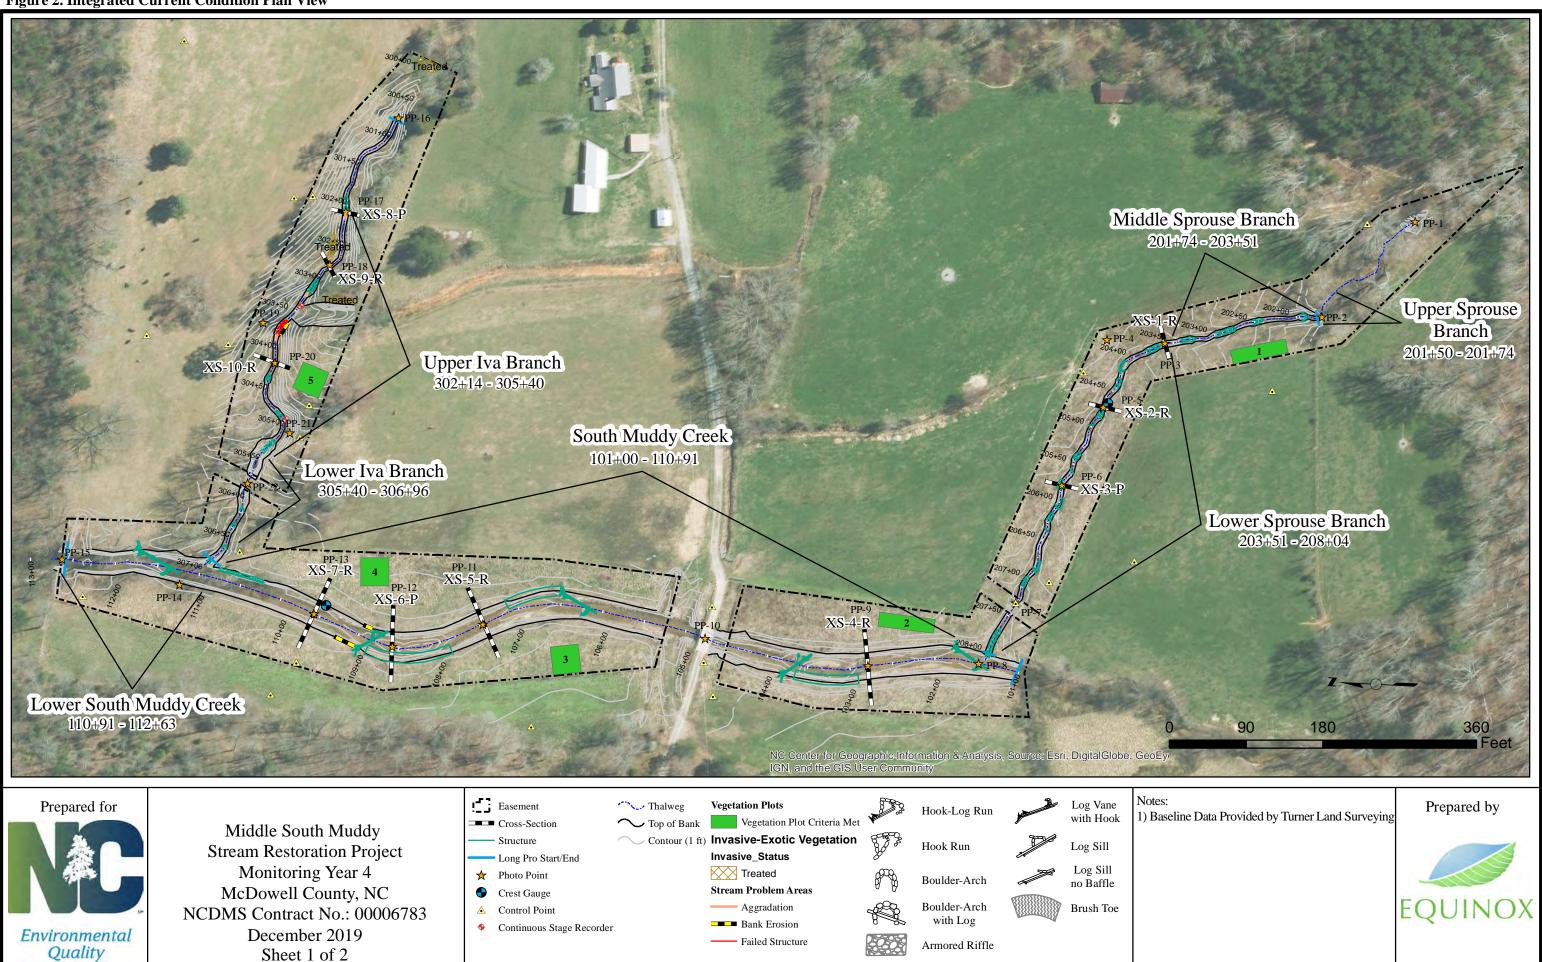


Figure 2. Integrated Current Condition Plan View

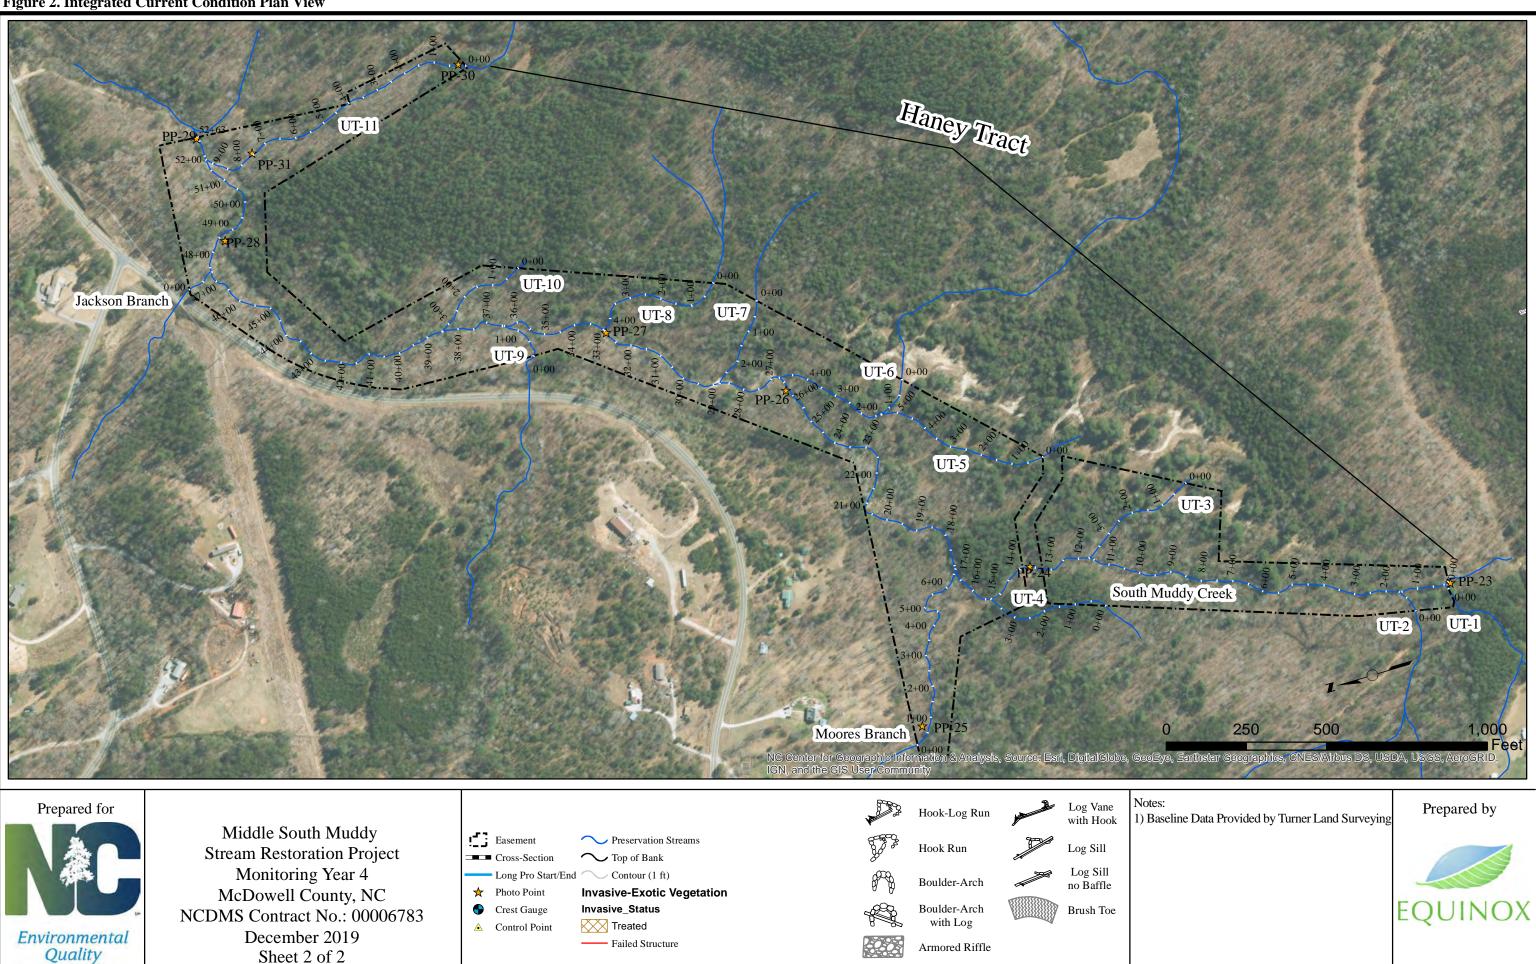

			T	able 1. Proje	ect Mitig	ation Co	mponer	ıts and	Summat	ion				
				Middle	South M	ıddy Stre	am Re	storatio	n Site					
					Mi	tigation (Credits							
	Stre	am	Riparian	Wetland	N	on-riparia	ın Wetla	ınd	Buffe	er		rogen nt Offset	Phosphorous	Nutrient Offset
Type	R	RE	R	RE		R	F	EΕ						
Totals	2,114	1,167												
					Proj	ect Com	ponent	s						
Project Com	ponent -or- Reach	ID Statio	oning/Location		isting e/Acreage	Restor Foota Acre	ge or	Rest	ation -or- oration ivalent	Approa		Mitigation Ratio	Mitigation Credits	Footage Excluded due to Easement Crossing/ Break
South	Muddy Creek	101	+00 - 110+91	9	931	91	6		R	PII		1:1	916	75
Lower Sc	outh Muddy Creek	110	+91 – 112+63	1	.77	17	2		R	EI		1.5:1	115	=
Upper	Sprouse Branch	201	+50 - 201+74		24	24	4		R	EII		2.5:1	10	-
Middle and L	Lower Sprouse Bra	nch 201	+74- 208+04	5	598	61	1		R	PII		1:1	611	19
Upper and	d Lower Iva Branci	n 302	+14 - 306+96	4	171	46	2		R	PI		1:1	462	20
H	aney Tract			5,	836	5,83	36	1	RE	Preserva	tion	5:1	1,167	-
					Comp	onent Su	ımmati	on						
Restoration	n	Stream		Riparian W	etland		Non-rip	arian W	etland	В	uffer	Upland		
Level		(linear feet)		(acres))			(acres)		(squa	(square feet)		(acres	s)
			River	ine No	n-Riverin	е								
Restoration		1,989												
Enhancement	į.													
Enhancement	: I	172												
Enhancement	: II	24												
Creation														
Preservation		5,836												
High Quality Preservation														
					P	MP Elen	ients							
Element	1	Location	Pi	rpose/Function	n						Not	es		
FB	E	ntire Site	Prote	ct Stream Cha	nnel									
BMP Element BR = Bioreter	ts ntion Cell; SF = Sai	nd Filter; SW = S	tormwater Wetl	and; WDP = V	Vet Deten	tion Pond	d; DDP :	= Dry D	etention P	ond; FS=	Filter	Strip; S = Gr	assed Swale; LS = I	Level Spreader;

NI = Natural Infiltration Area; FB = Forested Buffer

Table 2. Project Activity and Reporting History Middle South Muddy Stream Restoration Site								
	Data Collection							
Activity or Report	Complete	or Delivery						
Mitigation Plan	Feb - 2012	Mar - 2012						
Final Design - Construction Plans	N/A	Nov - 2012						
Construction	N/A	Dec - 2015						
Permanent Seed Mix Applied	-	Mar - 2016						
Live Stake Plantings	1	Mar - 2016						
Baseline Monitoring Document (Year 0 Monitoring - Baseline)	May - 2016	June -2016						
Year 1 Monitoring	Dec - 2016	Jan - 2017						
Year 1 Geomorphology Monitoring	Dec - 2016	-						
Year 1 Vegetation Monitoring	Oct - 2016	-						
Year 2 Monitoring	Oct - 2017	Nov - 2017						
Year 2 Geomorphology Monitoring	June - 2017	-						
Year 2 Vegetation Monitoring	Sept - 2017	-						
Year 3 Monitoring	Nov - 2018	Nov - 2018						
Year 3 Vegetation Monitoring	Sept - 2018	-						
Year 3 Geomorphology Monitoring	Oct - 2018	-						
Year 4 Invasive vegetation treatment		Jul-2019						
Year 4 Invasive vegetation secondary treatment		Oct-2019						
Year 4 Monitoring	Oct - 2019	Dec- 2019						
Year 5 Monitoring								

	Table 3. Project Contacts			
Mid	dle South Muddy Stream Restoration Site			
	North Carolina Division of Mitigation Services			
D. Co. Co. Accessor	217 W Jones Street Suite 3000a			
Prime Contractor	Raleigh, North Carolina 27603			
	Matthew Reid (828) 231-7812			
	Wolf Creek Engineering			
Designer	12 1/2 Wall Street Suite C			
Designer	Asheville, North Carolina 28801			
	S. Grant Ginn (828) 449-1930			
	River Works, Inc			
Construction	6105 Chapel Hill Road			
Contractor	Raleigh, North Carolina 27607			
	Jon Harrell (919) 710-3326			
	River Works, Inc			
Seeding Contractor	6105 Chapel Hill Road			
Seeding Contractor	Raleigh, North Carolina 27607			
	Jon Harrell (919) 710-3326			
	River Works, Inc			
Planting Contractor	6105 Chapel Hill Road			
Training Contractor	Raleigh, North Carolina 27607			
	Jon Harrell (919) 710-3326			
	Turner Land Surveying			
As-built Surveys	3719 Benson Drive			
	Raleigh, North Carolina 27609			
	David Turner (919) 827-0745			
	Green Resource			
Seeding Mix Source	5204 Highreen Court			
	Colfax, North Carolina 27235			
	(336) 855-6363			
	Foggy Mountain Nursery			
Live Stakes	797 Helton Creek Road			
	Lansing, North Carolina			
	(336) 384-5323			
Monitoring Performers	Equinox Environmental			
(MY0-MY4)	37 Haywood St.			
2016 - 2019	Asheville, North Carolina 28801			
	Drew Alderman (828) 253-6856			

Table 4. Project	Baseline Information and At	tributes						
	Project Information							
Project Name		Middle South Muddy Creek						
County	McDowell 5.07							
Project Area (acres)	5.87							
Project Coordinates (latitude and longitude)		35.5635° N , 81.9249° W						
Project Wa Physiographic Province	tershed Summary Information	Blue Ridge						
River Basin		Catawba River						
USGS Hydrologic Unit 8-digit 3050101	USGS Hydrologic Unit 14		03050101040020					
DWR Sub-basin	, ,	03-08-30						
Project Drainage Area (acres)		2,893						
Project Drainage Area Percentage of Impervious Area		>1%						
CGIA Land Use Classification		2.03.01.01						
Rea	ch Summary Information							
Parameters	South Muddy Creek	Iva Branch	Sprouse Branch					
Length of reach (linear feet)	1,108	471	622					
Valley classification (Rosgen)	Valley Type VIIIb	Valley Type II	Valley Type II					
Drainage area (acres)	3,002	27	29					
	*	1						
NCDWQ stream identification score	44	31	34					
NCDWQ Water Quality Classification	C	C	C					
Morphological Description (stream type) (Rosgen)	G4	G5	G5					
Evolutionary trend (Rosgen)	F4	G5	G5					
Underlying mapped soils	Iotla, Hayesville Clay	Iotla, Hayes ville Clay	Iotla, Hayes ville Clay					
Drainage class	Poorly drained	Poorly drained	Poorly drained					
Soil Hydric status	Non-hydric	Non-hydric	Non-hydric					
Slope	0.40%	4.60%	2.20%					
FEMA classification	Limited Detail	N/A	N/A					
Native vegetation community	Agricultural	Agricultural	Agricultural					
Percent composition of exotic invasive vegetation	<1%	<1%	<1%					
Wetla	and Summary Information							
Parameters	Wetland 1	Wetland 2	Wetland 3					
Size of Wetland (acres)	-	-	-					
Wetland Type (non-riparian, riparian riverine or riparian non-riverine)	-	-	-					
Mapped Soil Series	-	-	-					
Drainage class	-	-	-					
Soil Hydric Status	-	=	-					
Source of Hydrology	-	-	-					
Hydrologic Impairment Native vegetation community	-	-	-					
-	-	-	-					
Percent composition of exotic invasive vegetation	-	-	-					
	gulatory Considerations		Supporting					
Regulation	Applicable?	Resolved?	Documentatio NW 27					
Waters of the United States – Section 404	Yes	Yes	(2011-02233) 401 Certification					
Waters of the United States – Section 401	Yes	Yes Yes 4						
Endangered Species Act	No	N/A	ERTR					
Historic Preservation Act	No	N/A	ERTR					
Coastal Zone Management Act (CZMA)/ Coastal Area Management Act (CAMA)	No	N/A						
FEMA Floodplain Compliance	Yes	Yes	Case #: 14-04-0367R					
Essential Fisheries Habitat	No	N/A	2.0.000710					

Appendix B Visual Assessment Data

Table 5. Visual Stream Morphology Stability Assessment Middle South Muddy Stream Restoration Site - South Muddy Creek Assessed Length 1,088 feet

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability	Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
	(Riffle and Run Units)	2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate.	5	5			100%			
	3. Meander Pool	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	5	5			100%			
	Condition	Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	5	5			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run).	5	5			100%			
	4. That weg Tosition	2. Thalweg centering at downstream of meander bend (Glide).	5	5			100%			
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			2	36	98%	0	0	98%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	0	0	100%
				Totals	2	36	99%	0	0	93%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	5	5			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	5	5			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	5	5			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	5	5			100%			
	4. Habitat	Pool forming structures maintaining ~ M ax Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	5	5			100%			

Table 5 Cont'd. Visual Stream Morphology Stability Assessment Middle South Muddy Stream Restoration Project - Sprouse Branch Assessed Length 611 feet

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability	Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
	(Riffle and Run Units)				0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	14	14			100%			
	3. Meander Pool	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	16	16			100%			
	Condition	Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	16	16			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run).	16	16			100%			
	4. That weg Tosition	2. Thalweg centering at downstream of meander bend (Glide).	16	16			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	0	0	100%
				Totals	0	0	100%	0	0	100%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	18	18			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	18	18			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	18	18			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	18	18			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio ≥ 1.6. Rootwads/logs providing some cover at base-flow.	18	18			100%			

Table 5 Cont'd. Visual Stream Morphology Stability Assessment Middle South Muddy Stream Restoration Project - Iva Branch Assessed Length 462 feet

Assessed Length 462 feet										
Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed		Aggradation - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			3	15	96%			
	(Riffle and Run Units)	2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	Texture/Substrate - Riffle maintains coarser substrate.	9	9			100%			
	3. Meander Pool	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth ≥ 1.6).	9	9			100%			
	Condition	Length appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	9	9			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run).	9	9			100%			
	4. That weg Tostuon	2. Thalweg centering at downstream of meander bend (Glide).	9	9			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			1	15	98%	0	0	98%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	0	0	100%
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	0	0	100%
				Totals	1	15	98%	0	0	98%
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	9	10			90%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	9	10			90%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	9	10			90%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	9	10			90%			
	4. Habitat	Pool forming structures maintaining \sim M ax Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	9	10			90%			

Table 6. Vegetation Condition Assessment Middle South Muddy Stream Restoration Site

Planted Acreage: 5.87

Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	0	0.00	0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	0	0.00	0%
		Totals	0	0.00	0%
13. Areas of Poor Growth Rates or vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%
		Cumulative Totals	0	0.00	0%

Easement Acreage: 5.87

	Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4	. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present)	3	0.01	<1%
5	5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	N/A	0	0.00	0%

N/A - Item does not apply.



Upper Sprouse Branch – Permanent Photo Station 1 Looking Downstream



Upper Sprouse Branch – Permanent Photo Station 2 Looking Downstream



Lower Sprouse Branch – Permanent Photo Station 3 Looking Downstream at Cross-Section 1



Lower Sprouse Branch – Permanent Photo Station 4 Looking Downstream, Northwest- 292 degrees



Lower Sprouse Branch – Permanent Photo Station 4 Looking Upstream; South 182 degrees



Lower Sprouse Branch – Permanent Photo Station 5 Looking Downstream at Cross-Section 2



Lower Sprouse Branch – Permanent Photo Station 6 Looking Downstream at Cross-Section 3



Lower Sprouse Branch – Permanent Photo Station 7 Looking Upstream from Crossing



Lower Sprouse Branch – Permanent Photo Station 8 Station 101+50 - Looking Upstream at Confluence with South Muddy



South Muddy Creek – Permanent Photo Station 8 Station 101+50 - Looking Downstream



South Muddy Creek – Permanent Photo Station 8 Station 101+50 - Looking Upstream



South Muddy Creek – Permanent Photo Station 9 Station 102+75 - Looking Downstream at Cross-Section 4




South Muddy Creek – Permanent Photo Station 10 Station 104+75 - Looking Upstream from Bridge



South Muddy Creek – Permanent Photo Station 10 Station 104+75 - Looking Downstream from Bridge



South Muddy Creek – Permanent Photo Station 11 Station 107+45 - Looking Downstream at Cross-Section 5

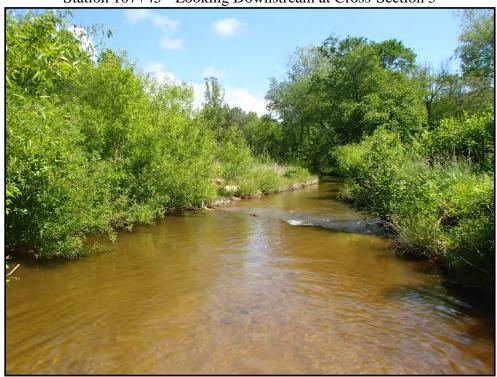

South Muddy Creek – Permanent Photo Station 12 Station 108+58- Looking Downstream at Cross-Section 6



South Muddy Creek – Permanent Photo Station 13 Station 109+58 - Looking Downstream at Cross-Section 7



Lower South Muddy Creek – Permanent Photo Station 14 Station 111+20 - Looking Upstream



Lower South Muddy Creek – Permanent Photo Station 14 Station 111+20 - Looking Downstream



Lower Iva Branch – Permanent Photo Station 14 Station 111+20 - Looking Upstream from Confluence



Lower South Muddy Creek – Permanent Photo Station 15 Station 112+62 - Looking Upstream



Upper Iva Branch – Permanent Photo Station 16 Station 300+50 - Looking Downstream



Upper Iva Branch – Permanent Photo Station 17 Station 302+13 - Looking Downstream at Cross-Section 8



Upper Iva Branch – Permanent Photo Station 18 Station 302+82 - Looking Downstream at Cross-Section 9



Upper Iva Branch – Permanent Photo Station 19 Station 303+75 - Looking Upstream



Upper Iva Branch – Permanent Photo Station 20 Station 304+20 - Looking Downstream at Cross-Section 10



Upper Iva Branch – Permanent Photo Station 21 Station 305+10 - Looking Upstream



Lower Iva Branch – Permanent Photo Station 22 Station 305+85 - Looking Upstream from Crossing



Haney Tract – Permanent Photo Station 23 Looking Downstream South Muddy Creek



Haney Tract – Permanent Photo Station 24 Looking Upstream South Muddy Creek



Haney Tract – Permanent Photo Station 24 Looking Downstream South Muddy Creek



Haney Tract – Permanent Photo Station 25 Looking Downstream Tributary to South Muddy Creek



Haney Tract – Permanent Photo Station 26 Looking Upstream South Muddy Creek



Haney Tract – Permanent Photo Station 26 Looking Downstream South Muddy Creek



Haney Tract – Permanent Photo Station 26 Looking Upstream Tributary to South Muddy Creek



Haney Tract – Permanent Photo Station 27 Looking Upstream South Muddy Creek



Haney Tract – Permanent Photo Station 27 Looking Downstream South Muddy Creek



Haney Tract – Permanent Photo Station 28 Looking Upstream South Muddy Creek



Haney Tract – Permanent Photo Station 28 Looking Downstream South Muddy Creek



Haney Tract – Permanent Photo Station 28 Looking Upstream Tributary to South Muddy Creek



Haney Tract – Permanent Photo Station 29 Looking Upstream South Muddy Creek



Haney Tract – Permanent Photo Station 30 Looking Downstream Tributary to South Muddy Creek



Haney Tract – Permanent Photo Station 31 Looking Upstream Tributary to South Muddy Creek

Problem Area Photos



Failed Structure – Iva Branch STA 303+67 (looking upstream)



Bank Scour LDB- South Muddy Creek 109+00 (looking upstream)

Problem Area Photos



Bank Scour RDB- South Muddy Creek 109+00 (looking upstream)

Appendix C Vegetation Plot Data

Table 7. Vegetation Plot Crit	eria Attainment	
Middle South Muddy Stream	Restoration Site	9
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	
2	Yes	
3	Yes	100%
4	Yes	
5	Yes	

N.	Table 8. CVS Vegetation Plot Metadata Iiddle South Muddy Stream Restoration Site
Report Prepared By	Owen Carson
Date Prepared	11/20/2019 15:50
Date Trepareu	11/20/2017 13.30
database name	Equinox_2019_A_MiddleSouthMuddy_MY4.mdb
database name	Z:\ES\NRI&M\EEP Monitoring\Middle South Muddy\MY4-
database location	2019\Data\Veg
computer name	FIELDTECH3-PC
file size	60854272
DESCRIPTION	ON OF WORKSHEETS IN THIS DOCUMENT
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
	A matrix of the count of total living stems of each species (planted and
ATT Stome by Diet and are	natural volunteers combined) for each plot; dead and missing stems are
ALL Stems by Plot and spp	excluded.
DD (JECT SIMMADV
	JECT SUMMARY
Project Code project Name	Middle South Middy
Description	Middle South Middy
River Basin	Catawba
Sampled Plots	5
- Tripica I Iou	,

		Table 9				m Cou am Re			•								
					-J				ent Plo	t Data	(MY42	2019)					
			938	75-01-0	0001	938	75-01-0	0002	938	75-01-0	0003	938	75-01-0	0004	938	75-01-0	0005
Scientific Name	Common Name	Species Type	PnoLS	P-all	Т	PnoLS	P-all	Т	PnoLS	P-all	Т	PnoLS	P-all	Т	PnoLS	P-all	Т
Acer rubrum	red maple	Tree															
Acer rubrum var. rubrum	red maple	Tree	2	2	2	1	1	1				1	1	1	7	7	7
Betula nigra	river birch	Tree	2	2	2	3	3	3	1	1	1	2	2	2			
Carpinus caroliniana	American hornbeam	Tree													2	2	2
Celtis occidentalis	common hackberry	Tree							2	2	2						
Cercis canadensis	eastern redbud	Tree				1	1	1									
Cornus amomum	silky dogwood	Shrub						1									
Fraxinus pennsylvanica	green ash	Tree	1	1	1	3	3	3	4	4	4	2	2	2			
Juniperus virginiana	eastern redcedar	Tree												2			
Platanus occidentalis	American sycamore	Tree	4	4	4	7	7	7	1	1	1	6	6	21	2	2	7
Platanus occidentalis var.	Sycamore, Plane-tree	Tree															
Rhus aromatica	fragrant sumac	Shrub															
Rhus copallinum	flameleaf sumac	shrub															
Rhus glabra	smooth sumac	shrub															16
Ulmus americana	American elm	Tree													2	2	2
		Stem count	9	9	9	15	15	16	8	8	8	11	11	28	13	13	34
		size (ares)		1			1			1			1			1	
		size (ACRES)		0.02			0.02			0.02			0.02			0.02	
		Species count	4	4	4	5	5	6	4	4	4	4	4	5	4	4	5
	St	tems per ACRE	364.2	364.2	364.2	607	607	647.5	323.7	323.7	323.7	445.2	445.2	1133	526.1	526.1	1376

¹PnoLS: No livestakes included in tally; P-all: All planted stems included in tally; T: Total stems including recruitment.

		Table 9.	Total	Plante	d Ster	n Cou	nts (An	nual N	Means))								1
		Midd	le Suth	Mudo	ly Stre	am Re	estorati	on Pr	oject									
									Ann	ual M	eans							Color for Density
Scientific Name	Common Name	Species Type	M'	Y4 (201	L9)	M	Y3 (201	8)	M	Y2 (20:	L7)	М	Y1 (201	6)	M	/0 (20 :	16)	Exceeds requirements by 10%
Acer rubrum	red maple	Tree	PnoLS	P-all	T	PnoLS	P-all	Т	PnoLS	P-all	Т	PnoLS	P-all	Т	PnoLS	P-all	T	Exceeds requirements, but by less than 10%
Acer rubrum var. rubrum	red maple	Tree						2										Fails to meet requirements, by less than 10%
Betula nigra	river birch	Tree	11	11	11	11	11	11	11	11	11	11	11	11	11	11	11	Fails to meet requirements by more than 10%
Carpinus caroliniana	American hornbeam	Tree	8	8	8	8	8	8	7	7	7	7	7	7	5	5	5	
Celtis occidentalis	common hackberry	Tree	2	2	2	2	2	2	4	4	4	4	4	4	5	5	5	
Cercis canadensis	eastern redbud	Tree	2	2	2													
Cornus amomum	silky dogwood	Shrub	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	
Fraxinus pennsylvanica	green ash	Tree			1													
Juniperus virginiana	eastern redcedar	Tree	10	10	10	11	11	11	11	11	11	11	11	11	11	11	11	
Platanus occidentalis	American sycamore	Tree			2													
Platanus occidentalis var	Sycamore, Plane-tre	Tree	20	20	40	20	20	47	20	20	20	20	20	20	20	20	20	
Rhus aromatica	fragrant sumac	Shrub									19							
Rhus copallinum	flameleaf sumac	shrub						11										
Rhus glabra	smooth sumac	shrub												11				
Ulmus americana	American elm	Tree			16						12							
			2	2	2	4	4	4	4	4	4	6	6	6	7	7	7	<u>'</u>
		Stem count	56	56	95	57	57	97	58	58	89	60	60	71	60	60	60	5
		size (ares)		5			5			5			5			5		
		size (ACRES)		0.12			0.12			0.12			0.12			0.12		
		Species count	8	8	11	7	7	9	7	7	9	7	7	8	7	7	7	<u>'</u>
	S	tems per ACRE	453.2	453.2	768.9	461.3	461.3	785.1	469.4	469.4	720.3	485.6	485.6	574.7	485.6	485.6	485.6	5

¹PnoLS: No livestakes included in tally; P-all: All planted stems included in tally; T: Total stems including recruitment.





Middle South Muddy - Vegetation Monitoring Plot 1 October 24th, 2019



Middle South Muddy - Vegetation Monitoring Plot 2 October 24th, 2019



Middle South Muddy - Vegetation Monitoring Plot 3 October 24th, 2019



Middle South Muddy - Vegetation Monitoring Plot 4 October 24th, 2019



Middle South Muddy - Vegetation Monitoring Plot 5 October 24th, 2019

Appendix D Stream Geomorphology Data

		Mide	dle Sc	outh M						am Da				reek (1.088	feet)								
Parameter	Regi	ional C		1			ng Cond		iccn /	Lowe		erence			1,000		Design	1		As	-Built	Baseli	ine	
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	30.7	-	-	-	-	-	-	-	19.4	-	-	36.6	-	-	-	30.8	-	30.7	31.1	31.0	31.6	0.5	3
Floodprone Width (ft)				-	-	-	-	-	-	30.0	-	-	65.0	-	-	-	65.0	-	65.0	84.7	88.0	101.0	18.2	3
Bankfull Mean Depth (ft)	-	1.8	-	-	-	-	-	-	-	1.6	-	-	1.6	-	-	-	1.7	-	1.6	1.9	1.9	2.1	0.3	3
Bankfull Max Depth (ft)				-	-	-	-	-	-	2.0	-	-	2.2	-	-	-	2.2	-	2.3	2.7	2.8	2.9	0.4	3
Bankfull Cross Sectional Area (ft2)		51.7		-	-	-	-	-	-	30.2	-	-	36.6	-	-	-	52.2	-	50.5	58.1	59.0	64.9	7.2	3
Width/Depth Ratio				-	-	-	-	-	-	12.3	-	-	14.9	-	1	-	18.1	1	14.8	16.8	15.9	19.8	2.6	3
Entrenchment Ratio				-	-	-	-	-	-	1.3	-	-	2.8	-	ı	-	2.1	1	2.1	2.7	2.8	3.3	0.6	3
Bank Height Ratio				-	-	-	-	-	-	1.0	-	-	1.2	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	3
d50 (mm)				-	-	-	-	-	-	-	29.0	-	-	-	-									
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	17.7	-	-	64.0	-	-	-	-	-	54.4	109.6	85.4	229.5	68.9	5
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.77	-	-	3.60	-	-	-	-	-	0.001	0.003	0.003	0.005	0.001	5
Pool Length (ft)				-	-	-	-	-	-	12.0	-	-	36.0	-	-	-	-	-	34.8	50.8	51.3	66.3	12.4	5
Pool Max Depth (ft)				-	-	-	-	-	-	2.3	-	-	2.9	-	-	-	3.3	-	3.2	4.6	4.5	6.0	0.9	6
Pool Spacing (ft)				-	-	-	-	-	-	97.5	-	-	193.0	-	-	154.5	-	220.7	112.6	196.3	187.9	323.2	89.4	5
Pattern																								
Channel Belt Width (ft)				-	-	-	Ι.	-	l -	T -	100.0	-	-	-	-	-	-	-	63.72	86.44	92.6	103	20.34	3
Radius of Curvature (ft)				-	-	-	-	-	_	32.0	-		514.0	-	-	-	61.0	-	102.1	114.7	120.1	121.8	10.9	3
Rc: Bankfull Width (ft)				-	-	-	<u> </u>	-	_	-	-	_	-	-	_	_	-	_	3.3	3.7	3.9	3.9	0.4	3
Meander Wavelength (ft)				-	-	_	<u> </u>	-	-	-	300.0	-	_	-	_	_	-	-	466.5	495.0	497.3	521.1	27.4	3
Meander Width Ratio				<u> </u>	-	-	١.	_	-	<u> </u>	4.3	_	-	_	_	_	3.2	_	2.0	2.8	3.0	3.3	0.7	3

Substrate, Bed and Transport Parameters																								
Ri% / Ru% / P% / G% / S%							-			1			-							55% /	11% / 2	26% / 8%	6 / 0%	
SC% / Sa% / G% / C% / B% / Be%							_				1% / 8%	6 / 72%	/ 17% /	1% / 1%										
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)							_							120 / - / -										
Reach Shear Stress (Competency) lb/ft ²							_					0.8					_							
Max Part Size (mm) Mobilized at Bankfull							-			<u> </u>			60				-					-		
Stream Power (Transport Capacity) W/m ²							-						-											
Additional Reach Parameters																l								
							_					3.	33			1	4.7							
Drainage Area (mi ²) Impervious Cover Estimate (%)							-						-				-							
* '													24				C4					24		
Rosgen Classification Bankfull Velocity (fps)		-					-					3					-					.4		
• • • • • • • • • • • • • • • • • • • •							-						3.0											
Bankfull Discharge (cfs)													50											
Valley Length (ft)							-										1,136					<i>(</i> 2		
Channel Thalweg Length (ft)				_			-			<u> </u>			00				1,161				1,1			
Sinuosity				_			-			-			10				1.03		-		1.			
Water Surface Slope (ft/ft)				-			-			1			-				0.003				0.0			
Bankfull Slope (ft/ft)				-			-			<u> </u>			-				0.003				0.0	102		
Bankfull Floodplain Area (acres)				<u> </u>			-			<u> </u>			-											
Proportion Over Wide (%)							-			ļ			-											
Entrenchment Class (ER Range)				-			-			ļ			-											
Incision Class (BHR Range)							-			<u> </u>			-											
ВЕНІ							-			<u> </u>			-											
Channel Stability or Habitat Metric							-			<u> </u>			-											
Biological or Other							-						-											

				N						Stream				rt)										
Parameter	Reg	ional C	urve				g Cond		Tuuic	DPIOUS			Reach I			Г	Design	1		As	-Built	/ Baseli	ine	
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	4.8	-	-	-	-	-	-	-	23.4	-	-	24.7	-	-	-	4.8	-	-	-	-	-	-	-
Floodprone Width (ft)				-	-	-	-	-	-	43.0	-	-	52.0	-	-	-	15.0	-	-	-	-	-	-	-
Bankfull Mean Depth (ft)	-	0.5	-	-	-	-	-	-	-	1.3	-	-	1.5	-	-	-	0.3	-	-	-	-	-	-	-
Bankfull Max Depth (ft)				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	0.5	-	-	-	-	-	-	-
Bankfull Cross Sectional Area (ft ²)		0.5		-	-	-	-	-	-	33.4	-	-	34.6	-	-	-	1.6	-	-	-	-	-	-	-
Width/Depth Ratio				-	-	-	-	-	-	15.8	-	-	18.4	-	-	-	14.1	-	-	-	-	-	-	-
Entrenchment Ratio				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	3.2	-	-	-	-	-	-	-
Bank Height Ratio				-	-	-	-	-	-	1.4	-	-	1.6	-	-	-	1.0	-	-	-	-	-	-	-
d50 (mm)				-	-	-	-	-	-	-	45.0	-	-	-	-									
Profile				•						•			•											
Riffle Length (ft)				-	-	-	-	-	-	20.0	-	-	40.0	-	-	-	-	-	15.2	20.0	16.1	28.8	7.6	3
Riffle Slope (ft/ft)				-	-	-	-	-	-	1.500	-	-	4.300	-	-	-	-	-	0.005	0.007	0.008	0.010	0.002	3
Pool Length (ft)				-	-	-	-	-	-	6.0	-	-	42.0	-	-	-	-	-	3.7	9.2	8.2	16.5	5.3	4
Pool Max Depth (ft)				-	-	-	-	-	-	2.3	-	-	2.3	-	-	-	0.8	-	1.6	2.0	1.8	2.7	0.5	4
Pool Spacing (ft)				-	-	-	-	-	-	51.0	-	-	113.0	-	-	15.9	-	22.7	43.0	49.1	44.4	60.1	9.5	3
Pattern																								
Channel Belt Width (ft)				-	-	-	l -	-	-	-	43.0	-	-	-	-	-	-	-	7.1	7.9	7.8	8.9	0.9	3
Radius of Curvature (ft)				-	-	-	-	-	-	44.0	-	-	103.0	-	-	-	-	-	8.2	15.0	14.0	23.8	6.9	4
Rc: Bankfull Width (ft)												_	-	-	_	_	-	-	1.7	3.1	2.9	5.0	1.4	4
Meander Wavelength (ft)				-	-	-	-	-	-	-	100.0	-	-	-	-	-	-	-	20.4	26.3	27.1	30.7	4.5	4
Meander Width Ratio				-	<u> </u>	_	_	_	_	-	1.8	-	-	_	_	-	2.3	_	1.5	1.7	1.6	1.9	0.2	3
With Ratio							<u> </u>	<u> </u>			1.0			<u> </u>			2.3	<u> </u>	1.5	1.7	1.0	1.7	0.2	
Substrate, Bed and Transport Parameters																								
Ri% / Ru% / P% / G% / S%							_													39% /	0% / 24	1% / 8%	/ 29%	
SC% / Sa% / G% / C% / B% / Be%							-			1	% / 10%	/ 48%	41% / 0)% / 1%							0,0,0		. =	
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)							-						/ 130 / 1											
Reach Shear Stress (Competency) lb/ft ²							_			<u> </u>		1.9										-		
Max Part Size (mm) Mobilized at Bankfull							-					9					-					-		
				_			-										-							
Stream Power (Transport Capacity) W/m ² Additional Reach Parameters																								
							-			1		2.1	77				0.03							
Drainage Area (mi ²) Impervious Cover Estimate (%)							-					2.					-							
•							-					В					B5				Е	35		
Rosgen Classification		-					-					6.					-							
Bankfull Velocity (fps)												210												
Bankfull Discharge (cfs)		-					-										- 107							
Valley Length (ft)							-					38					187							
Channel Thalweg Length (ft)				\vdash			-			<u> </u>		40				<u> </u>	177		-		1'			
Sinuosity							-					1.					1.06				1.			
Water Surface Slope (ft/ft)				<u> </u>			-									<u> </u>	0.031		-		0.0			
Bankfull Slope (ft/ft)				<u> </u>			-					-					0.031				0.0	129		
Bankfull Floodplain Area (acres)				<u> </u>			-																	
Proportion Over Wide (%)							-					-												
Entrenchment Class (ER Range)				<u> </u>			-			<u> </u>		-												
Incision Class (BHR Range)							-																	
BEHI							-																	
Channel Stability or Habitat Metric							-					-												
Biological or Other							-					-												

				N						Stream				t)										
Parameter	Regi	ional C	urve				ng Cond		0 1101	produ			Reach I			Г	Design			As	-Built	/ Baseli	ine	
	U																							
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	5.3	-	-	-	-	-	-	-	23.4	-	-	24.7	-	-	-	5.2	-	5.1	5.3	5.3	5.4	0.2	2
Floodprone Width (ft)				-	-	-	-	-	-	43.0	-	-	52.0	-	-	-	15.0	-	14.0	19.0	19.0	24.0	3.5	2
Bankfull Mean Depth (ft)	-	0.5	-	-	-	-	-	-	-	1.3	-	-	1.5	-	-	-	0.4	-	0.3	0.3	0.3	0.3	0.0	2
Bankfull Max Depth (ft)				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	0.6	-	0.6	0.6	0.6	0.6	0.0	2
Bankfull Cross Sectional Area (ft ²)		2.2		-	-	-	-	-	-	33.4	-	-	34.6	-	-	-	1.9	-	1.7	1.7	1.7	1.8	0.0	2
Width/Depth Ratio				-	-	-	-	-	-	15.8	-	-	18.4	-	-	-	14.3	-	15.1	15.9	15.9	16.7	1.1	2
Entrenchment Ratio				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	2.9	-	2.6	3.6	3.6	4.5	1.3	2
Bank Height Ratio				-	-	-	-	-	-	1.4	-	-	1.6	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	2
d50 (mm)				-	-	-	-	-	-	-	45.0	-	-	-	-									
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	20.0	-	-	40.0	-	-	-	-	-	6.0	16.2	14.2	32.2	9.3	9
Riffle Slope (ft/ft)				-	-	-	-	-	-	1.5	-	-	4.3	-	-	-	-	-	0.003	0.011	0.011	0.025	0.007	9
Pool Length (ft)				-	-	-	-	-	-	6.0	-	-	42.0	-	-	-	-	-	3.4	8.7	9.0	12.1	3.1	11
Pool Max Depth (ft)				-	-	-	-	-	-	2.3	-	-	2.3	-	-	-	0.8	-	1.3	1.8	1.8	2.3	0.3	11
Pool Spacing (ft)				-	-	-	-	-	-	51.0	-	-	113.0	-	-	18.1	-	25.8	19.0	32.9	32.2	55.1	10.5	10
Pattern												•	•											
Channel Belt Width (ft)				-	-	-	-	-	-	-	43.0	-	-	-	-	-	-	-	10.1	10.4	10.4	10.6	0.3	3
Radius of Curvature (ft)				-	-	-	-	-	-	44.0	-	-	103.0	-	-	-	-	-	8.8	10.6	10.6	12.5	1.9	4
Rc: Bankfull Width (ft)				4								-	-	-	-	-	-	-	1.7	2.0	2.0	2.4	0.4	4
Meander Wavelength (ft)											100.0	-	-	-	-	-	-	-	33.2	38.1	38.5	42.9	3.5	5
Meander Width Ratio				-	-	-	-	-	-	-	1.8	-	-	-	-	-	3.1	-	1.9	2.0	2.0	2.0	0.0	3
											<u> </u>			<u> </u>										
Substrate, Bed and Transport Parameters																								
Ri% / Ru% / P% / G% / S%							-					-								41% /	6% / 27	7% / 9%	/ 17%	
SC% / Sa% / G% / C% / B% / Be%							-			1	% / 10%	/ 48% /	41% / 0	0% / 1%										
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)							-			5	.2 / 22 /	45 / 75	/ 130 / 1	90 / - / -										
Reach Shear Stress (Competency) lb/ft ²							-					1.9					-					-		
Max Part Size (mm) Mobilized at Bankfull							-					9	1				-					-		
Stream Power (Transport Capacity) W/m ²							-					-					-							
Additional Reach Parameters																								
Drainage Area (mi ²)							-					2.7	77				0.04							
Impervious Cover Estimate (%)							-										-							
Rosgen Classification							-					В	4				B5				E	35		
Bankfull Velocity (fps)		-					_					6.												
Bankfull Discharge (cfs)		-					-					210					-							
Valley Length (ft)							-					380					422							
Channel Thalweg Length (ft)							_					400					453				4:	53		
Sinuosity				\vdash			-					1.				\vdash	1.07				1.			
Water Surface Slope (ft/ft)				\vdash			-					-				\vdash	0.014				0.0			
Bankfull Slope (ft/ft)							_										0.014				0.0			
Bankfull Floodplain Area (acres)							-										3.014				0.0	,.,		
Proportion Over Wide (%)				\vdash			-																	
				\vdash			-																	
Entrenchment Class (ER Range) Incision Class (BHR Range)				_			-																	
Incision Class (BHR Range) BEHI							-																	
				 			-			 														
Channel Stability or Habitat Metric							-																	
Biological or Other							-																	

											m Data Branc													
Parameter	Regi	ional C	urve				g Cond		Срр	1		_	Reach I	Data			Design			As	-Built	/ Baseli	ne	
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	4.8	-	-	-	-	-	-	-	23.4	-	-	24.7	-	-	-	4.8	-	4.6	4.9	4.9	5.3	0.5	2
Floodprone Width (ft)				-	-	-	-	-	-	43.0	-	-	52	-	-	-	15.0	-	14.0	15.5	15.5	17.0	2.1	2
Bankfull Mean Depth (ft)	-	0.5	-	-	-	-	-	-	-	1.3	-	-	1.5	-	-	-	0.3	-	0.4	0.4	0.4	0.4	0.0	2
Bankfull Max Depth (ft)				-	-	-	-	-	-	1.8	-	-	2.2	-	_	-	0.5	-	0.6	0.6	0.6	0.7	0.1	2
Bankfull Cross Sectional Area (ft ²)		1.8		-	-	-	-	-	-	33.4	-	-	34.6	-	-	-	1.6	-	1.9	2.0	2.0	2.1	0.1	2
Width/Depth Ratio				-	-	-	-	-	-	15.8	-	-	18.4	-	-	-	14.1	-	11.0	12.2	12.2	13.3	1.6	2
Entrenchment Ratio				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	3.2	-	3.0	3.1	3.1	3.2	0.1	2
Bank Height Ratio				-	-	-	-	-	-	1.4	-	-	1.6	-	-	-	1.0	-	1.0	1.0	1.0	1.0	0.0	2
d50 (mm)				-	-	-	-	-	-	-	45.0	-	-	-	_									
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	20.0	-	-	40.0	-	-	-	-	-	26.7	48.8	40.1	90.6	24.6	5
Riffle Slope (ft/ft)				-	-	-	-	-	-	1.50	-	-	4.30	-	-	-	-	-	0.001	0.004	0.002	0.009	0.003	5
Pool Length (ft)				-	-	-	-	-	-	6.0	-	-	42.0	-	-	-	-	-	2.1	2.8	2.7	3.4	0.6	4
Pool Max Depth (ft)				-	-	-	-	-	-	2.3	-	-	2.3	-	-	-	0.8	-	0.5	0.8	0.8	1.2	0.3	4
Pool Spacing (ft)				-	-	-	-	-	-	51.0	-	-	113.0	-	-	15.9	-	22.7	47.1	55.5	59.0	60.4	7.3	3
Pattern																								
Channel Belt Width (ft)				- I	- I	-	I -	-	-	Ι.	43.0	-	-	-	_	-	_	-	11.9	14.8	14.8	17.6	4.0	2
Radius of Curvature (ft)				-	_	_	-	_	-	44.0	-	-	103.0	-	_	-	_	-	7.6	9.4	8.4	13.2	2.6	4
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	_	-	-	-	-	-	-	-	1.5	1.9	1.7	2.7	0.5	4
Meander Wavelength (ft)				-	-	-	-	-	-	<u> </u>	100.0	-	_	_	_	_	-	_	43.2	48.1	47.7	53.8	5.0	4
Meander Width Ratio				-	_	_	<u> </u>	_	_	<u> </u>	1.8	-	_	_	_	_	2.5	_	2.4	3.0	3.0	3.5	0.8	2
Wealider Width Ratio											1.0						2.3		2.4	3.0	3.0	3.3	0.8	2
Substrate, Bed and Transport Parameters																								
Ri% / Ru% / P% / G% / S%							_													80%	/0%/4	% / 2% /	/ 14%	
SC% / Sa% / G% / C% / B% / Be%							-			 	1% / 10%	6 / 48%	/41% / (0% / 1%						0070	7 070 7 1	70 7 270 7	1170	
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)							-				5.2 / 22 /													
Reach Shear Stress (Competency) lb/ft ²							_			1	0.27 227	1.9		,,,,,			-					_		
Max Part Size (mm) Mobilized at Bankfull							-			 		9					-					-		
Stream Power (Transport Capacity) W/m ²							_										-							
Additional Reach Parameters																l .								
							-			Ι		2.7	77			1	0.03							
Drainage Area (mi²) Impervious Cover Estimate (%)							_										-							
Rosgen Classification							-			<u> </u>		В					B5				Е	35		
		-								-		6.					-				-	,,		
Bankfull Velocity (fps)		-					-					210					-							
Bankfull Discharge (cfs)							-					38					424							
Valley Length (ft)										<u> </u>											2	26		
Channel Thalweg Length (ft)												40					326					26		
Sinuosity												1.1				 	1.09		 			10		
Water Surface Slope (ft/ft)												-					0.058		-)56		
Bankfull Slope (ft/ft)										 							0.058				0.0)56		
Bankfull Floodplain Area (acres)							-			 														
Proportion Over Wide (%)							-			├		-												
Entrenchment Class (ER Range)							-			<u> </u>		-												
Incision Class (BHR Range)							-			<u> </u>														
BEHI							-			<u> </u>		-												
Channel Stability or Habitat Metric							-			<u> </u>		-												
Biological or Other							-			L														

											n Data Branc													
Parameter	Regi	ional C	nrve				g Cond		LUW	liva			Reach I	Data		Г	Design	,		As	-Ruilt	Baseli	ne	
z in inneces	- Tuego					22000	g conc					- renee		- LILLE			Design	<u> </u>	ļ	120	Duile,	Duscii		
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Bankfull Width (ft)	-	5.6	-	-	-	-	-	-	-	23.4	-	-	24.7	-	-	-	5.5	-	-	-	-	-	-	-
Floodprone Width (ft)				-	-	-	-	-	-	43.0	-	-	52	-	-	-	15.0	-	-	-	-	-	-	-
Bankfull Mean Depth (ft)	-	0.5	-	-	-	-	-	-	-	1.3	-	-	1.5	-	-	-	0.4	-	-	-	-	-	-	-
Bankfull Max Depth (ft)				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	0.6	-	-	-	-	-	-	-
Bankfull Cross Sectional Area (ft ²)		2.4		-	-	-	-	-	-	33.4	-	-	34.6	-	-	-	2.1	-	-	-	-	-	-	_
Width/Depth Ratio				-	-	-	_	-	-	15.8	-	-	18.4	_	_	-	14.4	_	-	-	-	_	_	_
Entrenchment Ratio				-	-	-	-	-	-	1.8	-	-	2.2	-	-	-	2.7	-	-	-	-	-	-	-
Bank Height Ratio				-	-	-	-	-	-	1.4	-	-	1.6	-	-	-	1.0	-	-	-	-	-	-	-
d50 (mm)				_	-	-	_	-	-	-	45.0	_	_	_	_									
Profile						<u> </u>			<u> </u>			<u> </u>							<u> </u>					
Riffle Length (ft)					·	- I	- I	- I	-	20.0	-	-	40.0	-	-	١.	I -	-	9.4	11.8	11.8	14.3	3.5	2
Riffle Slope (ft/ft)				-	-	-	-	-	-	1.50	_	_	4.30	_	-	-	_	_	0.010	0.021	0.021	0.033	0.016	2
Pool Length (ft)				-	-	-	-	-	-	6.0	-	-	42.0	-	-	-	-	-	5.8	9.4	9.4	12.9	3.3	4
Pool Max Depth (ft)				_	-	-	-	-	-	2.3	_	_	2.3	_	_	-	0.9	_	1.0	1.1	1.1	1.2	0.1	4
Pool Spacing (ft)				-	-	-	-	-	-	51.0	-	-	113.0	-	-	19.3	-	27.5	20.8	25.9	20.8	36.1	8.9	3
Pattern Pattern										51.0			113.0			17.5		27.5	20.0	20.7	20.0	30.1	0.7	
Channel Belt Width (ft)				Ι.	Ι.	l .	Ι.	Ι.	l .	I .	43.0	l -	-	_	-	<u> </u>			8.9	9.6	9.6	10.3	1.0	2
Radius of Curvature (ft)				-	-	-	-	-	-	44.0	43.0	-	103.0	-	-				12.2	12.5	12.5	12.8	0.4	2
Re: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-				2.2	2.3	2.3	2.3	0.4	2
				-	-	-	-	-	-	-	100.0	-	-	-	-				23.0					3
Meander Wavelength (ft)				-	-	-	-	_	-	-	1.8	_	-	-	-		2.2		1.6	27.4	25.5 1.7	33.6 1.9	5.6 0.2	2
M eander Width Ratio											1.8				-		2.2	_	1.6	1.7	1./	1.9	0.2	2
Substrate, Bed and Transport Parameters Ri% / Ru% / P% / G% / S%							_												ı —	2/10/- /	1704 / 3	8% / 209	√ / ∩ 04	
SC% / Sa% / G% / C% / B% / Be%							-				1% / 10%	. / 1804	/ // 1.0/_ / /	704 / 104						2470 /	1 / 70 / 3	070 / 20	0 / U70	
							-				5.2 / 22 /													
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm) Reach Shear Stress (Competency) lb/ft ²											3.21221	1.9		. 90 / - / -			-							
Max Part Size (mm) Mobilized at Bankfull							-					9					÷					-		
							-										<u> </u>							
Stream Power (Transport Capacity) W/m ² Additional Reach Parameters																	_							
							_			_		2.7	77			_	0.046							
Drainage Area (mi²)							-					۷.,					0.040							
Impervious Cover Estimate (%)												В									р	15		
Rosgen Classification							-										В5				В	13		
Bankfull Velocity (fps)		-					-					6. 210					-							
Bankfull Discharge (cfs)		-					-										-							
Valley Length (ft)							-					380				-	151							
Channel Thalweg Length (ft)							-					400					156					56		
Sinuosity												1.1					1.02				1.			
Water Surface Slope (ft/ft)							-					-					0.026				0.0			
Bankfull Slope (ft/ft)							-										0.026				0.0)35		
Bankfull Floodplain Area (acres)							-					-												
Proportion Over Wide (%)							-					-												
Entrenchment Class (ER Range)							-			<u> </u>														
Incision Class (BHR Range)							-					-												
ВЕНІ							-					-												
Channel Stability or Habitat Metric							-																	
Biological or Other							-					-	-											

								7	Table 11			_		lydraulic m Resto		_	ımmary													
		-		ion 1 (Ri ouse Bra	/	_		_		ion 2 (Rif ouse Brar	- /			-		tion 3 (Po ouse Bran	/				oss-Secti South Mu		/	_				on 5 (Rif ddy Creel	/	
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	1,278.1	1,278.1	1,278.1	1,278.2	1,278.1		1,275.8	1,275.8	1,275.8	1,276.0	1,275.9		1,273.7	1,273.7	1,273.7	1,273.8	1,273.7		1,269.4	1,269.4	1,269.4	1,269.5	1,269.4		1,267.9	1,267.9	1,267.9	1,268.1	1,268.0	
Low Bank Height Elevation (datum) Used	-	-	-	1,278.1	1,278.4		-	-	-	1,275.9	1,276.0		-	-	-	1,273.7	1,273.6		-	-	-	1,269.4	1,269.5		-	-	-	1,268.4	168.6	
Bankfull Width (ft)	5.4	6.1	6.3	5.5	5.5		5.1	5.3	5.4	6.3	6.0		6.1	6.8	6.8	8.0	7.2		31.6	32.6	31.8	30.2	29.0		30.7	30.6	31.8	29.6	29.0	
Floodprone Width (ft)	14.0	14.0	14.0	14.0	14.0		23.0	23.0	23.0	23.0	23.0		32.0	32.0	32.0	32.0	32.0		65.0	65.0	65.0	65.0	65.0		101.0	101.0	101.0	101.0	101.0	
Bankfull Mean Depth (ft)	0.3	0.2	0.2	0.3	0.3		0.3	0.2	0.2	0.3	0.3		1.0	0.9	0.9	0.7	0.8		1.6	1.7	1.7	1.7	1.7		1.9	1.9	1.9	2.0	2.0	
Bankfull Max Depth (ft)	0.6	0.5	0.4	0.5	0.6		0.6	0.5	0.5	0.7	0.5		1.5	1.6	1.7	1.3	1.6		2.3	2.6	2.6	2.8	2.8		2.8	2.8	3.0	3.3	3.4	
Bankfull Cross Sectional Area (ft ²)	1.8	1.5	1.5	1.8	1.8		1.7	1.3	1.2	1.7	1.7		5.9	6.3	6.3	5.9	5.9		50.5	54.1	52.8	50.5	50.5		59.0	57.9	61.3	59.0	59.0	
Bankfull Width/Depth Ratio	16.7	25.4	25.8	17.4	17.0		15.1	21.5	23.7	23.3	21.2		6.3	7.5	7.3	10.9	8.7		19.8	19.7	19.1	18.0	16.7		15.9	16.2	16.4	14.9	14.3	
Bankfull Entrenchment Ratio	2.6	2.3	2.2	2.5	2.5		4.5	4.3	4.3	3.7	3.9		5.3	4.7	4.7	4.0	4.5		2.1	2.0	2.0	2.2	2.2		3.3	3.3	3.2	3.4	3.5	
Bankfull Bank Height Ratio*	1.0	0.9	0.9	0.9	1.5		1.0	1.0	0.9	0.9	1.2		1.0	1.1	1.0	0.9	0.9		1.0	0.9	1.0	1.0	1.0		1.0	1.0	1.1	1.1	1.2	
Low Top of Bank Height Depth (ft)	-	-	-	0.4	0.9		-	-	-	0.6	0.6		-	-	-	1.2	1.5		-	-	-	2.7	2.2		-	-	-	3.6	3.5	
d50 (mm)	N/A	N/A	N/A	N/A	N/A		N/A	N/A	N/A	N/A	N/A		N/A	N/A	N/A	N/A	N/A		N/A	14.0	27.0	27.0	44.0		N/A	18.0	15.0	16.0	2.4	
		(Cross-Sec	tion 6 (Po	ol)			Cr	oss-Secti	ion 7 (Rif	fle)			Cı	ross-Sec	tion 8 (Po	ol)			Cr	oss-Secti	on 9 (Rif	fle)			Cro	ss-Sectio	on 10 (Ri	ffle)	
			South M	ıddy Cree	k			S	outh Mu	ddy Cree	k				Upper Iv	a Branch	l				Upper Iva	a Branch	l				Upper Iv	a Branch		
Dimension	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5
Record Elevation (datum) Used	1,268.0	1,268.0	1,268.0	1,268.1	1,268.2		1,267.3	1,267.3	1,267.3	1,267.5	1,267.6		1,286.1	1,286.1	1,286.1	1,286.2	1,286.1		1,285.3	1,285.3	1,285.3	1,285.2	1,285.3		1,277.1	1,277.1	1,277.1	1,277.2	1,277.1	
Low Bank Height Elevation (datum) Used	-	-	-	1,268.5	1,268.4		-	-	-	1,267.4	1,267.3		-	-	-	1,286.0	1,285.9		-	-	-	1,285.2	1,285.2		-	-	-	1,277.2	1,277.2	
Bankfull Width (ft)	35.3	35.9	36.7	31.7	31.7		31.0	31.2	34.0	29.9	36.2		5.5	5.8	5.6	7.2	5.6		4.6	4.2	4.1	6.0	6.7		5.3	5.6	5.8	4.2	3.7	
Floodprone Width (ft)	166.0	166.0	166.0	166.0	166.0		88.0	88.0	88.0	88.0	88.0		17.0	17.0	17.0	17.0	17.0		14.0	14.0	14.0	14.0	14.0		17.0	17.0	17.0	17.0	17.0	
Bankfull Mean Depth (ft)	2.4	2.4	2.4	2.7	2.7		2.1	2.2	2.0	2.2	1.8		1.0	1.0	1.0	0.8	0.8		0.4	0.4	0.5	0.3	0.3		0.4	0.3	0.4	0.5	0.3	
Bankfull Max Depth (ft)	4.0	3.9	3.9	4.3	3.7		2.9	3.0	3.1	3.4	3.5		1.8	1.7	1.7	1.6	1.4		0.7	0.6	0.8	0.7	0.6		0.6	0.6	0.6	0.8	0.5	
Bankfull Cross Sectional Area (ft ²)	85.7	86.3	89.2	85.7	85.7		64.9	67.7	67.9	64.3	64.9		5.7	5.6	5.6	5.7	4.6		1.9	1.8	2.1	1.9	2.1		2.1	1.9	2.5	2.1	1.2	
Bankfull Width/Depth Ratio	14.5	14.9	15.1	11.7	11.8		14.8	14.4	17.0	13.9	20.2		5.4	6.1	5.5	9.0	6.7		11.0	9.8	8.0	18.7	21.5		13.3	16.7	13.3	8.4	11.2	
Bankfull Entrenchment Ratio	4.7	4.6	4.5	5.2	5.2		2.8	2.8	2.6	2.9	2.4		3.1	2.9	3.1	2.4	3.0		3.0	3.3	3.5	2.3	2.1		3.2	3.0	3.0	4.0	4.6	
Bankfull Bank Height Ratio*	1.0	1.0	1.0	1.1	1.1		1.0	0.9	0.9	1.0	0.9		1.0	0.9	1.0	0.8	1.0		1.0	1.0	0.9	0.9	0.9		1.0	1.0	1.0	1.0	1.3	
Low Top of Bank Height Depth (ft)	-	-	-	4.7	3.9		-	-	-	3.3	3.2		-	-	-	1.3	1.3		-	-	-	0.7	0.6		-	-	-	0.8	0.6	
d50 (mm)	N/A	N/A	N/A	N/A	N/A		N/A	0.91	1.3	18.0	6.2		N/A	N/A	N/A	N/A	N/A		N/A	N/A	N/A	N/A	N/A		N/A	N/A	N/A	N/A	N/A	
N/A - Item does not apply.	•	•	•	•	•		•	•			•		•	•	•	•				•	•		•	•				•		

^{*} Beginning in MY3 (2018), the bankfull elevation and channel cross-section dimensions have been calculated using a fixed Abkf as described in the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS (9/2018)

									N	Tiddle	Tal South	ble 11 Mud	b. M	onitor eam F	ing D	ata - S ration	tre am Site -	Reac South	h Data Mudd	a Sumr	nary ek (1.	088 fe	et)												
Parameter			Bas	eline					M		2000					Y - 2	0100	00000		25 010		Y - 3					M	Y - 4					MY - 5		
Dimension & Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min Me	an M	led Ma	x SD	n
Bankfull Width (ft)	30.7	31.1	31.0	31.6	0.5	3	30.6	31.5	31.2	32.6	1.0	3	31.8	32.5	31.8	34.0	1.3	3	29.6	29.9	29.9	30.2	0.3	3	29.0	31.4	29.0	36.2	4.1	3					
Floodprone Width (ft)	65.0	84.7	88.0	101.0	18.2	3	65.0	84.7	88.0	101.0	18.2	3	65.0	84.7	88.0	101.0	18.2	3	65.0	84.7	88.0	101.0	18.2	3	65.0	84.7	88.0	101.0	18.2	3					
Bankfull Mean Depth (ft)	1.6	1.9	1.9	2.1	0.3	3	1.7	1.9	1.9	2.2	0.3	3	1.7	1.9	1.9	2.0	0.2	3	1.7	1.9	2.0	2.2	0.2	3	1.7	1.9	1.8	2.0	0.2	3					
Bankfull Max Depth (ft)	2.3	2.7	2.8	2.9	0.4	3	2.6	2.8	2.8	3.0	0.2	3	2.6	2.9	3.0	3.1	0.3	3	2.8	3.2	3.3	3.4	0.3	3	2.8	3.2	3.4	3.5	0.4	3					
Bankfull Cross-Sectional Area (ft ²)	50.5	58.1	59.0	64.9	7.2	3	54.1	59.9	57.9	67.7	7.0	3	52.8	60.7	61.3	67.9	7.5	3	50.5	57.9	59.0	64.3	6.9	3	50.5	58.1	59.0	64.9	7.3	3					
Width/Depth Ratio	14.8	16.8	15.9	19.8	2.6	3	14.4	16.7	16.2	19.7	2.7	3	16.4	17.5	17.0	19.1	1.4	3	13.9	15.6	14.9	18.0	2.2	3	14.3	17.1	16.7	20.2	3.0	3					
Entrenchment Ratio	2.1	2.7	2.8	3.3	0.6	3	2.0	2.7	2.8	3.3	0.7	3	2.0	2.6	2.6	3.2	0.6	3	2.2	2.8	2.9	3.4	0.6	3	2.2	2.7	2.4	3.5	0.7	3					
Bank Height Ratio	1.0	1.0	1.0	1.0	0.0	3	1.0	1.0	1.0	1.0	0.0	3	1.0	1.0	1.0	1.0	0.0	3	1.0	1.0	1.0	1.1	0.1	3	0.9	1.1	1.1	1.2	0.1	3					
Profile																																			
Riffle Length (ft)	54.4	109.6	85.4	229.5	68.9	5	64.1	111.4	90.3	203.5	56.0	5	58.0	108.2	99.1	202.2	57.7	5	70.2	102.6	77.4	206.9	58.7	5	44.4	114.6	113.4	203.3	55.8	6					
Riffle Slope (ft/ft)	0.001	0.003	0.003	0.005	0.001	5	0.001	0.005	0.004	0.009	0.003	5	0.001	0.004	0.003	0.008	0.003	5	0.000	0.004	0.001	0.013	0.005	5	0.002	0.004	0.003	0.007	0.002	6					
Pool Length (ft)	34.8	50.8	51.3	66.3	12.4	5	17.8	56.4	48.5	96.8	30.1	5	23.4	56.0	56.9	95.7	26.5	5	26.0	55.6	54.3	91.7	24.8	5	21.8	42.6	37.4	67.6	17.1	5					
Pool Max Depth (ft)	3.2	4.6	4.5	6.0	0.9	6	3.4	4.1	3.8	5.4	0.8	5	3.7	4.6	4.4	5.8	0.8	5	3.0	4.7	4.6	6.2	1.4	5	3.9	5.4	5.4	7.5	1.3	5					
Pool Spacing (ft)	112.6	196.3	187.9	323.2	89.4	5	177.1	247.4	239.1	334.2	68.6	4	179.1	249.1	230.1	357.2	81.2	4	139.1	248.7	229.5	396.8	112.5	4	69.1	212.7	256.5	268.6	96.1	4					
Pattern																																			
Channel Belt Width (ft)	63.7	86.4	92.6	103.0	20.34	3																													
Radius of Curvature (ft)	102.1	114.7	120.1	121.8	10.94	3																													
Rc: Bankfull Width (ft/ft)	3.28	3.7	3.86	3.92	0.35	3																													
Meander Wavelength (ft)	466.5	495.0	497.3	521.1	27.38	3																													
Meander Width Ratio	2.0	2.8	3.0	3.3	0.65	3																													
Additional Reach Parameters																																			
Rosgen Classification			(C4					(C4					(C4					C	C4					(C4							
Channel Thalweg Length (ft)			1,	163					1,	158					1,	174					1,1	151					1,	141							
Sinuosity (ft)			1	.03					1.	03					1	.05					1.	.03					1.	02							
Water Surface Slope (Channel) (ft/ft)			0.	003					0.0	033					0.0	0033					0.0	027					0.0	033							
Bankfull Slope (ft/ft)			0.	002					0.0	029					0.0	0037					0.0	031					0.0	034							
Ri% / Ru% / P% / G% / S%	55%	11%	26%	8%	0%		56%	6%	28%	9%	0%		54%	10%	28%	8%	0%		53%	11%	29%	8%	0%		64%	6%	20%	10%	0%						

⁻ Information Unavailable

N/A - Information does not apply.

 $Ri = Riffle \ / \ Ru = Run \ / \ P = Pool \ / \ G = Glide \ / \ S = Step$

									24.1	Ta	ble 11	b Cor	nt'd.	Monito	ring]	Data -	Stream	n Rea	ich Da	ta Sur	nmary		4)													
Parameter			Bas	eline			1			aie <u>So</u> 7 - 1	uth M	uaay	<u>Strea</u>	m Kes		<u>on Site</u> Y - 2	e - M10	iaie S	prous	e Bra	nch (17 MY		t)				M	Y - 4					M	7 - 5		
Dimension & Substrate - Riffle	Min	Mean	Med		SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med		SD	n
Bankfull Width (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Floodprone Width (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Mean Depth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Max Depth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Cross-Sectional Area (ft ²)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Width/Depth Ratio	-	-	-	-		-	-	-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Entrenchment Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bank Height Ratio	-	-	-	-		-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		-												
Profile																																				
Riffle Length (ft)	15.2	20.0	16.1	28.8	7.6	3	18.1	27.3	23.6	40.1	11.5	3	16.9	24.0	19.6	35.5	10.0	3	16.3	23.9	18.4	37.0	11.4	3	16.3	29.6	32.5	37.0	9.5	3						
Riffle Slope (ft/ft)	0.005	0.007	0.008	0.010	0.002	3	0.003	0.008	0.009	0.013	0.005	3	0.002	0.010	0.011	0.017	0.008	3	0.007	0.010	0.009	0.013	0.003	3	0.007	0.013	0.012	0.019	0.005	3						
Pool Length (ft)	3.7	9.2	8.2	16.5	5.3	4	6.5	9.4	9.9	11.5	2.2	4	5.7	8.1	7.4	11.9	2.7	4	6.0	8.5	8.2	11.7	2.4	4	8.44	11.04	10.99	13.72	2.22	4						
Pool Max Depth (ft)	1.6	2.0	1.8	2.7	0.5	4	1.1	1.8	1.8	2.4	0.6	4	1.3	1.8	1.7	2.4	0.5	4	1.2	1.5	1.6	1.8	0.2	4	1.22	1.55	1.57	1.80	0.22	4						
Pool Spacing (ft)	43.0	49.1	44.4	60.1	9.5	3	52.3	58.9	52.6	71.7	11.1	3	42.4	49.3	47.2	58.3	8.2	3	42.2	48.9	47.8	56.5	7.2	3	42.23	48.86	47.81	56.53	7.21	3						
Pattern																																				
Channel Belt Width (ft)	7.1	7.9	7.8	8.9	0.9	3																														
Radius of Curvature (ft)	8.2	15.0	14.0	23.8	6.9	4																														
Rc: Bankfull Width (ft/ft)	1.7	3.1	2.9	5.0	1.4	4																														
Meander Wavelength (ft)	20.4	26.3	27.1	30.7	4.5	4																														
Meander Width Ratio	1.5	1.7	1.6	1.9	0.2	3																														
Additional Reach Parameters	-	-					•			-						,	•												-			•				
Rosgen Classification			I	35					I	35]	B5					В	5					F	35								
Channel Thalweg Length (ft)			1	77					1	59					1	60					1:	58					1	56								
Sinuosity (ft)			1.	.01					1.	02					1	.03					1.0)2					1.	.01								
Water Surface Slope (Channel) (ft/ft)			0.0	029					0.0)28					0.	029					0.0	30					0.	.02								
Bankfull Slope (ft/ft)			0.0	029		•		•	0.0)25	•	•			0.	026	•				0.0	23	•	•		•	0.0	021								
Ri% / Ru% / P% / G% / S%	39%	0%	24%	8%	29%		44%	0%	20%	7%	28%		46%	0%	21%	7%	27%		45%	0%	21%	5%	28%		49%	0%	18%	13%	21%							

⁻ Information Unavailable

N/A - Information does not apply.

 $Ri = Riffle \ / \ Ru = Run \ / \ P = Pool \ / \ G = Glide \ / \ S = Step$

									Mid									Strean - Lov					34 feet	t)													
Parameter			Bas	eline					MY							MY-			•				Y - 3					M	Y - 4					MY	[- 5		
Dimension & Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mea	n M	ed	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	5.1	5.3	5.3	5.4	0.2	2	5.3	5.7	5.7	6.1	0.6	2	5.4	5.8	5.	.8	6.3	0.6	2	5.5	5.9	5.9	6.3	0.5	2	5.5	5.7	5.7	6.0	0.3	2						
Floodprone Width (ft)	14.0	19.0	19.0	24.0	3.5	2	14.0	18.5	18.5	23.0	6.4	2	14.0	18.:	5 18	3.5	23.0	6.4	2	14.0	18.5	18.5	23.0	6.4	2	14.0	18.5	18.5	23.0	6.4	2						
Bankfull Mean Depth (ft)	0.3	0.3	0.3	0.3	0.0	2	0.2	0.2	0.2	0.2	0.0	2	0.2	0.2	0.	.2	0.2	0.0	2	0.3	0.3	0.3	0.3	0.0	2	0.3	0.3	0.3	0.3	0.0	2				i T		
Bankfull Max Depth (ft)	0.6	0.6	0.6	0.6	0.0	2	0.5	0.5	0.5	0.5	0.1	2	0.4	0.5	0.	.5	0.5	0.1	2	0.5	0.6	0.6	0.7	0.1	2	0.5	0.5	0.5	0.6	0.0	2				i T		
Bankfull Cross-Sectional Area (ft ²)	1.7	1.7	1.7	1.8	0.0	2	1.3	1.4	1.4	1.5	0.1	2	1.2	1.4	1.	.4	1.5	0.2	2	1.7	1.7	1.7	1.8	0.0	2	1.7	1.7	1.7	1.8	0.1	2				i T		
Width/Depth Ratio	15.1	15.9	15.9	16.7	1.1	2	21.5	23.4	23.4	25.4	2.8	2	23.7	24.3	8 24	1.8	25.8	1.5	2	17.4	20.3	20.3	23.3	4.1	2	17.0	19.1	19.1	21.2	3.0	2				i T		
Entrenchment Ratio	2.6	3.6	3.6	4.5	1.3	2	2.3	3.3	3.3	4.3	1.4	2	2.2	3.2	3.	.2	4.3	1.4	2	2.5	3.1	3.1	3.7	0.8	2	2.5	3.2	3.2	3.9	0.9	2				i T		
Bank Height Ratio	1.0	1.0	1.0	1.0	0.0	2	1.0	1.0	1.0	1.0	0.0	2	1.0	1.0	1.	.0	1.0	0.0	2	0.9	0.9	0.9	0.9	0.0	2	1.2	1.4	1.4	1.5	0.3	2						
Profile																																					
Riffle Length (ft)	6.0	16.2	14.2	32.2	9.3	9	7.6	19.1	14.2	39.7	11.0	9	5.3	15.	1 10	0.6	30.2	9.2	9	6.4	16.2	12.2	32.5	10.6	6	8.8	19.9	14.8	37.0	11.4	6						
Riffle Slope (ft/ft)	0.003	0.011	0.011	0.025	0.007	9	0.004	0.009	0.009	0.016	0.004	9	0.004	1 0.01	2 0.0	010	0.025	0.007	9	0.007	0.014	0.011	0.030	0.008	6	0.005	0.010	0.010	0.017	0.005	6						
Pool Length (ft)	3.4	8.7	9.0	12.1	3.1	11	5.2	10.4	10.4	15.7	3.6	11	3.8	9.3	9.	.1	15.5	4.2	11	5.4	9.4	9.1	17.8	3.6	11	3.1	12.1	10.7	35.9	7.3	11						
Pool Max Depth (ft)	1.3	1.8	1.8	2.3	0.3	11	1.0	1.8	1.9	2.3	0.4	11	1.4	1.7	1.	.7	2.1	0.3	11	1.2	1.6	1.6	2.0	0.3	11	1.2	1.6	1.6	2.0	0.3	11						
Pool Spacing (ft)	19.0	32.9	32.2	55.1	10.5	10	26.3	39.2	38.6	62.5	10.8	10	17.3	32.9	9 33	3.0	54.6	10.1	10	19.4	32.8	34.3	55.2	10.9	10	19.4	29.8	29.2	42.2	8.4	10						
Pattern																																					
Channel Belt Width (ft)	10.1	10.4	10.4	10.6	0.3	3																															
Radius of Curvature (ft)	8.8	10.6	10.6	12.5	1.9	4																															
Rc: Bankfull Width (ft/ft)	1.7	2.0	2.0	2.4	0.4	4																															
Meander Wavelength (ft)	33.2	38.1	38.5	42.9	3.5	5																															
Meander Width Ratio	1.9	2.0	2.0	2.0	0.0	3																															
Additional Reach Parameters																	·			•										•							
Rosgen Classification			F	35					F	5						В5	i]	35]	B5								
Channel Thalweg Length (ft)			4	53					4	55						463	3					4	66					4	169								
Sinuosity (ft)			1.	.07					1.	04						1.04	4					1	.04					1	.05								
Water Surface Slope (Channel) (ft/ft)				017					0.0)14						0.01	7					0.	018					0.	020								
Bankfull Slope (ft/ft)			0.0	017					0.0	16						0.02	20					0.	020					0.	021								
Ri% / Ru% / P% / G% / S%	41%	6%	27%	9%	17%		41%	6%	27%	9%	16%		39%	6%	29	9%	10%	16%		28%	8%	29%	12%	22%		30%	13%	27%	13%	17%							

⁻ Information Unavailable

N/A - Information does not apply.

 $Ri = Riffle \ / \ Ru = Run \ / \ P = Pool \ / \ G = Glide \ / \ S = Step$

									N								Stre ar Site - U																			
Parameter			Bas	eline					M				ľ			Y - 2						7-3					M	Y - 4					MY	- 5		
Dimension & Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n
Bankfull Width (ft)	4.6	4.9	4.9	5.3	0.5	2	4.2	4.9	4.9	5.6	1.0	2	4.1	4.9	4.9	5.8	1.2	2	4.2	5.1	5.1	6.0	1.2	2	3.7	5.2	5.2	6.7	2.2	2						
Floodprone Width (ft)	14.0	15.5	15.5	17.0	2.1	2	14.0	15.5	15.5	17.0	2.1	2	14.0	15.5	15.5	17.0	2.1	2	14.0	15.5	15.5	17.0	2.1	2	14.0	15.5	15.5	17.0	2.1	2						
Bankfull Mean Depth (ft)	0.4	0.4	0.4	0.4	0.0	2	0.3	0.4	0.4	0.4	0.1	2	0.4	0.5	0.5	0.5	0.1	2	0.3	0.4	0.4	0.5	0.1	2	0.3	0.3	0.3	0.3	0.0	2						
Bankfull Max Depth (ft)	0.6	0.6	0.6	0.7	0.1	2	0.6	0.6	0.6	0.6	0.1	2	0.6	0.7	0.7	0.8	0.1	2	0.7	0.7	0.7	0.8	0.1	2	0.5	0.6	0.6	0.6	0.1	2						
Bankfull Cross-Sectional Area (ft ²)	1.9	2.0	2.0	2.1	0.1	2	1.8	1.9	1.9	1.9	0.0	2	2.1	2.3	2.3	2.5	0.3	2	1.9	2.0	2.0	2.1	0.2	2	1.2	1.7	1.7	2.1	0.6	2						
Width/Depth Ratio	11.0	12.2	12.2	13.3	1.6	2	9.8	13.2	13.2	16.7	4.9	2	8.0	10.6	10.6	13.3	3.7	2	8.4	13.6	13.6	18.7	7.3	2	11.2	16.4	16.4	21.5	7.3	2						
Entrenchment Ratio	3.0	3.1	3.1	3.2	0.1	2	3.0	3.2	3.2	3.3	0.2	2	3.0	3.2	3.2	3.5	0.4	2	2.3	3.2	3.2	4.0	1.2	2	2.1	3.4	3.4	4.6	1.8	2						
Bank Height Ratio	1.0	1.0	1.0	1.0	0.0	2	1.0	1.0	1.0	1.0	0.0	2	1.0	1.0	1.0	1.0	0.0	2	0.9	1.0	1.0	1.0	0.1	2	0.9	1.0	1.0	1.1	0.1	2						
Profile																																·				
Riffle Length (ft)	26.7	48.8	40.1	90.6	24.6	5	21.8	46.1	37.7	88.5	25.5	5	23.6	46.3	35.6	87.7	25.1	5	26.6	46.6	32.3	83.9	24.6	5	13.0	30.5	27.2	49.3	15.2	5						
Riffle Slope (ft/ft)	0.001	0.004	0.002	0.009	0.003	5	0.005	0.007	0.007	0.011	0.002	5	0.006	0.008	0.007	0.011	0.002	5	0.011	0.022	0.023	0.033	0.010	5	0.007	0.015	0.014	0.024	0.006	5						
Pool Length (ft)		2.8	2.7	3.4	0.6	4	3.2	4.5	4.1	6.7	1.7	4	1.6	4.2	4.2	6.9	2.3	4	6.2	6.7	6.3	7.9	0.8	4	7.6	15.7	19.1	20.5	7.1	3						
Pool Max Depth (ft)	0.5	0.8	0.8	1.2	0.3	4	0.4	0.5	0.5	0.8	0.2	4	0.3	0.5	0.4	1.0	0.3	4	0.4	0.6	0.4	1.0	0.4	3	0.2	0.9	0.3	3.7	1.5	5						
Pool Spacing (ft)	47.1	55.5	59.0	60.4	7.3	3	49.6	54.9	54.9	60.1	5.3	3	48.2	54.8	53.9	62.3	7.1	3	41.3	55.5	43.5	81.7	22.7	3	45.0	60.9	60.9	76.8	22.5	2						
Pattern																																				
Channel Belt Width (ft)	11.9	14.8	14.8	17.6	4.0	2																														
Radius of Curvature (ft)	7.6	9.4	8.4	13.2	2.6	4																														
Rc: Bankfull Width (ft/ft)	1.5	1.9	1.7	2.7	0.5	4																														
Meander Wavelength (ft)		48.1	47.7	53.8	5.0	4																														
Meander Width Ratio	2.4	3.0	3.0	3.5	0.8	2																														
Additional Reach Parameters																											-									
Rosgen Classification			E	35					E	35]	B5					E	35					I	35								
Channel Thalweg Length (ft)			3	26					3:	30					3	28					3:	32					3	25								
Sinuosity (ft)				10					1.	11					1	.11					1.	12					1.	.09								
Water Surface Slope (Channel) (ft/ft))56						-						-					0.0	532						-								
Bankfull Slope (ft/ft)			0.0)56					0.0	598					0.0)595					0.0	670					0.0	047								
Ri% / Ru% / P% / G% / S%	80%	0%	4%	2%	14%		75%	0%	6%	4%	15%		75%	0%	5%	4%	15%		77%	0%	9%	3%	11%		66%	0%	20%	0%	14%							

⁻ Information Unavailable

N/A - Information does not apply.

 $Ri = Riffle \ / \ Ru = Run \ / \ P = Pool \ / \ G = Glide \ / \ S = Step$

									1.	Ta	ble 11	b Cor	nt'd. I	Monito	oring l	Data -	Stream	n Rea	ch Dat	ta Sur	nmary (136 f	ont)														
Parameter			Bas	eline						7 - 1	South	Mud	uy su	eam N		<u>аноп ;</u> Y - 2	51te - 1	_owe1	Iva b	Tanci	MY						M	Y - 4					M	7 - 5		
Dimension & Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med		SD	n
Bankfull Width (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Floodprone Width (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Mean Depth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Max Depth (ft)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bankfull Cross-Sectional Area (ft ²)	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Width/Depth Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Entrenchment Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Bank Height Ratio	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-												
Profile																																				
Riffle Length (ft)	9.4	11.8	11.8	14.3	3.5	2	10.4	16.5	16.5	22.7	8.7	2	11.6	17.2	17.2	22.8	7.9	2	6.7	12.7	12.7	18.7	8.5	2	6.7	27.3	19.2	64.1	25.2	2						
Riffle Slope (ft/ft)	0.010	0.021	0.021	0.033	0.016	2	0.005	0.015	0.015	0.026	0.015	2	0.009	0.015	0.015	0.020	0.007	2	0.009	0.022	0.022	0.035	0.019	2	0.005	0.016	0.011	0.035	0.013	2						
Pool Length (ft)	5.8	9.4	9.4	12.9	3.3	4	2.9	5.3	5.0	8.3	2.7	4	3.4	5.8	4.9	10.0	3.1	4	3.5	7.1	7.5	9.8	2.9	4	3.8	12.4	12.5	20.7	8.2	4						
Pool Max Depth (ft)	1.0	1.1	1.1	1.2	0.1	4	0.6	1.0	1.0	1.5	0.3	4	0.5	1.1	1.0	1.7	0.5	4	0.3	0.9	0.9	1.5	0.5	4	0.3	0.8	0.7	1.5	0.5	4						
Pool Spacing (ft)	20.8	25.9	20.8	36.1	8.9	3	18.0	23.4	24.4	27.8	5.0	3	18.9	23.8	25.0	27.6	4.5	3	21.3	25.2	25.5	28.8	3.8	3	24.8	49.2	42.6	80.1	28.2	3						
Pattern																																				
Channel Belt Width (ft)	8.9	9.6	9.6	10.3	1.0	2																														
Radius of Curvature (ft)	12.2	12.5	12.5	12.8	0.4	2																														
Rc: Bankfull Width (ft/ft)	2.2	2.3	2.3	2.3	0.1	2																														
Meander Wavelength (ft)	23.0	27.4	25.5	33.6	5.6	3																														
Meander Width Ratio	1.6	1.7	1.7	1.9	0.2	2																														
Additional Reach Parameters																																				
Rosgen Classification			I	35					I	35]	B5					В	5					I	B5								
Channel Thalweg Length (ft)			1	56					1	54					1	.59					15	8					1	53								
Sinuosity (ft)				.03					1.	03					1	.07					1.0)6					1.	.03								
Water Surface Slope (Channel) (ft/ft)			0.0	032						-						-					0.0	503					0.	.03								
Bankfull Slope (ft/ft)			0.0	035					0.0)26					0.	033					0.0	34					0.0	042								
Ri% / Ru% / P% / G% / S%	24%	17%	38%	20%	0%		43%	17%	28%	14%	0%		45%	14%	30%	11%	0%		34%	13%	38%	16%	0%		56%	6%	33%	5%	0%							


⁻ Information Unavailable

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

Project Name: Middle South Muddy XS Number: 1 Station: 203+60

Reach Name: Lower Sprouse Branch XS Type: Riffle

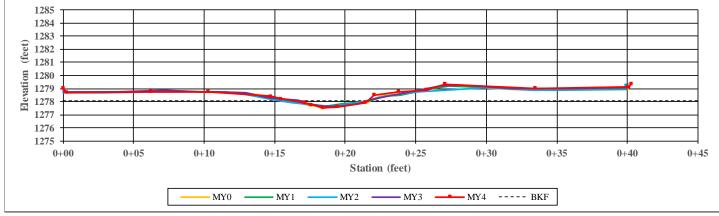

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	5.4	6.1	6.3	5.0	5.5	-	-	-
Floodprone Width (ft)	14.0	14.0	14.0	14.0	14.0	-	-	-
Bankfull Mean Depth (ft)	0.3	0.2	0.2	0.3	0.3	-	-	-
Bankfull Max Depth (ft)	0.6	0.5	0.4	0.4	0.6	-	-	-
Bankfull Cross-Sectional Area (ft ²)	1.8	1.5	1.5	1.4	1.8	-	-	-
Width/Depth Ratio	16.7	25.4	25.8	17.4	17.0	-	-	-
Entrenchment Ratio	2.6	2.3	2.2	2.8	2.5	-	-	-
Bank Height Ratio	1.0	0.9	0.9	1.5	1.5	-	-	-
Low Top of Bank Depth (ft)	-	-	-	0.4	0.9	-	-	-




Left Descending Bank



Right Descending Bank

Project Name:Middle South MuddyXS Number:2Station:204+72

Reach Name: Lower Sprouse Branch XS Type: Riffle

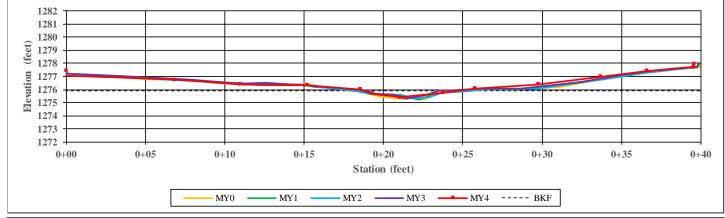

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	5.1	5.3	5.4	4.0	6.0	-	-	-
Floodprone Width (ft)	23.0	23.0	23.0	23.0	23.0	-	-	-
Bankfull Mean Depth (ft)	0.3	0.2	0.2	0.2	0.3	-	-	-
Bankfull Max Depth (ft)	0.6	0.5	0.5	0.5	0.5	-	-	-
Bankfull Cross-Sectional Area (ft ²)	1.7	1.3	1.2	0.9	1.7	-	-	-
Width/Depth Ratio	15.1	21.5	23.7	18.3	21.2	-	ı	-
Entrenchment Ratio	4.5	4.3	4.3	5.8	3.9	-	-	-
Bank Height Ratio	1.0	1.0	0.9	1.2	1.2	-	-	-
Low Top of Bank Depth (ft)	-	-	-	0.4	0.6	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy **XS Number:** 3 **Station:** 205+79

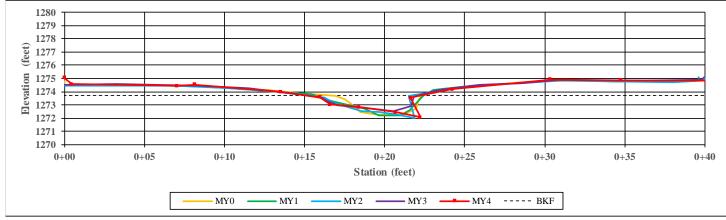

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	6.1	6.8	6.8	7.3	7.2	-	-	-
Floodprone Width (ft)	32.0	32.0	32.0	32.0	32.0	-	-	-
Bankfull Mean Depth (ft)	1.0	0.9	0.9	0.7	0.8	-	-	-
Bankfull Max Depth (ft)	1.5	1.6	1.7	1.2	1.6	-	-	-
Bankfull Cross-Sectional Area (ft ²)	5.9	6.3	6.3	5.3	5.9	-	-	-
Width/Depth Ratio	6.3	7.5	7.3	10.1	8.7	-	-	-
Entrenchment Ratio	5.3	4.7	4.7	4.4	4.5	-	-	-
Bank Height Ratio	1.0	1.1	1.0	1.0	0.9	-	-	-
Low Top of Bank Depth (ft)	-	-	-	1.2	1.5	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy **XS Number:** 4 **Station:** 102+79

Reach Name: South Muddy Creek XS Type: Riffle

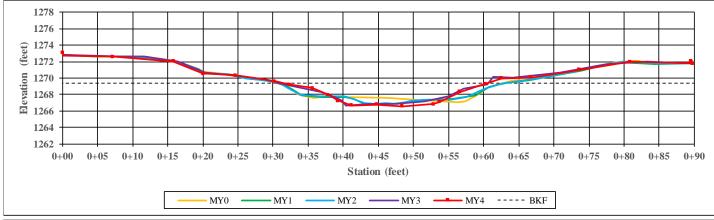

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	31.6	32.6	31.8	29.5	29.0	-	-	-
Floodprone Width (ft)	65.0	65.0	65.0	65.0	65.0	-	-	-
Bankfull Mean Depth (ft)	1.6	1.7	1.7	1.6	1.7	-	-	-
Bankfull Max Depth (ft)	2.3	2.6	2.6	2.7	2.8	-	-	-
Bankfull Cross-Sectional Area (ft ²)	50.5	54.1	52.8	46.9	50.5	-	-	-
Width/Depth Ratio	19.8	19.7	19.1	18.6	16.7	-	-	-
Entrenchment Ratio	2.1	2.0	2.0	2.2	2.2	-	-	-
Bank Height Ratio	1.0	0.9	1.0	1.0	1.1	-	-	-
Low Top of Bank Depth (ft)	-	-	-	2.7	2.2	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy **XS Number:** 5 **Station:** 107+45

Reach Name: South Muddy Creek **XS Type:** Riffle

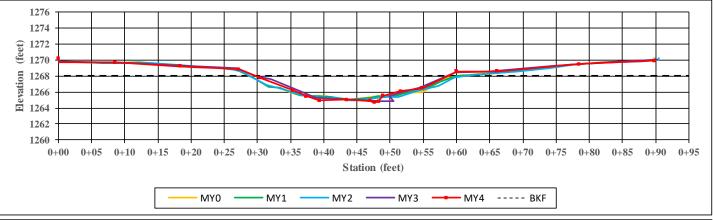

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	30.7	30.6	31.8	28.4	29.0	-	-	-
Floodprone Width (ft)	101.0	101.0	101.0	101.0	101.0	-	-	-
Bankfull Mean Depth (ft)	1.9	1.9	1.9	1.9	2.0	-	-	-
Bankfull Max Depth (ft)	2.8	2.8	3.0	3.1	3.4	-	-	-
Bankfull Cross-Sectional Area (ft ²)	59.0	57.9	61.3	52.9	59.0	-	-	-
Width/Depth Ratio	15.9	16.2	16.4	15.3	14.3	-	-	-
Entrenchment Ratio	3.3	3.3	3.2	3.6	3.5	-	-	-
Bank Height Ratio	1.0	1.0	1.1	1.1	1.2	-	-	-
Low Top of Bank Depth (ft)	-	-	-	3.6	3.5	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy **XS Number:** 6 **Station:** 108+57

Reach Name: South Muddy Creek XS Type: Pool

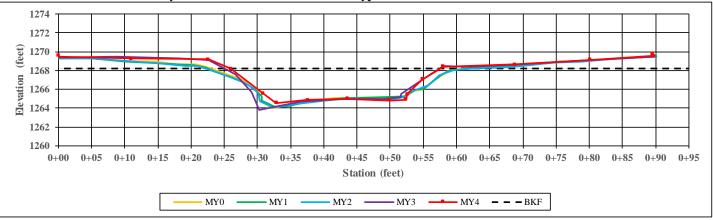

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	35.3	35.9	36.7	31.4	31.7	-	-	-
Floodprone Width (ft)	166.0	166.0	166.0	166.0	166.0	-	-	-
Bankfull Mean Depth (ft)	2.4	2.4	2.4	2.7	2.7	-	-	-
Bankfull Max Depth (ft)	4.0	3.9	3.9	4.2	3.7	-	-	-
Bankfull Cross-Sectional Area (ft ²)	85.7	86.3	89.2	84.0	85.7	-	-	-
Width/Depth Ratio	14.5	14.9	15.1	11.7	11.8	-	-	-
Entrenchment Ratio	4.7	4.6	4.5	5.3	5.2	-	-	-
Bank Height Ratio	1.0	1.0	1.0	1.0	1.1	-	-	-
Low Top of Bank Depth (ft)	-	-	-	4.7	3.9	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy XS Number: 7 Station: 109+57

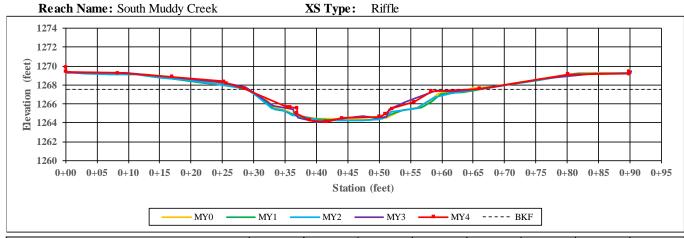

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	31.0	31.2	34.0	29.1	36.2	-	-	ı
Floodprone Width (ft)	88.0	88.0	88.0	88.0	88.0	-	-	-
Bankfull Mean Depth (ft)	2.1	2.2	2.0	2.0	1.8	-	-	-
Bankfull Max Depth (ft)	2.9	3.0	3.1	3.2	3.5	-	-	-
Bankfull Cross-Sectional Area (ft ²)	64.9	67.7	67.9	57.9	64.9	-	-	-
Width/Depth Ratio	14.8	14.4	17.0	14.6	20.2	-	-	ı
Entrenchment Ratio	2.8	2.8	2.6	3.0	2.4	-	-	-
Bank Height Ratio	1.0	0.9	0.9	0.9	0.9	-	-	-
Low Top of Bank Depth (ft)	ı	-	-	3.3	3.2	-	-	1




Left Descending Bank



Right Descending Bank

Project Name: Middle South MuddyXS Number:8Station: 302+13

Reach Name: Upper Iva Branch XS Type: Pool

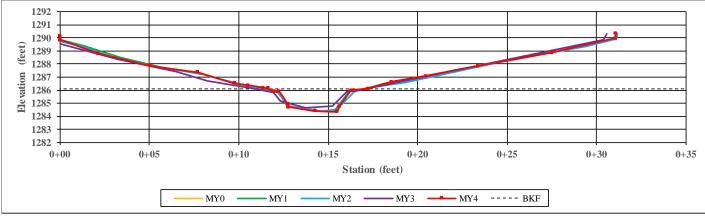

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	5.5	5.8	5.6	6.4	6.9	-	-	-
Floodprone Width (ft)	17.0	17.0	17.0	17.0	17.0	-	-	-
Bankfull Mean Depth (ft)	1.0	1.0	1.0	0.8	0.8	-	-	-
Bankfull Max Depth (ft)	1.8	1.7	1.7	1.5	1.5	-	-	-
Bankfull Cross-Sectional Area (ft ²)	5.7	5.6	5.6	5.0	5.7	-	-	-
Width/Depth Ratio	5.4	6.1	5.5	8.1	8.3	-	-	-
Entrenchment Ratio	3.1	2.9	3.1	2.7	2.5	-	-	-
Bank Height Ratio	1.0	0.9	1.0	1.0	0.8	-	-	-
Low Top of Bank Depth (ft)	-	-	-	1.3	1.2	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South Muddy **XS Number:** 9 **Station:** 302+82

Reach Name: Upper Iva Branch XS Type: Riffle

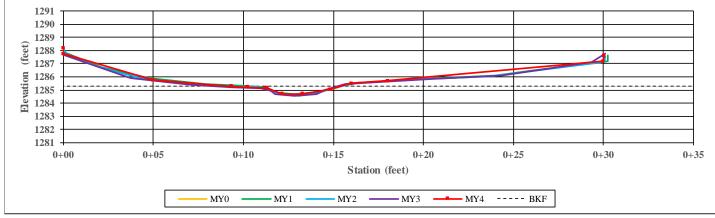

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	4.6	4.2	4.1	7.3	6.4	-	-	-
Floodprone Width (ft)	14.0	14.0	14.0	14.0	14.0	-	-	-
Bankfull Mean Depth (ft)	0.4	0.4	0.5	0.4	0.3	-	-	-
Bankfull Max Depth (ft)	0.7	0.6	0.8	0.8	0.6	-	-	-
Bankfull Cross-Sectional Area (ft ²)	1.9	1.8	2.1	2.7	1.9	-	-	-
Width/Depth Ratio	11.0	9.8	8.0	20.2	21.3	-	-	-
Entrenchment Ratio	3.0	3.3	3.5	1.9	2.2	-	-	-
Bank Height Ratio	1.0	0.989	0.897	0.9	0.9	-	-	-
Low Top of Bank Depth (ft)	-	-	-	0.7	0.5	-	-	-




Left Descending Bank



Right Descending Bank

Project Name: Middle South MuddyXS Number:10Station: 304+20

Reach Name: Upper Iva Branch XS Type: Riffle

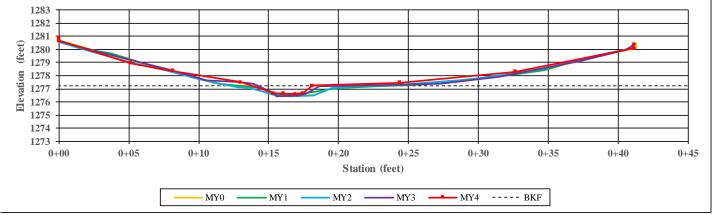

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	5.3	5.6	5.8	3.8	5.1	-	-	-
Floodprone Width (ft)	17.0	17.0	17.0	17.0	17.0	-	-	-
Bankfull Mean Depth (ft)	0.4	0.3	0.4	0.4	0.4	-	-	-
Bankfull Max Depth (ft)	0.6	0.6	0.6	0.7	0.7	-	-	-
Bankfull Cross-Sectional Area (ft ²)	2.1	1.9	2.5	1.7	2.1	-	-	-
Width/Depth Ratio	13.3	16.7	13.3	8.7	12.6	-	-	-
Entrenchment Ratio	3.2	3.0	3.0	4.4	3.3	-	-	-
Bank Height Ratio	1.0	1.0	1.0	1.0	0.9	-	-	-
Low Top of Bank Depth (ft)	-	-	-	0.8	0.6	-	-	-




Left Descending Bank



Right Descending Bank


Middle South Muddy South Muddy Creek Longitudinal Profile Staioning 101+00 to 112+75.16

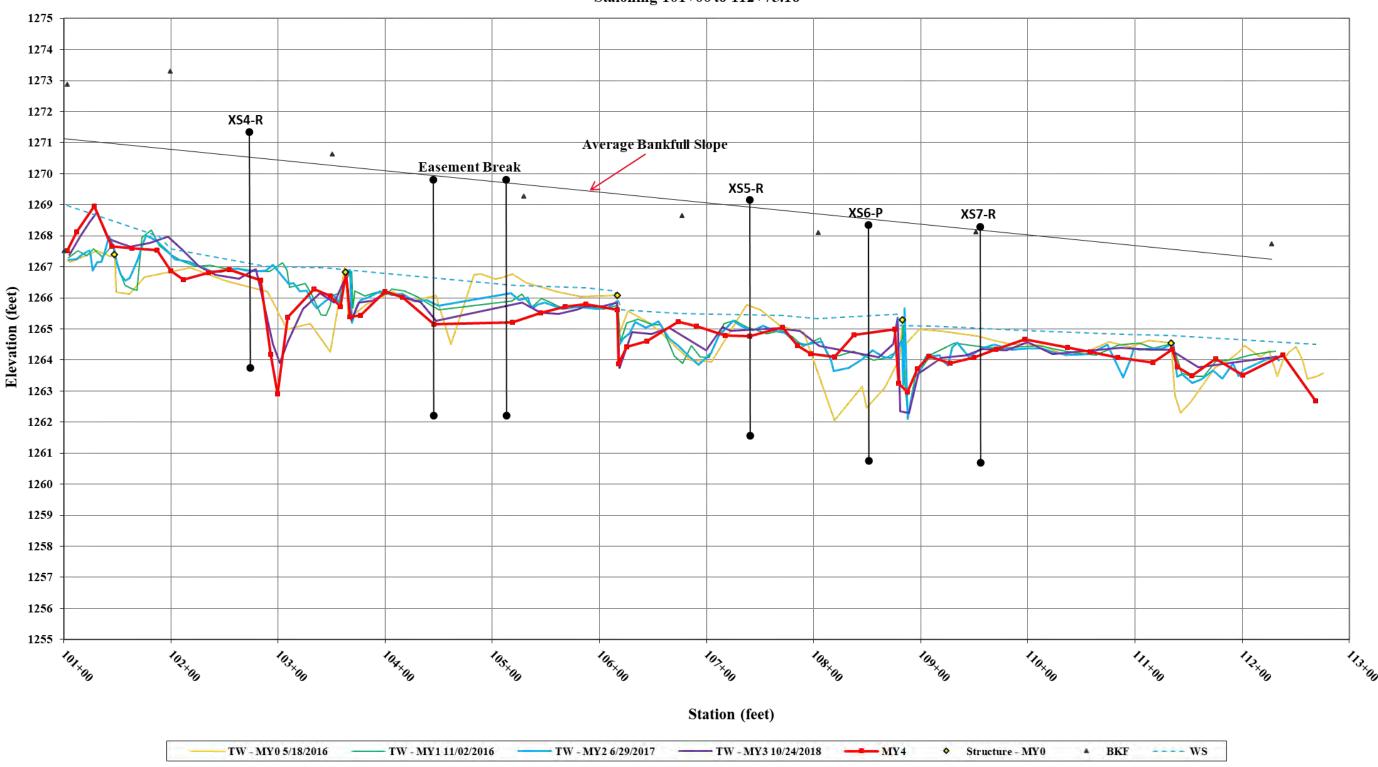

Middle South Muddy Sprouse Branch Longitudinal Profile Staioning 201+72.34 to 208+91.81



Middle South Muddy Iva Branch Longitudinal Profile Staioning 300+79.55 to 307+17.78

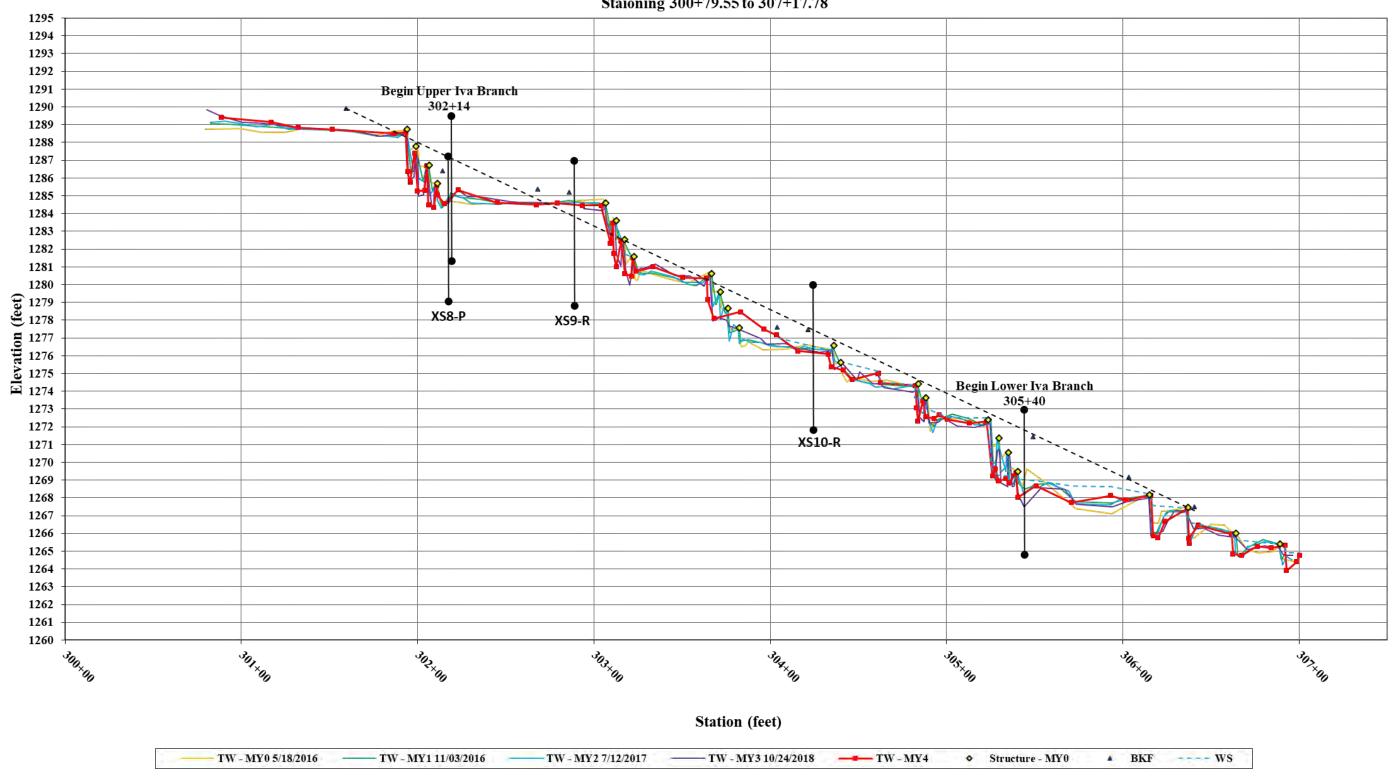

This Page Intentionally Left Blank


Middle South Muddy

Cross Section 4 - Riffle

Monitoring Year - 2019; MY4

Bed Surface Material		%	%
Particle Size Class (mm)	Number	Individual	Cumulative
0 - 0.062	0	0.0%	0%
0.062 - 0.125	0	0.0%	0%
0.125 - 0.25	1	1.0%	1%
0.25 - 0.5	1	1.0%	2%
0.5 - 1.0	0	0.0%	2%
1 - 2	12	11.4%	13%
2 - 4	0	0.0%	13%
4 - 8	4	3.8%	17%
8 - 16	6	5.7%	23%
16 - 32	14	13.3%	36%
32 - 64	42	40.0%	76%
64-128	23	21.9%	98%
128-256	2	1.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	105	100%	100%

Summary Data					
D50	44				
D84	78				
D95 110					

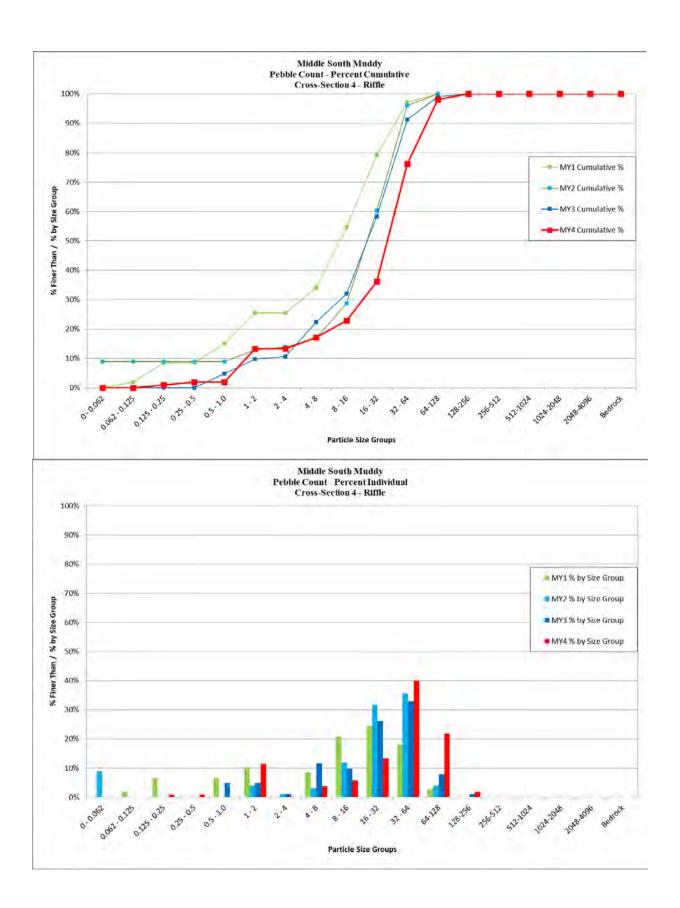


Middle South Muddy


Cross Section 5 - Riffle

Monitoring Year - 2019; MY4

Bed Surface Material		%	%
Particle Size Class (mm)	Number	Individual	Cumulative
0 - 0.062	5	4.8%	5%
0.062 - 0.125	1	1.0%	6%
0.125 - 0.25	7	6.7%	12%
0.25 - 0.5	6	5.7%	18%
0.5 - 1.0	3	2.9%	21%
1 - 2	30	28.6%	50%
2 - 4	2	1.9%	51%
4 - 8	5	4.8%	56%
8 - 16	13	12.4%	69%
16 - 32	13	12.4%	81%
32 - 64	9	8.6%	90%
64-128	11	10.5%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	105	100%	100%

Summary Data					
D50 2.4					
D84	46				
D95	89				

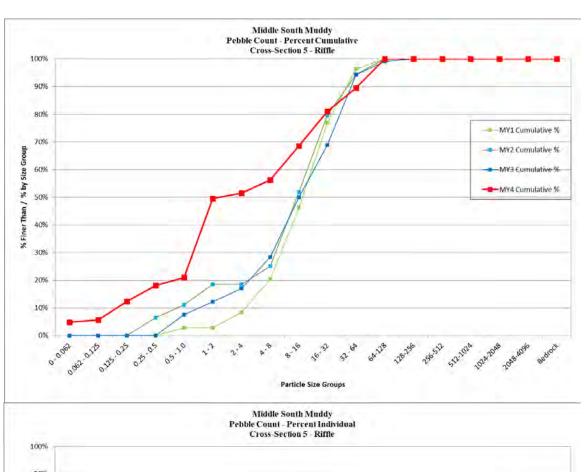

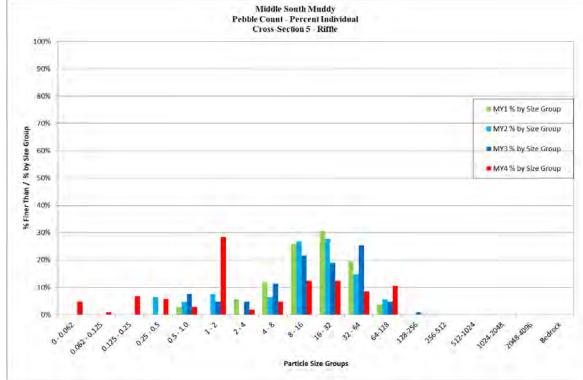


Middle South Muddy

Cross Section 7 - Riffle

Monitoring Year - 2019; MY4

Bed Surface Material		%	%
Particle Size Class (mm)	Number	Individual	Cumulative
0 - 0.062	5	4.8%	5%
0.062 - 0.125	4	3.8%	9%
0.125 - 0.25	8	7.6%	16%
0.25 - 0.5	5	4.8%	21%
0.5 - 1.0	2	1.9%	23%
1 - 2	22	21.0%	44%
2 - 4	3	2.9%	47%
4 - 8	8	7.6%	54%
8 - 16	20	19.0%	73%
16 - 32	13	12.4%	86%
32 - 64	9	8.6%	94%
64-128	5	4.8%	99%
128-256	1	1.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	105	100%	100%

Summary Data						
D50	6.2					
D84	30					
D95	68					

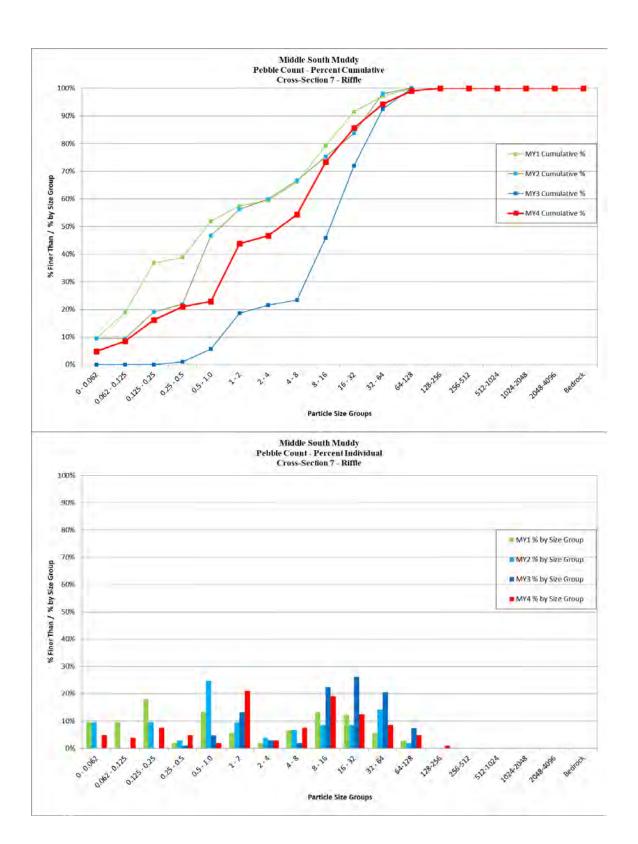

Appendix E Hydrologic Data

This Page Intentionally Left Blank

	Table 12. Verification	n of Bankfull Evo	ents	
I	Middle South Muddy Str	eam Restoration	Project	
	South Mud	ldy Creek		
Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
2/25/2016	Unknown ¹	Wrack Lines	Unknown	-
10/27/2017	Unknown ²	Wrack Lines	Unknown	-
2/13/2018	Unknown ³	Wrack Lines	Unknown	-
11/1/2018	Unknown ⁴	Wrack Lines	Unknown	-
5/9/2019	Unknown ⁵	Wrack Lines	Unknown	1
	Sprouse	Branch		
Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
3/23/2016	Unknown ¹	Wrack Lines	Unknown	-
10/27/2017	Unknown ²	Crest Gauge	1.08	-
2/13/2018	Unknown ³	Crest Gauge	0.1	-
11/1/2018	Unknown ⁴	Crest Gauge	0.4	-
5/9/2019	Unknown ⁵	Crest Gauge	0.33	2
	Iva Br	anch		
Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
2/25/2016	Unknown ¹	Wrack Lines	Unknown	-
10/27/2017	Unknown ²	Wrack Lines	Unknown	-
2/13/2018	Unknown ³	Wrack Lines	Unknown	-
11/1/2018	Unknown ⁴	Wrack Lines	Unknown	_

¹Potential Date is 2/2/2016

²Potential Date is 10/23/2017

³Potential Date is 2/11/2018

⁴Potential Date is 10/18/2018

⁵Potential Date is 2/18/2019

Photo Verification of Bankfull Events



Photo #1 - South Muddy Creek Wrack Lines



Photo #2 – Sprouse Branch Crest Gauge at 13 inches (recorded bankfull is 9")



Photo #3 – South Muddy Creek Crest Gauge at 14 inches




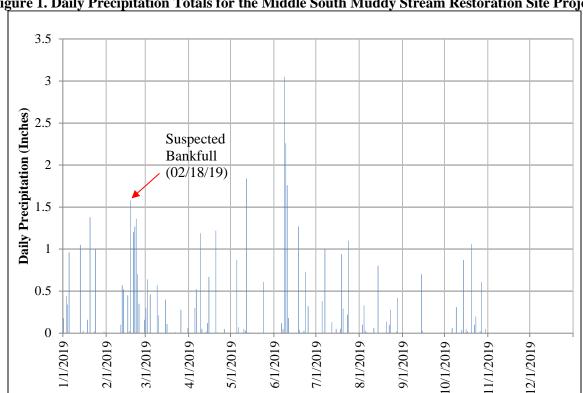


Figure 1. Daily Precipitation Totals for the Middle South Muddy Stream Restoration Site Project



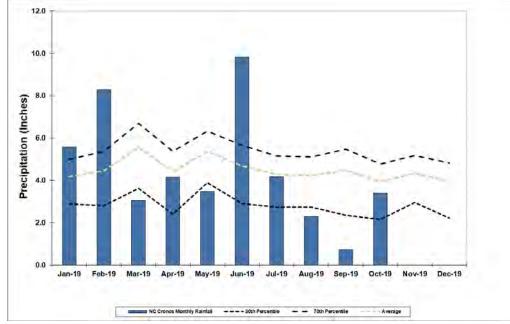

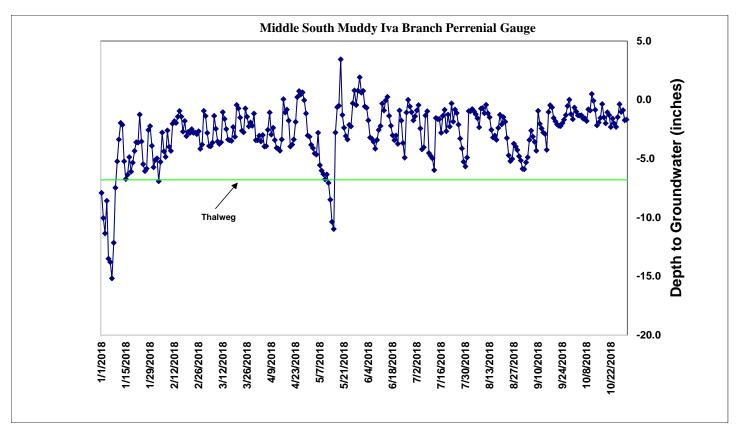

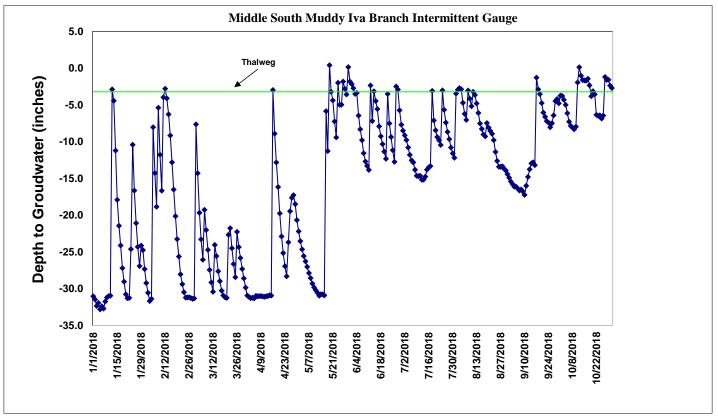

This Page Intentionally Left Blank

Appendix F Invasive Vegetation Treatment

This Page Intentionally Left Blank

Carolina Silvics, Inc. Pesticide Application Log

CarSilv - 0709

Client NC Division of Mitigation Services

Project Site South Moddy Creek

Date 10-16-2019

Start Time 12:00 End Time 15:00

Only PAL for Site for This Day? Yes If NO, this is PAL # of ##

Sky Cover Partly Cloudy Temp (F) 64

Wind Direction WNW Wind Speed 6-10 from

Applicators Joshua G Merrig (NC 028-93717)

Grainger Coughtrey (NC 026-346; 2)

Application Method Basal Bark

Herbicide Other (see comments)

Horbicide Rate (%) 15 Total Concentrate 57.5 illioz

Surfactant or Adjuvant (1)

Surfactant/Adjudivant 1 Rate

(%)

Other Bine Dye

Other Rate/Amt 1 fliaz

Dauent Diesel fuel

Total Solution 3 gal

Species Controlled Callery Pear

Jap. Honaystokle Privet spp. Multiflora Rose

Area Description Walked the entire mitigation area. We saw some regrowth Rose and Privet from

the last treatment. There were also larger specimen Privet and Rose that apposited to have been missed from the previous treatment. We also walked the lower half of the preservation reach. The invasive species present was Rose and Privet. They

word very small only standing 6 inches to one foot tall.

Additional Comments