South Muddy Creek Stream Restoration Project Year 2 Monitoring Report

McDowell County, North Carolina

NCEEP Project Number – 737



Project Info:	Monitoring Year: 2 of 5 Year of Data Collection: 2013 Year of Completed Construction: 2011 NCEEP Project Manager: Paul Wiesner Submission Date: December 20 th , 2013
Submitted To:	NCDENR - Ecosystem Enhancement Program 1625 Mail Service Center Raleigh, NC 27699 NCDENR Contract ID No. 004522



South Muddy Creek Stream Restoration Project Year 2 Monitoring Report

McDowell County, North Carolina

Report Prepared and Submitted by Michael Baker Engineering, Inc. NC Professional Engineering License # F-1048

Baker

Michael Baker Engineering, Inc. 797 Haywood Road Suite 201 Asheville, North Carolina 28806 Phone: 828.350.1408 Fax: 828.350.1409

Matthew Reid Project Manager Micky Clemmons Office Principal

Table of Contents

1.0	EXECUTIVE SUMMARY	1
2.0	METHODOLOGY	3
2.1	<i>Gir Curr 1</i> 155 C55 <i>merri</i>	
2	2.1.1 Morphologic Parameters and Channel Stability	3
2	2.1.2 Hydrology	4
2	2.1.3 Photographic Documentation of Site	4
2	2.1.4 Visual Stream Morphological Stability Assessment	5
2.2	Vegetation Assessment	5
3.0	REFERENCES	6

Appendices

Appendix	A	Project	Vicini	ty Map and Background Tables
		Figure	1	Vicinity Map and Directions
		Table	1	Project Components
		Table	2	Project Activity and Reporting History
		Table	3	Project Contacts Table
		Table	4	Project Attribute Table
Appendix	B	Visual A	Assessi	nent Data
		Technic	al Me	morandum – Site Assessment Report for Monitoring Year 1
		Figure	2	Current Condition Plan View (CCPV)
		Table	5a	Visual Stream Morphology Stability Assessment Table
		Table	5b	Stream Problem Areas (SPAs)
		Table	6a	Vegetation Condition Assessment Table
		Table	6b	Vegetation Problem Areas (VPAs)
		Stream	Statior	n Photos
		Stream	Proble	m Area Photos
		Vegetat	ion Plo	ot Photos
		Vegetat	ion Pr	oblem Area Photos
Appendix	С	Vegetat	ion Ple	ot Data
		Table	7	Vegetation Plot Criteria Attainment
		Table	8	CVS Vegetation Plot Metadata
		Table	9	CVS Stem Count Total and Planted by Plot and Species
Appendix	D	Stream	Survey	⁹ Data
		Figure	3	Year 2 Cross-sections with Annual Overlays

Appendices

Figure	4	Year 2 Longitudinal Profiles with Annual Overlays
Figure	5	Riffle Pebble Count Size Class Distribution with Annual Overlays
Table	10	Baseline Stream Data Summary Tables
Table	11a	Cross-section Morphology Data Table
Table	11b	Stream Reach Morphology Data Table
Hydrola	aic D	ata

Appendix E Hydrologic Data

Table12Verification of Bankfull Events

1.0 EXECUTIVE SUMMARY

The South Muddy Creek Restoration Project (Project) was restored by Michael Baker Engineering, Inc. (Baker) through an on-call design and construction services contract with the North Carolina Ecosystem Enhancement Program (NCEEP). This report documents and presents Year 2 monitoring data as required during the five-year monitoring period.

The specific goals for the South Muddy Creek Restoration Project were as follows:

- Create geomorphically stable conditions on the Project site,
- Improve and restore hydrologic connections between the streams and their floodplains,
- Improve water quality in the South Muddy Creek watershed, and
- Improve aquatic and terrestrial habitat along the Project corridor.

To accomplish these goals the following objectives were implemented:

- Excavate a wide floodplain bench and construct a new channel with stable dimension and pattern,
- Restore channel access the floodplain during bankfull or larger storm events to increase hydrologic connections and alleviate erosive shear stresses,
- Incorporate bedform diversity with varied in-stream structures to provide a variety of aquatic habitats,
- Treat the floodplain for invasive species vegetation, and
- Reestablish a riparian buffer with native vegetation to improve terrestrial habitat and eliminate excessive sedimentation from erosion.

The Project site is located approximately nine miles southeast of Marion in McDowell County, North Carolina, as shown in Figure 1 in Appendix A. The Project is situated in the Catawba River Basin, within the North Carolina Division of Water Quality (NCDWQ) sub-basin 03-08-30 and United States Geologic Survey (USGS) hydrologic unit 03050101040-020. Directions to the Project site can be found in Figure 1 of Appendix A.

South Muddy Creek lies within the Piedmont physiographic province. Its watershed is predominately forested, supporting some isolated rural residential housing, chicken farms, agricultural lands, nurseries, and several small rural residential developments. In the early 1960's the McDowell County Natural Resource Conservation Service (NRCS) constructed a flood control structure within South Muddy Creek approximately three miles upstream from the Project area. This structure controls flows from approximately 12.4 square miles of the watershed and is located on privately-owned land that is maintained by the NRCS.

The land surrounding the Project site has been used predominantly for crop cultivation and the stream channel has been impacted from past channelization; the channel became disconnected from its floodplain by channel incision over time and excessive shear stress forces on the bed and banks had caused erosion. The Project involved the restoration of 2,787 linear feet (LF) of stream along South Muddy Creek at Sain Road using a Rosgen Priority 2 restoration approach. The Priority 2 channel design approach entailed the excavation of bankfull benches to alleviate shear stress on stream banks, re-establishment of channel pattern to dissipate flow velocities in meander bends while creating in-stream habitat with riffle-pool sequences and the strategic placement of in-stream structures. Approximately 14.1 acres of associated riparian buffer were restored or enhanced throughout the Project area and a conservation easement consisting of 17.1 acres will protect and preserve all stream reaches and riparian buffers in perpetuity.

Table 6a in Appendix B summarizes the vegetation condition of the Project site. The planted acreage performance categories were functioning at 100% with no bare areas or low stem density areas to report.

Invasive areas of concern were observed and documented accordingly in Table 6a and as vegetation problem areas (VPAs) in Figure 2 and Table 6b (Appendix B). Eighteen discrete areas of invasive species were documented throughout the site and totaled approximately 1.26 acres, or 7.4 percent of the total easement acreage. A more detailed summary of the results for the vegetation condition assessment can be found in Appendix B which includes a technical memorandum, current condition plan view (CCPV) figures, supporting data tables, and photo logs; the contents of Appendix B was submitted to NCEEP in May 2013 and served as the interim visual site assessment report.

A NCEEP licensed contractor conducted exotic invasive plant control on the project site during the 2013 growing season. In addition, exotic invasive plant species will also be treated on the project site during the 2014 growing season.

The success criteria or survival threshold for all 12 vegetation monitoring plots were attained and are summarized in Tables 7 and 9 of Appendix C. The average density of total planted stems or tract mean (including volunteers), based on data collected from the 12 monitoring plots during Year 2 monitoring, is 651 stems per acre; this further indicates that the Project site is on track for meeting the minimum success interim criteria of 320 trees per acre by the end of Year 3 and the final success criteria of 260 trees per acre by the end of Year 5. It should be noted that most vegetation plots exhibiting a lower planted stem density count are offset by the presence of thriving volunteer species, thereby boosting or increasing the stem density for a given plot and the tract in general upon inclusion of volunteers for total stems per acre.

Table 5a in Appendix B, indicates the South Muddy Creek site is geomorphically stable overall and performing at 100% for the majority of parameters evaluated within the lateral/vertical stability and in-stream structure performance categories. The six sub-categories receiving scores of less than 100% correspond to the five stream problem areas (SPAs) documented and summarized in Table 5b (Appendix B). The five SPAs were characterized by localized areas of bank scour and were all located upstream of the Sain Road bridge. A more detailed summary of the results for the visual stream stability assessment can be found in Appendix B which includes a technical memorandum, CCPV figures, supporting data tables, and photo logs.

The four permanent cross-sections in Appendix D show that there has been little adjustment to stream dimension within the Project reach since construction. In general, riffles appeared to have narrowed in width slightly while pools show little to no change in (maximum) depth. The longitudinal profile indicates that the bed features are generally stable and that grade control structures (constructed riffles and j-hooks) continue to help maintain the overall profile desired. Pool lengths and depths appear to have been maintained with minor localized adjustments. The Aggradation noted in the Year 1 Monitoring Report within the downstream limits of the Project reach profile along the meander bend beginning at station 36+00 has begun to scour and return to a more stable maximum depth. Scour within the aggraded meander bend, from larger, subsequent storm flows, should continue to flush the aggraded material downstream and help to re-establish a deeper pool over time. The site was found to have had at least one bankfull event based on crest gauge readings. Information on bankfull events is provided in Table 12 of Appendix E.

Summary information/data related to the occurrence of items such as beaver or encroachment, and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly Restoration Plan) documents available on EEP's website. *It should be noted that the Baseline Monitoring Report and Mitigation Plan for this Project includes the summary of constructed design approaches for South Fork Hoppers Creek (EEP Project No. 92251), a nearby project site that was designed and constructed in conjunction with the South Muddy Creek project as part of the same EEP on-call design and construction services contract. All raw data supporting the tables and figures in the appendices is available from EEP upon request.*

2.0 METHODOLOGY

The five-year monitoring plan for the Project site includes criteria to evaluate the success of the vegetation and stream components of the project. The methodology and report template used to evaluate these two components adheres to the EEP monitoring guidance document dated November 7, 2011, which will continue to serve as the template for subsequent monitoring years. The specific locations of monitoring features, such as vegetation plots, permanent cross-sections, reference photo stations and crest gauges, are shown on the CCPV sheets found in Figure 2 of Appendix B.

The majority of Year 2 monitoring data was collected in May 2013 and September 2013. All visual site assessment data contained in Appendix B was collected on May 1st except for the vegetation plot data and corresponding plot photos which were collected on September 19th. All stream survey (channel dimension and profile) and sediment data were collected on August 15th. Stream survey data was collected using a Topcon GRS-1 network Rover GPS unit which collects point data with an accuracy of less than one tenth of a foot.

2.1 Stream Assessment

Geomorphic monitoring of restored stream reaches is being conducted for five years to evaluate the effectiveness of the restoration practices installed. Monitored stream parameters include channel dimension (cross-sections), profile (longitudinal survey), bed composition, bank and channel stability, bankfull flows, and reference sites documented by photographs. A crest gauge, as well as high flow marks, will be used to document the occurrence of bankfull events. The methods used and any related success criteria are described below for each parameter. For monitoring stream success criteria, 4 permanent cross-sections, 1 crest gauge, and 20 photo identification points were installed.

2.1.1 Morphologic Parameters and Channel Stability

2.1.1.1 Dimension

Four permanent cross-sections were installed throughout the entire project area. Cross-sections selected for monitoring were located in representative riffle and pool facets and each cross-section was marked on both banks with permanent pins to establish the exact transect used. The two pairs of riffle and pool cross-sections are all located upstream of the Sain Road bridge crossing. A common benchmark will be used for cross-sections and consistently referenced to facilitate comparison of year-to-year data. The cross-sectional surveys will include points measured at major breaks in slope, including top of bank, bankfull, inner berm, edge of water, and thalweg, if the features are present. Riffle cross-sections were classified using the Rosgen Stream Classification System (Rosgen, 1994), and all monitored cross-sections should fall within the quantitative parameters defined for channels of the design stream type.

There should be little change in as-built cross-sections. If changes do take place, they will be evaluated to determine if they represent a movement toward a more unstable condition (e.g., down-cutting or erosion) or a movement toward increased stability (e.g., settling, vegetative changes, deposition along the banks, or decrease in width/depth ratio). Cross-sectional data is presented in Figure 3 of Appendix D.

2.1.1.2 Longitudinal Profile

One longitudinal profile was surveyed for the entire project length of the Project reach and is provided in Figure 4 of Appendix D. Longitudinal profiles will be replicated annually during the five year monitoring period.

Measurements taken during longitudinal profiles include thalweg, water surface, and the top of low bank. All measurements were taken at the head of each feature (e.g., riffle, run, pool, glide) and the maximum pool depth. Elevations of grade control structures were also included in the longitudinal profiles surveyed. Surveys were tied to a permanent benchmark.

The pools should remain relatively deep with flat water surface slopes, and the riffles should remain steeper and shallower than the pools. Bed form observations should be consistent with those observed for channels of the design stream type as well as other design information.

2.1.1.3 Substrate and Sediment Transport

Bed load material analysis consists of a pebble count taken in the same constructed riffle (at crosssection X4) during annual geomorphic surveys of the Project site. This sample, combined with evidence provided by changes in cross-section and profile data will reveal changes in sediment gradation that occur over time as the stream adjusts to upstream sediment loads. Significant changes in sediment gradation will be evaluated with respect to stream stability and watershed changes. Bed material distribution data is located in Figure 5 of Appendix D.

2.1.2 Hydrology

2.1.2.1 Streams

The occurrence of bankfull events within the monitoring period will be documented by the use of crest gauges and photographs. One crest gauge was installed on the floodplain at the bankfull elevation along the left top of bank at station 22+00. The bottom of the crest gauge coincides with the top of bank (bankfull) elevation. The crest gauges record the highest watermark between site visits, and are checked at each site visit to determine if a bankfull event has occurred. Photographs are used to document the occurrence of debris lines and sediment deposition on the floodplain during monitoring site visits.

Two bankfull flow events must be documented at the crest gauge within the 5-year monitoring period. The two bankfull events must occur in separate years; otherwise, the stream monitoring will continue until two bankfull events have been documented in separate years or until the monitoring period ends. If two bankfull events have not been documented at the end of 5 years the Interagency Review Team (IRT) will have to decide on an appropriate course of action.

2.1.3 Photographic Documentation of Site

Photographs will be used to document restoration success visually. Reference stations were photographed during the as-built survey; this will be repeated for at least five years following construction. Reference photos are taken once a year, from a height of approximately five to six feet. Permanent markers will ensure that the same locations (and view directions) are utilized during each monitoring period. Selected site photographs are shown in Appendix B.

2.1.3.1 Lateral Reference Photos

Reference photo transects were taken of the right and left banks at each permanent cross-section. A survey tape was captured in most photographs which represents the cross-section line located perpendicular to the channel flow. The water line was located in the lower edge of the frame in order to document bank and riparian conditions. Photographers will make an effort to consistently maintain the same area in each photo over time.

2.1.3.2 Structure Photos

Photographs of primary grade control structures (i.e. vanes and weirs), along the restored streams are included within the photographs taken at reference photo stations. Photographers will make every effort to consistently maintain the same area in each photo over time.

Lateral and structure photographs are used to evaluate channel aggradation or degradation, bank erosion, success of riparian vegetation, structure function, and stability, and effectiveness of erosion control measures subjectively. Lateral photos should not indicate excessive erosion or degradation of the banks. A series of photos over time should indicate successive maturation of riparian vegetation and consistent structure function.

2.1.4 Visual Stream Morphological Stability Assessment

The visual stream morphological stability assessment involves the qualitative evaluation of lateral and vertical channel stability, and the integrity and overall performance of in-stream structures throughout the Project reach as a whole. Habitat parameters, such as riffle embeddedness and pool depth maintenance, are also measured and scored. The entire project reach was walked, noting geomorphic conditions of the stream bed profile (riffle/pool facets), both stream banks, and engineered in-stream structures. Photos were taken at every stream photo reference station as discussed in the previous section, and in locations of potential SPAs which were documented in the field for subsequent mapping on the CCPV figures. A more detailed summary of the methodology and results for the visual stream stability assessment can be found in Appendix B which includes a technical memorandum, supporting data tables, and SPA photos.

2.2 Vegetation Assessment

Successful restoration of the vegetation on a mitigation site is dependent upon hydrologic restoration, active planting of preferred canopy species, and volunteer regeneration of the native plant community. In order to determine if the criteria are achieved, twelve vegetation monitoring quadrants were installed across the project site. The total number of quadrants was calculated using the CVS-NCEEP Entry Tool Database version 2.2.7 (CVS-NCEEP, 2007). The size of individual quadrants varies from 100-square meters for tree species to 1-square meter for herbaceous vegetation. Level 1 CVS vegetation monitoring will occur in spring, after leaf-out has occurred, or in the fall prior to leaf fall. At the end of the first growing season during baseline surveys, species composition, density, and survival were evaluated. Individual quadrant data provided during subsequent monitoring events will include diameter, height, density, and coverage quantities. Relative values will be calculated, and importance values will be determined. Individual trees will be marked to ensure that they can be found in succeeding monitoring years. Mortality will be determined from the difference between the previous year's living, planted trees and the current year's living, planted trees.

The interim measure of vegetative success for the site is the survival of at least 320, 3-year old, planted trees per acre at the end of Year 3 of the monitoring period. The final vegetative success criteria is the survival of 260, 5-year old, planted trees per acre at the end of the Year 5 monitoring period.

Photographs are used to visually document vegetation success in sample plots. Reference photos of tree and herbaceous condition within plots are taken at least once per year. As part of the visual site assessment conducted on May 1, 2013, the vegetation condition of planted vegetation along stream banks, floodplains, and terraces were qualitatively evaluated for performance; this also included the documentation of invasive species and potential VPAs which were recorded in the field for subsequent mapping on the CCPV figures. A more detailed summary of the methodology and results for the vegetation condition assessment can be found in Appendix B which includes a technical memorandum, supporting data tables, and photo logs.

3.0 REFERENCES

Carolina Vegetation Survey (CVS) and NC Ecosystem Enhancement Program (NCEEP). 2007. CVS-NCEEP Data Entry Tool v. 2.2.7. University of North Carolina, Raleigh, NC.

Lee, M., Peet R., Roberts, S., Wentworth, T. 2007. CVS-NCEEP Protocol for Recording Vegetation, Version 4.1.

Rosgen, D. L. 1994. A Classification of Natural Rivers. Catena 22:169-199.

APPENDIX A

PROJECT VICINITY MAP AND BACKGROUND TABLES

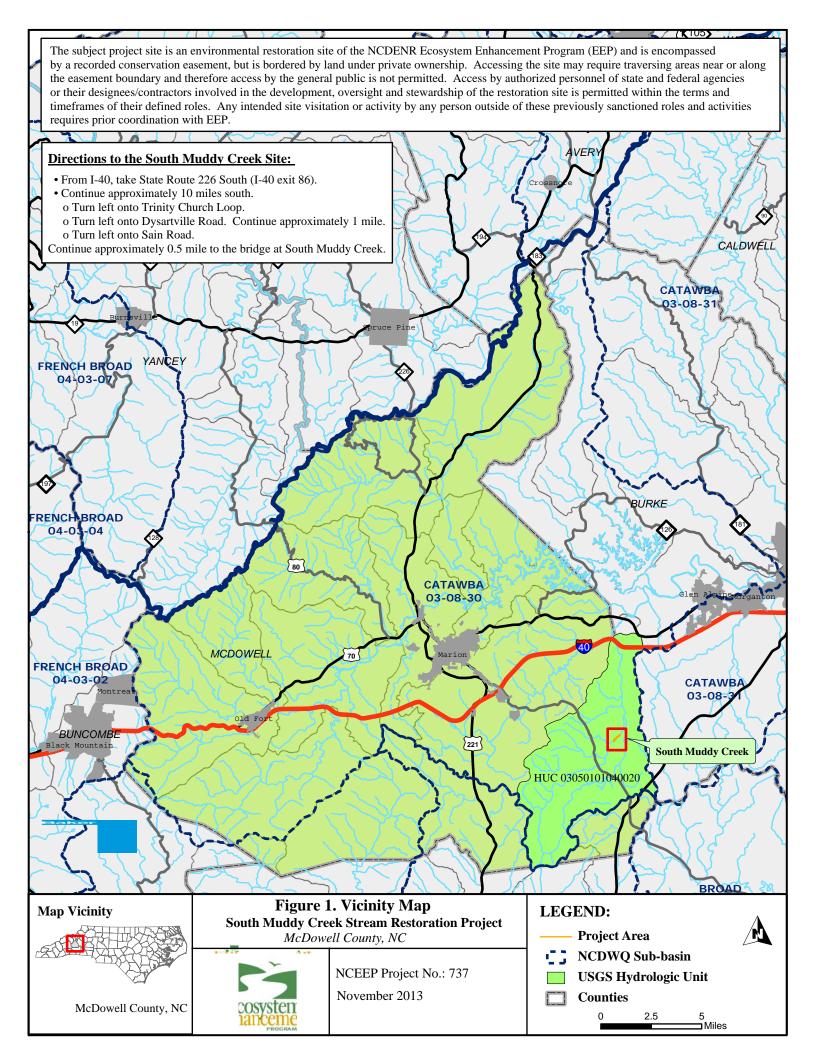


	Table 1. Project Components South Muddy Creek Mitigation Plan: EEP Project No. 737										
Project Segment or Reach ID	Existing Feet/Acres*	Mitigation Type	Approach	Linear Footage or Acreage*	Mitigation Ratio	Mitigation Units	Stationing	Comment			
South Muddy Creek	2,593	R	P2	2,787	1:1	2,787	10+00 - 38+77**	Installed in-stream structures to protect the stream bank from erosion and to provide aquatic habitat. Priority 2 was implemented to connect the channel to a newly evacated floodplain bench.			
* Existing reach breaks and d							1	l			
** Stationing includes 20 ft. of	of farm crossing above S	ain Rd. and 70 ft. o	f Sain Rd. bridge	crossing, but is not reflec	ted in the reach ler	gth.					
		Compone	ent Summations								
Restoration Level		Stream (LF)	Riparian Wetland (Ac)		Non-Ripar (Ac)	Upland (Ac)					
			Riverine	Non-Riverine							
Restoration		2,787	-	-	-	-					
Enhancement			-	-	-	-					
Enhancement I		-									
Enhancement II		-									
Creation			-	-	-	-]				
Preservation		-	-	-	-	-					
HQ Preservation		-	-	-	-	-					
			-	-]				
	Totals	2,787		-	-	-]				
Total	Project Mitigation Units	2,787									

Table 2. Project Activity and Reporting HistorySouth Muddy Creek Mitigation Plan: EEP Project No.737Elapsed Time Since Grading/Planting Complete: 2 year 6 Months									
Number of Reporti									
Activity or Report Scheduled Completion Complete Completion									
Restoration Plan Prepared	N/A	N/A	Jul-07						
Restoration Plan Amended	N/A	N/A	Jan-08						
Restoration Plan Approved	N/A	N/A	Aug-08						
Final Design – (at least 90% complete)	N/A	N/A	Jun-09						
Construction Begins	Jun-10	N/A	Jun-10						
Temporary S&E mix applied to entire project area	N/A	N/A	N/A						
Permanent seed mix applied to entire project area	Nov-10	N/A	Jan-11						
Planting of live stakes	Mar-11	N/A	Mar-11						
Planting of bare root trees	Mar-11	N/A	Mar-11						
End of Construction	Mar-11	N/A	Jun-11						
Survey of As-built conditions (Year 0 Monitoring-baseline)	Nov-10	N/A	Jun-11						
Year 1 Monitoring	Dec-12	Sep-12	Nov-12						
Invasive Treatment	NA	NA	Aug-13						
Year 2 Monitoring	Dec-13	Sep-13	Nov-13						
Year 3 Monitoring	Dec-14	N/A	N/A						
Year 4 Monitoring	Dec-15	N/A	N/A						
Year 5 Monitoring	Dec-16	N/A	N/A						

Table 3. Project Contacts TableSouth Muddy Creek Mitigation Plan: EEP Project No. 737							
Designer							
Michael Baker Engineering, Inc.	5550 Seventy-Seven Center Dr., Ste.320 Charlotte, NC 28217 <u>Contact:</u> Scott Hunt, Tel. 919-459-9003						
Construction Contractor							
Carolina Environmental Contracting, Inc.	150 Pine Ridge Road Mount Airy, NC 27030 <u>Contact:</u> Joanne Cheatham, Tel. 336-320-3849						
Planting Contractor							
Carolina Environmental Contracting, Inc.	150 Pine Ridge Road Mount Airy, NC 27030 <u>Contact:</u> Joanne Cheatham, Tel. 336-320-3849						
Seeding Contractor							
Carolina Environmental Contracting, Inc. 12/11/2012							
	Joanne Cheatham, Tel. 336-320-3849						
Seed Mix Sources Nursery Stock Suppliers	Green Resources, Tel. 336-855-6363 Foggy Mountain Nursery, Tel. 336-384-5323						
Profession Land Surveyor Turner Land Survey, PLLC.	3201 Glenridge Drive Raleigh, NC 27604 Contact:						
Profession Land Surveyor As-Built Plan Set Production	David Turner, Tel. 919-875-1378 Lissa Turner, Tel. 919-875-1378						
Monitoring Performers							
Michael Baker Engineering, Inc.	797 Haywood Road, Suite 201 Asheville, NC 28806 <u>Contact:</u>						
Stream Monitoring Point of Contact: Vegetation Monitoring Point of Contact: Wetland Monitoring Point of Contact:	Matthew Reid, Tel. 828-350-1408 Matthew Reid, Tel. 828-350-1408 Matthew Reid, Tel. 828-350-1408						

Table 4. Proje	Table 4. Project Attribute Table							
South Muddy Creek Mitig	ation Plan: EEP Project No. 737							
	McDowell County, NC							
Physiographic Region								
	Inner Piedmont Belt							
Project River Basin	Catawba							
USGS HUC for Project and Reference sites	Project: 03050101040020; References: 03040103050 -090 (Spencer Creek), -080 (Barnes Creek); 03030002060 -070 (Morgan Creek); 03020201080 -020 (Sal's Branch)							
NCDWQ Sub-basin for Project and Reference	03-06-06 (Morgan Creek); 03-04-02 (Sal's Branch)							
	Muddy Creek Local Watershed Plan (LWP), 2003							
WRC Class (Warm, Cool, Cold)	Warm							
% of project easement fenced or demarcated	100%							
Beaver activity observed during design phase ?	None							
Restoration Com	ponent Attribute Table							
	South Muddy							
Drainage area (sq. mi.)								
Stream order	4th							
Restored length	2,787							
Perennial or Intermittent	Perennial							
Watershed type (Rural, Urban, Developing etc.)	Rural							
Watershed LULC Distribution (e.g.)								
Developed Low-Medium Intensity	3.7							
Ag-Cultivated Crops	0.6							
Ag-Pasture/Hay	10.5							
Forested	77.4							
Other (Open water, Grassland, Etc.)	7.8							
Watershed impervious cover (%)	U							
NCDWQ AU/Index number	03-08-30							
NCDWQ classification	С							
303d listed ?	No							
Upstream of a 303d listed segment?	No							
Reasons for 303d listing or stressor	N/A							
Total acreage of easment	17.1							
Total planted arceage as part of the restoration	14.1							
Rosgen classification of pre-existing	G4c							
Rosgen classification of As-built	C4							
Valley type	Alluvial							
Valley slope	0.0017 ft/ft							
Valley side slope range (e.g. 2-3%)	U							
Valley toe slope range (e.g. 2-3%)	U							
	Riverine, Upper Perennial, Unconsolidated Bottom, Cobble-Gravel							
Trout waters designation	No							
Species of concern, endangered etc.? (Y?N)	No							
Dominant soil series and characteristics								
Series	IoA							
Depth	10							
Clay %	18							
K	0.15							
Т	5							

APPENDIX B

VISUAL ASSESSMENT DATA

<u>Site Assessment Report – Monitoring Year 2</u>

South Muddy Creek (Randolph/Duncan Properties) Stream Restoration Project McDowell County, North Carolina May 2013



Submitted To:	NCDENR - Ecosystem Enhancement Program 1625 Mail Service Center Raleigh, NC 27699 NCDENR Contract ID No. 004522
Submitted By:	Michael Baker Engineering, Inc. 797 Haywood Avenue, Suite 201 Asheville, NC 28806 License: F-1084, Baker Project No. 128221





Year 2 Site Assessment Report – South Muddy Creek Michael Baker Engineering, Inc. North Carolina Ecosystem Enhancement Program May 31, 2013

1. Introduction

1.1 Purpose

This report summarizes overall stream and vegetation conditions as part of an interim site assessment conducted in conjunction with the Year 2 monitoring services for the South Muddy Creek Stream Restoration Project site located in McDowell County, NC. This site assessment will be included as part of a more comprehensive annual monitoring report to be completed and submitted later this year (fall 2013). The report describes project objectives, discusses the assessment methodology, summarizes assessment results, and documents potential stream and vegetation problem areas (SPAs and VPAs respectively).

1.2 Objectives

The objectives of the site assessment were to:

- provide a general overview of stream morphological stability;
- provide a general overview of vegetation conditions;
- identify and document potential SPAs and VPAs.

1.3 Supporting Data

Supporting data and information are provided following the narrative portion of this report and include:

- current condition plan view (CCPV) figures (Figure 2, sheets 1 and 2);
- visual stream morphology stability assessment table (Table 5a);
- SPA inventory table (Table 5b);
- vegetation condition assessment table (Table 6a);
- VPA inventory table (Table 6b);
- stream station photos;
- SPA photos;
- VPA photos.

2 Methodology

The methodology used for assessing overall stream and vegetation conditions at the South Muddy Creek Stream Restoration Project site adhered to the most recent NCEEP monitoring guidance documents (dated November 7, 2011). The site assessment was comprised of two components, a visual stream morphology stability assessment and a vegetation condition assessment, both of which are described in more detail in the following sections of this report. The assessment was strictly qualitative. Vegetation monitoring plot counts were excluded from this assessment but will be conducted after July 2013; this data will be summarized in Appendix C and the CCPV figure of the Year 2 annual monitoring report to be submitted in late November of this year.

The South Muddy Creek Stream Restoration Project site was evaluated as one project reach for each of the two components (SPA and VPA). This was done since the stream and riparian corridor are contained within one contiguous section along the mainstem of South Muddy Creek; site conditions appeared uniform allowing for an assessment as one reach and the project was assessed as one reach for the Final Baseline Monitoring Document/As-Built Report. Baker performed the visual site assessment on May 1st, 2013.

2.1 Visual Stream Morphology Stability Assessment

The visual stream morphology stability assessment involved the evaluation of lateral and vertical channel stability, and the integrity and overall performance of in-stream structures throughout the project reach as a whole. Habitat parameters, such as riffle embeddedness and pool depth maintenance, were also measured and scored. The entire 2,787 linear foot reach was walked, noting geomorphic conditions of the stream bed profile (riffle/pool facets), both stream banks, and engineered in-stream structures. Photos were taken at every existing stream photo point station (from the as-built) and in locations of potential SPAs which were recorded in the field for subsequent mapping on the CCPV figures.

2.2 Vegetation Condition Assessment

The vegetation condition assessment involved the evaluation of vegetation within the 17.1 acre conservation easement and included assessing the performance of planted vegetation along stream banks, floodplains, and terraces as well as the documentation of invasive species. The assessment of planted vegetation was confined to the 14.1 acres of riparian buffer planting zones within the easement boundary as part of the restoration design whereas invasive vegetation and encroachment areas of invasive species were evaluated for the entire 17.1 acre easement boundary. Photos were recorded in locations of potential VPAs throughout the easement, such as areas exhibiting sparse or slow growth/vigor, low stem density, and areas of invasive vegetation concern.

2.3 Post-processing of Field Data

The post-processing of field data consisted of the download and organization of photos into respective photo logs (stream and vegetation), creating the CCPV figures in GIS and AutoCAD using the field-mapped SPAs and VPAs, populating the SPA and VPA tables, and finally scoring the performance of the reach in terms of stream morphology stability and vegetation condition using assessment forms provided by NCEEP.

3 Summary of Results

3.1 Visual Stream Morphology Stability Assessment

Table 5a summarizes the performance of the South Muddy Creek Stream Restoration Project reach in terms of lateral (stream bank) and vertical (channel bed) stability while evaluating the functionality and integrity of in-stream structures. Engineered in-stream structures evaluated for the assessment of this project reach consisted of constructed riffles, rock/log j-hooks, log vanes, root wads, geolifts, and brush mattresses. Constructed riffles were justified for inclusion in the evaluation of structures since they are the predominant grade control structure used throughout the site; however, they were only assessed for the 'overall integrity' and 'grade control' parameter categories in Table 5a.

As Table 5a indicates, the South Muddy Creek site was geomorphically stable overall and performing at 100 percent as the design intended for the majority of parameters evaluated within the lateral/vertical stability and in-stream structure performance categories. The five sub-categories receiving scores of less than 100 percent corresponded to the five SPAs that were documented and summarized in Table 5b.

All 5 SPAs were characterized by localized areas of bank scour and were all located upstream of the Sain Road bridge. Two of the five SPAs documented in Table 5b, SPA1-1 and SPA1-2, were SPAs persisting from the Year 1 monitoring assessment (and are referenced as such by the first number in the SPA naming convention). SPA1-1 consists of a portion of undermined brush mattress along the right bank in an outer meander bend that has resulted in bank erosion. The length of undercut and eroded bank along SPA1-1 has increased from 10 linear feet (LF) to 80 LF, migrating 70 LF downstream in approximately one year or since this SPA was first documented in the Year 1 visual assessment. The structural integrity of this brush mattress has become compromised. Lateral instability along this outer meander bend is likely to continue migrating downstream if left unchecked over time.

SPA1-2 was still unstable laterally, but remained unchanged in length or severity of bank erosion since it was first reported a year ago. It appears that some aggraded riffle material at the head of riffle was splitting and directing flow toward the left bank (SPA1-2) causing the bank to erode. Regrading and uniformly distributing the aggraded riffle material throughout the riffle may prevent the diversion of flow toward the left bank thereby alleviating scour along this bank.

SPA1-3 is no longer deemed an SPA due to a combination of vegetation growth holding the bank and erosional and depositional processes that have reduced the bank angle thereby improving bank stability in this area within the past year.

SPA2-1 is an area of localized scour and bank erosion along both banks located within the upstream project reach limits between station 12+30 and 12+60. Bank instability was caused by high near bank stress from the diversion of flow around a recently removed beaver dam.

Erosion along the right bank is larger in magnitude and severity than the left bank since that portion of the right bank coincides with the transition between the outer meander bend and a riffle where higher velocities tend to be concentrated and near bank stress tends to be greater.

SPA2-2 consists of a 60 LF length of brush mattress compromised by an undercut bank between station 16+70 and 17+30; it is located along the right bank at the beginning of a meander bend. The brush mattress (and a portion of the staked and matted bank) appears to be separating from the right bank and overhanging from a combination of poor soil compaction and scour along the toe of bank. Some of the brush originally installed behind the matting to armor the bank has washed away leaving the bank exposed and vulnerable to subsequent erosion. The bank protection provided by the remaining length of brush mattress along the right bank may become compromised and less effective over time if SPA2-2 is not stabilized and the scour (and instability) is allowed to continue to migrate further downstream by undermining the brush.

SPA2-3 consists of an area of localized scour along the right bank located downstream of an outer meander bend between station 12+30 and 12+60. Bank scour could potentially be a result of the lack of centering of the thalweg immediately downstream of the upstream meander bend (and was noted accordingly in Table 5a). As a result, some velocity vectors within the riffle have been redirected toward the right bank instead of being centered in the riffle, thereby increasing near bank stress and causing the bank to erode. The bank is vertical, exposed, devoid of vegetation and matted protection, and is mild to moderately eroded.

3.2 Vegetation Condition Assessment


Table 6a summarizes the vegetation condition of the South Muddy Creek Stream Restoration site. The planted acreage performance categories were functioning at 100 percent with no bare areas, low stem density areas, or areas of poor growth rates/vigor to report. Invasive areas of concern were observed and documented accordingly in Table 6a and as VPAs in Figure 2 and Table 6b. There were a total of 15 VPAs, 8 of which were identified last year during the Year 1 visual assessment and 7 that were newly identified during this current assessment. VPAs documented last year were included in this assessment since there has been no treatment implemented to date (although treatment is scheduled sometime this year). As with the SPAs, the first number in the VPA naming convention references the monitoring year in which the VPA was identified during the visual assessment. Because the VPAs reported from last year's assessment, they will not be discussed in this memorandum; but all are included in the scoring of easement acreage performance categories in Table 6a, and are also summarized in Table 6b, Figure 2 (CCPV), and the VPA photolog.

Eighteen discrete areas of invasive species were documented throughout the site and totaled approximately 1.26 acres, or 7.4 percent of the total easement acreage (Table 6a). This resulted in 15 VPAs since three adjacent pairs of mapped polygons, exhibiting uniform

invasive species compositions conditions, were combined into three individual VPAs. Invasive species comprised approximately 0.29 acres more of the easement acreage area during this current visual assessment compared to last year's, or an increase of 1.7 percent in easement acreage area.

VPAs newly identified during this assessment (VPA2-1 through VPA2-7) were either composed of multiflora rose (Rosa multiflora), privet (Ligustrum sinense), or Japanese honevsuckle (Lonicera japonica), or a combination of those invasive species. Multiflora rose and Japanese honeysuckle were the most prevalent invasive species observed within the VPAs and were found within six of the seven newly identified VPAs. The 4 largest VPAs documented were VPA2-2, VPA2-6, VPA2-1, and VPA2-3 (in decreasing order by area) which are all located in the left terrace near the periphery of the easement boundary; these areas are susceptible to the encroachment of invasives from outside the easement. These 4 VPAs make up approximately 90 percent of the newly identified VPA acreage within the easement; VPA2-4 is also located in the left terrace along the periphery of the easement boundary near the downstream side of the Sain Road bridge. The persistence of invasive vegetation from within existing tree stands after prior treatment appears to be the other primary cause for the proliferation of invasive vegetation, and is the potential cause for VPA2-5 and VPA2-7 located in the left terrace downstream of the Sain Road bridge. An existing tree stand is not apparent for VPA2-5 on the CCPV in Figure 2; but it is situated around a power pole that was protected during construction and thus is surrounded by an undisturbed soil matrix likely containing intact roots and seeds of multiflora rose and Japanese honeysuckle.

As an update to additional areas of concern reported in the Year 1 Monitoring Report, there were no signs of kudzu in the left or right floodplains upstream of the Sain Road bridge; however, kudzu was observed outside the easement in those areas between the easement boundary and Sain Road.

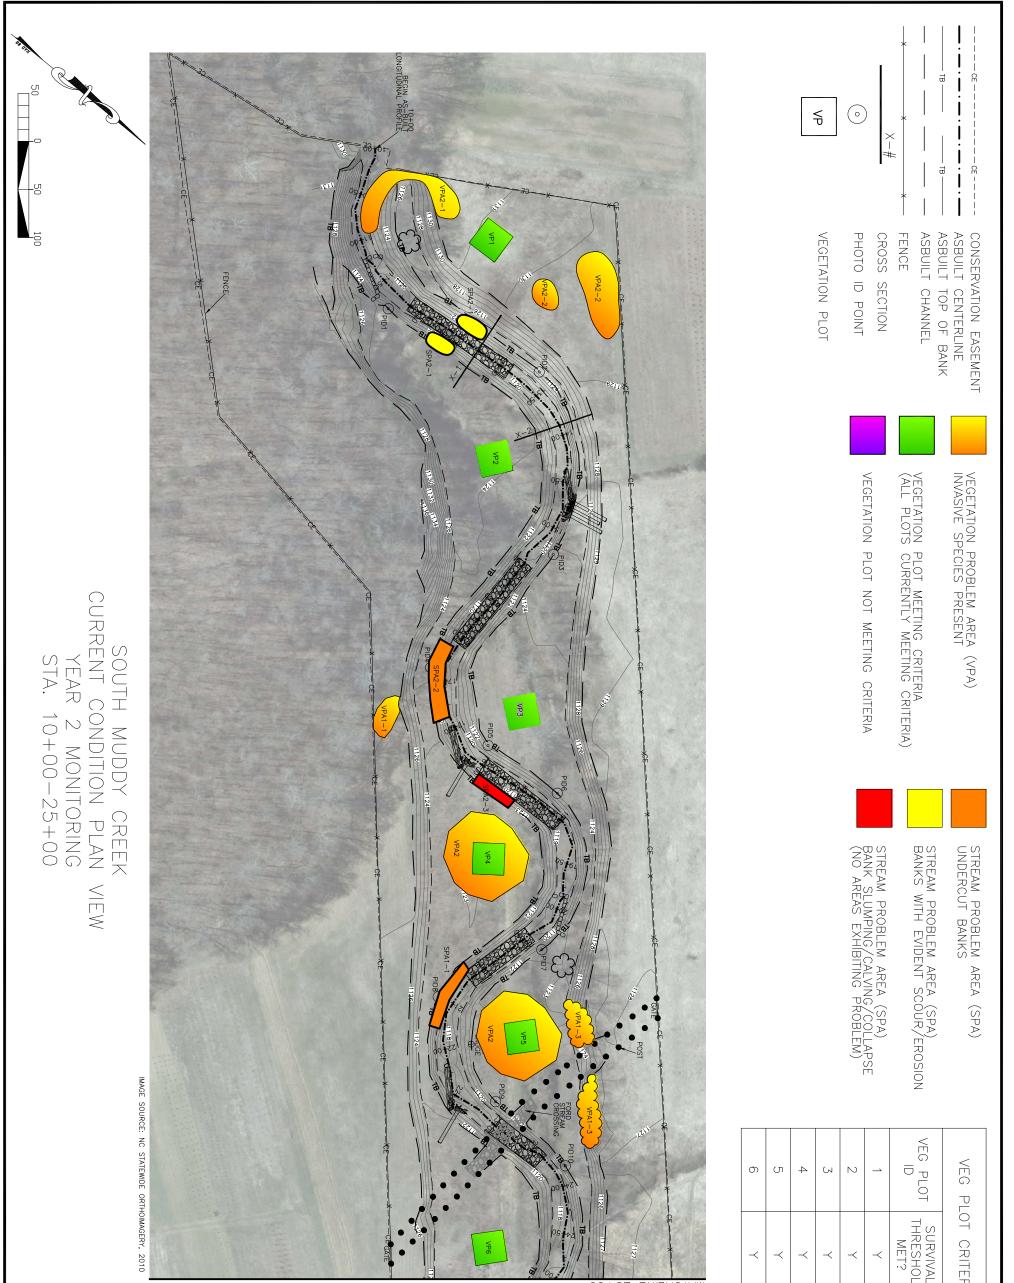

N H					-			
tur *	თ	J	4	3	2		VEG PLOT ID	VEG PL
MATCHLINE 25	~	~	~	~	\prec	\prec	SURVIVAL THRESHOLD MET?	OT CRITERIA
	688/486	728/688	486/728	850/809	1619/809	526/486	TOTAL/PLANTED STEM COUNT	VEG PLOT CRITERIA ATTAINMENT
Bake						NC 797 Ash Pho	hael Baker Eng Engineering Lic Haywood Roos eville, North Ca ne: 828.350.140 828.350.1409	ense F-1084 I, Suite 201 rolina 28806

00 +

SOUTH MUDDY CREEK STREAM RESTORATION PROJECT MCDOWELL COUNTY, NORTH CAROLINA

Prepared for: Ecosystem Enhancement Program

2728 Capitol Blvd., Suite 1H 103 Raleigh, NC 27604 Phone: 919-715-0476

Fax: 919-715-2219

Ecosystem

5/28/2013

đ

737 737 128221

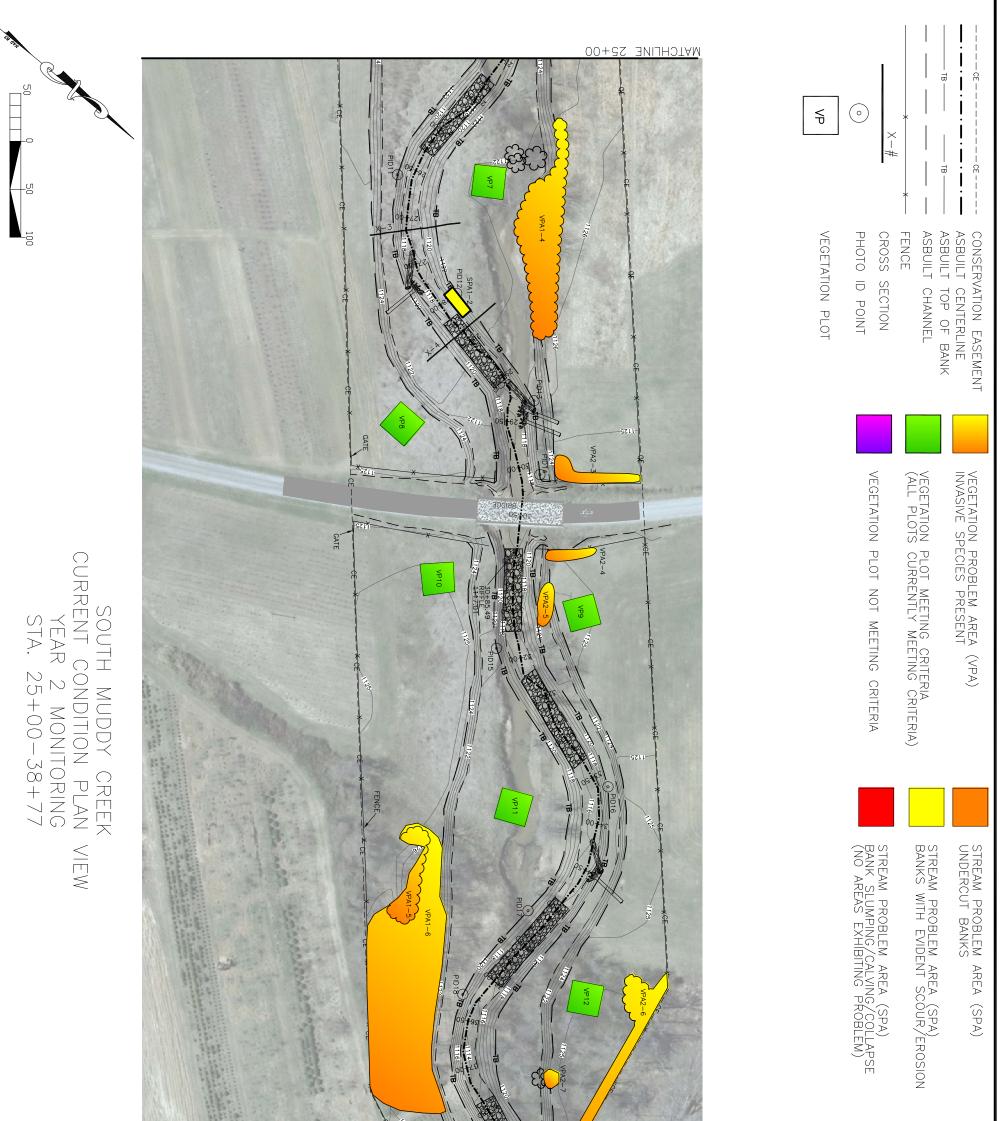


IMAGE SOURCE NO	10 11 12	۵ ۵		G PL
STATEWIDE ORTHOMAGERY	~ ~ ~	~ ~		OT CRITERIA
SOFILE	567/688 364/445 445/728	486/688 405/445		ATTAINMENT TOTAL/PLANTED
Noticing Vent: 2 of 2 Net: 2 of 2 Net: 2 of 2 Net: 2 of 2 Net: 2 of 2 Net: 2 of 5 Net: 2 of 5 Net:	er		NC Engine 797 Hayw Asheville	Baker Engineering Inc. eering License F-1084 ood Road, Suite 201 North Carolina 28806 88.350.1408 350.1409

Table 5a.		Visual Stream Morphology Stability Assessment								
Reach ID		South Muddy Creek								
Assessed Leng	jth (LF)	2787								
Major Channel	Channel Sub-		Number Stable,	Total	Number of	Amount of	% Stable,	Number with	-	Adjusted % fo
Category	Category	Metric	Performing as Intended	Number per As-Built	Unstable Segments	Unstable Footage	Performing as Intended	Stabilizing Woody Veg.	Stabilizing Woody Veg.	Stabilizing Woody Veg.
1. Bed	1. Vertical Stability	1. Aggradation			0	0	100%			
	-	2. Degradation			0	0	100%			
	2. Riffle Condition	1. Texture/Substrate	11	11			100%			
	3. Meander Pool	1. Depth	12	12			100%			
	Condition	2. Length	12	12			100%			
	4. Thalweg position	1. Thalweg centering at upstream of meander bend (Run)	12	12			100%			
		2. Thalweg centering at downstream of meander (Glide)	10	11			91%			
			•							
2. Bank	1. Scoured/Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			3	105	98%	0	0	98%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely			2	140	97%	0	0	97%
	3. Mass Wasting	Bank slumping, calving, or collapse		-	0	0	100%	0	0	100%
				Totals	5	245	96%	0	0	96%
3. Engineering Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	36	38			95%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	11	11			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms	9	9			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	25	27			93%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth	9	9			100%			

	Table 5b. Stream Problem Areas South Muddy Creek Restoration Project: Project No. 737				
Feature Issue	South Muddy C Station No.	South Muddy Creek (2,787 LF) Station No. Suspected Cause			
Bank Scour	21+20 to 22+00	Right bank (including brush mattress and matting) separating and beginning to slump at beginning of outer meander bend from a combination of poor compaction and scour along the toe of bank. Bank scour appears to have migrated further downstream along the outer meander bend, eroding an additional 70 linear feet within the past year of monitoring.	SPA1-1		
	27+90 to 28+10 27+90 to 28+10 Localized scour along left bank resulting in raw, vertical bank, devoid of vegetation and matted protection. Cause appears to be localized eddying within the riffle.		SPA1-2		
	12+30 to 12+60	Localized scour and bank erosion along right bank and a small portion of the left bank across the channel. Caused by high near bank stress from the diversion of flow around a recently removed beaverdam.	SPA2-1		
	16+70 to 17+30	Right bank (including brush mattress and matting) separating and beginning to slump at beginning of outer meander bend from a combination of poor compaction and scour along the toe of bank.	SPA2-2		
	17+95 to 18+50	Localized scour along the right bank of a riffle resulting in raw, vertical bank, devoid of vegetation and matted protection. Appears to be caused by high near bank stress as the thalweg appears to have migrated toward the near bank third of the channel within the riffle (lack of centering of thalweg downstream of meander bend). Vegetation and rootmass along that portion of bank is sparse.	SPA2-3		

*Note: The first digit in the Photo Number column references the monitoring year and the second digit references the problem area or photo (which would be identical to a prior years problem area/photo number when persisting from a previous monitoring year).

Table 6a.	Vegetation Condition Assessment					
Reach ID	South Muddy Creek					
Planted Acreage	14.1					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	0.1 acres	NA	0	0.00	0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or					
-	5 stem count criteria.	0.1 acres	NA	0	0.00	0%
			Total	0	0.00	0.0%
3. Areas of Poor Growth Rates	Areas with woody stems of a size class that are obviously small given					
	the monitoring year.	0.25 acres	NA	0	0.00	0%
		Cun	nulative Total	0	0.00	0.0%

Easement Acreage	17.1					
Vegetation Category	Definitions	Mapping Threshold	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern			•	,,,	Ŭ	Ŭ
	Areas or points (if too small to render as polygons at map scale).	1000 SF	see figure	18	1.26	7.4%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	none	NA	0	0.00	0.0%

	Table 6b. Vegetation P South Muddy Creek Restoration	roblem Areas Project: Project No. 737		
	South Muddy			
Feature Issue	Station No.	Suspected Cause	Photo Number*	
Invasive/Exotic Populations	17+25 (right terrace)	Rosa multiflora : persisting after treatment	VPA1-1	
	18+00 to 21+00 (right flood bench)	Campsis radicans persisting after treatment	VPA1-2	
	20+50 to 23+00 (left flood bench)	r r		
	21+75 to 23+75 (left terrace slope) Rosa multiflora and Ligustrum sinense : persisting after treatment within existing tree stand 25+50 to 28+50 (left terrace slope) Rosa multiflora, Ligustrum sinense, and Lonicera japonica : persisting after treatment within existing tree stand		VPA1-3	
			VPA1-4	
	35+00 to 36+50 (right terrace)	Rosa multiflora and Ligustrum sinense : persisting after treatment within existing tree stand	VPA1-5	
	35+00 to 37+25 (right terrace)	<i>Pueraria lobata</i> : persisting after treatment within existing tree stand, terrace, and terrace slope	VPA1-6	
	38+75 (downstream project limits along right bank/terrace)	Rosa multiflora and Ligustrum sinense : persisting after treatment within existing tree stand	VPA1-7	
	38+75 (downstream project limits along left bank/terrace)	Lonicera japonica : persisting after treatment within existing tree stand/potential encroachment from outside	VPA1-8	
	See Plan View Figure	Rosa multiflora and Lonicera japonica : potential encroachment from outside	VPA2-1	
	See Plan View Figure	Rosa multifora : potential encroachment from outside	VPA2-2	
	See Plan View Figure	Rosa multiflora and Lonicera japonica : potential encroachment from outside	VPA2-3	
	See Plan View Figure	<i>Lonicera japonica</i> : potential encroachment from outside	VPA2-4	
	See Plan View Figure	Rosa multiflora and Lonicera japonica : persisting after treatment	VPA2-5	
	See Plan View Figure	Multiflora rose, Chinese privet, and Lonicera japonica : persisting after treatment within existing tree stand/potential encroachment from outside	VPA2-6	
	See Plan View Figure	Multiflora rose, Chinese privet, and Lonicera japonica : persisting after treatment within existing tree stand	VPA2-7	

*Note: The first digit in the Photo Number column references the monitoring year and the second digit references the problem area or photo (which would be identical to a prior years problem area/photo number when persisting from a previous monitoring year).

South Muddy Creek Stream Station Photos



South Muddy Creek PID 1 – J-Hook near upstream end of project



South Muddy Creek PID 3 – Log Vane in Meander



South Muddy Creek PID 5 - Log Vane in Meander



South Muddy Creek PID 2 - Constructed Riffle,



South Muddy Creek PID 4 - Constructed Riffle



South Muddy Creek PID 6 - Constructed Riffle



South Muddy Creek PID 7 – J-Hook in Meander



South Muddy Creek PID 8 - Constructed Riffle



South Muddy Creek PID 9 - Log Vane in Meander



South Muddy Creek PID 10 – Stream Crossing



South Muddy Creek PID 11 - Constructed Riffle



South Muddy Creek PID 12 – Log Vane and Root Wad in Meander




South Muddy Creek PID 13 - Constructed Riffle



South Muddy Creek PID 14 – Immediately upstream of Sain Road crossing



South Muddy Creek PID 15 – Constructed Riffle downstream of Sain Road crossing

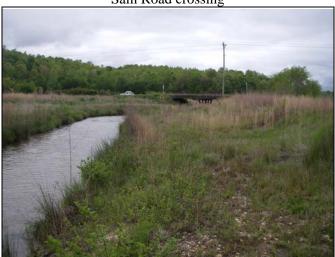

South Muddy Creek PID 16



South Muddy Creek PID 17 - Log Vane in Meander



South Muddy Creek PID 18 – Constructed Riffle



South Muddy Creek PID 19



South Muddy Creek PID 20 – J-Hook near downstream end of project

South Muddy Creek Stream Problem Area (SPA) Photos



SPA1-1 – Right bank/brush mattress separating from poor compaction and scour along toe of bank (looking downstream from left bank to right bank)



SPA2-1 – Localized scour along right bank from flow diversion around a recently removed beaverdam



SPA1-2 – Localized scour along left bank from eddying within the riffle (looking downstream)



SPA2-2 – Right bank/brush mattress separating from poor compaction and scour along toe of bank (looking downstream from left bank to right bank)



SPA2-3 – Localized scour along right bank within a riffle from the lack of thalweg centering downstream of a meander bend (looking downstream from left to right bank)

SOUTH MUDDY CREEK VEGETATION PLOT PHOTOS

Notes:

1. Herbaceous plot located in foreground of each photo.



9/19/2013 - Photo 1: Veg Plot 1

9/19/2013 - Photo 2: Veg Plot 1: Herbaceous Plot



9/19/2013 - Photo 3: Veg Plot 2



9/19/2013 - Photo 4: Veg Plot 2: Herbaceous Plot



9/19/2013 - Photo 5: Veg Plot 3



9/19/2013 - Photo 6: Veg Plot 3: Herbaceous Plot



9/19/2013 - Photo 7: Veg Plot 4



9/19/2013 - Photo 8: Veg Plot 4: Herbaceous Plot



9/19/2013 - Photo 9: Veg Plot 5



9/19/2013 - Photo 10: Veg Plot 5: Herbaceous Plot



9/19/2013 - Photo Point 11: Veg Plot 6



9/19/2013 - Photo Point 12: Veg Plot 6: Herbaceous Plot



9/19/2013 - Photo Point 13: Veg Plot 7



9/19/2013 - Photo Point 14: Veg Plot 7: Herbaceous Plot



9/19/2013 - Photo Point 15: Veg Plot 8



9/19/2013 - Photo Point 16: Veg Plot 8: Herbaceous Plot



9/19/2013 - Photo Point 17: Veg Plot 9



9/19/2013 - Photo Point 18: Veg Plot 9: Herbaceous Plot



9/19/2013 - Photo Point 19: Veg Plot 10



9/19/2013 - Photo Point 20: Veg Plot 10: Herbaceous Plot



9/19/2013 - Photo Point 21: Veg Plot 11



9/19/2013 - Photo Point 22: Veg Plot 11: Herbaceous Plot



9/19/2013 - Photo Point 23: Veg Plot 12



9/19/2013 - Photo Point 24: Veg Plot 12: Herbaceous Plot

South Muddy Creek Vegetation Problem Area (VPA) Photos



VPA1-1 – Multiflora Rose



VPA1-3 – Multiflora Rose and Chinese Privet



VPA1-2 – Trumpet vine persisting after treatment (photo from MY1)



VPA1-4 – Multiflora Rose, Chinese Privet, Japanese Honeysuckle



VPA1-5 - Multiflora Rose and Chinese Privet



 $\label{eq:VPA1-6} VPA1-6-Kudzu\ persisting\ after\ treatment\ (photo\ from\ MY1)$



VPA1-7 - Multiflora Rose and Chinese Privet



VPA1-8 – Japanese Honeysuckle



VPA2-1 - Multiflora Rose and Japanese Honeysuckle



VPA2-2 – Multiflora Rose



VPA2-3 - Multiflora Rose and Japanese Honeysuckle



VPA2-4 – Japanese Honeysuckle



VPA2-5 - Multiflora Rose and Japanese Honeysuckle



VPA2-6 – Multiflora Rose, Chinese Privet, Japanese Honeysuckle



VPA2-7 - Multiflora Rose, Chinese Privet, Japanese Honeysuckle

APPENDIX C

VEGETATION PLOT DATA

	Table 7. Vegetation Plot General Mathematical Structure												
Vegetation Plot ID	South Muddy Creek Mitigation Vegetation Survival Threshold Met?	Plan: EEP Pro Total/Plan ted Stem Count*	oject No. 737 Tract Mean										
1	Y	526/486											
2													
3													
4													
5	Y	728/688											
6	Y	688/486	651										
7	Y	647/526	651										
8	Y	486/688											
9	Y	405/445											
10	Y	567/688											
11	Y	364/445											
12	Y	445/728											
Note: *Total/Planted Stem Count reflects the changes in stem density based on the density of stems at the time of the As-Built Survey (Planted) and the current total density of planted stems													
including volu	unteers (Total).												

	Table 8. CVS Vegetation Plot Metadata
	South Muddy Creek Mitigation Plan: EEP Project No. 737
Report Prepared By	Matthew Reid
Date Prepared	9/30/2013 12:16
Database name	cvs-eep-entrytool-v2.3.1_South Muddy_Hoppers.mdb
Database location	L:\Monitoring\Monitoring Guidance\Vegetation\CVS EEP Entrytool V2.3.1
Computer name	ASHEWMDREID2
File size	28475392
DESCRIPTION OF WORKSHEETS IN	THIS DOCUMENT
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all
Proj, total stems	natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
PROJECT SUMMARY	
Project Code	92251
Project Name	South Muddy Cr. Stream Restoration
	This mitigation project consists of 7,389 LF of stream restoration and preservation efforts on South Muddy Creek and
Description	South Fork Hoppers (including 1 unnamed tributary) at the Melton Farm.
River Basin	Catawba
Length(ft)	7389
Stream-to-edge width (ft)	120
Area (sq m)	164733.86
Required Plots (calculated)	24
Sampled Plots	12
Sumpton 1 1000	

South Muddy Creek Mitiga													Curre	nt Det	a (MY2	2012)											1					Annual	Moone					
			DI	. 1	DI	. 0	DI		DI		DI					/		. 0	DI	. 0	D1	10	D1	11	DI	10	6			2011)				(2014)	3 637.4	(2015)	1015	(201.6)
T G •		m	Plo	ot I	Plo	t 2	Plo	ot 3	Plo	ot 4	Ple	ot 5	Ple	ot 6	Plo	ot /	Plo	ot 8	Plo	t 9	Plot	: 10 T	Plot	11 T	Plo	t 12	P	ent Mean	AB (2011)	MY1	(2012)	MYS	(2014)	MY4	(2015)		(2016)
Tree Species	Common Name	~1	P	1	P	1	Р	1	P	1	P	1	P	1	P	Ĩ	P	1	P	1	Р	1	P	1	Р	1	1	1	P	1	P	1	Р	1	Р	1	Р	
Betula nigra	River Birch	Tree	1	1	l	1			1	1	5	5	1	1	5	5	2	2					3	3			2	2	3	3	3	2	_				-	—
Celtis laevigata	Sugarberry	Shrub	2	2	1	1	4	4			2	2			1	1	1	1									2	2	2	2	2	1						—
Diospyros virginiana	Persimmon	Tree									2	2	1	1													2	2	2	2	0	3						—
Fraxinus pennsylvanica	Green Ash	Tree			4	4	1	1	1	1					1	1			4	4	5	5			2	2	3	3	2	2	2	3						—
Iuglans nigra	Black Walnut	Tree									1	1			2	2											2	2	2	2	2	1						
Liriodendron tulipfera	Tulip Poplar	Tree	3	3	4	4	5	5	4	4	2	2	2	2					3	3			1	1	1	1	3	3	4	4	4	3						
Nyssa sylvatica	Blackgum	Tree							1	1																	1	1	1	1	1	1						
Platanus occidentalis	Sycamore	Tree			4	4	7	7	3	3	2	2			2	2	4	4			4	4	4	4	5	5	4	4	4	4	4	3						
Quercus pagoda	Cherrybark Oak	Tree																									0	0	0	0	0	3						
Quercus palustris	Pin Oak	Tree					1	1	2	2	1	1	1	1	2	2	1	1	2	2			1	1	3	3	2	2	2	2	2	1						
Quercus phellos	Willow Oak	Tree													1	1			1	1							1	1	1	1	1	1						
Quercus rubra	N. Red Oak	Shrub			3	3							2	2			2	2			5	5					3	3	4	4	3	2						
Volunteers																																						
Acer rubrum	Red Maple	Tree																																				
Diospyros virginiana	Persimmon	Tree																																				
Iuglans nigra	Black Walnut	Tree		2																								2										
Liriodendron tulipfera	Tulip Poplar	Tree		1		3						1				2		2										2										
Platanus occidentalis	Sycamore	Tree		2		20		3				2		10														7										
Quercus rubra	N. Red Oak	Tree		2																								2										
	Plo	t area (acres)	0.0	25	0.0	25	0.0)25	0.0)25	0.0	025	0.0	025	0.0	25	0.0	25	0.0	25	0.0	25	0.02	25	0.0	25												
	S	pecies Count	3	6	6	6	5	5	6	6	7	7	5	6	7	8	5	6	4	4	3	3	4	4	4	4	5	5	6	6	6	6						
	Plante	ed Stems/Plot	6	6	17	17	18	18	12	12	15	15	7	7	14	14	10	10	10	10	14	14	9	9	11	11	12	12	16	16	16	13						
P=Planted	Tot	al Stems/Plot	6	13	17	40	18	21	12	12	15	18	7	17	14	16	10	12	10	10	14	14	9	9	11	11	12	16	16	16	16	18						
Γ=Total			243			1619			486	486	607		283		567	647		486	405	405	567	567	364	364	445	445		651	627	627	627	523					1	
		ems Per Acre	-																					-	-	2											1	
	(includin	g volunteers)	52	26	16	19	8	50	4	86	7	28	6	88	64	17	48	86	40)5	56	57	36	4	44	15		651	627	627	7	25						
Notes: CVS Level 1 Su		0			oora ob	comrod	luuro	logg th	on 10 (in in h	aight	The	form	tion n	aganta	d in mu	raly fo	nnou	dinair	formo	tion ob	out th	annai	of t	roog th	at maa	1.000000	w the riner			are not	nlanta	d In D	lot 2 m	ultipla		ro sood	ingo

APPENDIX D


STREAM SURVEY DATA

South Muddy Creek Permanent Cross Section X1

(Year 2 Monitoring - August 2013)



LEFT BANK

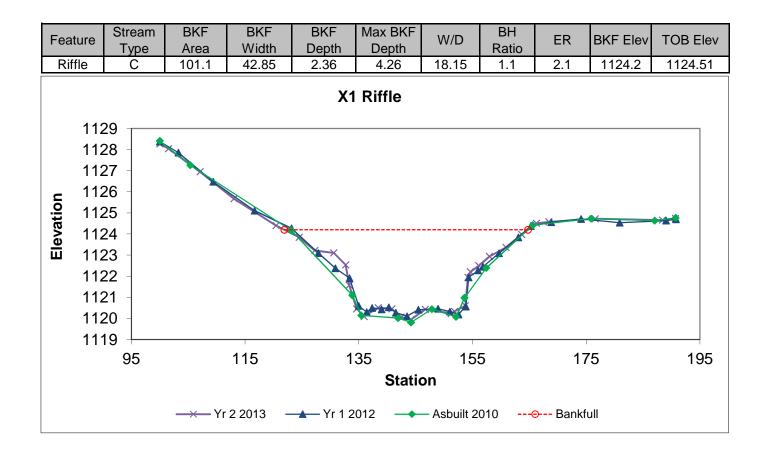


South Muddy Creek

Permanent Cross Section X2

(Year 2 Monitoring - August 2013)



LEFT BANK

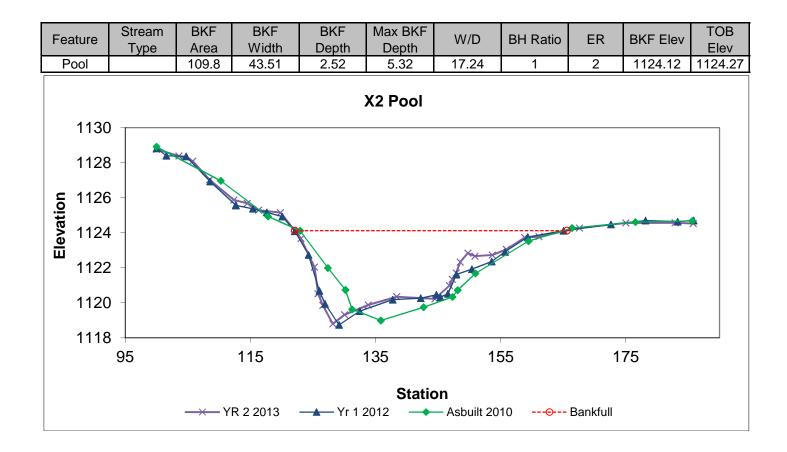


South Muddy Creek Permanent Cross Section X3

(Year 2 Monitoring - August 2013)



LEFT BANK

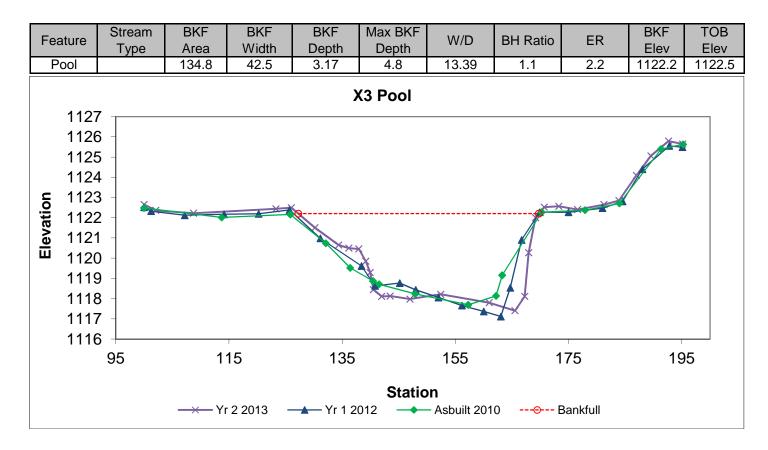


South Muddy Creek Permanent Cross Section X4


(Year 2 Monitoring - August 2013)





LEFT BANK

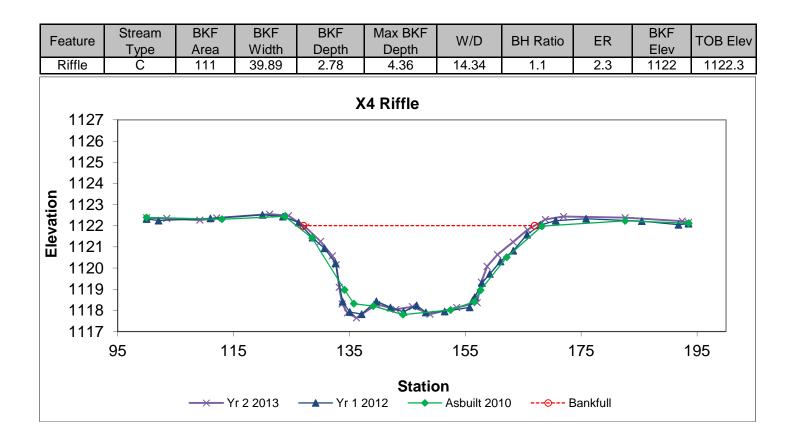


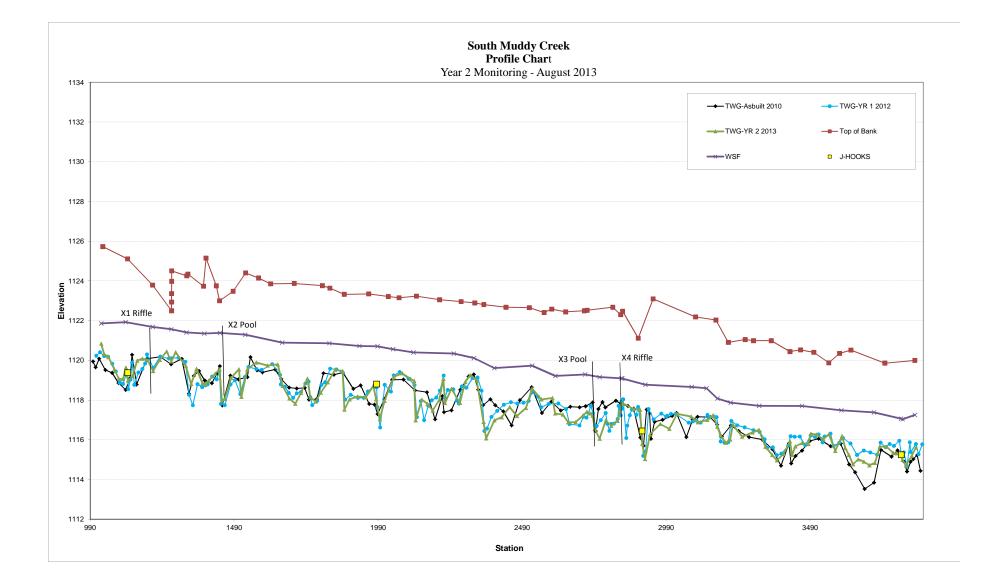

	BAKER PROJECT NO. 128221
SITE OR PROJECT:	South Muddy Creek Stream Restoration Project
REACH/LOCATION:	South Muddy Creek - Cross-section 4 (Riffle)
DATE COLLECTED:	8/16/2013
FIELD COLLECTION BY:	MDR
DATA ENTRY BY:	MDR

			PARTICLE CLASS COUNT	Sumr	nary
MATERIAL	PARTICLE	SIZE (mm)	Riffle	Class %	% Cum
SILT/CLAY	Silt / Clay	< .063	2	2%	2%
	Very Fine	.063125			2%
	Fine	.12525			2%
SAND	Medium	.2550			2%
	Coarse	.50 - 1.0			2%
	Very Coarse	1.0 - 2.0	4	4%	6%
	Very Fine	2.0 - 2.8			6%
	Very Fine	2.8 - 4.0			6%
	Fine	4.0 - 5.6			6%
	Fine	5.6 - 8.0			6%
	Medium	8.0 - 11.0	5	5%	11%
GRAVEL	Medium	11.0 - 16.0			11%
	Coarse	16.0 - 22.6	3	3%	14%
	Coarse	22.6 - 32	5	5%	19%
	Very Coarse	32 - 45	11	11%	30%
	Very Coarse	45 - 64	9	9%	39%
	Small	64 - 90	26	26%	65%
	Small	90 - 128	15	15%	80%
COBBLE	Large	128 - 180	11	11%	91%
	Large	180 - 256	3	3%	94%
	Small	256 - 362	3	3%	97%
	Small	362 - 512	2	2%	99%
BOULDER	Medium	512 - 1024	1	1%	100%
	Large-Very Large	1024 - 2048			
BEDROCK	Bedrock	> 2048			
	-	Total	100	100%	100%

Cumi	nulative
Channel ma	terials (mm)
D ₁₆ =	26.0
D ₃₅ =	54.7
D ₅₀ =	73.9
D ₈₄ =	144.9
D ₉₅ =	287.3
D ₁₀₀ =	512-1024

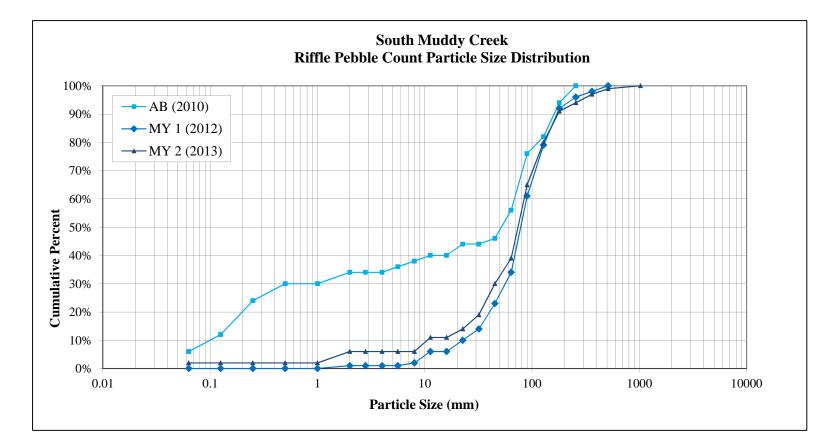

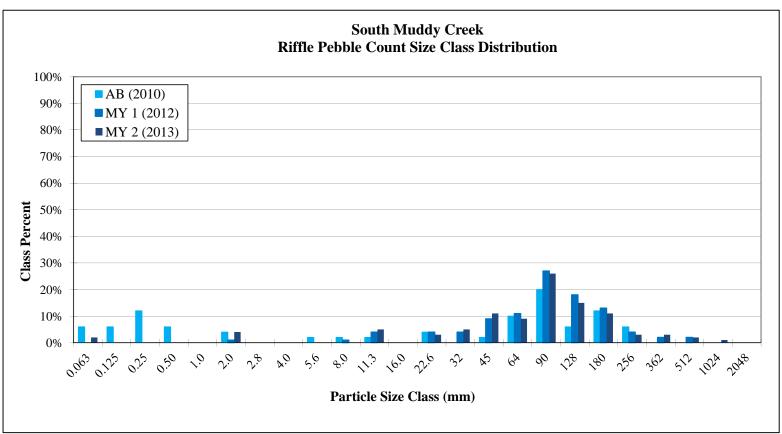


Table 10. Baseline Stream Summary South Muddy Creek Mitigation Plan: EEP Project No. 737

														South		eek (2,787 LF)																		
Parameter	USGS		onal Curve In				Pre-Existin	g Condition								Reference Re	ach(es) Data	1	_						Des	sign				Mo	nitoring Ba	seline (As-bu	uilt)	
	Gauge		rman et al, 19	,				-						an Creek						es Creek											-			
Dimension and Substrate - Riffle BF Width (ft)		LL 23.0	UL 80.0	Eq. 42.0	Min 24.1	Mean 32.3	Med	Max 51.2	SD	n	Min 33.2	Mean	Med	Max 33.5	SD	n	Min 60.7	Mean	Med	Max 69	SD	n	Min	Mean 43.2	Med	Max	SD	n	Min 41.4	Mean	Med	Max 42.2	SD	n
Floodprone Width (ft)		25.0	80.0	42.0	24.1 29.6	52.5 44.8		72.7		5	55.2 77.5			35.5 86.8		2	219			220		2		45.2 210+				1	41.4 90.7			42.2		2
BF Mean Depth (ft)		2.3	5.8	3.8	1.9	27		3.0		5	2.3			2.4		2	2.9			3.8		2		3.0				1	2.7			2.8		2
BF Max Depth (ft)					3.3	3.6		4.0		5	2.8			2.9		2	3.9			5.2		2		4.2				1	4.2			4.4		2
BF Cross-sectional Area (ft ²)		80.0	300.0	157.6	72.8	83.8		97.2		5	75.1			79.8		2	199			288		2		128.5				1	110.8			115.9		2
Width/Depth Ratio					8.1	12.9		26.9		5	14.1			14.7		2	16			23.8		2		14.4				1	15.4			15.5		2
Entrenchment Ratio					1.1	1.4		1.7		5	2.3			2.6		2	3.2			3.6		2		4.9+				1	2.2			2.2		2
Bank Height Ratio					2.4	2.8		2.8		5+		1.0				2								1.0				1	1.0			1.0		2
d50 (mm)						4.0				1		3.0				1		60				1												
Pattern																																		
Channel Beltwidth (ft)																							128.0			209.0		9	143.0	168.3	164.0	244.0	32.2	8
Radius of Curvature (ft)																							84.0			138.0		9	96.0	121.2	114.0	152.0	18.9	9
Rc:Bankfull width (ft/ft)																							1.9			3.2		9	2.3	2.9	2.7	3.6	0.5	9
Meander Wavelength (ft)																							345.0			506.0		6	387.0	400.8	396.5	418.0	12.9	6
Meander Width Ratio																							3.0			4.8		9	3.4	4.0	3.9	5.8	0.8	8
Profile																														00		100	23	
Riffle Length (ft) Riffle Slope (ft/ft)					0.003	0.004		0.006			0.01			0.02									0.0034			0.0054			61 0.000	80	88	122 0.011	23	3
Pool Length (ft)					0.005	0.004		0.006		3	0.01			0.02		2							0.0054			0.0054			0.000	0.006	0.005	0.011	0.004	3
Pool Spacing (ft)					80	163		240			46			277		2							154.0			327.0		10	167	272	257	335	53	3
Pool Max Depth (ft)					3.8	4.8		5.8		4	40	4.1		211		1							6.2			10.3		10	107	272	257	555		5
Pool Volume (ft ³)					5.0	4.0		5.0		-		4.1				1							0.2			10.5								
Substrate and Transport Parameters																																		
Ri% / Ru% / P% / G% / S%																																		
SC% / Sa% / G% / B% / Be% d16 / d35 / d50 / d84 / d95															·																0.15/5/5	2/135/190		
Reach Shear Stress (competency) lb/f ²					0.18		<0.06/0.2	/4/25/44		5			N/A / 1.2	/ 3 / / / / 800)				0.4 / 11 / 60	/ 512 / >204	8			0.28							0.15 / 5 / 52	2 / 135 / 190		
Max part size (mm) mobilized at bankfull (Rosgen Curve)					0.18	05.0		0.5		3														0.28										
Stream Power (transport capacity) W/m ²					10.8	95.0		24		5														90.0 12.6										
Additional Reach Parameters					10.0			24		5														12.0										
Drainage Area (SM)								18.8						8.4						23.0						18.8						18.8		
Impervious cover estimate (%)																																		
Rosgen Classification						G4c						C4						C4						C4						C5				
BF Velocity (fps)					4.1			5.5		5		7												3.1						3.0				
BF Discharge (cfs)		290.0	2000.0	741.1		400						524.0												400.0						340.0				
Valley Length						2446																								2409				
Channel length (ft)						2593																		2842						2787				
Sinuosity						1.06																		1.20						1.18				
Water Surface Slope (Channel) (ft/ft)						0.0016						0.0070												0.0017						0.0016				
BF slope (ft/ft)																																		
Bankfull Floodplain Area (acres)																																		
BEHI VL% / L% / M% / H% / VH% / E%																																		
Channel Stability or Habitat Metric																																		
Biological or Other					<u> </u>												<u> </u>																	
* Harman, W.A., G.D. Jennings, J.M. Patterson, D.R. Clinton, L.O. Slate, A.G. Jessup	o, J.K. Everhart, a	nd R.E. Smith.	1999. Bankfull l	hydraulic geome	etry relationship	ps for North Caro	lina streams. Wil	idiand Hydrolog	AWRA Sym	posium Proceed	ings. D.S. Olsen	and J.P. Potyor	dy, eds. Americ	an Water Resour	rces Association	. June 30-July 2, 19	99. Bozeman, N	AT.																

					Т	able 11a.	Cross-s	ection M	Aorphol	ogy Da	ta Tabl	e											
					South	Muddy (Creek M	itigation	n Plan: H	EEP Pro	oject N	o. 737											
						S	outh Mu	ıddy Cre	eek (2,78	87 LF)													
		Cross	s-section	1 (Riffle)			Cro	oss-sectio	on 2 (Poo	ol)			Cros	ss-section	n 3 (Poc	ol)			Cro	ss-sectio	n 4 (Riff	le)	
Dimension and substrate	Base	MY1	MY2	MY3 M	MY4 MY5	Base	MY1	MY2	MY3	MY4	MY5	Base	MY1	MY2	MY3	MY4	MY5 I	lase	MY1	MY2	MY3	MY4	MY5
Based on fixed baseline bankfull elevation																							
Record Elevation (Datum) Used (ft)	1124.2	1124.2	1124.2			1124.1	1124.1	1124.1				1122.2	1122.2	1122.2			1	22.0	1122.0	1122.0			
BF Width (ft)	41.4	40.8	42.9			42.1	43.1	43.51				44.2	43.1	42.5			4	2.2	40.9	39.9			I
BF Mean Depth (ft)	2.7	2.5	2.4			2.8	2.7	2.5				2.9	3.0	3.2				2.8	2.8	2.8			ł
Width/Depth Ratio	15.5	16.5	18.2			15.3	16.0	17.2				15.4	14.4	13.4				5.4	14.8	14.3			ł
BF Cross-sectional Area (ft ²)	110.8	100.5	101.1			115.8	115.8	109.8				126.5	129.0	134.8			1	15.9	113.3	111			ł
BF Max Depth (ft)	4.4	4.1	4.3			5.1	5.4	5.3				4.5	5.1	4.8				4.2	4.2	4.4			ł
Width of Floodprone Area (ft)	90.7	89.8	90.7			85.6	85.9	85.8				95.3	95.1	95.2			9	3.6	93.5	93.5			ł
Entrenchment Ratio	2.2	2.2	2.1			N/A	N/A	N/A				N/A	N/A	N/A				2.2	2.3	2.3			ł
Bank Height Ratio	1.0	1.0	1.1			1.0	1.1	1				1.0	1.0	1.1				1.0	1.0	1.1			ł
Wetted Perimeter (ft)	46.8	45.7	47.6			47.6	48.4	48.6				49.9	49.1	48.8			4	7.7	46.4	45.5			ł
Hydraulic Radius (ft)	2.4	2.2	2.1			2.4	2.4	2.3				2.5	2.6	2.8				2.4	2.4	2.4			

Table 11b. Baseline Stream Summary South Muddy Creek Mitigation Plan: EEP Project No. 737 South Muddy Creek (2,787 LF)

							1						South Muuu	y Creek (2,7	0/LF)																						
Parameter		М	Ionitoring B	Baseline (As-l	ouilt)				Ν	IY-1					М	Y-2					MY-3							Y-4						IY-5			
Dimension and Substrate - Riffle	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min M	lean 1	Med 1	Max	SD	n	Min	Mean	Med	Max	SD SD	n	Min	Mean	Med	Max	SD	n	
BF Width (ft)) 41.4			42.2		2	40.8			40.9		2	39.9			42.9		2																			
Floodprone Width (ft)) 90.7			93.6		2	89.8			93.5		2	90.7			93.5		2																			
BF Mean Depth (ft)	2.7			2.8		2	2.5			2.8		2	2.4			2.8		2																			
BF Max Depth (ft)	4.2			4.4		2	4.1			4.2		2	4.3			4.4		2																			
BF Cross-sectional Area (ft2)) 110.8			115.9		2	100.5			113.3		2	101.1			111		2																			
Width/Depth Ratio	15.4			15.5		2	14.8			16.5		2	14.3			18.2		2																			
Entrenchment Ratio				2.2		2	2.2			2.3		2	2.1			2.3		2																			
Bank Height Ratio	1.0			1.0		2	1.0			1.0		2	1.1			1.1		2																			
Pattern																																					
Channel Beltwidth (ft)) 143.0	168.3	164.0	244.0	32.2	8																															
Radius of Curvature (ft)	96.0	121.2	114.0	152.0	18.9	9																															
Rc:Bankfull width (ft/ft)) 2.3	2.9	2.7	3.6	0.5	9																															
Meander Wavelength (ft)	387.0	400.8	396.5	418.0	12.9	6																															
Meander Width Ratio	3.4	4.0	3.9	5.8	0.8	8																															
Profile																																					
Riffle Length (ft)) 61	80	88	122	23	3	72	101	98	133	30.610456	3	71	100.66667	106	125	27.392213	3																			
Riffle Slope (ft/ft)	0.000	0.006	0.005	0.011	0.004	3	0.002	0.005	0.005	0.009	0.004	3	0.003	0.006	0.005	0.009	0.003	3																			
Pool Length (ft))																																				
Pool Spacing (ft)) 167	272	257	335	53	3	209	251	253	290	41	3	219	255	262	285	34	3																			
Pool Max Depth (ft))																																				
Substrate and Transport Parameters																																					
d16 / d35 / d50 / d84 / d95			0.15/5/3	52 / 135 / 190)				34.5 / 64.8/78	3/145.9/3	234.4			26	0 / 54.7 / 73	.9 / 144.9 / 28	37.3																				
Reach Shear Stress (competency) lb/f																																					
Stream Power (transport capacity) W/m2																																					
Additional Reach Parameters																																					
Drainage Area (SM))			18.8						18.8						18.8																					_
Rosgen Classification		C5						C5						C5																							
BF Velocity (fps)		3.0						3.0						3.0																							
BF Discharge (cfs)	ý	340.0						318.0						318.0																							
Valley Length	, h	2409						2409						2409																							
Channel length (ft))	2787						2787						2787																							
Sinuosity	, ,	1.18						1.18						1.18																							
Water Surface Slope (Channel) (ft/ft)		0.0016						0.0016						0.0016																							
BF slope (ft/ft))																																				
DI Slope (1011)	/																																				

APPENDIX E

HYDROLOGIC DATA

Table 12. Verification of BarSouth Muddy Creek Mitigation	Afull or Greater than Bankfull Events Plan: EEP Project No. 737		
Date of Data Collection	Date of Event	Method of Data Collection	Gauge Watermark Height (feet above bankfull)
May 1, 2013	December 31, 2012 - May 1, 2013*	Gauge measurement	0.07
December 31, 2012	August 1, 2012 - December 31, 2012*	Gauge measurement	0.06
August 1, 2012	May 18, 2012 - August 1, 2012*	Gauge measurement	0.17
May 18, 2012	September 2010 (crest gauge installation for asbuilt) - May 18, 2012*	Gauge measurement	0.08

* Date of event(s) occurred sometime between the date range specified.