

**ANNUAL MONITORING REPORT
UPPER UT to CANE CREEK (PICKARD)
RESTORATION SITE**

**ALAMANCE COUNTY, NORTH CAROLINA
EEP Project No. 395**

Monitoring Year 2 of 5 (2010)



Submitted to:
North Carolina Department of Environment and Natural Resources
Ecosystem Enhancement Program
Raleigh, North Carolina



January 2011

**ANNUAL MONITORING REPORT
UPPER UT to CANE CREEK (PICKARD)
RESTORATION SITE**

**ALAMANCE COUNTY, NORTH CAROLINA
EEP Project No. 395**

Monitoring Year 2 of 5 (2010)



Submitted to:
North Carolina Department of Environment and Natural Resources
Ecosystem Enhancement Program
Raleigh, North Carolina

Prepared by:
Axiom Environmental, Inc.
20 Enterprise Street
Suite 7
Raleigh, North Carolina 27607

Design Firm:
URS Corporation
1600 Perimeter Park Drive, Suite 400
Morrisville, NC 27560



January 2011

1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT

The Upper UT to Cane Creek (Pickard) Restoration Site (Site) is located in southwest Alamance County approximately 5 miles east of Liberty, North Carolina in United States Geological Survey Hydrologic Unit 03030002050050 (North Carolina Division of Water Quality Subbasin 03-06-04) of the Cape Fear River Basin. This Hydrologic Unit has been identified as a Targeted Local Watershed in NCEEP's *Cape Fear River Basin Restoration Priorities 2009*. The Site was identified to assist the North Carolina Ecosystem Enhancement Program in meeting stream and wetland restoration goals. Primary activities at the Site included stream restoration and wetland enhancement/preservation by excluding livestock from the Site, stabilizing stream banks, installing in-stream structures, adjusting stream plan form, removing invasive species, and replanting riparian areas with native vegetation. Project restoration efforts provided 6783 Stream Mitigation Units and 1.1 riparian riverine Wetland Mitigation Units. This report (compiled based on EEP's *Revised Table of Contents for 2009 Monitoring Report Submissions* Version 1.2.1 dated 6/1/09) summarizes data for year 2 (2010) monitoring.

The goals and objectives of this project focused on improving local water quality, enhancing flood attenuation, and restoring aquatic and riparian habitat. These goals were accomplished by the following.

1. Reestablished stream stability and the capacity to transport watershed flows and sediment load by restoring stable channel morphology supported by natural instream habitat and grade/bank stabilization structures.
2. Reduced nonpoint source sedimentation and nutrient inputs into the Site by eliminating the acceleration of bank erosion as a result of land use activities, excluding livestock, and reestablishing a native riparian buffer greater than 50 feet in width.
3. Enhanced the capacity of the Site to mitigate flood flows by reconnecting the stream to the historic floodplain.

Success criteria dictate an average density of 320 stems per acre must be surviving after three monitoring years, 290 stems per acre after four monitoring years, and 260 stems per acre after five monitoring years. Based on the number of stems counted, average densities were measured at 518 planted stems per acre surviving in year 2 (2010). The dominant species identified at the Site were planted stems of river birch (*Betula nigra*), green ash (*Fraxinus pennsylvanica*), swamp chestnut oak (*Quercus michauxii*), and willow oak (*Quercus michauxii*). Fourteen of the individual plots met success criteria with planted stems alone, the remaining plot (Plot 12) met success criteria when including appropriate natural recruit species. Several areas within the Site, noted on Figure 3 (Appendix A), had poor herbaceous vegetation development, most likely due to soil infertility following construction; these areas are starting to recover naturally.

Success criteria for stream restoration reaches should show little to no change from the as-built channel over the five-year monitoring period. Year 2 (2010) monitoring measurements indicate that there have been minimal changes in both the longitudinal profile and cross-sections as compared to as-built data. Three bankfull events were documented to occur so far during the year 2 (2010) monitoring period for a total of four bankfull events. A few areas of minor bank erosion and channel fill were documented within the Site and are depicted on Figure 3 (Appendix A). These are not considered to be a problem at this time but should continue to be monitored closely in subsequent monitoring years.

In summary, the Site achieved success criteria for vegetation and stream attributes in the Second Monitoring Year (2010). Summary information and data related to the occurrence of items such as beaver or encroachment and statistics related to performance of various project and monitoring elements can be found in table and figures within this report's appendices. Narrative background and supporting information formerly found in these reports can be found in the mitigation and restoration plan documents available on EEPs website. All raw data supporting the tables and figures in the appendices is available from EEP upon request.

Table of Contents

1.0 EXECUTIVE SUMMARY/PROJECT ABSTRACT.....	i
2.0 METHODOLOGY	1
2.1 Vegetation Assessment	1
2.2 Stream Assessment	1
3.0 REFERENCES.....	1

List of Figures

Figure 1. Site Location	Appendix A
Figure 2. Monitoring Plan View	Appendix A
Figure 3. Problem Area Plan View.....	Appendix A

List of Tables

Table 1. Site Restoration Structures and Objectives	Appendix B
Table 2. Project Activity and Reporting History.....	Appendix B
Table 3. Project Contacts Table	Appendix B
Table 4. Project Attribute Table.....	Appendix B
Table 5. Vegetation Plot Mitigation Success Summary Table.....	Appendix C
Table 6. Vegetation Metadata Table.....	Appendix C
Table 7. Total and Planted Stems by Plot and Species	Appendix C
Table 8. Qualitative Visual Stability Assessment	Appendix D
Table 9. Verification of Bankfull Events.....	Appendix D

Appendices

APPENDIX A. FIGURES AND PLAN VIEWS

- Figure 1. Site Location
- Figure 2. Monitoring Plan View
- Figure 3. Problem Area Plan View

APPENDIX B. GENERAL PROJECT TABLES

- Table 1. Site Restoration Structures and Objectives
- Table 2. Project Activity and Reporting History
- Table 3. Project Contacts Table
- Table 4. Project Attributes Table

APPENDIX C. VEGETATION ASSESSMENT DATA

- Table 5. Vegetation Plot Mitigation Success Summary
- Vegetation Monitoring Plot Photos
- CVS Summary Data Tables
 - Table 6. Vegetation Metadata Table
 - Table 7. Total and Planted Stems by Plot and Species

APPENDIX D. STREAM ASSESSMENT DATA

- Tables 8A-8E. Qualitative Visual Stability Assessment
- Table 9. Verification of Bankfull Events
- Cross-section Plots and Tables
- Longitudinal Profile Plots
- Pebble Count Plots

2.0 METHODOLOGY

2.1 Vegetation Assessment

Following Site construction, fifteen plots (10-meters square) were established and monumented with metal fence posts at all plot corners and PVC at each plot origin. Plots were surveyed in June and July 2010 for the year 2 (2010) monitoring season. Sampling was conducted as outlined in the *CVS-EEP Protocol for Recording Vegetation, Version 4.0* (Lee et al. 2006) (<http://cvs.bio.unc.edu/methods.htm>); results are included in Appendix C. The taxonomic standard for vegetation used for this document was *Flora of the Carolinas, Virginia, Georgia, and Surrounding Areas* (Weakley 2007). The locations of vegetation monitoring plots are depicted on Figure 2 in Appendix A.

2.2 Stream Assessment

Twelve permanent cross-sections and five approximately 600 linear foot long monitoring reaches were established after construction was completed. Measurements of each cross-section include points at all breaks in slope including top of bank, bankfull, and thalweg. Riffle cross-sections are classified using the Applied Fluvial Morphology (Rosgen 1996) stream classification system. Longitudinal profile measurements include thalweg and water surface; with each measurement taken at the head of facets (i.e. riffle, run, pool, and glide) in addition to the maximum pool depth. Visual assessment of in-stream structures was conducted to determine if failure has occurred. Failure of a structure may be indicated by collapse of the structure, undermining of the structure, abandonment of the channel around the structure, and/or stream flow beneath the structure. Stream assessment data are included in Appendix D with the locations of cross-sections and monitoring reaches depicted on Figure 2 in Appendix A.

3.0 REFERENCES



- Lee, Michael T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2006. CVS-EEP Protocol for Recording Vegetation, Version 4.0. (online). Available: <http://cvs.bio.unc.edu/methods.htm>
- Rosgen, D. 1996. Applied River Morphology. Wildland Hydrology (Publisher). Pagosa Springs, Colorado.
- Weakley, Alan S. 2007. Flora of the Carolinas, Virginia, Georgia, and Surrounding Areas (online). Available: <http://www.herbarium.unc.edu/WeakleysFlora.pdf> [February 1, 2008]. University of North Carolina Herbarium, North Carolina Botanical Garden, University of North Carolina, Chapel Hill, North Carolina.
- United States Army Corps of Engineers, United States Environmental Protection Agency, North Carolina Wildlife Resources Commission, North Carolina Division of Water Quality (USACE et al.). 2003. Stream Mitigation Guidelines.

APPENDIX A
FIGURES AND PLAN VIEWS

- Figure 1. Site Location
- Figure 2. Monitoring Plan View
- Figure 3. Problem Area Plan View

Directions to the Site:

- From Raleigh, take US-64 West to exit 381 for NC-87 towards Spring Lake and Fayetteville
- Turn right on NC-87/Graham Road
- Take a slight left onto Silk Hope Gum Springs Road/Silk Hope Road
- Turn right on Snow Camp Road
- Turn left on Old Dam Road
- The Site is located at the stream crossing between Wild Rose Road and Cocoa Road
- Latitude, Longitude of Site: 35.8644°N, 79.4800°W (NAD83/WGS84)

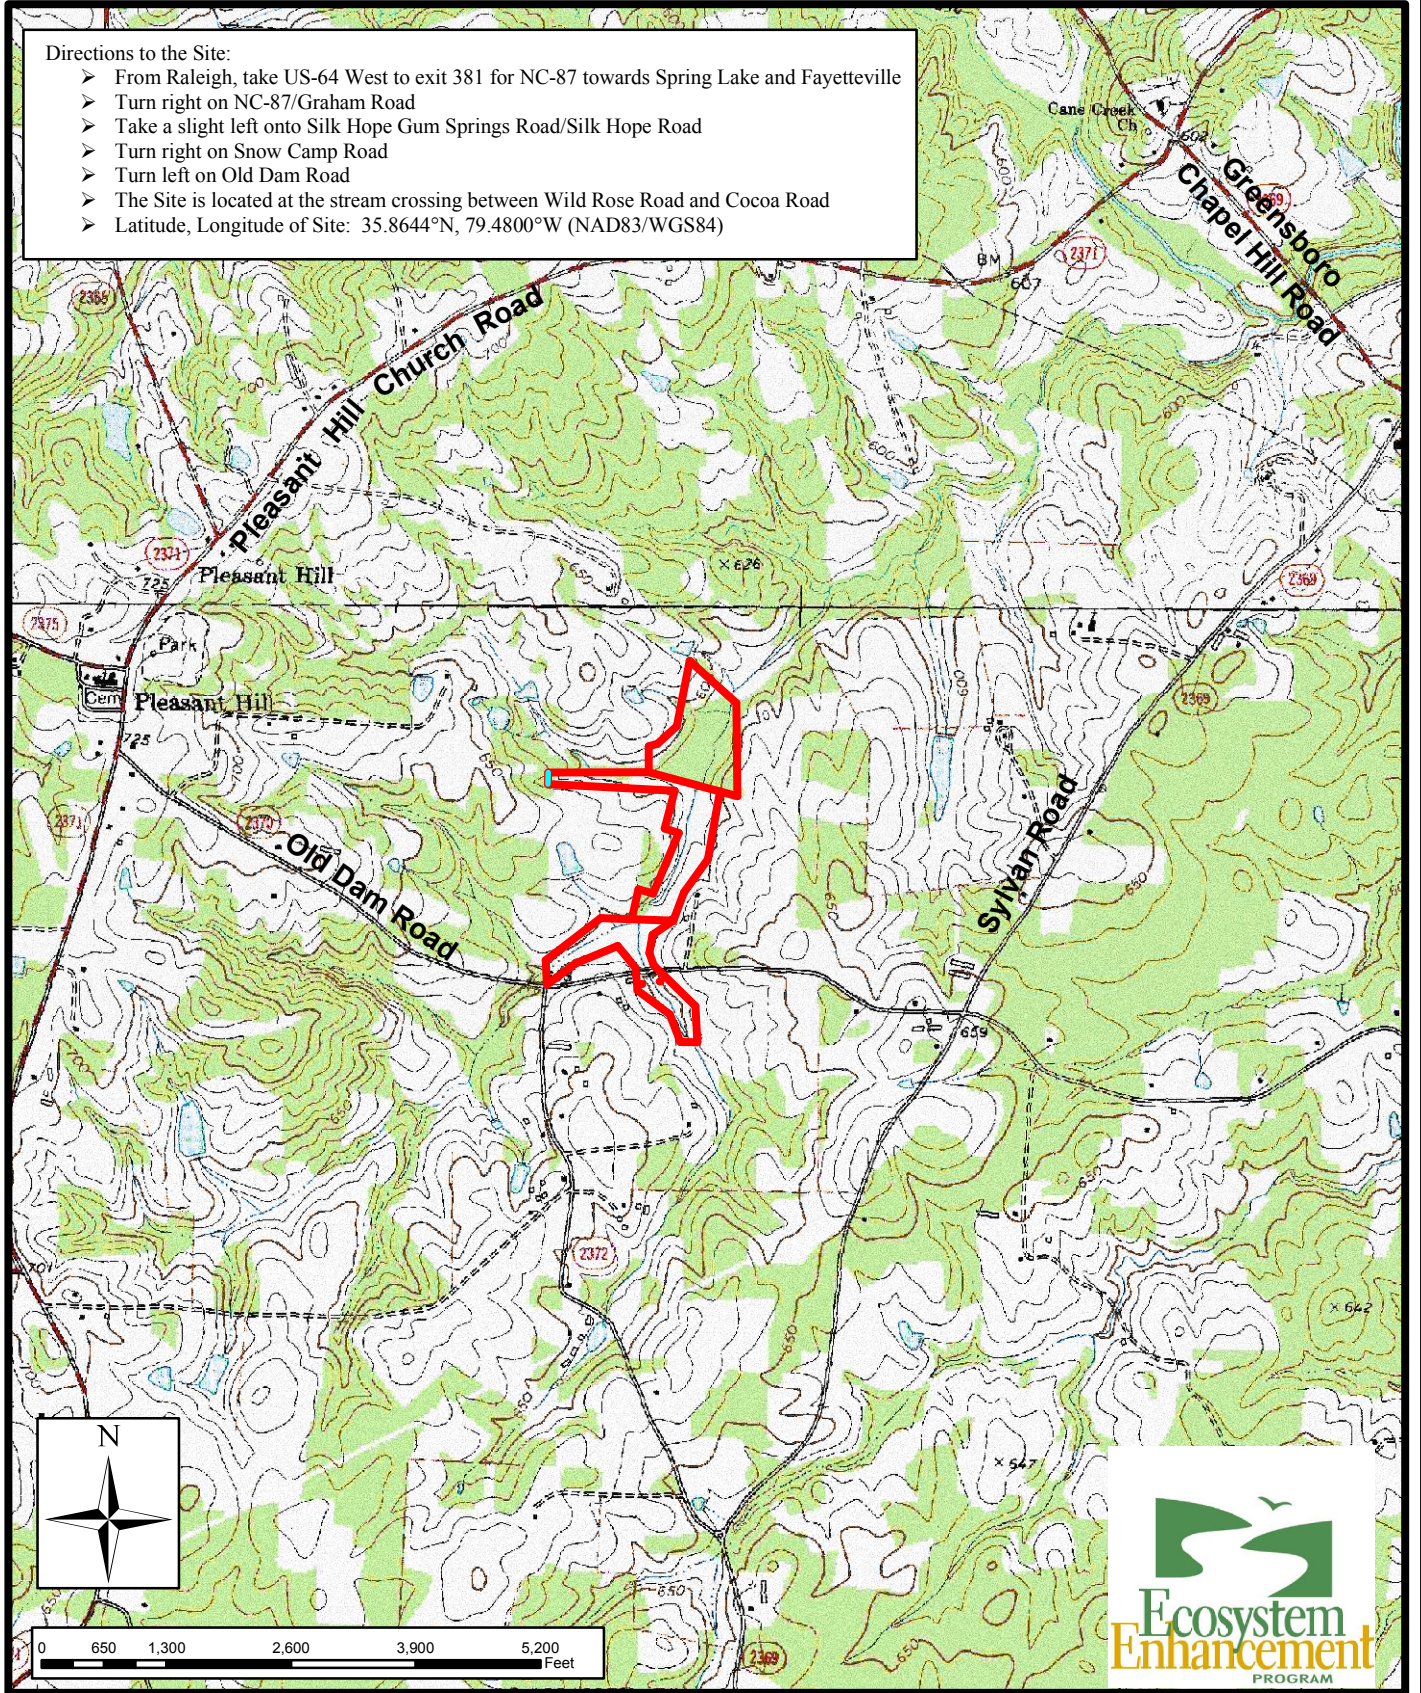

Axiom Environmental, Inc.
20 Enterprise St. # 7
Raleigh, NC 27607
(919) 215-1693

SITE LOCATION
UT to CANE CREEK RESTORATION SITE
EEP Project # 395
Alamance County, North Carolina


Dwn. By: WGL
Date: Nov 2009
Project: 08-001

FIGURE
1

Cross Section	Latitude	Longitude
XS 1	-79.46231125280	35.86357848520
XS 1	-79.46224334430	35.86364281960
XS 2	-79.46291475650	35.86418007320
XS 2	-79.46302231990	35.86416991240
XS 3	-79.46530725110	35.86550320910
XS 3	-79.46526070740	35.86542379120
XS 4	-79.46643260370	35.86509047200
XS 4	-79.46647493230	35.86515800210
XS 5*	-79.463936	35.865319
XS 5*	-79.463875	35.865384
XS 6	-79.46372879620	35.86656128990
XS 6	-79.46362506590	35.86650426440
XS 7	-79.46283123450	35.86682218920
XS 7	-79.46285414140	35.86689897400
XS 8	-79.46212539700	35.86772749340
XS 8	-79.46217373980	35.86780348540
XS 9	-79.46209588240	35.86902251620
XS 9	-79.46200190240	35.86899246280
XS 10	-79.46160158640	35.87010655060
XS 10	-79.46149803240	35.87011035350
XS 11	-79.46127581910	35.87110850340
XS 11	-79.46140636960	35.87114812000
XS 12	-79.46064310510	35.87173551710
XS 12	-79.46078244370	35.87175495800

* Locations are approximate

Vegetation Plot	Latitude	Longitude
plot 1 origin	-79.46221505100	35.86321150230
plot 2 origin	-79.46271264430	35.86399560110
plot 3 origin	-79.466299	35.865173
plot 4 origin	-79.46448443860	35.86584506480
plot 5 origin	-79.46399365180	35.86571252330
plot 6 origin	-79.46357095240	35.86620590610
plot 7 origin	-79.46344201540	35.86664098490
plot 8 origin	-79.46267301560	35.86685520690
plot 9 origin	-79.46261109950	35.86750457640
plot 10 origin	-79.46215083880	35.86763646240
plot 11 origin	-79.46204497230	35.86830888870
plot 12 origin	-79.46182655010	35.86915604160
plot 13 origin	-79.46166371170	35.87004828190
plot 14 origin	-79.46107250310	35.87113937100
plot 15 origin	-79.46062551010	35.87207557390

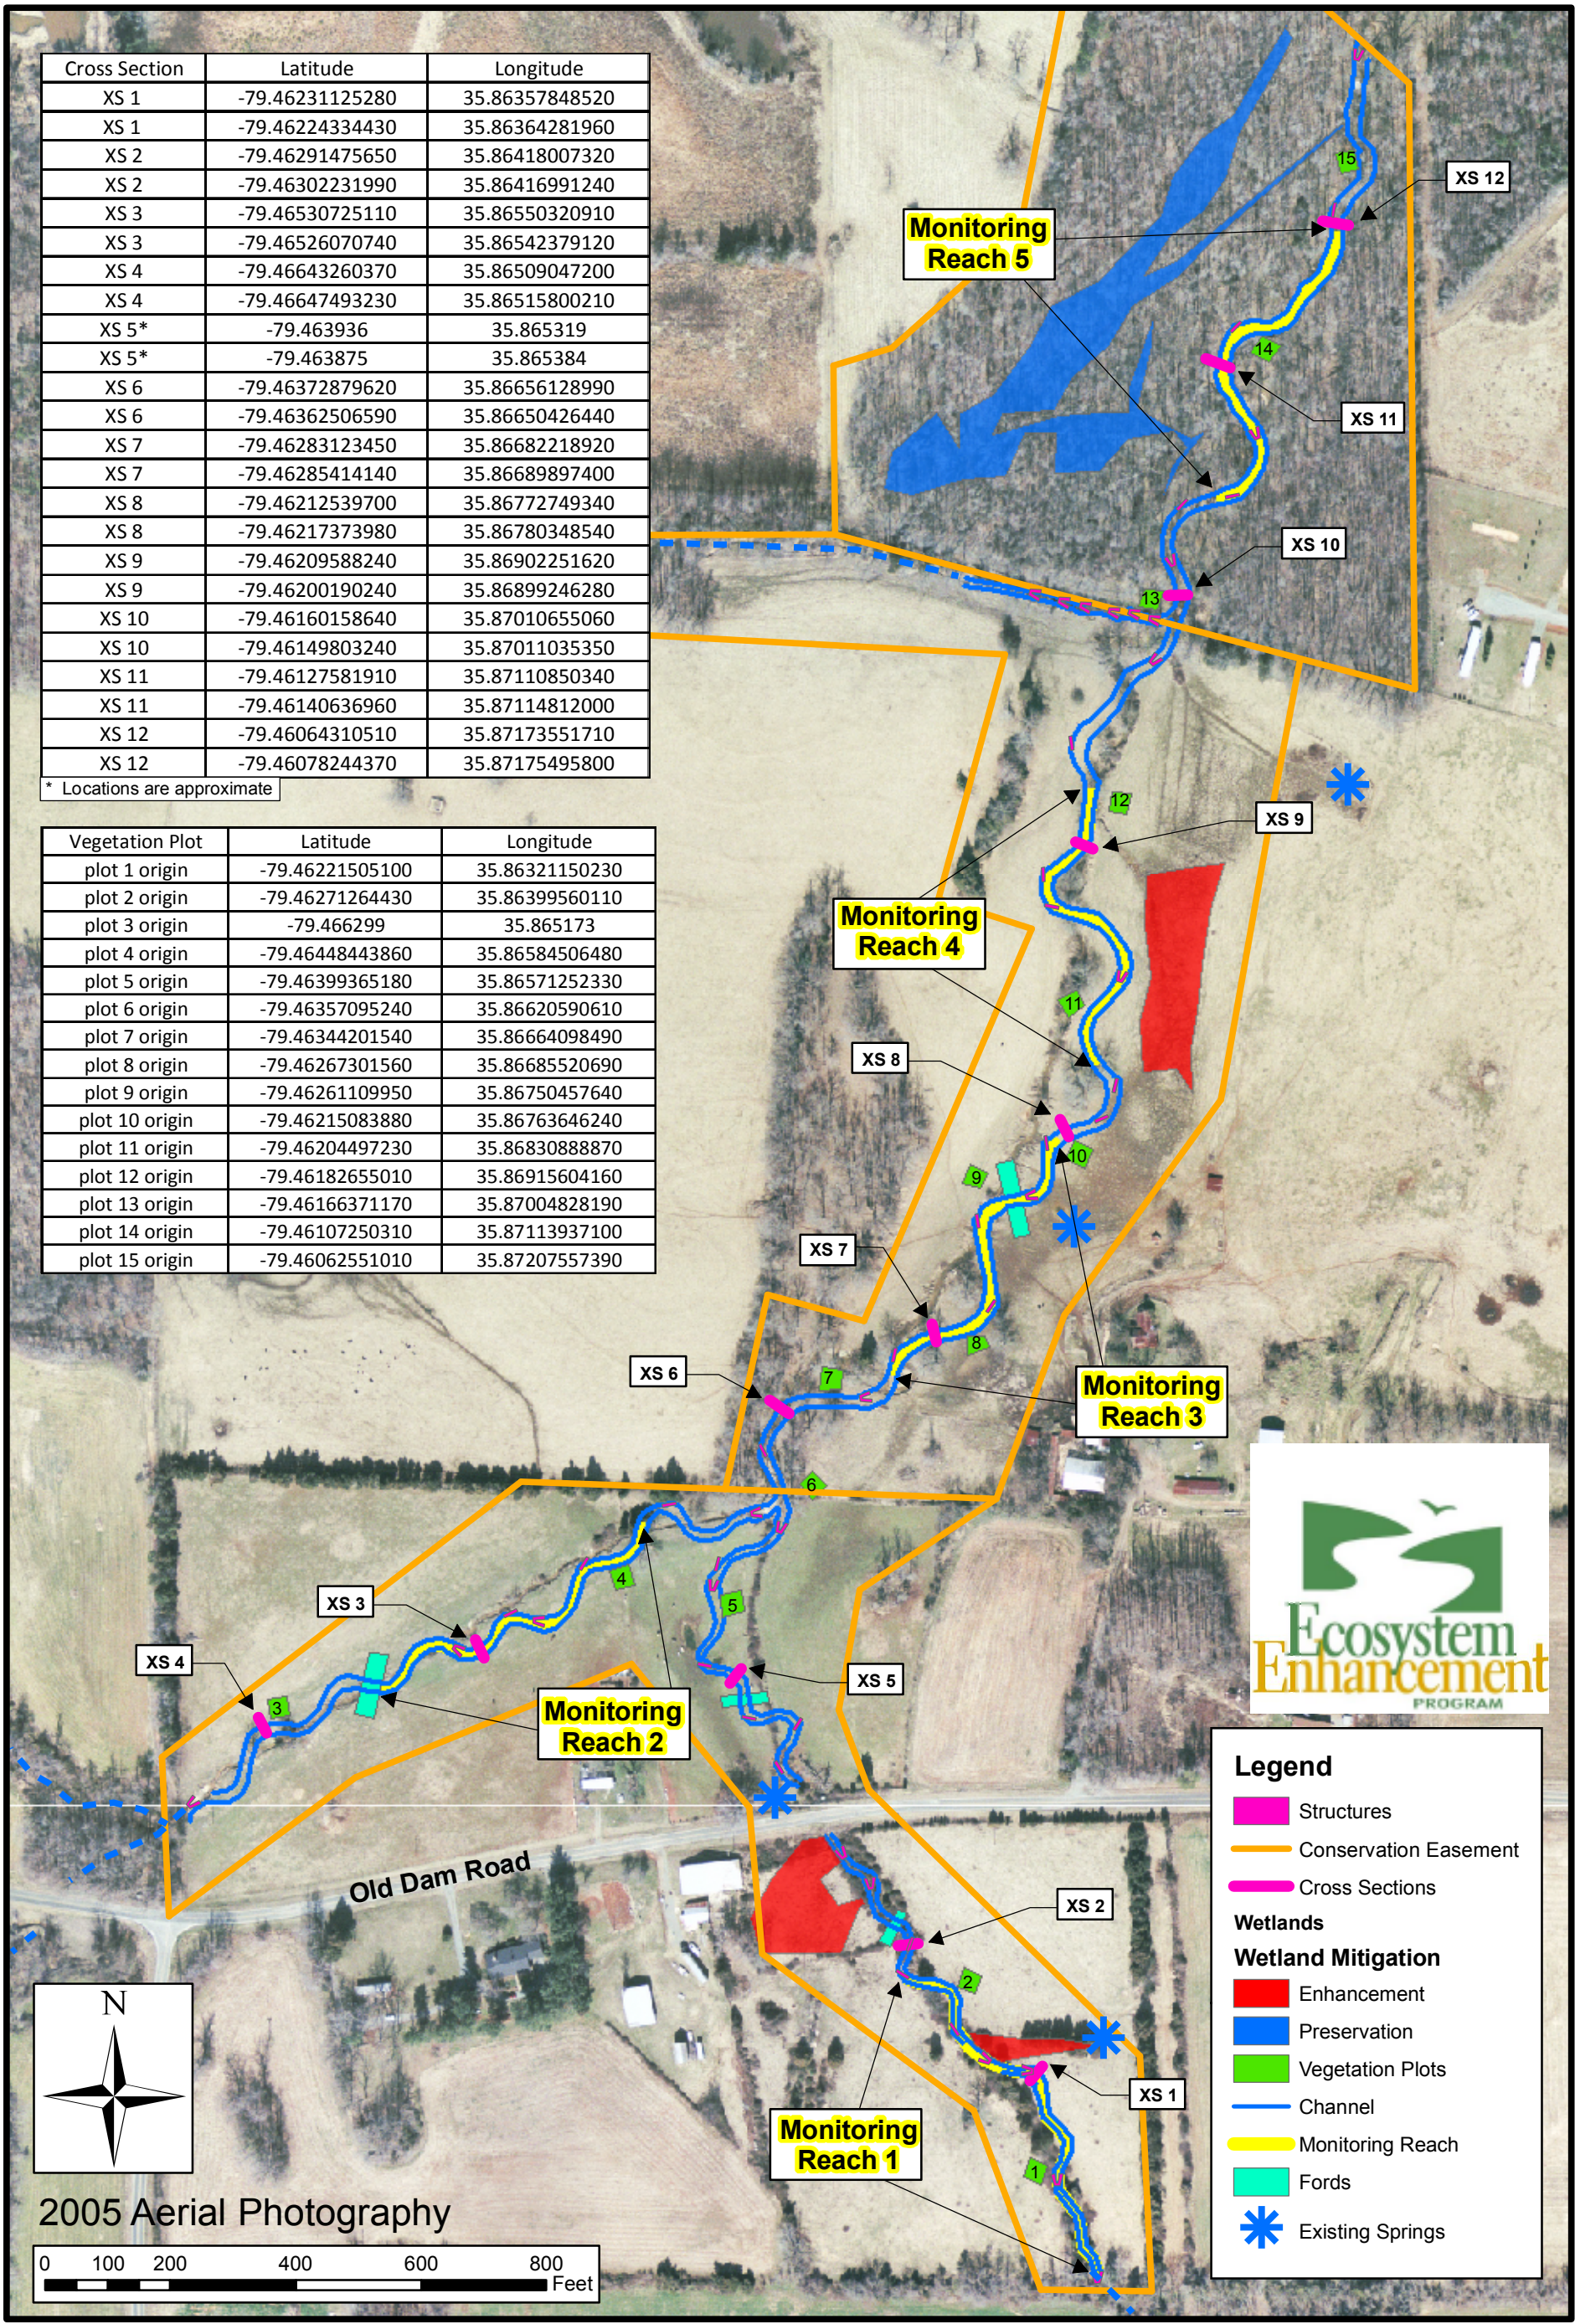

Legend	
■	Structures
—	Conservation Easement
●	Cross Sections
Wetlands	
Wetland Mitigation	
■	Enhancement
■	Preservation
■	Vegetation Plots
—	Channel
—	Monitoring Reach
■	Fords
✱	Existing Springs




Axiom Environmental, Inc.
20 Enterprise St. # 7
Raleigh, NC 27607
(919) 215-1693

MONITORING PLANVIEW
UT to CANE CREEK RESTORATION SITE
EEP Project # 395
Alamance County, North Carolina

Dwn. By: WGL
Date: Nov 2009
Project: 08-001

FIGURE
2

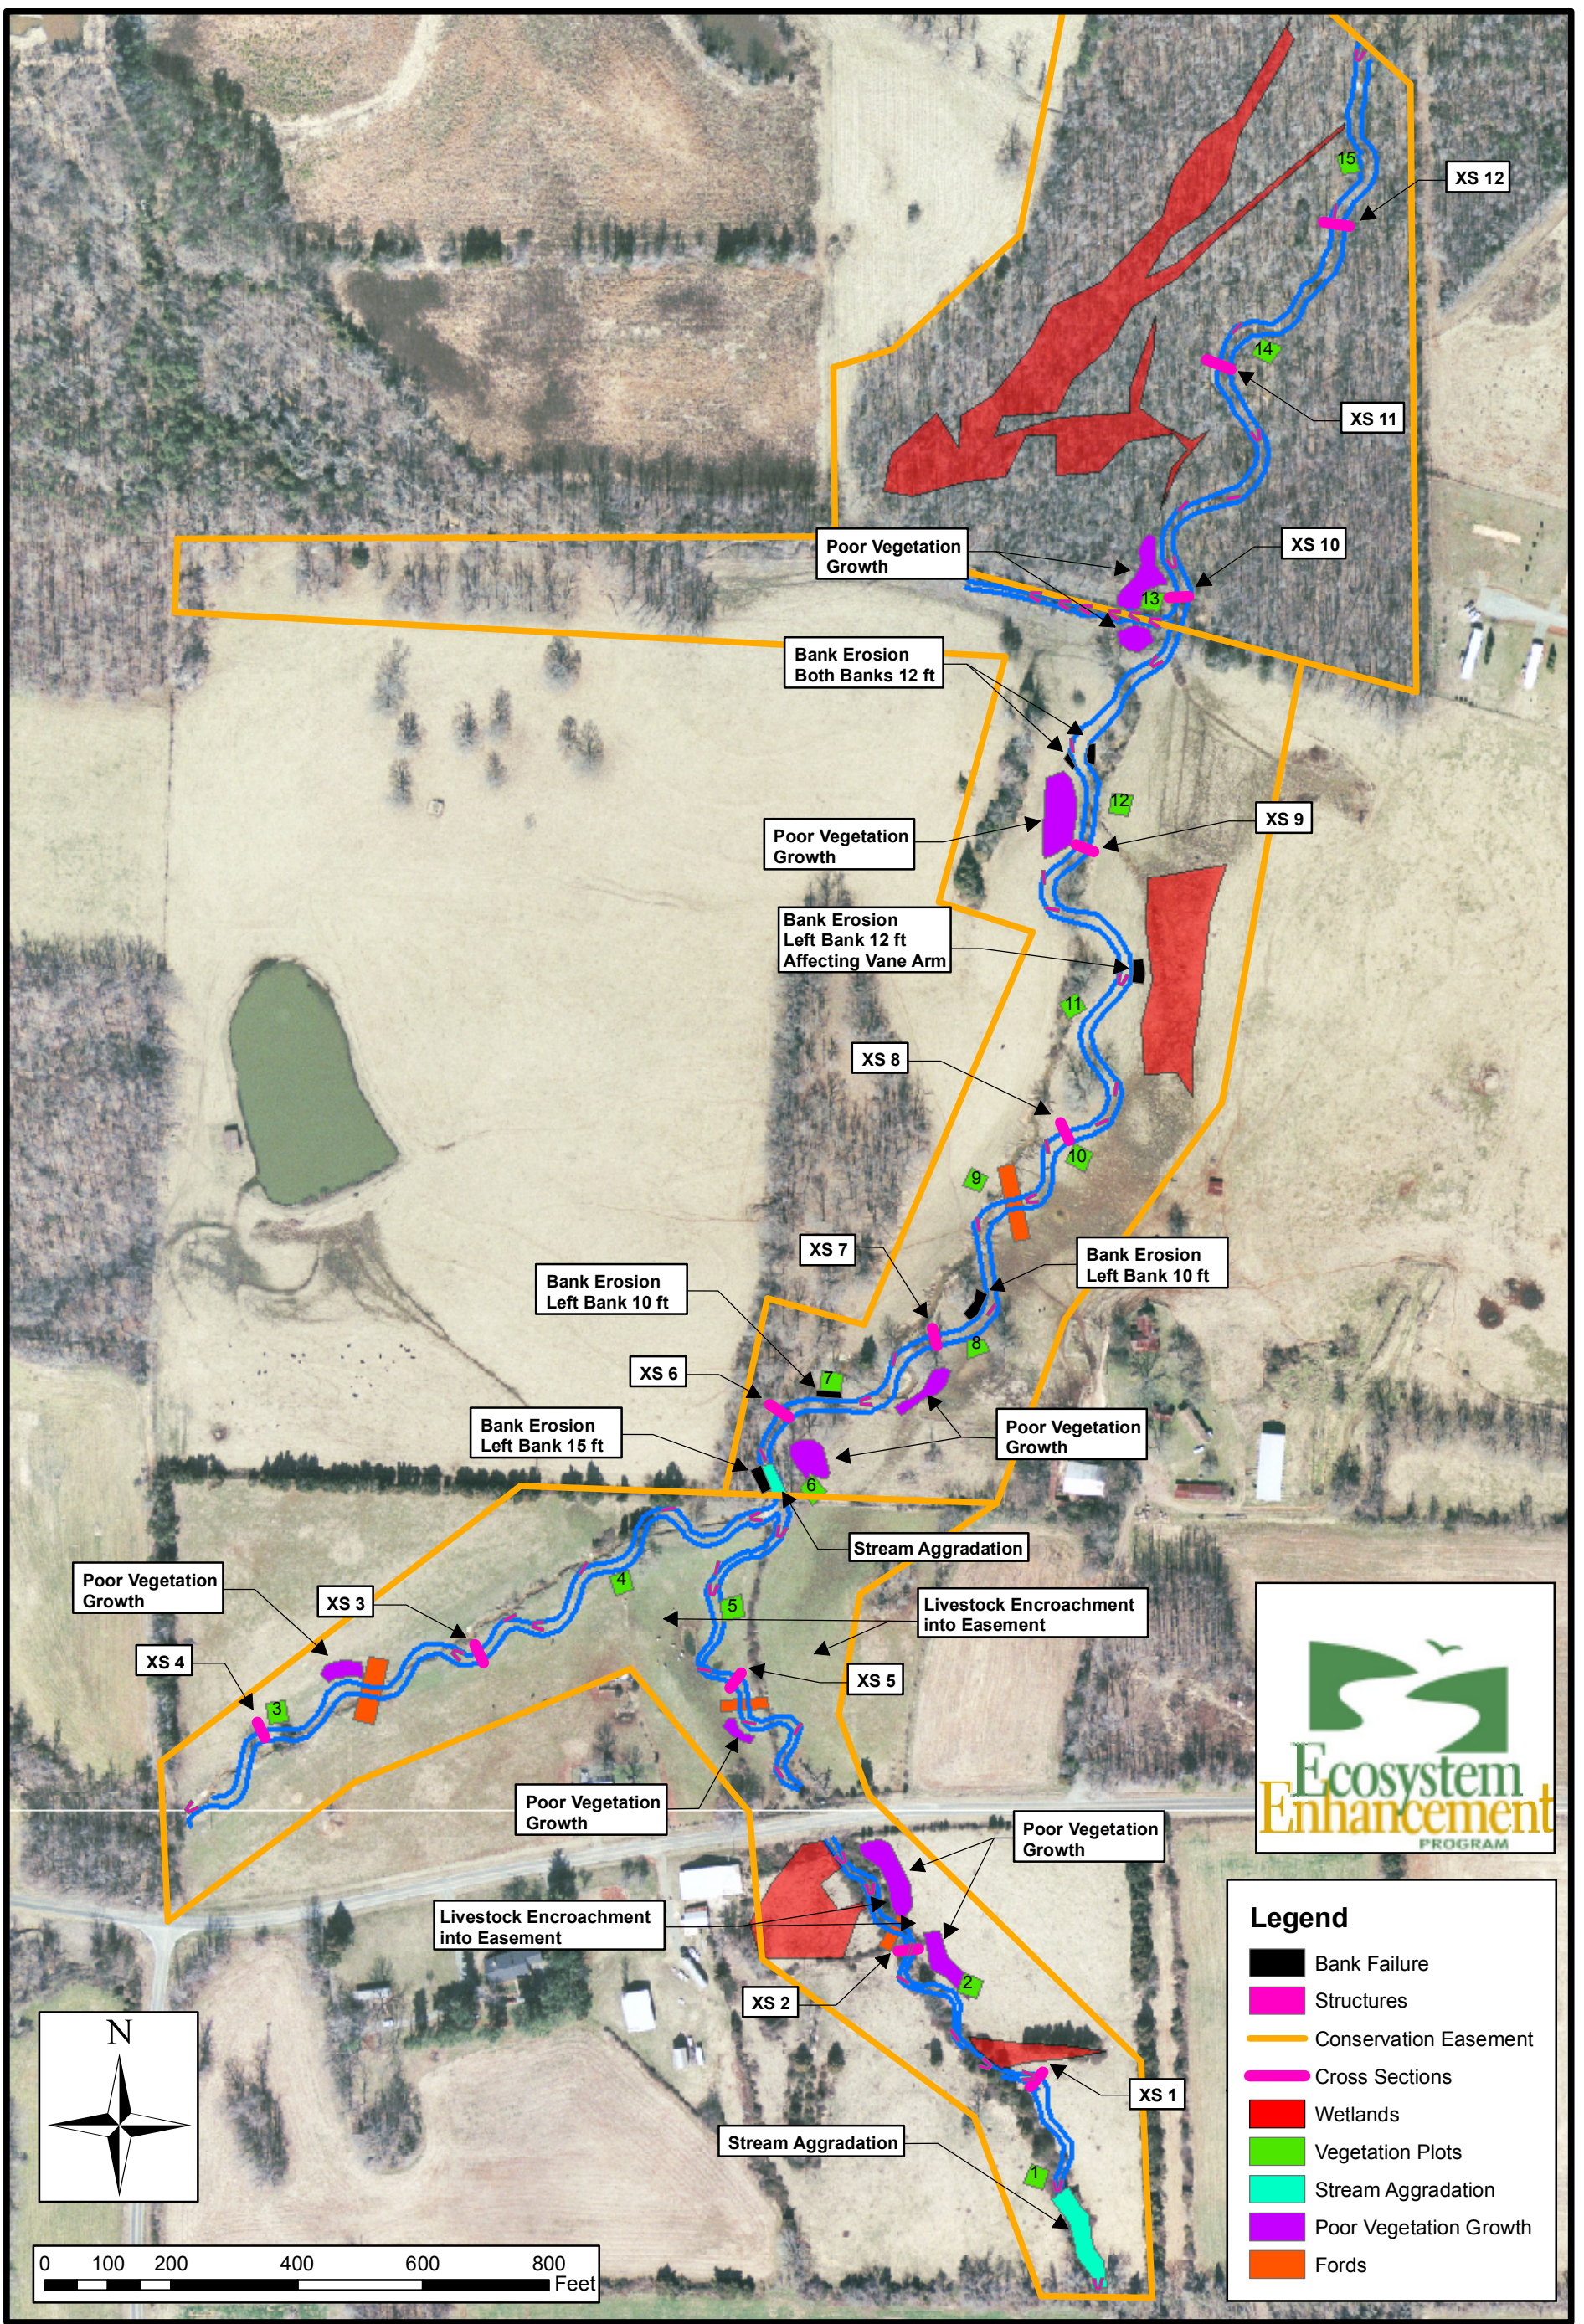

Axiom Environmental, Inc.
 20 Enterprise St. # 7
 Raleigh, NC 27607
 (919) 215-1693

**PROBLEM AREA PLANVIEW
 UT to CANE CREEK RESTORATION SITE
 EEP Project # 395
 Alamance County, North Carolina**

Dwn. By: WGL
 Date: Nov 2009
 Project: 08-001

**FIGURE
 3**

APPENDIX B

GENERAL PROJECT TABLES

Table 1. Site Restoration Structures and Objectives

Table 2. Project Activity and Reporting History

Table 3. Project Contacts Table

Table 4. Project Attributes Table

**Table 1. Site Restoration Structures and Objectives
Upper UT to Cane Creek (Pickard)(EEP Project Number 395)**

Restoration Segment/ Reach ID*	Station Range	Mitigation Type	Priority Approach	Linear Footage/ Acreage	Comment
Reach A	10+00-28+10.76	Restoration	Priority 1	1738.76**	Restoration of dimension and profile through a combination of on new location and in place restoration.
Reach B	28+10.76-49+29.45	Restoration	Priority 1	2118.69	
Reach C	49+29.45-61+24.03	Restoration	Priority 2	1194.58	
Reach D	100+00-113.57.31	Restoration	Priority 1	1357.31	
Reach E	200+00-203+73.25	Restoration	Priority 1	373.25	
Wetlands	--	Enhancement	--	1.3	Invasive species removal, cattle removal, and planting.
Wetlands	--	Preservation	--	2.0	Invasive species removal.
Component Summation					
Restoration Level	Stream (linear footage)	Riverine Riparian Wetland (acreage)		Planted Riparian Buffer (acreage)	
Restoration	6782.59	--		--	
Enhancement	--	1.3		--	
Preservation	--	2.0		--	
Totals	6782.59 linear feet	3.3 acres		41 acres	
Mitigation Units	6783 SMUs	1.1 WMUs		--	

* Locations of each reach are depicted on the As-built Drawings in Appendix A

** Constructed linear footage excludes the 72-foot corrugated metal pipe at Old Dam Road; therefore, the linear footage is shorter than stationing depicts.

**Table 2. Project Activity and Reporting History
UT to Cane Creek (EEP Project Number 395)**

Activity or Report	Data Collection Complete	Completion or Delivery
Restoration Plan	--	February 2006
Construction Completion	--	March 2009
Site Planting	--	March 2009
As-built Drawings	July-October 2008	July 2009
Mitigation Plan	--	October 2009
Year 1 (2009) Annual Monitoring	October 2009	November 2009
Year 2 (2010) Annual Monitoring	September 2010	January 2011

Table 3. Project Contacts Table
Upper UT to Cane Creek (Pickard)(EEP Project Number 395)

Designer	URS Corporation 1600 Perimeter Park Drive, Suite 400 Morrisville, North Carolina 27560 Kathleen McKeithan (919) 461-1597
Construction Contractor	River Works, Inc. 8000 Regency Parkway, Suite 200 Cary, North Carolina 27511 Will Pederson (919) 459-9001
Conservation Easement Contractor	Landmark Surveying, Inc. 109 E. Harden Street Graham, North Carolina 27253 (336) 229-6275
Planting Contractor	Habitat Assessment & Restoration Program, Inc. 9305-D Monroe Road Charlotte, North Carolina 28270 Karri Blackmon (704) 841-2841
As-built Surveying Contractor	Level Cross Surveying, PLLC 668 Marsh County Lane Randleman, North Carolina 23717 Sherri Willard (336) 495-1713
Monitoring Performer	Axiom Environmental, Inc 20 Enterprise Street, Suite 7 Raleigh, NC 27607 Grant Lewis (919) 215-1693

**Table 4. Project Attribute Table
Upper UT to Cane Creek (Pickard)(EEP Project Number 395)**

Project County	Alamance County, North Carolina				
Physiographic Region	Piedmont				
Ecoregion	Carolina Slate Belt				
Project River Basin	Cape Fear				
USGS 14-digit HUC	03030002050050				
NCDWQ Subbasin	03-06-04				
Within EEP Watershed Plan Extent?	Yes-Targeted Local Watershed				
WRC Class	Warm				
% of project easement fenced	100 %				
Beaver activity observed during design phase	No				
Restoration Component Attribute Table					
	Reach A	Reach B	Reach C	Reach D	Reach E
Drainage area (acres)	390	1333	1640	892	282
Stream order	first	third	third	third	second
Restored length (linear feet)	1738.76	2118.69	1194.58	1357.31	373.25
Perennial or Intermittent	perennial	perennial	perennial	perennial	perennial
NCDWQ Index Number	16-28	16-28	16-28	16-28	16-28
NCDWQ Classification	C, NSW	C, NSW	C, NSW	C, NSW	C, NSW
303d list?	No	No	No	No	No
Upstream of a 303d listed segment?	No	No	No	No	No
Total acreage of easement	50.75	50.75	50.75	50.75	50.75
Total planted acreage of easement	41	41	41	41	41
Rosgen classification of preexisting	Degraded E4	Degraded E4	Degraded E4	Degraded E4	Degraded E4
Rosgen classification of asbuilt	E4	E4	E4	E4	E4
Valley type	VIII	VIII	VIII	VIII	VIII
Valley slope	0.0083	0.0041	0.0045	0.0046	0.0156
Cowardin classification	R3UB1	R3UB1	R3UB1	R3UB1	R3UB1
Trout waters designation?	No	No	No	No	No
Species of concern, T&E, etc?	No	No	No	No	No
Dominant Soil Series and Characteristics	Tirzah silt loam, Georgeville silt loam, Starr loam, Colfax silt loam, Herndon silt loam, and mixed alluvial land				
Watershed Land Use (%)					
Managed Herbaceous Coverage	49.8				
Mixed Upland Hardwoods	31.4				
Cultivated	9.9				
Southern Yellow Pine	4.6				
Deciduous Shrubland	2.0				
Mixed Hardwoods/Conifers	0.9				
Unmanaged Herbaceous Upland	0.6				
Evergreen Shrubland	0.4				
Water Bodies	0.4				
Impervious Surfaces	<0.1				

APPENDIX C

VEGETATION ASSESSMENT DATA

Table 5. Vegetation Plot Mitigation Success Summary

Vegetation Monitoring Plot Photos

CVS Summary Data Tables

Table 6. Vegetation Metadata Table

Table 7. Total and Planted Stems by Plot and Species

**Table 5. Vegetation Plot Mitigation Success Summary Table
Upper UT to Cane Creek (Pickard)(EEP Project Number 395)**

Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	100%
2	Yes	
3	Yes	
4	Yes	
5	Yes	
6	Yes	
7	Yes	
8	Yes	
9	Yes	
10	Yes	
11	Yes	
12	Yes	
13	Yes	
14	Yes	
15	Yes	

Upper UT to Cane Creek (Pickard) Restoration Site
Year 2 (2010) Annual Monitoring
Vegetation Plot Photos (taken June and July 2010)



Upper UT to Cane Creek (Pickard) Restoration Site
Year 2 (2010) Annual Monitoring
Vegetation Plot Photos (taken June and July 2010), continued



**Table 6. Vegetation Metadata Table
Upper UT to Cane Creek (Pickard)Restoration Site (EEP Project Number 395)**

Report Prepared By	Corri Faquin
Date Prepared	9/29/2010 10:38
database name	Axiom-EEP-2010-A.mdb
database location	C:\Business\Projects\2010\CVS Database
computer name	PHILLIP
file size	40685568
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	395
project Name	UT to Cane Creek
Description	Upper UT to Cane Creek (Pickard)Stream and Wetland Restoration
River Basin	Cape Fear
Sampled Plots	15

**Table 7. Total and Planted Stems by Plot and Species
Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)**

		Current Data (MY2 2010)																												Annual Totals					
Species	CommonName	Plot 1		Plot 2		Plot 3		Plot 4		Plot 5		Plot 6		Plot 7		Plot 8		Plot 9		Plot 10		Plot 11		Plot 12		Plot 13		Plot 14		Plot 15		Current Data MY2 (2010)		MY1 (2009)	
		Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total	Planted	Total stems	Planted stems	Total stems	Planted stems
		Acer rubrum	red maple					1						5				2							2				10		7		27	7	1
Alnus serrulata	hazel alder	1											1	1												6	6			8		1	1		
Aronia arbutifolia	red chokeberry														1	1														1	1				
Baccharis halimifolia	eastern baccharis																												1		1				
Betula nigra	river birch	1	1	5	5	4	4			3	3	2	1	4	4	3	3	4	4	2	2				8	7	1	1	2	2	39	37	31	30	
Carya	hickory	1	1	1	1			1				1						2	2						1	1			4	2	5	5			
Celtis laevigata	sugarberry							1					3	3			2	2							1	1			7	6	6	6			
Cephalanthus occidentalis	common buttonbush	2	2	2	2					1	1	1	1	1	1		1	1						2	2	1	1			11	11	9	9		
Cornus amomum	silky dogwood	1	1					4	4					1	1								1	1					7	7	7	7			
Corylus americana	American hazelnut												2	2											1	1			3	3	3	3			
Diospyros virginiana	common persimmon									3	3														1		1		6	3	4	2			
Fraxinus pennsylvanica	green ash			1	1	8	6	4	4	30		31	3	18	2	16		7	4	5	2	7	6	19	3	500		1302	2	215	2	2163	35	393	31
Juglans nigra	black walnut												4	2															4	2					
Juniperus vrginiana	eastern red cedar											2																	2						
Liquidambar styraciflua	sweetgum					121		2		5		17		225		36		220		16		6		5		31		50		26		760		53	
Liriodendron tulipifera	tuliptree																5		9	1							1	1	1		16	2	3	3	
Nyssa	tupelo									2	2																		2	2	1	1			
Pinus taeda	loblolly pine																									2			2						
Platanus occidentalis	American sycamore	1	1			4	2			1	1	1	1			10	7	2	2			1	1	2	1	1			7	6	30	22	22	18	
Pyrus calleryana	Callery pear																																	1	
Quercus michauxii	swamp chestnut oak									5	4	2	2			1	1			5	5			1	1			2	2	6	6	22	21	21	21
Quercus pagoda	cherrybark oak												2	2														3	3			5	5	5	5
Quercus phellos	willow oak	1	1	4	4	1	1			4	4					2	2	2	2					2	1	3	3	2	2	21	20	19	19		
Rhus copallinum	flameleaf sumac																	1											1						
Rhus glabra	smooth sumac							1					2																3			1			
Salix nigra	black willow	1	1	1		3	3			8	1					28				56		1							98	5	80	5			
Sassafras albidum	sassafras																																	1	
Unknown	unknown																					1	1							1	1	1	1		
Vaccinium	blueberry															1														1					
Plot area (acres)		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247		0.0247							
Species Count		8	7	6	5	7	5	6	2	10	8	9	5	11	9	9	5	9	6	6	4	5	3	7	5	11	6	10	7	9	4	27	19	22	17
Stem Count		9	8	14	13	142	16	13	8	62	19	62	8	263	18	100	14	244	15	93	10	16	8	32	7	556	20	1373	12	266	16	3245	192	668	167
Stems per acre		364	324	567	526	5749	648	526	324	2510	769	2510	324	10648	729	4049	567	9879	607	3765	405	648	324	1296	283	22510	810	55587	486	10769	648	8758	518	1803	451

APPENDIX D

STREAM ASSESSMENT DATA

Tables 8A-8E. Qualitative Visual Stability Assessment

Table 9. Verification of Bankfull Events

Cross-section Plots and Tables

Longitudinal Profile Plots

Pebble Count Plots

Table 8A. Qualitative Visual Stability Assessment

**Monitoring Reach 1 (641 linear feet)
Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)**

Feature Category	Metric (per As-built and reference baselines)	(# Stable) Number Performing as Intended	Total Number per As-built	Total Number / feet in unstable state	% Perform. in Stable Condition	Feature Perform. Mean or Total
A. Riffles	1. Present?	11	11	N/A	100	94.4
	2. Armor stable (e.g. no displacement)?	11	11	N/A	100	
	3. Facet grade appears stable?	11	11	N/A	100	
	4. Minimal evidence of embedding/fining?	8	11	N/A	72	
	5. Length appropriate?	11	11	N/A	100	
B. Pools	1. Present? (e.g. no severe aggradation)	8	11	N/A	73	82
	2. Sufficiently deep (Dmax pool:Mean Bkf > 2.2?)	8	11	N/A	73	
	3. Length appropriate?	11	11	N/A	100	
C. Thalweg	1. Upstream of meander bend centering?	11	11	N/A	100	100
	2. Downstream of meander centering?	11	11	N/A	100	
D. Meanders	1. Outer bend in state of limited/controlled erosion?	11	11	N/A	100	100
	2. Of those eroding, # w/ concomitant point bar formation?	0	0	N/A	100	
	3. Apparent Rc within spec?	11	11	N/A	100	
	4. Sufficient floodplain access and relief?	11	11	N/A	100	
E. Bed General	1. General channel bed aggradation areas (bar formation)	N/A	N/A	113	83	91.5
	2. Channel bed degradation - areas of increasing down cutting or head cutting?	N/A	N/A	0	100	
F. Bank	1. Actively eroding, wasting, or slumping bank	N/A	N/A	0	100	100
G. Vanes	1. Free of back or arm scour?	6	6	N/A	100	100
	2. Height appropriate?	6	6	N/A	100	
	3. Angle and geometry appear appropriate?	6	6	N/A	100	
	4. Free of piping or other structural failures?	6	6	N/A	100	
H. Wads / Boulders	1. Free of scour?	2	2	N/A	100	100
	2. Footing stable?	2	2	N/A	100	

Table 8B. Qualitative Visual Stability Assessment

**Monitoring Reach 2 (587 linear feet)
Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)**

Feature Category	Metric (per As-built and reference baselines)	(# Stable) Number Performing as Intended	Total Number per As-built	Total Number / feet in unstable state	% Perform. in Stable Condition	Feature Perform. Mean or Total
A. Riffles	1. Present?	7	7	N/A	100	100
	2. Armor stable (e.g. no displacement)?	7	7	N/A	100	
	3. Facet grade appears stable?	7	7	N/A	100	
	4. Minimal evidence of embedding/fining?	7	7	N/A	100	
	5. Length appropriate?	7	7	N/A	100	
B. Pools	1. Present? (e.g. no severe aggradation)	7	7	N/A	100	100
	2. Sufficiently deep (Dmax pool:Mean Bkf > 2.2?)	7	7	N/A	100	
	3. Length appropriate?	7	7	N/A	100	
C. Thalweg	1. Upstream of meander bend centering?	7	7	N/A	100	100
	2. Downstream of meander centering?	7	7	N/A	100	
D. Meanders	1. Outer bend in state of limited/controlled erosion?	7	7	N/A	100	100
	2. Of those eroding, # w/ concomitant point bar formation?	0	0	N/A	100	
	3. Apparent Rc within spec?	7	7	N/A	100	
	4. Sufficient floodplain access and relief?	7	7	N/A	100	
E. Bed General	1. General channel bed aggradation areas (bar formation)	N/A	N/A	0	100	100
	2. Channel bed degradation - areas of increasing down cutting or head cutting?	N/A	N/A	0	100	
F. Bank	1. Actively eroding, wasting, or slumping bank	N/A	N/A	0	100	100
G. Vanes	1. Free of back or arm scour?	4	4	N/A	100	100
	2. Height appropriate?	4	4	N/A	100	
	3. Angle and geometry appear appropriate?	4	4	N/A	100	
	4. Free of piping or other structural failures?	4	4	N/A	100	
H. Wads / Boulders	1. Free of scour?	2	2	N/A	100	100
	2. Footing stable?	2	2	N/A	100	

Table 8C. Qualitative Visual Stability Assessment

Monitoring Reach 3 (531 linear feet)

Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)

Feature Category	Metric (per As-built and reference baselines)	(# Stable) Number Performing as Intended	Total Number per As-built	Total Number / feet in unstable state	% Perform. in Stable Condition	Feature Perform. Mean or Total
A. Riffles	1. Present?	5	5	N/A	100	96
	2. Armor stable (e.g. no displacement)?	5	5	N/A	100	
	3. Facet grade appears stable?	5	5	N/A	100	
	4. Minimal evidence of embedding/fining?	5	5	N/A	100	
	5. Length appropriate?	4	5	N/A	80	
B. Pools	1. Present? (e.g. no severe aggradation)	4	4	N/A	100	100
	2. Sufficiently deep (Dmax pool:Mean Bkf > 2.2?)	4	4	N/A	100	
	3. Length appropriate?	4	4	N/A	100	
C. Thalweg	1. Upstream of meander bend centering?	5	5	N/A	100	100
	2. Downstream of meander centering?	5	5	N/A	100	
D. Meanders	1. Outer bend in state of limited/controlled erosion?	4	4	N/A	100	100
	2. Of those eroding, # w/ concomitant point bar formation?	0	0	N/A		
	3. Apparent Rc within spec?	4	4	N/A	1100	
	4. Sufficient floodplain access and relief?	4	4	N/A	100	
E. Bed General	1. General channel bed aggradation areas (bar formation)	N/A	N/A	0	100	100
	2. Channel bed degradation - areas of increasing down cutting or head cutting?	N/A	N/A	0	100	
F. Bank	1. Actively eroding, wasting, or slumping bank	N/A	N/A	10	98	98
G. Vanes	1. Free of back or arm scour?	5	5	N/A	100	100
	2. Height appropriate?	5	5	N/A	100	
	3. Angle and geometry appear appropriate?	5	5	N/A	100	
	4. Free of piping or other structural failures?	5	5	N/A	100	
H. Wads / Boulders	1. Free of scour?	0	0	N/A	100	100
	2. Footing stable?	0	0	N/A	100	

Table 8D. Qualitative Visual Stability Assessment

Monitoring Reach 4 (570 linear feet)

Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)

Feature Category	Metric (per As-built and reference baselines)	(# Stable) Number Performing as Intended	Total Number per As-built	Total Number / feet in unstable state	% Perform. in Stable Condition	Feature Perform. Mean or Total
A. Riffles	1. Present?	5	5	N/A	100	100
	2. Armor stable (e.g. no displacement)?	5	5	N/A	100	
	3. Facet grade appears stable?	5	5	N/A	100	
	4. Minimal evidence of embedding/fining?	5	5	N/A	100	
	5. Length appropriate?	5	5	N/A	100	
B. Pools	1. Present? (e.g. no severe aggradation)	4	4	N/A	100	100
	2. Sufficiently deep (Dmax pool:Mean Bkf > 2.2?)	4	4	N/A	100	
	3. Length appropriate?	4	4	N/A	100	
C. Thalweg	1. Upstream of meander bend centering?	5	5	N/A	100	100
	2. Downstream of meander centering?	5	5	N/A	100	
D. Meanders	1. Outer bend in state of limited/controlled erosion?	3	4	N/A	75	91
	2. Of those eroding, # w/ concomitant point bar formation?	0	0	N/A	0	
	3. Apparent Rc within spec?	4	4	N/A	100	
	4. Sufficient floodplain access and relief?	4	4	N/A	100	
E. Bed General	1. General channel bed aggradation areas (bar formation)	N/A	N/A	0	100	100
	2. Channel bed degradation - areas of increasing down cutting or head cutting?	N/A	N/A	0	100	
F. Bank	1. Actively eroding, wasting, or slumping bank	N/A	N/A	12	97	97
G. Vanes	1. Free of back or arm scour?	2	3	N/A	66	91.5
	2. Height appropriate?	3	3	N/A	100	
	3. Angle and geometry appear appropriate?	3	3	N/A	100	
	4. Free of piping or other structural failures?	3	3	N/A	100	
H. Wads / Boulders	1. Free of scour?	3	3	N/A	100	100
	2. Footing stable?	3	3	N/A	100	

Table 8E. Qualitative Visual Stability Assessment

Monitoring Reach 5 (634 linear feet)

Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)



Feature Category	Metric (per As-built and reference baselines)	(# Stable) Number Performing as Intended	Total Number per As-built	Total Number / feet in unstable state	% Perform. in Stable Condition	Feature Perform. Mean or Total
A. Riffles	1. Present?	5	5	N/A	100	96
	2. Armor stable (e.g. no displacement)?	5	5	N/A	100	
	3. Facet grade appears stable?	5	5	N/A	100	
	4. Minimal evidence of embedding/fining?	5	5	N/A	100	
	5. Length appropriate?	4	5	N/A	80	
B. Pools	1. Present? (e.g. no severe aggradation)	5	5	N/A	100	100
	2. Sufficiently deep (Dmax pool:Mean Bkf > 2.2?)	5	5	N/A	100	
	3. Length appropriate?	5	5	N/A	100	
C. Thalweg	1. Upstream of meander bend centering?	5	5	N/A	100	100
	2. Downstream of meander centering?	5	5	N/A	100	
D. Meanders	1. Outer bend in state of limited/controlled erosion?	5	5	N/A	100	100
	2. Of those eroding, # w/ concomitant point bar formation?	0	0	N/A	100	
	3. Apparent Rc within spec?	5	5	N/A	100	
	4. Sufficient floodplain access and relief?	5	5	N/A	100	
E. Bed General	1. General channel bed aggradation areas (bar formation)	N/A	N/A	0	100	100
	2. Channel bed degradation - areas of increasing down cutting or head cutting?	N/A	N/A	0	100	
F. Bank	1. Actively eroding, wasting, or slumping bank	N/A	N/A	0	100	100
G. Vanes	1. Free of back or arm scour?	3	3	N/A	100	100
	2. Height appropriate?	3	3	N/A	100	
	3. Angle and geometry appear appropriate?	3	3	N/A	100	
	4. Free of piping or other structural failures?	3	3	N/A	100	
H. Wads / Boulders	1. Free of scour?	1	1	N/A	100	100
	2. Footing stable?	1	1	N/A	100	

Table 9. Verification of Bankfull Events

Upper UT to Cane Creek (Pickard) Restoration Site (EEP Project Number 395)

Date of Data Collection	Date of Occurrence	Method	Photo (if available)
November 16, 2009	November 11, 2009	Visual observation of wrack adjacent to the stream channel and within the floodplain as the result of Tropical Storm Ida	1-2
February 17, 2010	February 5, 2010	Visual observations of overbank event including wrack lines and sediment deposition resulting from a 1.36 inch* rainfall event on February 5, 2010 that occurred after numerous rainfall events, within the 3 weeks prior, that totaled 3.52 inches.	3-4
June 16, 2010	May 17, 2010	Visual observations of overbank event including wrack lines and sediment deposition resulting from a 4.1 inch* rainfall event on May 16-17, 2010.	--
October 5, 2010	September 30, 2010	A 4.43-inch* rainfall event occurring between September 26-October 2, 2010.	--

* Reported at KBUY Weather Station in Burlington.

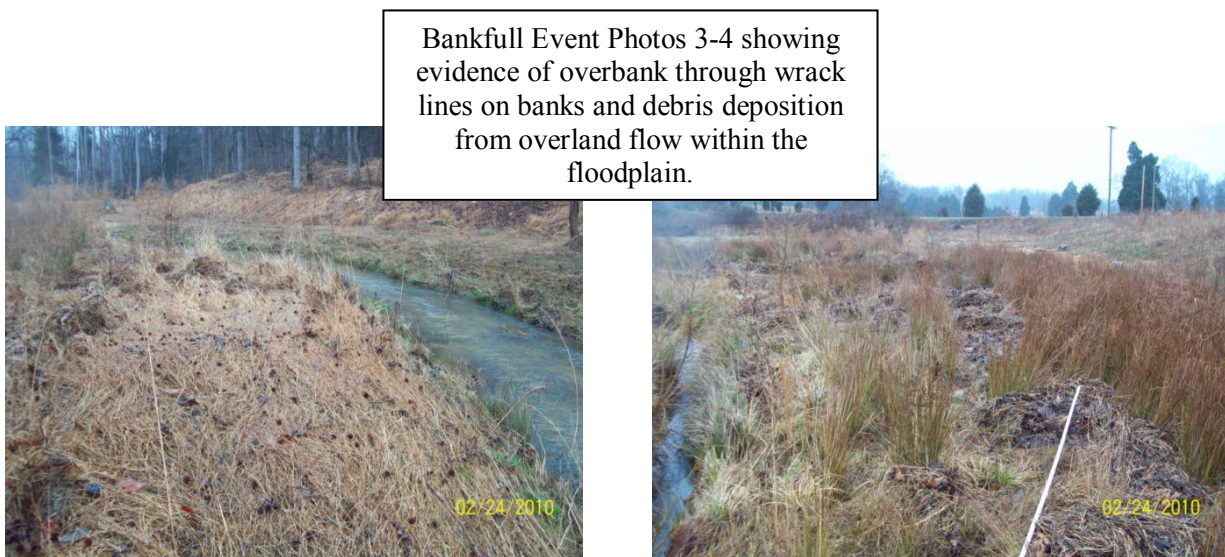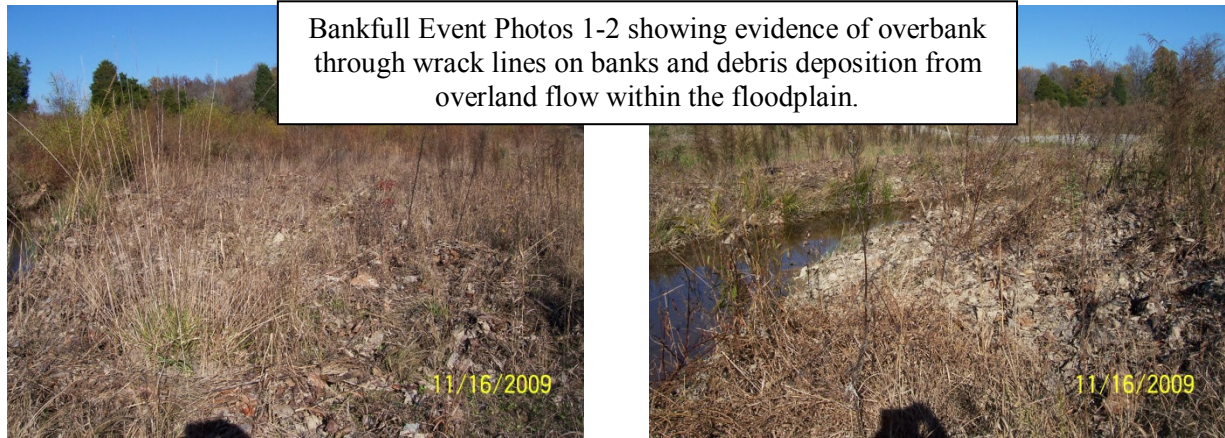


River Basin:	Cape Fear
Watershed:	UT to Cane Cr.
XS ID	XS - 9, Pool
Feature	Pool
Date:	8/13/2010
Field Crew:	Dean, Perkinson

Station	Elevation
0.0	85.4
3.8	85.3
5.8	85.1
7.5	84.5
8.6	84.2
9.0	84.2
9.5	83.9
10.2	83.6
10.9	83.2
11.5	82.9
12.8	82.6
14.0	82.3
14.7	82.1
15.6	82.1
16.8	82.2
17.4	82.4
18.0	82.8
18.4	83.4
19.3	83.9
20.4	84.4
21.3	85.0
23.2	85.4
26.3	85.5
30.2	85.4
33.2	85.3

SUMMARY DATA	
Bankfull Elevation:	85.2
Bankfull Cross-Sectional Area:	28.5
Bankfull Width:	17.7
Flood Prone Area Elevation:	NA
Flood Prone Width:	NA
Max Depth at Bankfull:	3.1
Mean Depth at Bankfull:	1.6
W / D Ratio:	NA
Entrenchment Ratio:	NA
Bank Height Ratio:	NA



Stream Type E/C

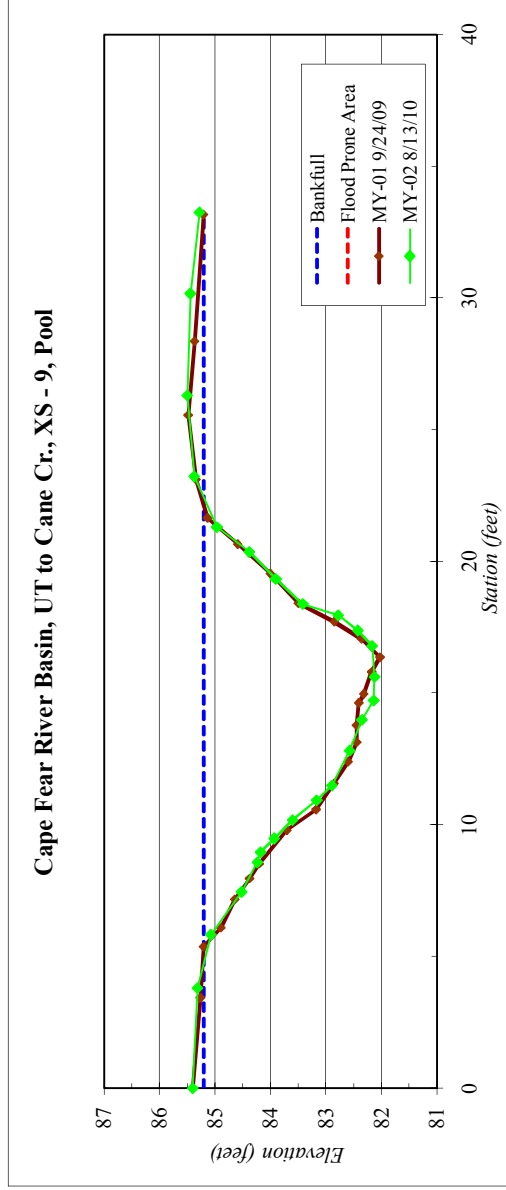


River Basin:	Cape Fear
Watershed:	UT to Cane Cr.
XS ID	XS - 10, Riffle
Feature	Riffle
Date:	8/13/2010
Field Crew:	Dean, Perkinson



Station	Elevation
33.5	84.5
31.1	84.1
28.4	84.1
26.6	84.0
25.7	83.8
25.1	83.4
24.3	83.0
23.3	82.4
22.8	82.3
22.1	82.3
21.5	82.1
20.8	82.1
19.9	81.9
18.6	81.8
17.8	81.7
17.7	81.5
17.0	81.5
16.4	81.4
15.7	81.4
14.7	81.7
13.9	81.7
13.1	81.8
12.1	81.8
11.0	82.5
9.8	82.4
7.8	82.8
6.2	83.1
4.6	83.4
2.7	83.6
0.0	83.8

SUMMARY DATA		
Bankfull Elevation:		83.5
Bankfull Cross-Sectional Area:		24.9
Bankfull Width:		21.1
Flood Prone Area Elevation:		85.5
Flood Prone Width:		150.0
Max Depth at Bankfull:		2.0
Mean Depth at Bankfull:		1.2
W / D Ratio:		17.9
Entrenchment Ratio:		7.1
Bank Height Ratio:		1.0

Stream Type: C

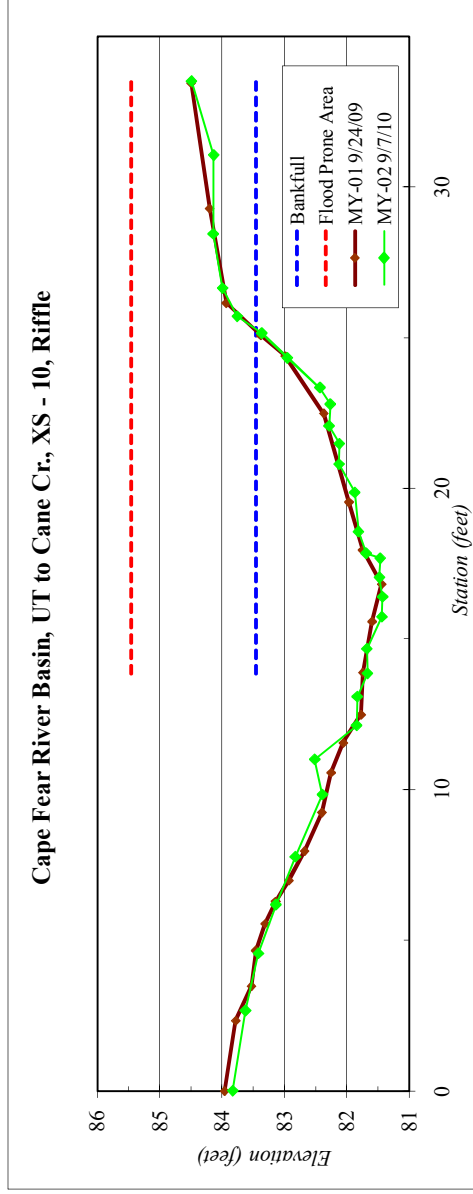


River Basin:	Cape Fear
Watershed:	UT to Cane Cr.
XS ID	XS - 11, Riffle
Feature	Riffle
Date:	8/12/2010
Field Crew:	Dean, Perkinson



Station	Elevation
0.0	94.88
6.1	94.70
7.6	94.70
8.4	94.30
9.9	93.94
11.3	93.22
12.2	92.90
12.6	92.09
13.3	91.69
14.5	91.69
16.4	91.77
17.6	91.96
19.7	92.20
20.6	92.55
22.0	92.87
24.5	93.61
25.7	94.17
27.9	94.70
30.0	94.87
33.8	94.8

SUMMARY DATA		
Bankfull Elevation:		94.2
Bankfull Cross-Sectional Area:		25.8
Bankfull Width:		17.0
Flood Prone Area Elevation:		96.7
Flood Prone Width:		150.0
Max Depth at Bankfull:		2.5
Mean Depth at Bankfull:		1.5
W / D Ratio:		11.2
Entrenchment Ratio:		8.8
Bank Height Ratio:		1.0

Stream Type E/C

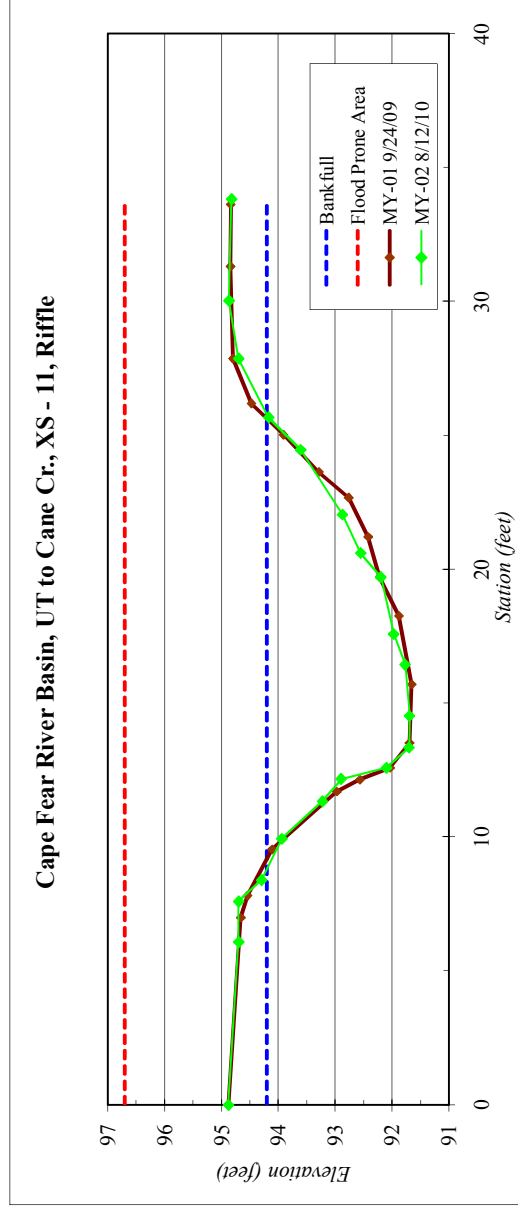


River Basin:	Cape Fear
Watershed:	UT to Cane Cr.
XS ID	XS - 12, Riffle
Feature	Riffle
Date:	8/12/2010
Field Crew:	Dean, Perkinson



Station	Elevation
0.0	93.88
8.1	94.14
11.6	94.19
12.6	94.20
13.1	93.91
14.3	93.07
15.4	92.55
16.5	92.10
17.2	91.73
18.1	91.62
19.7	91.39
20.5	91.33
21.7	91.17
22.6	91.27
23.4	91.15
24.2	91.14
25.0	91.67
26.3	92.19
27.6	92.58
28.9	93.1
29.6	93.5
30.7	93.8
33.5	94.0
36.3	93.9
40.5	94.1

SUMMARY DATA	
Bankfull Elevation:	93.7
Bankfull Cross-Sectional Area:	21.1
Bankfull Width:	12.4
Flood Prone Area Elevation:	96.3
Flood Prone Width:	150.0
Max Depth at Bankfull:	2.6
Mean Depth at Bankfull:	1.7
W/D Ratio:	7.3
Entrenchment Ratio:	12.1
Bank Height Ratio:	1.0

Stream Type E/C

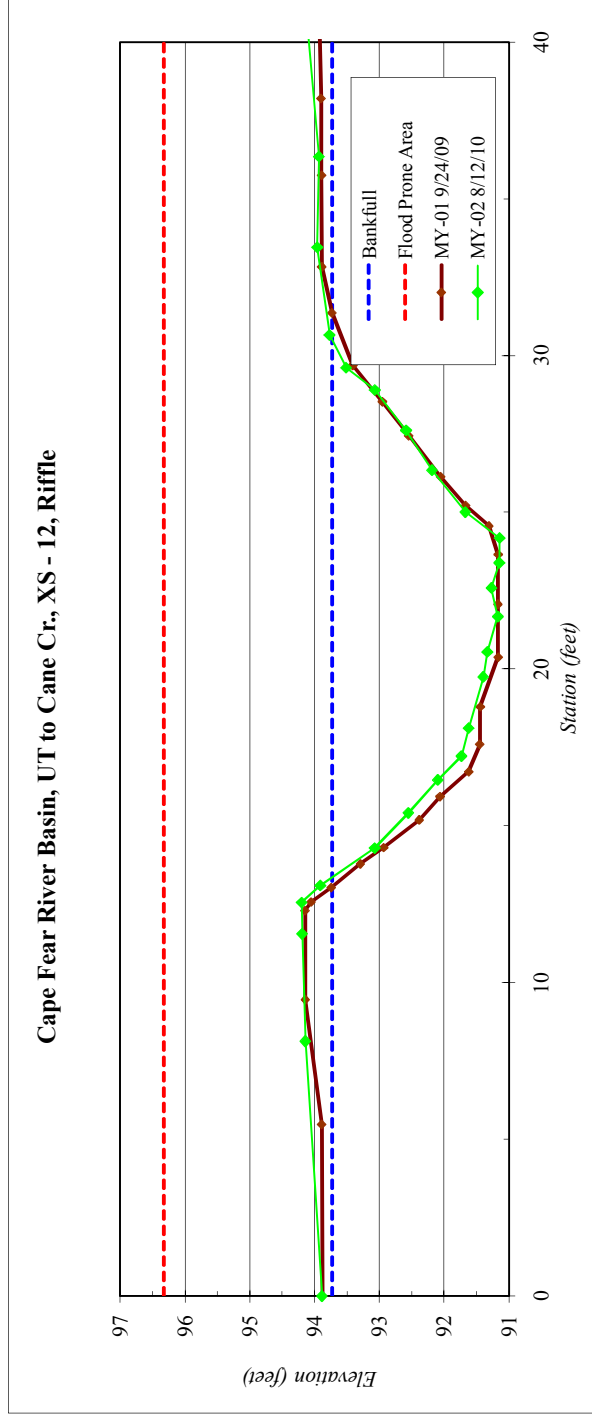


Project Name: UT to Cane Creek - Year 2 (2010) Profile
 Reach: 1
 Profile: 1
 Feature: 8/12/10
 Date: Dean, P. Perkins
 Crew:

2008		2009		2010		2011	
Station	As-built Survey Bed Elevation - Water Elevation	Station	Year 1 Monitoring Survey Bed Elevation - Water Elevation	Station	Year 2 Monitoring Survey Bed Elevation - Water Elevation	Station	Year 3 Monitoring Survey Bed Elevation - Water Elevation
677.8	0.0	0.0	94.9	0.0	94.3	95.0	
673.5	99.2	9.6	94.7	10.3	94.3	95.0	
668.5	99.6	29.4	94.6	19.0	94.6	95.2	
665.7	99.2	33.8	95.1	28.8	94.5	95.2	
665.7	99.2	33.8	94.2	32.0	94.5	95.2	
663.3	98.3	41.3	94.4	42.8	94.8	95.2	
661.8	97.9	44.3	94.9	46.6	94.4	95.2	
658.1	98.0	49.0	94.6	50.6	94.2	95.2	
655.1	98.1	51.5	94.4	54.5	94.2	95.2	
653.4	98.2	56.9	94.5	60.6	94.5	95.1	
651.2	99.1	60.9	94.7	64.0	94.3	95.2	
649.4	99.0	68.3	94.8	72.3	94.9	95.3	
648.8	98.9	70.8	94.8	75.7	94.9	95.3	
644.8	98.9	97.9	95.5	87.0	95.3	95.7	
641.1	98.6	118.7	95.2	105.0	95.3	95.7	
638.5	98.5	125.6	94.6	117.3	95.1	95.7	
636.4	98.5	131.0	95.0	124.3	94.4	95.7	
633.4	98.7	141.0	95.6	127.2	94.6	95.7	
631.1	98.9	149.2	95.6	136.0	95.2	95.7	
628.1	99.2	155.6	95.5	144.9	95.6	95.9	
625.9	99.1	161.2	95.0	153.7	94.6	95.9	
625.9	99.1	161.2	96.0	157.0	94.6	95.9	
620.6	98.9	172.0	96.0	165.3	95.0	95.9	
618.1	99.0	179.5	96.7	171.3	96.0	96.1	
614.2	98.8	183.8	96.1	177.6	96.3	96.3	
611.2	98.7	193.0	96.6	182.9	96.0	96.6	
608.9	98.1	207.5	96.7	189.0	96.2	96.6	
606.3	98.2	215.2	96.3	193.0	96.2	96.6	

Avg. Water Surface Slope	2009	2010	2011	2012
Riffle Length	0.068	0.057	0.057	
Avg. Riffle Slope	17	19		
Pool Length	0.0066	0.0094		
Avg. Pool Slope	20	9		
	0.0015	0.0		

UT to Cane Creek - Year 2 (2010) Profile - Reach 1

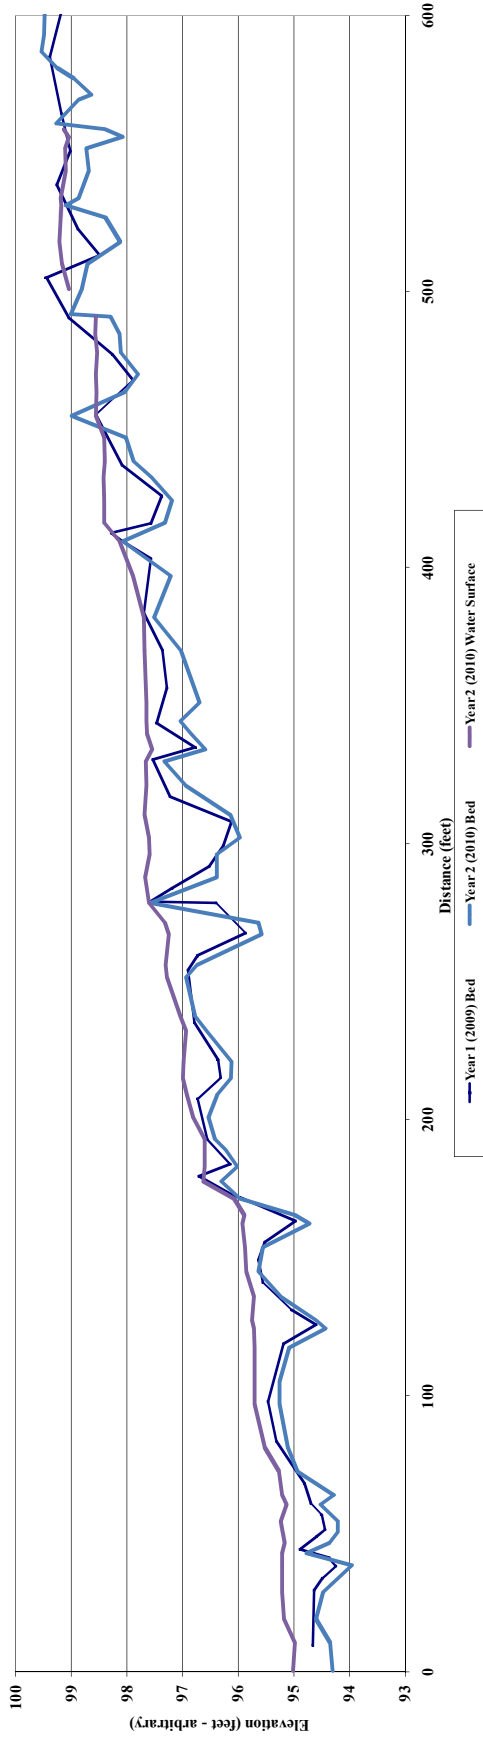


Project Name: UT to Cane Creek - Year 2 (2010) Profile
 Reach: 2
 Profile: 2
 Feature: 8/12/10
 Date: Dean, Robinson
 Crew:

Station	2008 As-built		2009 Year 1 Monitoring/Survey		2010 Year 2 Monitoring/Survey		2011 Year 3 Monitoring/Survey	
	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation	Station	Bed Elevation	Water Elevation
601.5	75.0		0.0	77.1		575.6	75.3	75.7
598.9	75.5		5.4	77.5		563.9	75.3	75.8
597.3	75.1		13.3	77.4		556.1	75.3	75.8
595.1	75.3		20.3	77.8		548.4	75.3	75.8
592.4	75.6		27.3	77.8		540.6	75.3	75.8
590.1	75.6		34.3	77.5		534.8	75.3	75.8
588.2	75.6		41.3	77.5		527.9	75.3	75.8
583.9	75.6		50.2	77.3		518.9	75.4	75.8
581.0	75.5		57.1	77.7		514.1	75.4	75.8
577.4	75.3		65.9	77.0		502.1	75.5	75.8
575.2	75.3		72.1	76.8		489.1	75.3	75.9
572.2	75.6		77.5	76.6		481.6	75.3	75.9
567.7	75.5		82.2	76.3		474.9	75.3	75.9
565.9	75.7		87.6	76.5		469.6	75.6	75.9
563.4	75.6		88.9	76.9		462.3	75.4	75.9
561.7	75.9		98.7	77.0		456.9	75.4	75.9
559.6	75.9		121.1	76.9		449.0	75.3	75.9
556.2	75.4		135.4	77.4		441.7	75.2	75.9
553.1	75.4		148.4	76.1		437.2	75.2	75.8
550.7	75.2		153.7	76.9		427.0	75.8	76.0
549.3	76.0		155.5	77.1		419.7	75.6	76.1
546.5	75.1		158.3	76.9		409.3	76.5	
544.3	75.8		188.3	76.9		390.3	76.5	
543.3	75.8		200.1	76.6		380.8	76.1	76.2
			212.1	76.8		375.3	76.0	
			222.5	76.9		368.9	76.4	
			232.0	76.6		364.8	76.5	
			240.0	76.3		357.9	76.5	

Avg. Water Surface Slope	2009	2010	2011	2012
Riffle Length	13	10		
Avg. Riffle Slope		
Pool Length	22	20		
Avg. Pool Slope		

No Water In Channel

UT to Cane Creek - Year 2 (2010) Profile - Reach 2

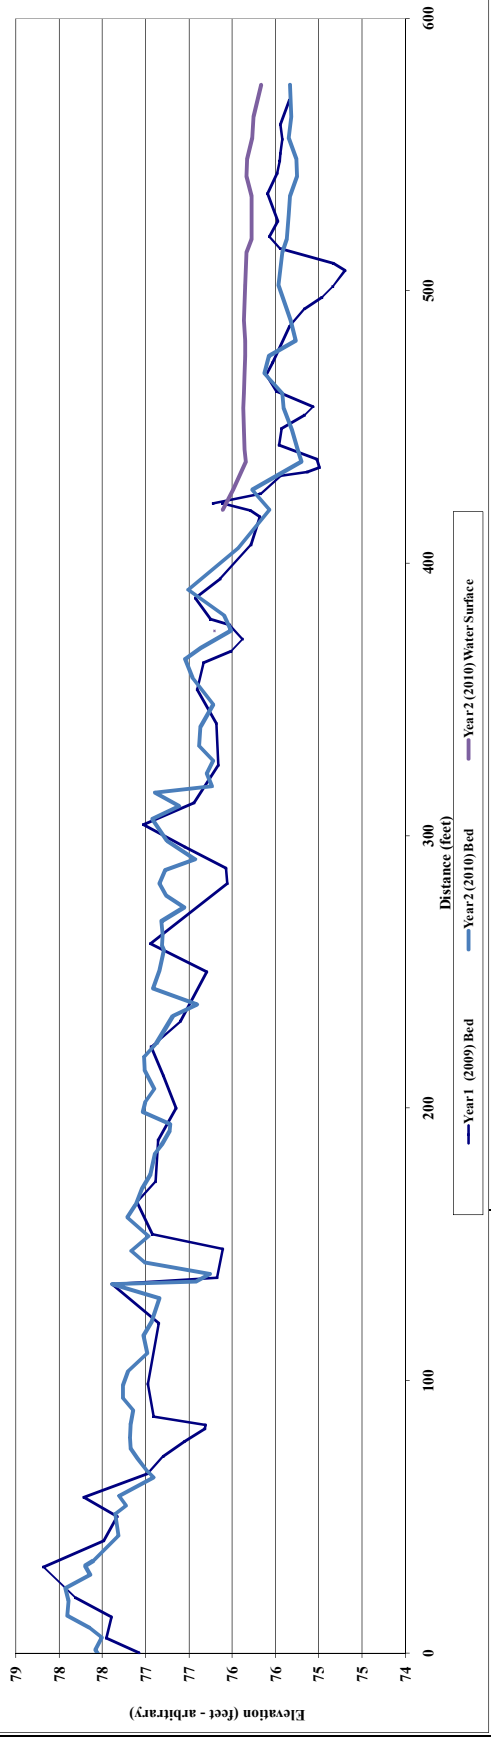


Project Name: UT to Cane Creek - Year 2 (2010) Profile
 Reach: 3
 Profile: 3
 Feature: 3
 Date: 8/12/10
 Crew: Dean, Perkins

Station	2008		2009		2010		2011	
	As-built	Water Elevation	Station	Water Elevation	Station	Water Elevation	Station	Water Elevation
15.2	87.1	87.1	0.0	87.1	523.3	85.5	85.7	85.7
16.3	87.1	87.1	6.5	86.6	519.8	84.9	85.8	85.8
18.5	86.7	87.1	11.8	86.7	517.5	85.1	85.7	85.7
20.7	86.7	87.1	16.6	86.7	517.5	85.1	85.7	85.7
21.7	86.7	87.1	16.6	86.7	517.5	85.1	85.7	85.7
23.8	86.9	87.1	22.7	86.5	507.6	84.8	85.7	85.7
26.6	87.0	87.1	29.5	86.5	502.8	84.8	85.7	85.7
27.0	86.9	87.1	34.5	86.5	497.9	84.6	85.7	85.7
28.8	86.3	87.1	49.1.8	86.5	491.8	84.5	85.7	85.7
30.9	86.0	87.1	35.9	86.6	485.0	85.4	85.7	85.7
33.8	86.4	87.1	46.4	86.4	477.0	85.2	85.7	85.7
35.6	86.2	87.1	50.8	86.4	466.8	85.1	85.7	85.7
37.4	86.2	87.1	54.8	86.4	458.0	85.3	85.8	85.8
39.4	86.1	87.1	59.6	86.2	449.8	85.6	86.0	86.0
41.6	86.1	87.1	71.1	86.1	439.8	85.6	86.0	86.0
45.9	86.0	87.1	86.1	86.3	430.0	85.7	86.0	86.0
47.5	86.2	87.1	75.0	86.3	421.6	85.7	86.1	86.1
49.9	85.9	87.1	82.1	86.2	407.7	86.2	86.3	86.3
51.7	86.0	87.1	92.4	86.5	401.6	85.7	86.3	86.3
53.4	85.8	87.1	102.0	86.9	396.8	85.5	86.3	86.3
55.0	85.9	87.1	115.5	86.9	390.6	85.5	86.3	86.3
57.3	85.9	87.1	121.7	86.9	382.2	85.6	86.3	86.3
59.3	85.9	87.1	121.7	86.8	372.0	85.7	86.3	86.3
61.0	85.7	87.1	130.4	86.5	362.0	85.7	86.3	86.3
63.8	85.8	87.1	140.2	86.3	327.6	85.4	86.4	86.4
65.6	86.4	87.1	149.0	86.5	317.1	85.8	86.3	86.3
67.8	86.6	87.1	167.0	86.5	308.0	85.6	86.3	86.3
69.9	86.3	87.1	175.0	86.1	295.3	85.7	86.3	86.3
					271.6	85.8	86.3	86.3

2009	2010	2011	2012
0.0025	0.0027		
96	69		
0.0036	0.0031		
37	20		
0.0001	0.0023		

UT to Cane Creek - Year 2 (2010) Profile - Reach 3

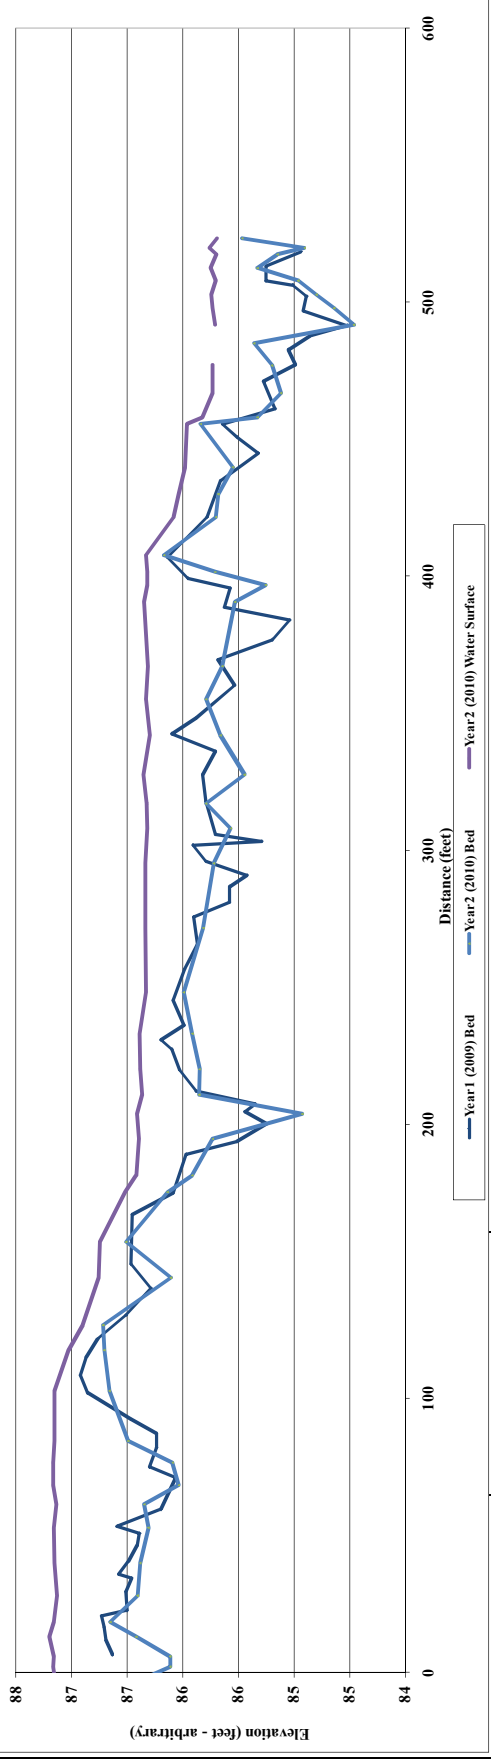


Project Name: UT to Cane Creek - Year 2 (2010) Profile
 Reach: 4
 Profile: 4
 Feature: 4
 Date: 8/12/10
 Crew: Dean, Perkins

Station	2008 As-built		2009 Year 1 Monitoring Survey		2010 Year 2 Monitoring Survey		2011 Year 3 Monitoring Survey	
	Bed Elevation	Water Elevation	Station	Bed Elevation - Water Elevation	Station	Bed Elevation - Water Elevation	Station	Bed Elevation - Water Elevation
0.1	83.5	84.0	0.0	84.0	562.0	82.0	84.1	84.1
1.8	83.6	83.7	11.2	83.7	544.4	81.8	84.2	84.2
3.2	83.7	83.2	13.2	83.2	523.1	81.8	84.3	84.3
4.7	83.9	84.1	14.1	84.1	505.7	82.0	84.4	84.4
6.1	83.9	84.1	14.1	84.1	487.2	81.5	84.4	84.4
7.6	83.6	84.4	55.1	84.4	485.2	81.5	84.4	84.4
9.0	83.7	84.1	96.7	84.1	478.7	81.0	84.5	84.5
10.8	83.5	84.0	118.3	84.0	473.3	81.2	84.4	84.4
12.2	83.5	84.0	140.7	83.0	458.7	82.1	84.4	84.4
13.8	83.7	83.1	149.9	83.1	439.2	82.2	84.6	84.6
15.5	83.6	83.5	172.5	83.5	426.5	82.0	84.6	84.6
16.8	83.6	83.2	183.2	83.2	411.8	82.0	84.6	84.6
18.1	83.7	83.5	187.6	83.5	395.0	81.8	84.6	84.6
20.1	83.8	83.0	208.3	83.0	395.0	82.1	84.6	84.6
21.2	83.8	83.1	226.4	83.1	393.5	82.1	84.6	84.6
22.3	83.9	83.0	246.1	83.0	385.5	81.6	84.6	84.6
23.2	83.9	82.5	250.6	82.5	377.2	81.1	84.6	84.6
24.0	83.9	82.0	259.7	82.0	368.8	81.5	84.6	84.6
25.2	83.8	82.4	267.9	82.4	359.1	81.6	84.6	84.6
26.4	83.9	81.6	275.6	81.6	348.4	81.6	84.6	84.6
27.7	83.0	82.5	293.1	82.5	344.2	81.4	84.6	84.6
28.7	83.0	82.7	301.4	82.7	338.5	82.2	84.6	84.6
29.8	83.9	82.4	304.0	82.4	338.5	82.0	84.6	84.6
30.9	84.0	82.4	322.8	82.4	332.5	82.0	84.6	84.6
32.4	84.2	82.5	338.0	82.5	323.1	82.1	84.7	84.7
33.6	84.1	82.0	345.5	82.0	308.7	82.3	84.7	84.7
35.1	84.1	81.9	357.5	81.9	292.2	82.3	84.8	84.8
36.2	84.0	82.7	368.0	82.7	284.2	81.9	84.8	84.8

2009	2010	2011	2012
0.0027	0.0039		
23	34		
0.0029	0.0064		
31	12		
0.0018	0.0016		

UT to Cane Creek - Year 2 (2010) Profile - Reach 4

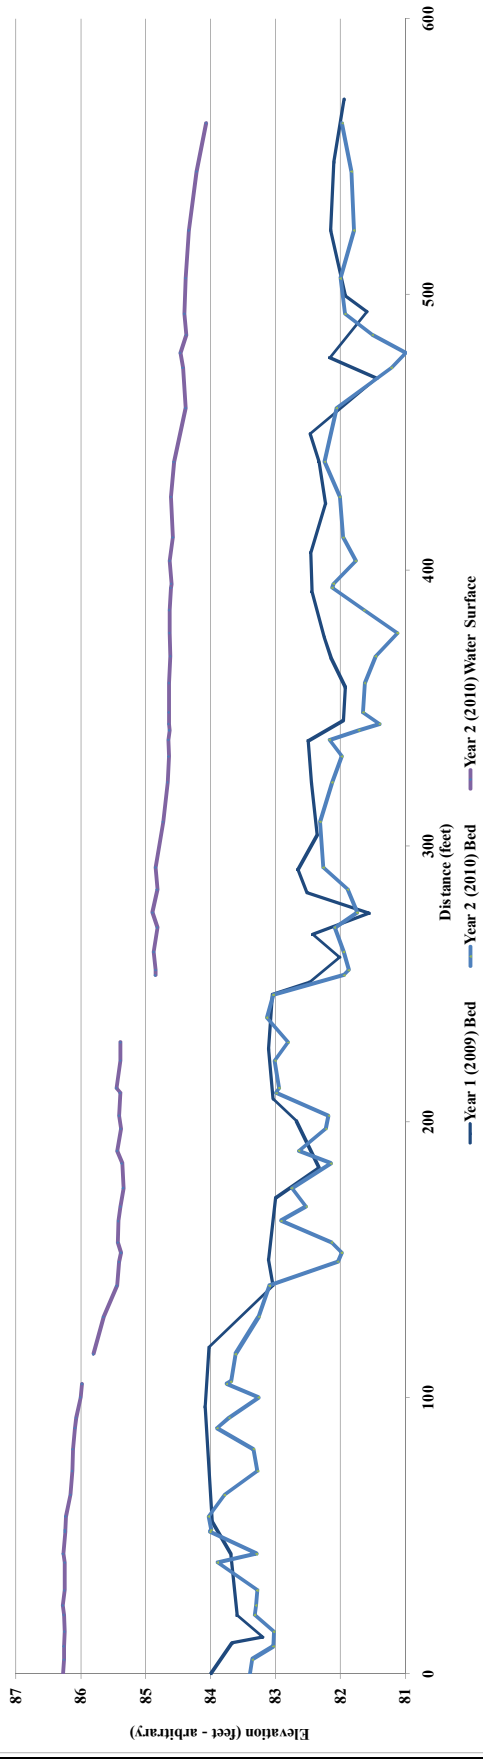


Project Name: UT to Cane Creek - Year 2 (2010) Profile
 Reach: 5
 Profile: 5
 Feature: 8/12/10
 Date: Dean, Perkins
 Crew:

Station	2008		2009		2010		2011	
	As-built Bed Elevation	Water Elevation	Year 1 Monitoring Survey Station	Bed Elevation	Water Elevation	Year 2 Monitoring Survey Station	Bed Elevation	Water Elevation
0.5	91.3		0.0	91.4	91.5	-36.3	90.9	91.3
3.0	91.3		7.4	91.2	91.5	-16.6	91.1	91.5
5.3	91.3		12.0	90.9	91.5	-0.6	91.2	91.7
6.3	91.0		12.0	90.8	91.5	13.6	90.7	91.7
6.3	91.0		24.7	90.8	91.5	22.7	90.7	91.7
12.7	90.5		49.6	91.4	91.6	27.7	90.6	91.7
15.5	90.6		96.1	91.4	91.7	36.6	91.3	91.7
18.3	90.6		101.4	90.4	91.8	54.3	91.5	91.8
20.8	90.6		107.4	91.0	91.7	61.2	91.5	91.9
22.8	90.6		115.7	91.6	91.7	69.4	91.2	91.9
26.9	90.3		131.4	91.7	91.9	78.1	91.9	92.0
27.5	90.4		144.7	91.6	91.9	91.4	90.9	92.0
31.7	90.6		164.3	91.8	92.0	97.4	91.9	92.0
31.7	90.6		164.3	91.0	91.9	104.2	91.0	92.0
34.8	90.7		172.7	91.4	92.0	112.2	91.8	92.1
38.1	91.2		196.3	91.7	91.9	124.8	91.7	92.1
39.3	91.2		217.0	91.3	92.0	138.5	91.6	92.2
42.7	91.4		231.0	91.0	92.0	146.9	90.8	92.2
45.9	91.4		250.1	91.6	91.9	154.6	90.4	92.2
46.5	91.3		275.2	91.9	92.1	160.4	90.8	92.2
48.9	91.4		317.6	91.7	92.1	181.0	91.5	92.2
52.2	91.6		335.8	91.5	92.1	191.4	91.5	92.2
52.2	91.6		335.8	91.8	92.1	214.4	91.1	92.2
53.9	91.2		360.8	92.1	92.1	229.1	90.5	92.2
55.1	91.4		393.2	92.2	92.2	243.5	91.1	92.2
58.8	91.2		411.8	92.1	92.3	251.8	91.8	92.3
63.8	91.7		418.8	91.7	92.3	289.5	91.8	92.4
66.5	91.4		431.4	92.3	92.4	312.2	91.2	92.4

2009 CDS	2010 CDS	2011 CDS	2012 CDS
0.0023	0.0023	0.0023	0.0023
33	32	32	32
0.0036	0.0036	0.0035	0.0035
28	14	14	14
0.0001	0.0001	0.0018	0.0018


UT to Cane Creek - Year 2 (2010) Profile - Reach 5

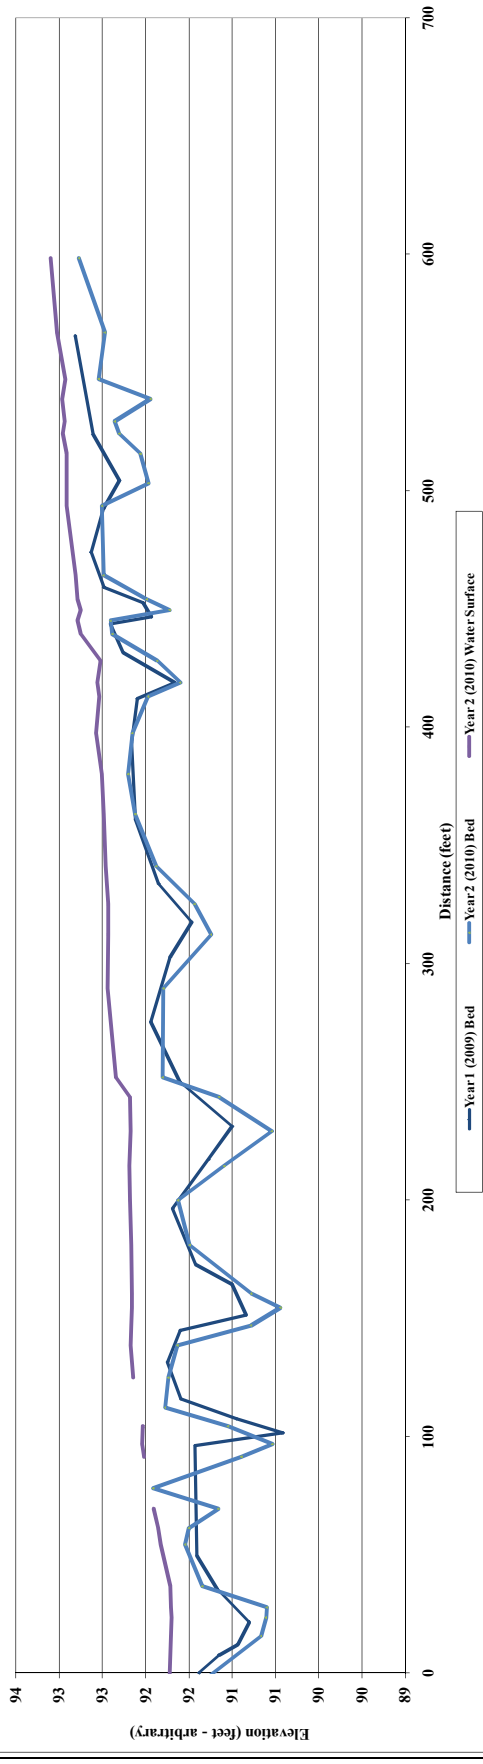

Weighted Pebble Count

Percent Riffle:		Percent Pool		Percent Run:		Percent Glide:	
50		50		50		50	
Material	Size Range (mm)	Total #	Weighted Count	Pebble Count, ---			
silt/clay	0 0.062	28.0	100				
very fine sand	0.062 0.13	0.0	0				
fine sand	0.13 0.25	0.0	0				
medium sand	0.25 0.5	0.0	0				
coarse sand	0.5 1	12.0	0				
very coarse sand	1 2	14.0	0				
very fine gravel	2 4	2.0	0				
fine gravel	4 6	4.0	0				
fine gravel	6 8	2.0	0				
medium gravel	8 11	8.0	0				
medium gravel	11 16	10.0	0				
coarse gravel	16 22	10.0	0				
coarse gravel	22 32	6.0	0				
very coarse gravel	32 45	2.0	0				
very coarse gravel	45 64	2.0	0				
small cobble	64 90	0.0	0				
medium cobble	90 128	0.0	0				
large cobble	128 180	0.0	0				
very large cobble	180 256	0.0	0				
small boulder	256 362	0.0	0				
small boulder	362 512	0.0	0				
medium boulder	512 1024	0.0	0				
large boulder	1024 2048	0.0	0				
very large boulder	2048 4096	0.0	0				
bedrock		0.0	0				
		Weighted Count:	100				
		True Total Particle Count:	50				

Note: Ut to Cane Creek - Reach 1

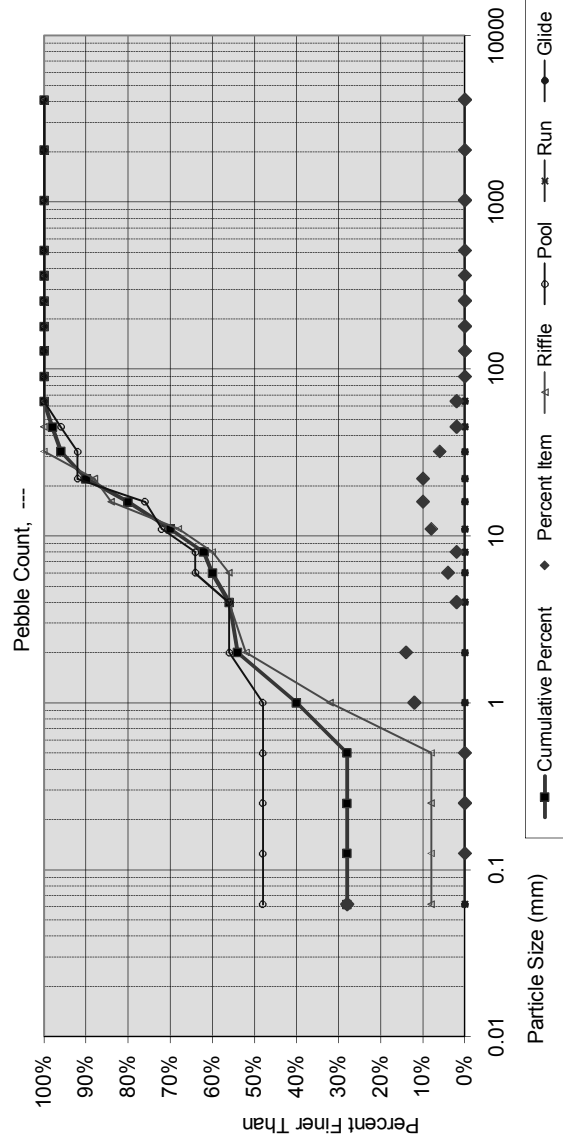


Size percent less than (mm)		Percent by substrate type			
D16	D35	D50	D84	D95	
#N/A	0.75	1.6	18	30	
					silt/clay
					28%
					sand
					26%
					gravel
					46%
					cobble
					0%
					boulder
					0%
					bedrock
					0%

Weighted Pebble Count

Percent Riffle:		Percent Run:		Percent Glide:	
50	50	50	50	50	50
Material	Size Range (mm)	Total #	Percent Run:	Percent Run:	Percent Run:
silt/clay	0 0.062	55.2	55.2%	55.2%	55.2%
very fine sand	0.062 0.13	3.1	3.1%	3.1%	3.1%
fine sand	0.13 0.25	3.1	3.1%	3.1%	3.1%
medium sand	0.25 0.5	3.1	3.1%	3.1%	3.1%
coarse sand	0.5 1	16.9	16.9%	16.9%	16.9%
very coarse sand	1 2	12.5	12.5%	12.5%	12.5%
very fine gravel	2 4	0.0	0.0%	0.0%	0.0%
fine gravel	4 6	0.0	0.0%	0.0%	0.0%
fine gravel	6 8	0.0	0.0%	0.0%	0.0%
medium gravel	8 11	2.0	2.0%	2.0%	2.0%
medium gravel	11 16	2.0	2.0%	2.0%	2.0%
coarse gravel	16 22	0.0	0.0%	0.0%	0.0%
coarse gravel	22 32	2.0	2.0%	2.0%	2.0%
very coarse gravel	32 45	0.0	0.0%	0.0%	0.0%
very coarse gravel	45 64	0.0	0.0%	0.0%	0.0%
small cobble	64 90	0.0	0.0%	0.0%	0.0%
medium cobble	90 128	0.0	0.0%	0.0%	0.0%
large cobble	128 180	0.0	0.0%	0.0%	0.0%
very large cobble	180 256	0.0	0.0%	0.0%	0.0%
small boulder	256 362	0.0	0.0%	0.0%	0.0%
small boulder	362 512	0.0	0.0%	0.0%	0.0%
medium boulder	512 1024	0.0	0.0%	0.0%	0.0%
large boulder	1024 2048	0.0	0.0%	0.0%	0.0%
very large boulder	2048 4096	0.0	0.0%	0.0%	0.0%
bedrock		0.0	0.0%	0.0%	0.0%
Weighted Count:		100			
True Total Particle Count:		57			

Pebble Count, ---

Note: Ut to Cane Creek - Reach 2

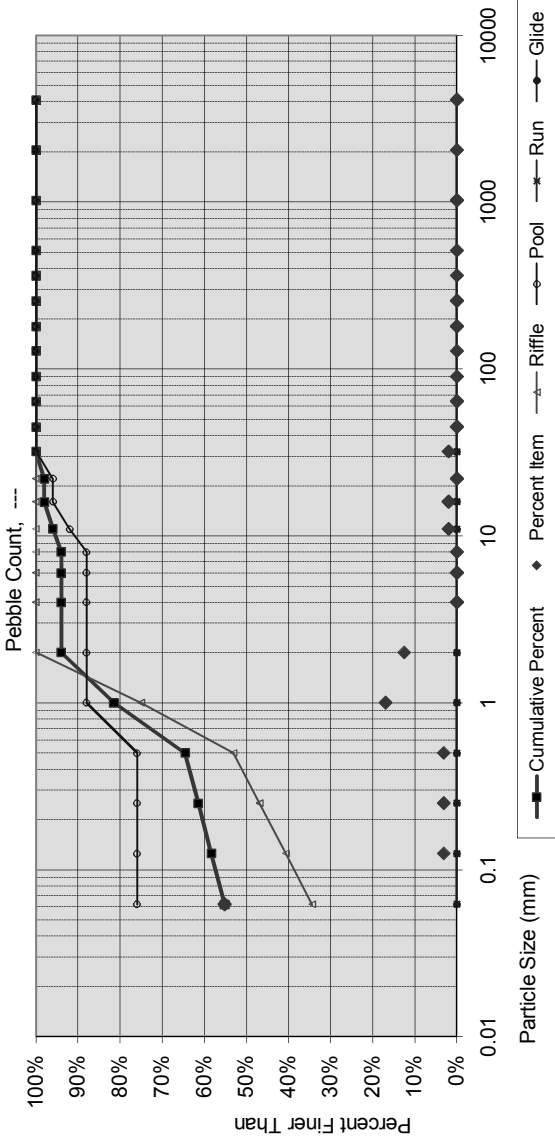


Size percent less than (mm)		Percent by substrate type													
D16	#N/A	D35	#N/A	D84	1	D95	9	gravel	6%	cobble	0%	boulder	0%	bedrock	0%
D50	#N/A	D100	1	D200	1	D400	1	sand	39%	gravel	6%	cobble	0%	boulder	0%
D100	1	D200	1	D400	1	D800	1	silt/clay	55%	gravel	6%	cobble	0%	boulder	0%

Weighted Pebble Count

Percent Riffle:		Percent Pool		Percent Run:		Percent Glide:							
50		50		50		50							
Material	Size Range (mm)	Total #	Weighted Count	D16	D35	D50	D84	D95	Percent by substrate type				
silt/clay	0 0.062	5.9	100	0.581	0.77	1.0	18	25	silt/clay	sand	gravel	cobble	bedrock
very fine sand	0.062 0.13	0.0							6%	59%	35%	0%	0%
fine sand	0.13 0.25	0.0											
medium sand	0.25 0.5	0.0											
coarse sand	0.5 1	46.8											
very coarse sand	1 2	11.8											
very fine gravel	2 4	1.9											
fine gravel	4 6	0.0											
medium gravel	6 8	0.0											
coarse gravel	8 11	8.0											
very coarse gravel	11 16	5.8											
small cobble	16 22	11.8											
medium cobble	22 32	7.9											
large cobble	32 45	0.0											
very large cobble	45 64	0.0											
small boulder	64 90	0.0											
medium boulder	90 128	0.0											
large boulder	128 180	0.0											
very large boulder	180 256	0.0											
bedrock	256 362	0.0											
	362 512	0.0											
	512 1024	0.0											
	1024 2048	0.0											
	2048 4096	0.0											
		0.0											
True Total Particle Count			51										

Note: Ut to Cane Creek - Reach 3

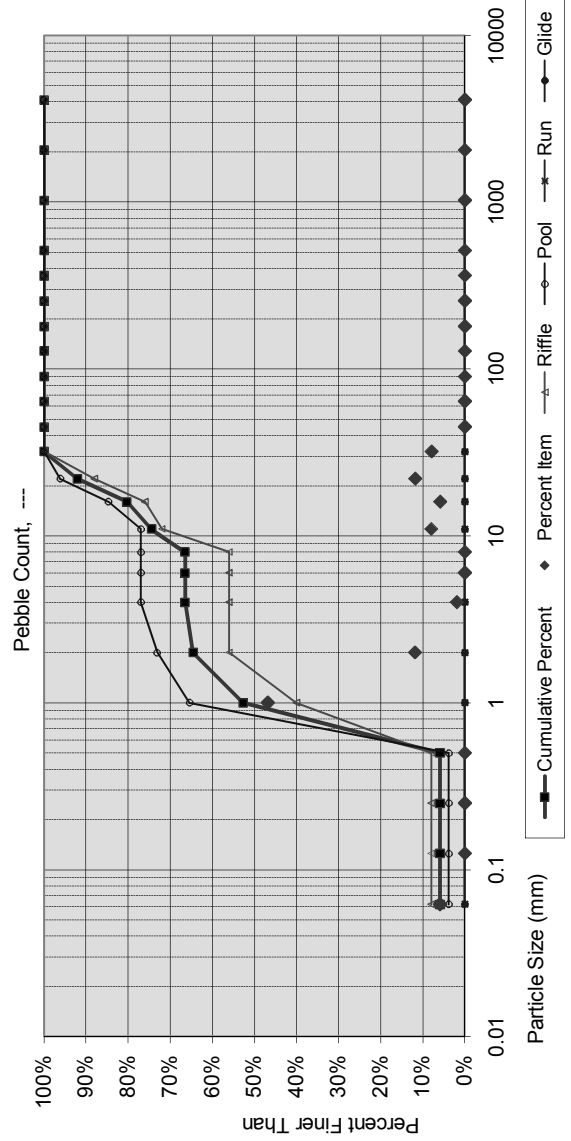


Size percent less than (mm)	D16	D35	D50	D84	D95	Percent by substrate type
0.581	0.77	1.0	18	25		silt/clay 6%, sand 59%, gravel 35%, cobble 0%, bedrock 0%

Weighted Pebble Count

Percent Riffle:		Percent Run:		Percent Glide:	
50	50	50	50	50	50
Material	Size Range (mm)	Total #	Percent Run:	Percent Run:	Percent Run:
silt/clay	0 0.062	11.3	#	#	#
very fine sand	0.062 0.13	0.0	#	#	#
fine sand	0.13 0.25	0.0	#	#	#
medium sand	0.25 0.5	3.8	#	#	#
coarse sand	0.5 1	39.7	#	#	#
very coarse sand	1 2	0.0	#	#	#
very fine gravel	2 4	1.9	#	#	#
fine gravel	4 6	3.8	#	#	#
fine gravel	6 8	9.5	#	#	#
medium gravel	8 11	5.7	#	#	#
medium gravel	11 16	7.4	#	#	#
coarse gravel	16 22	9.3	#	#	#
coarse gravel	22 32	5.6	#	#	#
very coarse gravel	32 45	1.9	#	#	#
very coarse gravel	45 64	0.0	#	#	#
small cobble	64 90	0.0	#	#	#
medium cobble	90 128	0.0	#	#	#
large cobble	128 180	0.0	#	#	#
very large cobble	180 256	0.0	#	#	#
small boulder	256 362	0.0	#	#	#
small boulder	362 512	0.0	#	#	#
medium boulder	512 1024	0.0	#	#	#
large boulder	1024 2048	0.0	#	#	#
very large boulder	2048 4096	0.0	#	#	#
bedrock		0.0	#	#	#
Weighted Count:		100			
True Total Particle Count:		53			

Pebble Count, ---

Note: Ut to Cane Creek - Reach 4

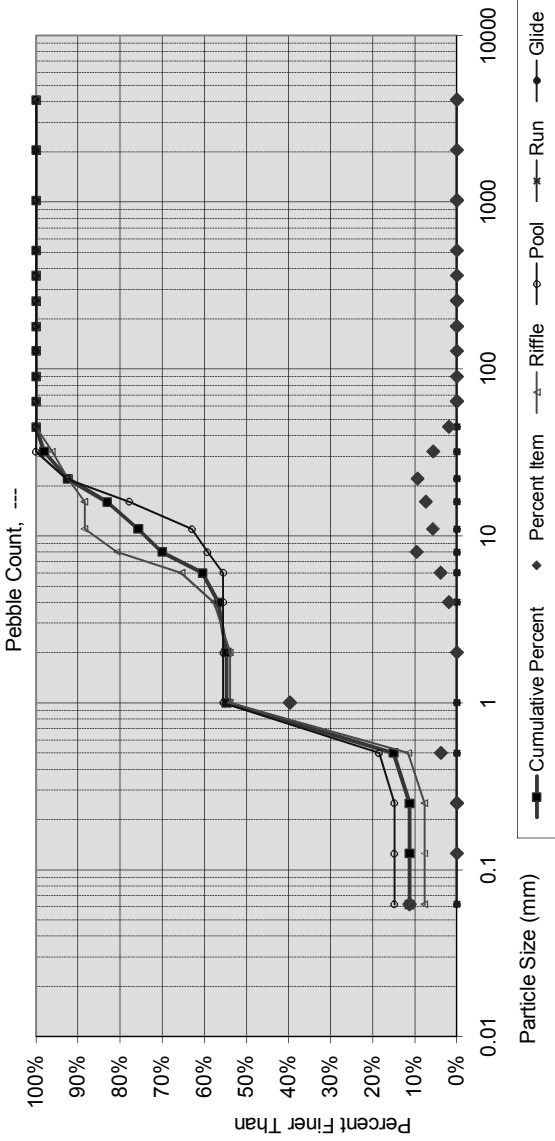

Size percent less than (mm)		Percent by substrate type							
D16	D35	D50	D84	D95	D16	D35	D50	D84	D95
0.509	0.71	0.9	16	26	silt/clay	sand	gravel	cobble	bedrock
					11%	43%	45%	0%	0%

