

Mitigation Project Name Devil's Racetrack  
 DMS IMS ID 95021  
 River Basin Neuse  
 Cataloging Unit 03020201

County Johnston  
 Date Project Instituted 7/27/2011  
 Date Prepared 8/27/2018

USACE Action ID 2012-00810  
 NCDWR Permit No 2012-0747

Credit Release Milestone	Stream Credits						Wetland Credits							
	Scheduled Releases (Stream)	Warm	Cool	Cold	Anticipated Release Year (Stream)	Actual Release Date (Stream)	Scheduled Releases (Forested)	Riparian Riverine	Riparian Non-riverine	Non-riparian	Scheduled Releases (Coastal)	Coastal	Anticipated Release Year (Wetland)	Actual Release Year (Wetland)
Potential Credits (Mitigation Plan)	18,215.100						55.200							
Potential Credits (As-Built Survey)	18,380.338						62.100							
Potential Credits (IRT Approved)*	18,215.100						62.100							
1 (Site Establishment)	N/A				N/A	N/A	N/A				N/A		N/A	
2 (Year 0 / As-Built)	30%	5,514.101			2014	6/5/2014	30%	18.630			30%		2014	6/5/2014
3 (Year 1 Monitoring)	10%	1,838.034			2015	4/23/2015	10%	6.210			10%		2015	4/23/2015
4 (Year 2 Monitoring)	10%	1,838.034			2016	4/25/2016	10%	6.210			15%		2016	4/25/2016
5 (Year 3 Monitoring)	8%	1,470.427			2017	10/20/2017	10%	6.210			20%		2017	10/20/2017
5 (Year 3 Monitoring) - NOT RELEASED	2%	364.302			2017	Not Released	5%	3.105					2017	Not Released
IRT Adjustment*		-112.360				10/20/2017								
6 (Year 4 Monitoring) - NOT RELEASED	5%	910.755			2018	Not Released	5%	3.105			10%		2018	Not Released
7 (Year 5 Monitoring)	10%				2019		15%				15%		2019	
8 (Year 6 Monitoring)	5%				2020		5%				N/A		2020	
9 (Year 7 Monitoring)	10%				2021		10%				N/A		2021	
Stream Bankfull Standard	10%	1,838.034			2016	4/25/2016	N/A				N/A			
Total Credits Released to Date		12,386.270					37.260							

DEBITS (released credits only)

	1.00986	1.5	2.5	5	1.01932	3	2	5	1	3	2	5	1	3	2	5
	Stream Restoration	Stream Enhancement I	Stream Enhancement II	Stream Preservation	Riparian Restoration	Riparian Creation	Riparian Enhancement	Riparian Preservation	Non-riparian Restoration	Non-riparian Creation	Non-riparian Enhancement	Non-riparian Preservation	Coastal Marsh Restoration	Coastal Marsh Creation	Coastal Marsh Enhancement	Coastal Marsh Preservation
As-Built Amounts (feet and acres)	18,282.000	76.000	154.000		63.300											
As-Built Amounts (mitigation credits)	18,103.499	50.667	61.600		62.100											
Percentage Released	68%	68%	68%		60%											
Released Amounts (feet / acres)	12,431.760	51.680	104.720		37.980											
Released Amounts (credits)	12,310.380	34.453	41.888		37.260											
NCDWR Permit																
USACE Action ID																
Project Name																
Remaining Amounts (feet / acres)	12,431.760	51.680	104.720		37.980											
Remaining Amounts (credits)	12,310.380	34.453	41.888		37.260											

Contingencies (if any): None

Signature of Wilmington District Official Approving Credit Release

Date

1 - For DMS, no credits are released during the first milestone

2 - For DMS projects, the second credit release milestone occurs automatically when the as-built report (baseline monitoring report) has been made available to the NCIRT by posting it to the NCEEP Portal, provided the following criteria have been met:

- 1) Approval of the final Mitigation Plan
- 2) Recordation of the preservation mechanism, as well as a title opinion acceptable to the USACE covering the property
- 3) Completion of all physical and biological improvements to the mitigation site pursuant to the mitigation plan
- 4) Receipt of necessary DA permit authorization or written DA approval for projects where DA permit issuance is not required

3 - A 10% reserve of credits is to be held back until the bankfull event performance standard has been met



# **MONITORING YEAR 5 ANNUAL REPORT FINAL**

## **DEVIL'S RACETRACK MITIGATION SITE**

Johnston County, NC

NCDEQ Contract 003989

DMS Project Number 95021

USACE Action ID Number 2012-00810

NCDWR Project Number 12-0747

Data Collection Period: March - November 2018

Draft Submission Date: January 24, 2019

Final Submission Date: March 18, 2019

---

### **PREPARED FOR:**



**NC Department of Environmental Quality  
Division of Mitigation Services**

1652 Mail Service Center  
Raleigh, NC 27699-1652

**PREPARED BY:**

---



**Wildlands Engineering, Inc.**  
312 West Millbrook Road, Suite 225  
Raleigh, NC 27609

**Jason Lorch**  
jlorch@wildlandseng.com  
Phone: 919.851.9986



March 18, 2019

Jeff Schaffer  
N.C. Division of Mitigation Services  
1652 Mail Service Center  
Raleigh, NC 27699-1652

RE: Monitoring Year 5 Report for Devil's Racetrack Mitigation Site (95021)  
Neuse River Basin – CU# 03020201  
Johnston County, North Carolina  
Contract No. 003989

Dear Mr. Schaffer,

We have reviewed the comments on the Monitoring Year 5 Report for the above referenced project dated February 26, 2019 and have revised the report based on these comments. The revised documents are submitted with this letter. Below are responses to each of your comments. For your convenience, the comments are reprinted with our response in italics.

- 1) Section 1.2.6, 3<sup>rd</sup> paragraph, page 1-5: Report states that six monitoring wells had a hydroperiod greater than 5% that did not meet success. Since there are a total of 35 wells, with 27 meeting success and 3 below 5%, DMS believes the count should be 5 wells with a hydroperiod greater than 5% that did not meet success. Please correct.

*This section was updated to state that 5 groundwater wells had a hydroperiod greater than 5% that did not meet success criteria.*

- 2) Appendix 1, Table 1:

- a) Given the complexity of the asset history on this project, please provide a table behind table 1 that documents any changes that have occurred since the Mitigation Plan and As-Built phases with reasons for those changes.

*Table 1A was added to document changes in credits that have occurred since the Mitigation Plan was approved.*

- b) Please be certain that the stationing, quantities, and assets displayed in the asset table are fully current and correct in light of all of the asset changes that have occurred and please provide the GIS features that are accurately segmented and match quantities in the table. The shapefiles from earlier in the project history do not appear to be correct. An example is the shapefile called final\_alignment\_updated.shp.

*The asset table has been verified and is current based on all the asset changes that have occurred. GIS files that match the quantities in Table 1 have been attached.*



If you have any questions, please contact me by phone (919) 851-9986, or by email (jlorch@wildlandseng.com).

Sincerely,

A handwritten signature in black ink, appearing to read "Jason Lorch".

**Jason Lorch**, *Monitoring Coordinator*

## EXECUTIVE SUMMARY

Wildlands Engineering (Wildlands) completed a full-delivery project for the North Carolina Division of Mitigation Services (DMS) to restore and enhance a total of 18,748 linear feet (LF) of stream and restore 59.70 acres (ac) of wetlands in Johnston County, North Carolina. The project streams consist of five unnamed tributaries (UTs) to the Neuse River. The largest of these streams, Devil's Racetrack Creek (East and West), drains directly to the Neuse River. The other four streams are small headwater tributaries to Devil's Racetrack Creek (Southwest Branch, Middle Branch, Southeast Branch, and North Branch). The project proposes to provide 18,215 stream mitigation units (SMU's) and 58.50 wetland mitigation units (WMU's). At the downstream limits of the project, the drainage area is 831 acres (1.30 square miles).

The Devil's Racetrack Mitigation Site, hereafter referred to as the Site, is located in eastern Johnston County along Devil's Racetrack Road just east of its intersection with U.S. Highway 701 and approximately one mile east of Interstate 95 (Figure 1). The Site is located in the western portion of the Inner Coastal Plain Physiographic Province (USGS, 1998) within the North Carolina Division of Water Resources (NCDWR) subbasin 03-04-02 of the Neuse River Basin (United States Geological Survey (USGS) Hydrologic Unit 03020201140010).

Prior to construction activities, the streams had been relocated and channelized and the surrounding wetland complex had been drained for agricultural purposes. The primary objectives of the project were to re-establish wetland hydrology, restore a Coastal Plain Small Stream Swamp wetland community, restore a Coastal Plain stream system to promote hydrologic connectivity with the floodplains and wetlands, stabilize stream banks, promote instream habitat and aeration, restore riparian buffers, and further improve water quality through removing existing agricultural practices. Figure 2 and Table 1 present the restoration and enhancement design for the Site.

The following project goals were established to address the effects listed above from watershed and project site stressors:

- Restore a large wetland complex to a naturally occurring community to improve riparian habitat and water quality;
- Restore a network of badly degraded stream channels, including multiple headwater streams, to create aquatic habitat and further improve water quality to receiving waters; and
- Restore riparian buffers along stream corridors for additional habitat and water quality benefits.

Stream and wetland restoration and enhancement construction efforts were completed in February 2014. Baseline as-built monitoring activities (MY0) were completed between January and February 2014. A conservation easement is in place on 96.065 acres of restored wetland and riparian stream corridors to protect them in perpetuity.

Monitoring Year 5 (MY5) assessment and site visits were completed between the months of March and November 2018 to assess the conditions of the project. Overall, the Site has met the required vegetation, hydrology, and stream success criteria for MY5. The overall MY5 average planted stem density for the Site is 575 stems per acre, which is greater than the year five interim density requirement of 260 stems per acre. All restored and enhanced streams are stable and functioning as designed. Southeast Branch, Southwest Branch, and Middle Branch all had pressure transducers installed to monitor stream flow. All three stream gages met the hydrologic criteria for MY5. Of the 35 groundwater monitoring wells on the Site, 27 met the success criteria (water table with 12 inches of the ground surface for 8.5% of the growing



season consecutively), five had a hydroperiod greater than 5% but did not meet the success criteria, and three had a hydroperiod below 5%. Out of the eight groundwater wells that didn't meet success criteria for MY5, four were within wetland areas determined to be at risk. During 2019 (MY6) Wildlands will have a Licensed Soils Scientist look at the soils on site to see which areas demonstrate hydric indicators and which areas are unlikely to become hydric.



**DEVIL’S RACETRACK MITIGATION SITE**  
Monitoring Year 5 Annual Report

**TABLE OF CONTENTS**

**Section 1: PROJECT OVERVIEW .....1-1**

    1.1 Project Goals and Objectives ..... 1-1

    1.2 Monitoring Year 5 Data Assessment..... 1-2

        1.2.1 Vegetative Assessment ..... 1-2

        1.2.2 Vegetation Areas of Concern ..... 1-3

        1.2.3 Stream Assessment..... 1-3

        1.2.4 Stream Areas of Concern ..... 1-4

        1.2.5 Hydrology Assessment..... 1-4

        1.2.6 Wetland Assessment..... 1-4

        1.2.7 Maintenance Plan ..... 1-5

    1.3 Monitoring Year 5 Summary ..... 1-5

**Section 2: METHODOLOGY .....2-1**

**Section 3: REFERENCES.....3-1**

**APPENDICES**

<b>Appendix 1</b>	<b>General Tables and Figures</b>
Figure 1	Project Vicinity Map
Figure 2a-b	Project Component/Asset Map
Table 1	Project Components and Mitigation Credits
Table 1A	Project Mitigation Credit History
Table 2	Project Activity and Reporting History
Table 3	Project Contacts Table
Table 4	Project Information and Attributes
<b>Appendix 2</b>	<b>Visual Assessment Data</b>
Figure 3.0-3.2	Integrated Current Condition Plan View
Table 5a-f	Visual Stream Morphology Stability Assessment Table
Table 6	Vegetation Condition Assessment Table
	Stream Photographs
	Vegetation Photographs
	Overview Photograph Comparison (Devil’s Racetrack East)
<b>Appendix 3</b>	<b>Vegetation Plot Data</b>
Table 7	Vegetation Plot Criteria Attainment
Table 8	CVS Vegetation Table - Metadata
Table 9	Planted and Total Stem Counts (Species by Plot with Annual Means)
<b>Appendix 4</b>	<b>Morphological Summary Data and Plots</b>
Table 10a-f	Baseline Stream Data Summary
Table 11a-f	Morphology and Hydraulic Summary (Dimensional Parameters – Cross Section)
Table 12a-f	Monitoring Data – Stream Reach Data Summary
	Cross Section Plots

<b>Appendix 5</b>	<b>Hydrology Summary Data and Plots</b>
Table 13	Verification of Bankfull Events
Table 14	Wetland Gage Attainment Summary
	Groundwater Gage Plots
	Stream Flow Gage Plots
	Monthly Rainfall Data
	Pre and Post Construction Groundwater Gage Comparison Plots



## Section 1: PROJECT OVERVIEW

---

The Devil's Racetrack Mitigation Site, hereafter referred to as the Site, is located in eastern Johnston County within the Neuse River Basin (USGS Hydrologic Unit 03020201) near the town of Four Oaks, North Carolina. The Site is located along Devil's Racetrack Road just east of its intersection with U.S. Highway 701 and approximately one mile east of Interstate 95. The Site is in the western portion of the Inner Coastal Plain Physiographic Province (USGS, 1998). The project watershed consists primarily of agricultural lands and forest. The only significant development in the watershed is a campground adjacent to Devil's Racetrack Creek on the western portion of the project site, a middle school in the upper portion of the watershed, a low-density subdivision with single family homes, and a small section of I-95. The drainage area for the project site is 831 acres (1.30 square miles) at the lower end of Devil's Racetrack Creek (East).

The project stream reaches include Devil's Racetrack Creek (East and West), Southwest Branch, Middle Branch, Southeast Branch, and North Branch, (stream restoration and/or enhancement level I/II approach). Mitigation work within the Site included restoration and enhancement of 18,748 linear feet (LF) of perennial and intermittent stream channel and restoration of 59.7 acres (ac) of riparian wetlands. The stream and wetland areas were also planted with native vegetation to improve habitat and protect water quality. The final mitigation plan was submitted and accepted by the DMS in January of 2013. Construction activities were completed by Land Mechanic Designs, Inc. (East Side) and Fluvial Solutions (West Side) in February 2014. Planting and seeding activities were completed by Bruton Natural Systems, Inc. in February 2014. Baseline monitoring (MY0) was conducted between December 2013 and February 2014. Annual monitoring will be conducted for seven years with the close-out anticipated to commence in 2021 given the success criteria are met. Appendix 1 provides more detailed project activity, history, contact information, and watershed/site background information for this project.

A conservation easement has been recorded and is in place along the stream and wetland riparian corridors to protect them in perpetuity; 96.065 ac (Deed Book 4221, Page 419-433) within two tracts owned by Nell Howell Revocable Trust. The project provides 18,215 stream mitigation units (SMU's) and 58.50 wetland mitigation units (WMU's). Directions and a map of the Site are provided in Figure 1 and project components are illustrated in Figures 2a and 2b.

### 1.1 Project Goals and Objectives

Prior to construction activities, the streams had been relocated and channelized and the surrounding wetland complex had been drained for agricultural purposes. Stream valleys and other low areas were filled to raise wet areas and even out the fields. At the same time the streams were straightened, and riparian vegetation was also removed. The project area west of Devil's Racetrack Road was used for row crop agriculture and the eastern portion was used for timber production.

The channelization of streams on the Site resulted in severely over-enlarged channels that were extremely deep in many locations. The alterations of the Site to promote farming practices resulted in complete elimination of the ecological function of this small stream/wetland complex. Specifically, functional losses at the Site include degraded aquatic habitat, altered hydrology (related to loss of floodplain connection and lowered water table), and reduction of quality and amount of riparian wetland habitats and related water quality benefits. Ongoing bank erosion was also occurring at some locations due to high, overly steep banks and lack of bank vegetation. Table 4 in Appendix 1 and Tables 10a through 10f in Appendix 4 present the pre-restoration conditions in detail.



The Site was designed to meet the over-arching goals as described in the mitigation plan (Wildlands, 2013). The project is intended to provide numerous ecological benefits within the Neuse River Basin. While many of these benefits are limited to the Devil's Racetrack Creek Site project area, others, such as pollutant removal and improved aquatic and terrestrial habitat, have more far-reaching effects. The following project specific goals established in the mitigation plan include:

- Restore a large wetland complex to a naturally occurring community to improve riparian habitat and water quality;
- Restore a network of badly degraded stream channels, including multiple headwaters streams, to create aquatic habitat and further improve water quality to receiving waters; and
- Restore riparian buffers along stream corridors for additional habitat and water quality benefits.

Secondary project goals established in the mitigation plan were to restore fish passage from the Neuse River to Devil's Racetrack Creek. This is a secondary goal because success will not be measured during monitoring.

The primary project goals were addressed through the following project objectives:

- Promote wetland hydrology by raising channelized stream beds and filling drainage ditches;
- Plant wetland areas with native tree species to restore a Coastal Plain Small Stream Swamp – Blackwater Subtype community;
- Reconstruct stream channels to have the appropriate slope, planform, and cross-sectional geometry for the region of the Coastal Plain in which the project is located;
- Size reconstructed stream channels to flood floodplains and wetlands frequently;
- Stabilize stream banks using bioengineering, natural channel design techniques, and grading to reduce bank angles and bank height;
- Install in-stream structures and woody debris to promote aeration of water, create habitat, and influence the creation of bed forms commonly found in sand bed channels;
- Restore riparian buffer areas with native tree species to stabilize channels, filter flood flows and runoff, and supplement wetland plantings; and
- Remove project area from agricultural production further improving water quality.

The design streams and wetlands were restored to the appropriate type based on the surrounding landscape, climate, and natural vegetation communities but also with strong consideration to existing watershed conditions and trajectory. The mitigation project was developed to restore a large stream/wetland complex directly adjacent to the Neuse River to a naturally occurring community to create riparian and wetland habitat and improve water quality. Other intentions of the design were to create stable habitats, improve riparian buffers, and restore the natural migration patterns for anadromous and other fish for spawning.

## **1.2 Monitoring Year 5 Data Assessment**

Annual monitoring and quarterly site visits were conducted during MY5 to assess the condition of the project. The stream and wetland mitigation success criteria for the Site follow the approved success criteria presented in the Devil's Racetrack Mitigation Plan (Wildlands, 2013).

### **1.2.1 Vegetative Assessment**

A total of 51 10-meter by 10-meter vegetation plots were established within the project easement areas during baseline monitoring. The final vegetation success criteria is the survival of 210 planted stems per

acre, within the conservation easement at the end of the seven year monitoring period (MY7). The interim vegetative success criteria for the Site is the survival of at least 260 stems per acre at the end of the fifth year of monitoring (MY5). Planted vegetation must average 10 feet in height in each plot at the end of MY7.

The MY5 vegetative survey was completed in August 2018. The 2018 vegetation monitoring resulted in an average planted stem density of 575 stems per acre which is greater than the MY 5 interim requirement of 260 stems per acre, but approximately 18% less than the stem density recorded in MY0. Individual plot data suggests planted stem density ranges from 324 to 769 stems per acre. When including volunteer stems, the average number of stems per acre is 744. This is well above the MY5 interim requirement of 260 stems per acre. There was an average of 14 planted stems per plot which is the same as MY4. All 51 of the vegetation plots individually met success criteria for MY5 and are on track to meet the success criteria required for MY7 (Table 9, Appendix 3). Refer to Appendix 2 for vegetation plot photographs and the vegetation condition assessment table and Appendix 3 for vegetation data tables.

### 1.2.2 Vegetation Areas of Concern

The restoration area east of Devil's Racetrack Road received significant treatment to improve the soil quality and herbaceous cover. Approximately 5 tons/acre of agricultural lime and 0.5 tons of fertilizer/acre (N, P, and K) with additional micronutrients (Zn, Mg, Cu, etc.) were spread across the area in September 2018. Additionally, the area was seeded with a permanent riparian mix and cool season temporary ground cover (rye grain). Composted Class A biosolids were also applied to areas. All soil amendments were mechanically incorporated to a depth of six inches. The temporary ground cover and species from the permanent seed mix were observed growing vigorously in November. Drone photos in Appendix 2 compare the east side in 2016 and 2018 after the soil amendments and re-seeding were complete. Wildlands is requesting that the IRT walk the east side of Devil's Racetrack to determine if this area can be removed from the stream credits at risk category.

During a site walk in the summer of 2018, the IRT expressed concerns about the density of sweetgum (*liquidambar styraciflua*) seedlings growing along the west side of Southwest Branch. In October 2018, this area of sweetgum was treated using the cut stump method to apply triclopyr. In November 2018, a small patch of mimosa (*albizzia julibrissin*) was treated on the west side of the project near US Highway 701. Scattered, low densities of Chinese privet (*Ligustrum sinense*) were also treated on the west side of the project in November 2018. An area containing Chinese privet exists between Devil's Racetrack (West) and North Branch. This area will be treated during MY6. The Current Condition Plan View in Appendix 2 shows vegetation areas of concern.

Loblolly pine (*Pinus taeda*) has continued to volunteer across the site. In January of 2019, pines were cut across the site to keep them from competing with desirable vegetation. Wildlands will continue to monitor and treat loblolly pine as necessary during subsequent monitoring years.

### 1.2.3 Stream Assessment

Morphological surveys for MY5 were conducted in April 2018. All streams within the Site are stable and met success criteria for MY5. In general, cross sections for all streams showed little to no change in bankfull area, maximum depth ratio, or width-to-depth ratio. Cross section surveys show that the bank height ratios remain at or very near 1.0. Entrenchment ratios vary slightly from year to year due to minor changes in bankfull widths. Small adjustments in width occur due to vegetation, sediment deposition, and many other factors. These minor changes do not indicate channel instability. Surveyed riffle cross sections fell within the parameters defined for channels of the appropriate Rosgen stream type.

Cross section 8 on Devil's Racetrack (West) has maintained a consistent bankfull width but has increased in depth and area. This is due to the location of the cross section within the shallow. The shallow was built with logs buried at the stream bed elevation, perpendicular to the stream banks, for grade control. These logs create downstream micro pools within the shallow. Cross section 8 was placed downstream of one of these logs in a micro pool. These micro pools are expected and the increase in depth and area of cross section 8 is typical in micro pools. Cross Section 8 is stable and performing as expected, even though there is an increase in depth and area.

Longitudinal profile surveys are not required on the project unless visual inspection indicates reach wide vertical stability concerns. Refer to Appendix 2 for the visual stability assessment table, the CCPV map, and reference photographs. Refer to Appendix 4 for the morphological data and plots.

#### **1.2.4 Stream Areas of Concern**

Several beaver dams were observed along Devil's Racetrack (West) in November 2018. Most of the dams were located between the start of the project at US Highway 701 and the powerline easement on Devil's Racetrack Creek. Two beaver dams were also located near Devil's Racetrack Road near the confluence of North Branch (CCPV, Appendix 2). The USDA has been contacted and is in the process of removing beaver from the Site. The site will be monitored for future beaver activity during subsequent monitoring years.

#### **1.2.5 Hydrology Assessment**

At the end of the seven-year monitoring period, two or more bankfull events must have occurred in separate years within the restoration reaches. Multiple bankfull events were recorded on all the streams with crest gages and pressure transducers during the MY5 data collection. All streams on the Site had multiple bankfull events during MY1, MY2, MY3, and MY4. Therefore, the Site has met the required stream hydrology success criteria.

Flow Gauges were installed on Southwest Branch, Southeast Branch, and Middle Branch to measure stream flow. These pressure transducers were installed to show that the streams have adequate flow throughout the year and are not ephemeral ditches. Per discussion with the Interagency Review Team (IRT), continuous flow must be documented for at least 30 consecutive days under normal circumstances on these streams. Stream flow must be documented to occur intermittently in all months other than July through September. Middle Branch showed constant flow throughout MY5. Southwest Branch showed consistent flow for 106 consecutive days from January 1 through mid-April when the flow gage malfunctioned. Southeast Branch flow gauge malfunctioned from the beginning of the year until mid-April but recorded consistent flow for over 30 consecutive days from late October to December. From mid-April to June and from late July to October Southeast Branch showed intermittent flow. All three streams have met the flow success criteria for MY5. Refer to Appendix 5 for hydrologic data.

#### **1.2.6 Wetland Assessment**

Thirty-four groundwater monitoring gages were established during the baseline monitoring and four additional gages were added during MY2, all but two (GW8, and GW32) are within the wetland restoration zones. Groundwater gages 8, and 32 were placed outside of wetland boundaries to capture the extent of the wetlands and were removed during MY5. All the gages were installed at appropriate locations so that the data collected will provide an indication of groundwater levels throughout the Site. To provide data for the determination of the growing season, three soil temperature probes (2 on the west side and 1 on the east side) have been installed at a depth of twelve inches. A barotroll logger (to measure barometric pressure used in the calculations of groundwater levels with well transducer data) and a rain gage were also installed on the Site. All monitoring gages were downloaded and maintained on an as needed basis.

The success criteria for wetland hydrology is to have a free groundwater surface within 12 inches of the ground surface for 8.5 percent of the growing season, which is measured in consecutive days under normal precipitation conditions. During MY1 NRCS WETS Data was used to determine the growing season for the Site. After discussions with the United States Army Corps of Engineers (USACE), it was agreed to use on-site soil temperature data to determine the beginning of the growing season and use NRCS WETS data to determine the end of the growing season. During MY5 the beginning of the growing season was extended by 20 days from March 21 to March 1 based on soil temperatures staying above 41 degrees Fahrenheit at 12 inches below the ground surface.

The USACE requested pre-construction groundwater well data be overlaid on hydrographs with the current monitoring year groundwater well data to see how groundwater levels are recharging after rain events on the Site. Wildlands overlaid the pre-construction groundwater well data with the closest monitoring groundwater well data and rain data. These plots suggest that the Site drained more rapidly and to greater depths prior to restoration. Refer to Appendix 5 for pre and post construction groundwater gage comparison plots.

Of the 35 groundwater monitoring wells on the Site, 27 met the success criteria (water table with 12 inches of the ground surface for 8.5% of the growing season consecutively), five had a hydroperiod greater than 5% but did not meet the success criteria, and three had a hydroperiod below 5%. Groundwater wells 8 and 32 were removed during MY5 because they were located outside of the wetland boundaries. Of the 27 wells that met the success criteria, hydroperiods ranged from 13.4% to 29.1%, with one outlier at 42.5%. Four of the eight wells that didn't meet success criteria are located in areas designated as wetland credits at risk. The other four wells are located in the middle of wetland areas that are surrounded by wells that easily meet wetland success criteria. Three of these four wells had a hydroperiod range of 5.4% to 8.4% which is greater than USACE defined minimum wetland hydroperiod but lower than the listed success criteria. The fourth well had a hydroperiod of 4.6%.

During 2019 (MY6) a Licensed Soil Scientist will observe a series of soil profiles near the groundwater wells that are not meeting success criteria to see if hydric soil indicators are forming. This data will be included in the MY6 report. Areas that are not showing evidence of hydric soil formation will be removed from wetland credit.

### **1.2.7 Maintenance Plan**

Privet will be treated on the Site during MY6, especially in the area along North Branch. Mimosa pines, and sweetgum will be monitored during subsequent monitoring years and will be treated as necessary. Beaver activity will be monitored and will be dealt with as necessary.

Wildlands will monitor the soil quality of the eastern side of the Site by taking regular soil samples. Additional amendments will be applied based on the results of these soil tests. This area will also be monitored for areas with low herbaceous cover and re-seeded if necessary.

## **1.3 Monitoring Year 5 Summary**

The average stem density for the Site is on track to meeting the MY7 success criteria; all individual vegetation plots meet the MY5 success criteria as noted in the CCPV. All streams within the Site are stable and functioning as designed. There have been at least two documented bankfull events recorded in separate years for each stream on the Site. Of the 36 groundwater monitoring wells on the Site, 27 met the success criteria (water table with 12 inches of the ground surface for 8.5% of the growing season consecutively), six had a hydroperiod greater than 5% but did not meet the success criteria, and three had

a hydroperiod below 5%. Privet, mimosa, and sweetgum seedlings will continue to be monitored and treatments will be applied if necessary. The vegetation on the east side of Devil's Racetrack has improved drastically. Soil samples will be taken regularly on the east side of the project and additional lime and fertilizer will be applied based on the results of the soil tests.

Summary information and data related to the success of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Mitigation Plan documents available on DMS's website. All raw data supporting the tables and figures in the appendices are available from DMS upon request.



## Section 2: METHODOLOGY

---

Geomorphic data was collected following the standards outlined in The Stream Channel Reference Site: An Illustrated Guide to Field Techniques (Harrelson et al., 1994) and in the Stream Restoration: A Natural Channel Design Handbook (Doll et al., 2003). All the Integrated Current Condition Mapping was recorded using a Trimble handheld GPS with sub-meter accuracy and processed using Pathfinder and ArcGIS. Crest gages and pressure transducers were installed in surveyed riffle cross sections and monitored quarterly. Hydrology attainment installation and monitoring methods are in accordance with the USACE (2003) standards. Vegetation monitoring protocols followed the Carolina Vegetation Survey-DMS Level 2 Protocol (Lee et al., 2008).



## Section 3: REFERENCES

---

- Doll, B.A., Grabow, G.L., Hall, K.A., Halley, J., Harman, W.A., Jennings, G.D., and Wise, D.E. 2003. Stream Restoration A Natural Channel Design Handbook.
- Harrelson, C.C., Rawlins, C.L., Potyondy, J.P. 1994. *Stream Channel Reference Sites: An Illustrated Guide to Field Technique*. Gen. Tech. Rep. RM-245. Fort Collins, CO: U.S. Department of Agriculture, Forest Service, Rocky Mountain Forest and Range Experiment Station. 61 p.
- Lee, M.T., Peet, R.K., S.D., Wentworth, T.R. 2008. CVS-DMS Protocol for Recording Vegetation Version 4.2. Retrieved from <http://cvs.bio.unc.edu/protocol/cvs-eep-protocol-v4.2-lev1-5.pdf>.
- Rosgen, D. L. 1994. A classification of natural rivers. *Catena* 22:169-199.
- Rosgen, D.L. 1996. Applied River Morphology. Pagosa Springs, CO: Wildland Hydrology Books.
- Rosgen, D.L. 1997. A Geomorphological Approach to Restoration of Incised Rivers. Proceedings of the Conference on Management of Landscapes Disturbed by Channel Incision. Center For Computational Hydroscience and Bioengineering, Oxford Campus, University of Mississippi, Pages 12-22.
- United States Army Corps of Engineers (USACE). 2003. Stream Mitigation Guidelines. USACE, NCDEQ-DWR, USEPA, NCWRC.
- United States Department of Agriculture (USDA). 2002. Natural Resources Conservation Service, Climate Information for Johnston County, NC (1971-2000). WETS Station: Clayton, NC1820.
- United States Geological Survey (USGS). 1998. North Carolina Geology. <http://www.geology.enr.state.nc.us/usgs/carolina.htm>
- Wildlands Engineering, Inc. 2013. Devil's Racetrack Stream and Wetland Mitigation Plan. DMS, Raleigh, NC.
- Wildlands Engineering, Inc. 2014. Devil's Racetrack Stream and Wetland Mitigation Site Baseline Monitoring Document and As-Built Baseline Report. DMS, Raleigh, NC.
- Winter, Thomas C., Harvey, Judson W., Franke, O. Lehn, Alley, William M. 1998. Ground Water and Surface Water: A Single Resource.



## **APPENDIX 1. General Tables and Figures**






Figure 1. Project Vicinity Map  
 Devil's Racetrack Mitigation Site  
 DMS Project No. 95021  
 Monitoring Year 5 - 2018  
 Johnston County, NC

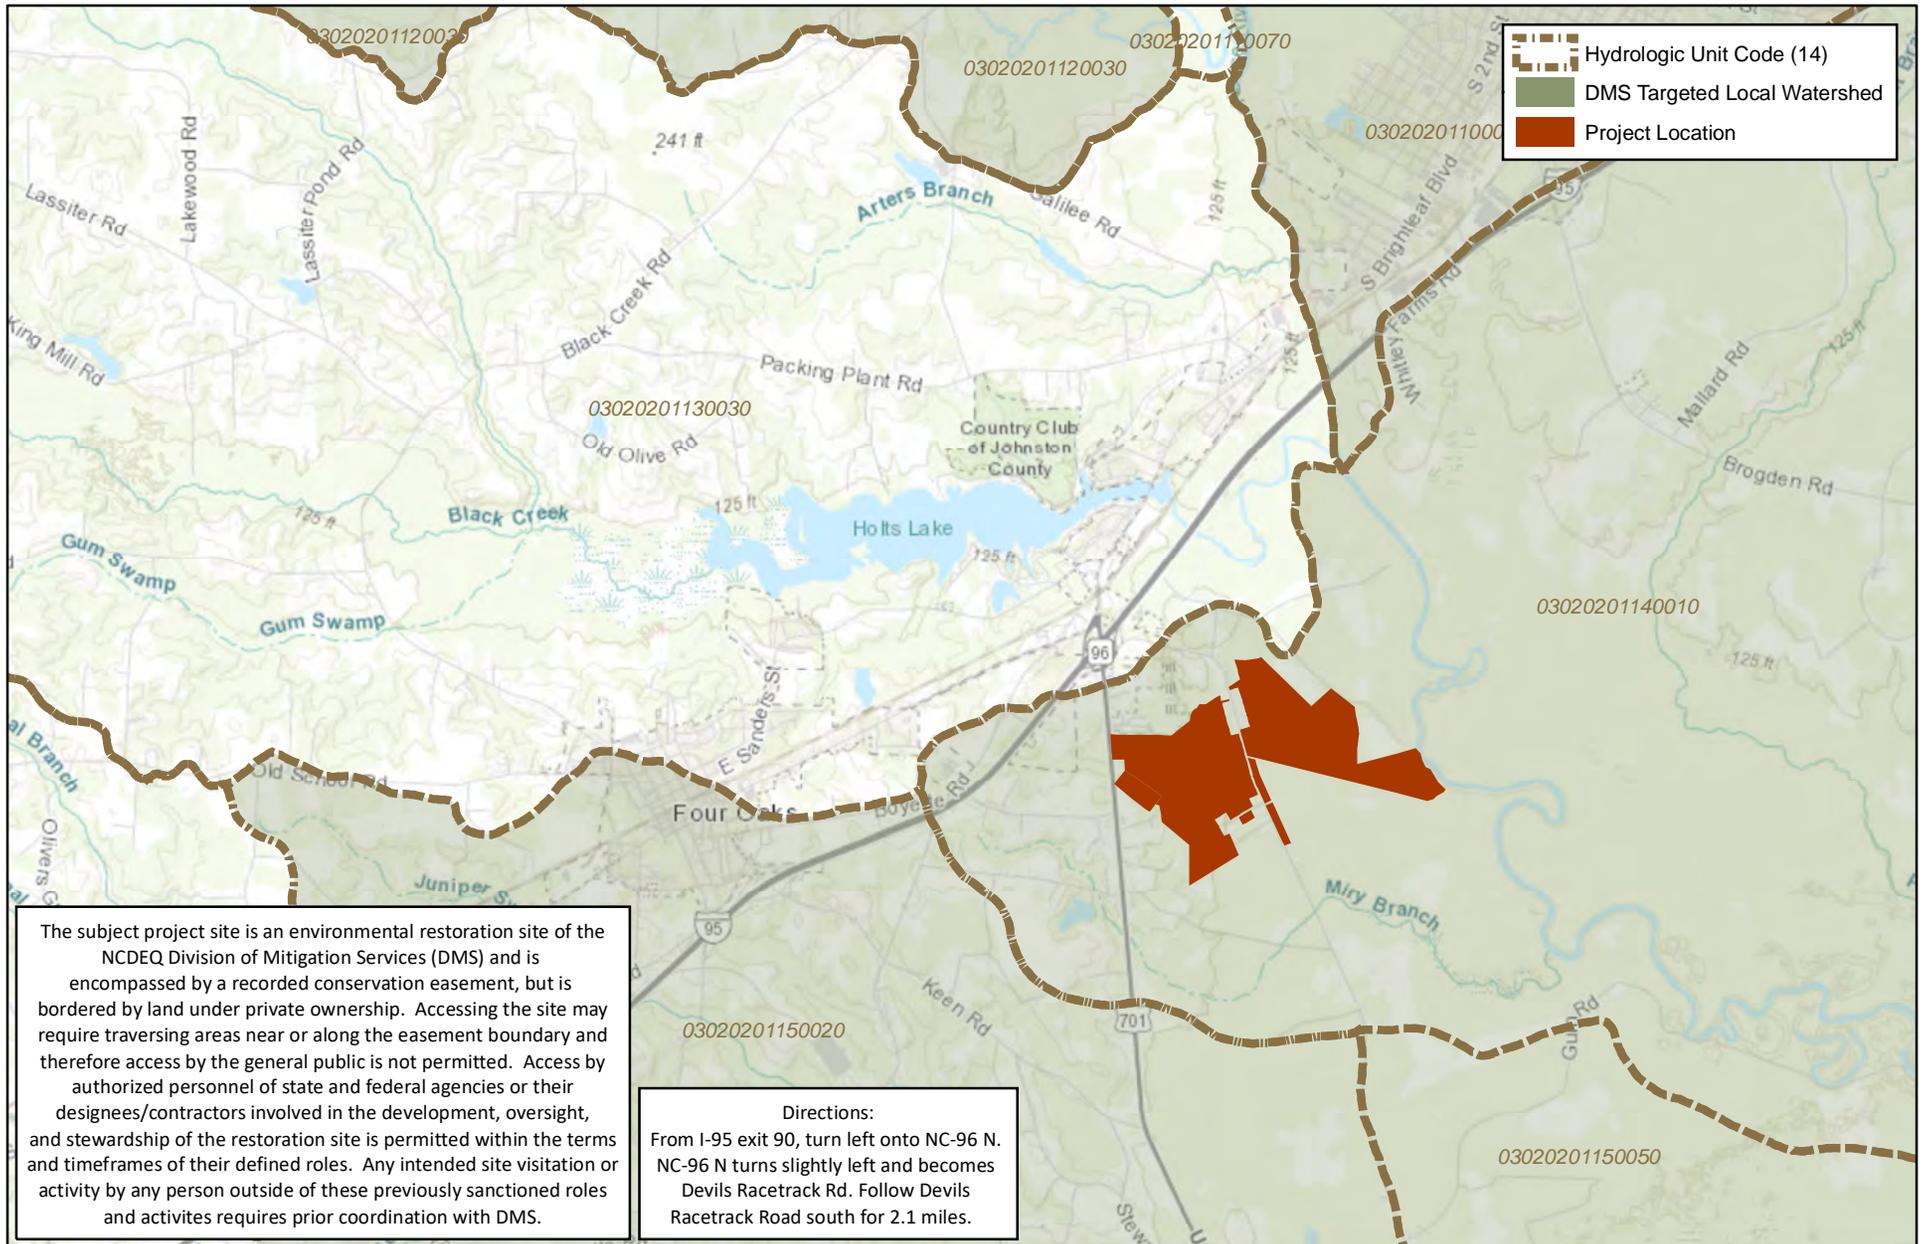

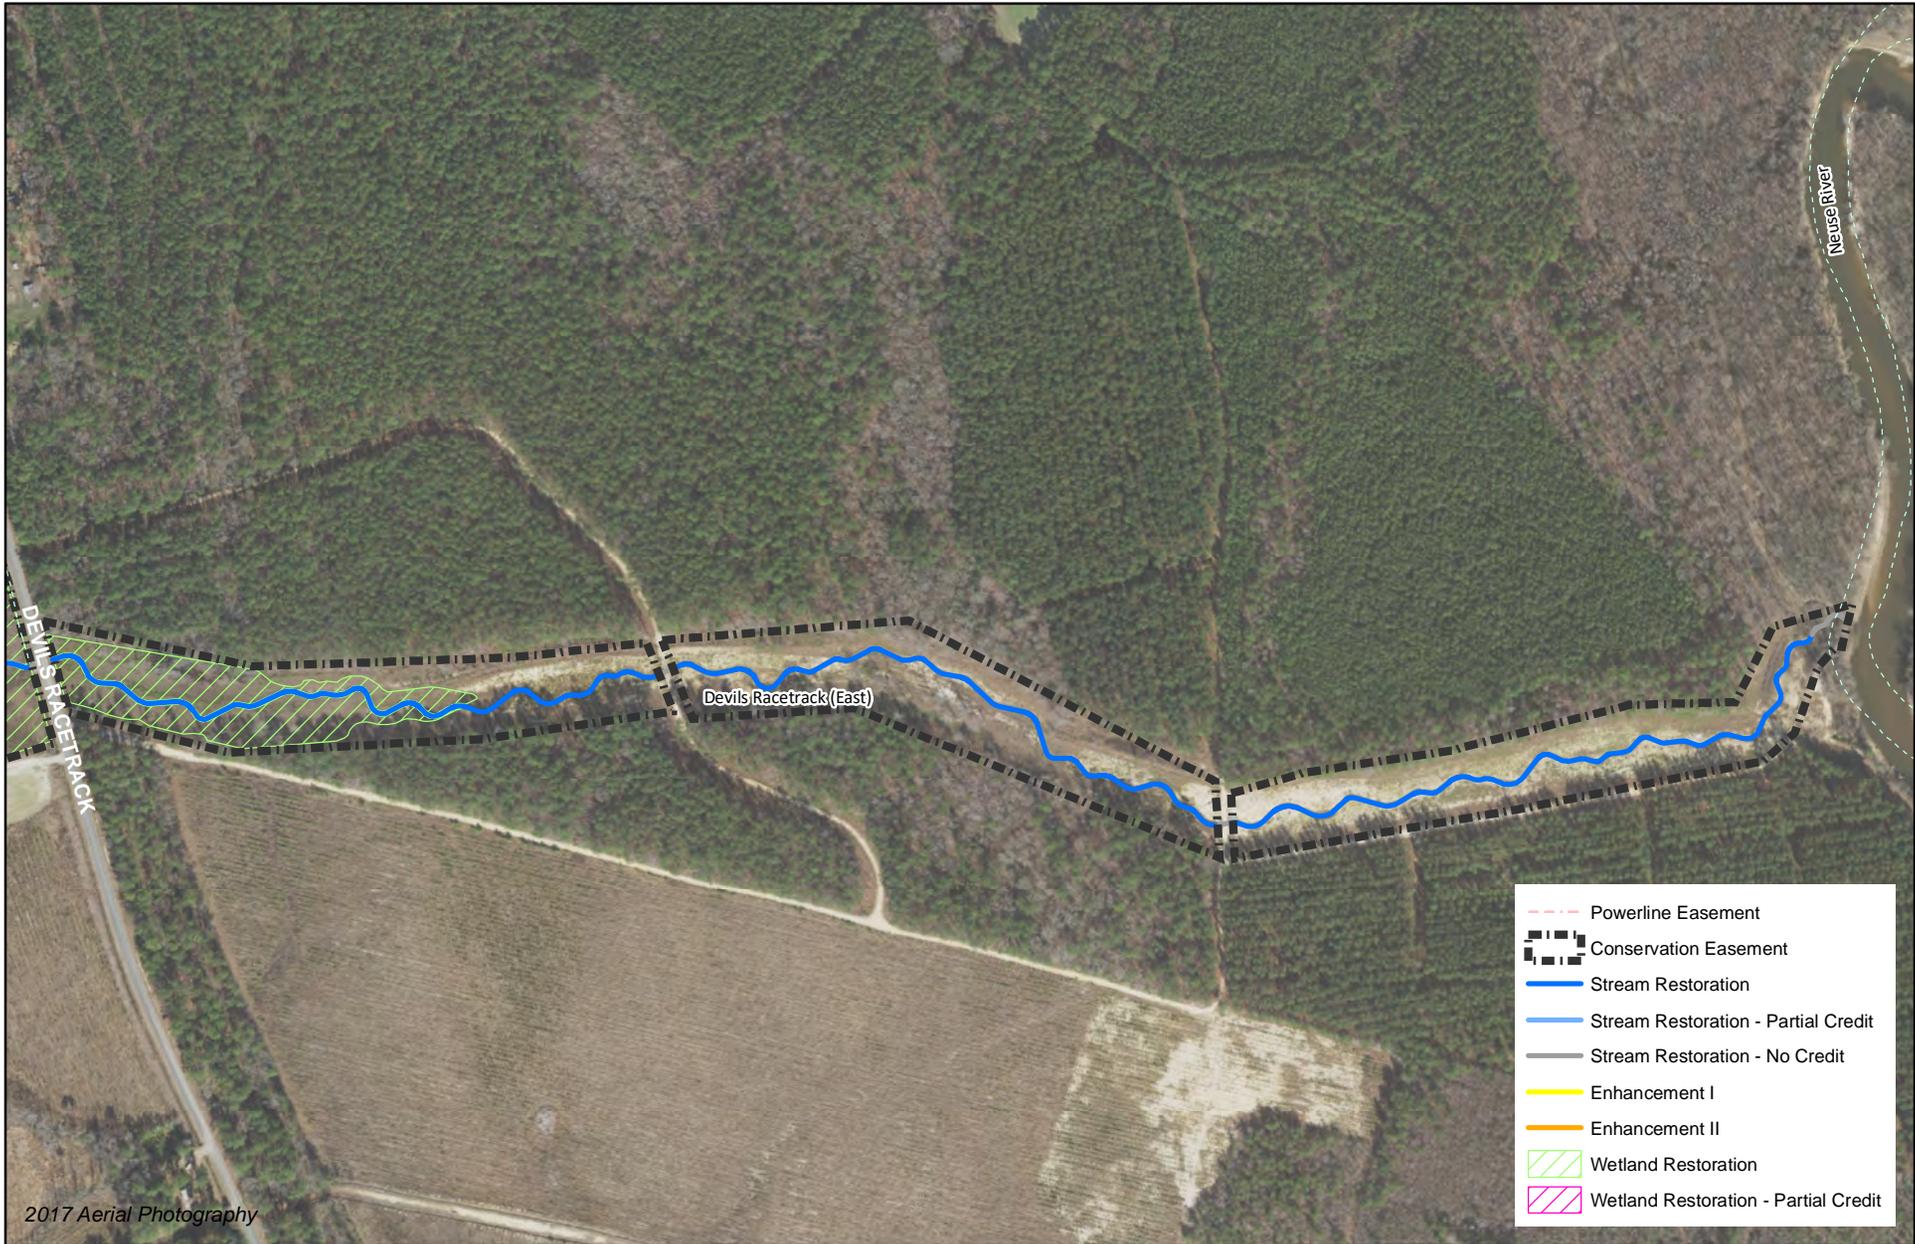

0 250 500 Feet



Figure 2b. Project Component/Asset Map  
 Devil's Racetrack Mitigation Site  
 DMS Project No. 95021  
 Monitoring Year 5 - 2018  
 Johnston County, NC

**Table 1. Project Components and Mitigation Credits**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Mitigation Credits									
Type	Stream		Riparian Wetland		Non-Riparian Wetland		Buffer	Nitrogen Nutrient Offset	Phosphorous Nutrient Offset
	R	RE	R	RE	R	RE			
Totals	16,361	0	55.53	0	N/A	N/A	N/A	N/A	N/A
<b>Totals</b>	<b>1,854</b>	<b>0</b>	<b>2.97</b>	<b>0</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>	<b>N/A</b>
Project Components									
Reach ID	As-Built Stationing/ Location	Existing Footage/ Acreage	Approach	Restoration or Restoration Equivalent	Restoration Footage/ Acreage	Mitigation Ratio	Credits (SMU/ WMU)		
Streams									
Devil's Racetrack Creek (West) (DOT ROW)	0+00-0+20	20 LF	P1	Restoration (No Credit)	20	N/A	N/A		
Devil's Racetrack Creek (West)	0+20-16+26 & 17+50-52+05	4,755 LF	P1	Restoration	5,061	1:1	5,061		
Devil's Racetrack Creek (West) (Power Line Easement)	16+26-17+50	196 LF	P1	Restoration (Partial Credit)	124	4:1 <sup>1</sup>	31		
Devil's Racetrack Creek (West) (DOT ROW)	52+05-52+11	5 LF	P1	Restoration (No Credit)	6	N/A	N/A		
Devil's Racetrack (East) (DOT ROW)	52+59-52+65	5 LF	P1	Restoration (No Credit)	6	N/A	N/A		
Devil's Racetrack (East)	52+65-70+73 71+03-88+00	4,778 LF	P1/2	Restoration	3,509	1:1	3,509		
<b>Devil's Racetrack (East)</b>	<b>88+31-106+85</b>		<b>P1/2</b>	<b>Restoration</b>	<b>1,854</b>	<b>1:1</b>	<b>1,854</b>		
Devil's Racetrack (East) (Easement Break)	70+73-71+03	30 LF	P1/2	Restoration (No Credit)	30	N/A	N/A		
Devil's Racetrack (East) (Easement Break)	88+00 to 88+31	31 LF	P1/2	Restoration (No Credit)	31	N/A	N/A		
Devil's Racetrack (East)	106+85-107+97	0 LF	P1/2	Restoration (No Credit)	112	N/A	N/A		
Southwest Branch	500+00-501+31 600+00-600+23	154 LF	EII	Enhancement	154	2.5:1	61.6		
Southwest Branch	501+31-502+06	75 LF	EI	Enhancement	75	1.5:1	50		
Southwest Branch	502+06-504+85 505+99-511+32	740 LF	P1/2	Restoration	812	1:1	812		
Southwest Branch (Power Line Easement)	504+85-505+99	111 LF	P1/2	Restoration (Partial Credit)	114	4:1 <sup>1</sup>	28.5		
Middle Branch	200+00-204+10	410 LF	Headwater Wetland		410	1:1	410		
Middle Branch	204+10-219+06	1,326 LF	P1/2	Restoration	1,496	1:1	1,496		
Southeast Branch	300+00-305+03 305+35-328+92	2,946 LF	P1	Restoration	2,860	1:1	2,860		
Southeast Branch (Easement Break)	305+03-305+35	30 LF	P1	Restoration (Partial Credit)	32	N/A	N/A		
North Branch	403+76-424+18	---	P1	Restoration	2,042	1:1	2,042		
Wetlands									
Riparian Wetlands (West)	N/A	0.0 ac	N/A	Restoration	51.70	1:1	51.70		
Riparian Wetlands (West) (Power Line Easement)	N/A	0.0 ac	N/A	Restoration (Partial Credit)	1.53	4:1	0.38		
Riparian Wetlands (East)	N/A	0.0 ac	N/A	Restoration	3.45	1:1	3.45		
<b>Riparian Wetlands (West)</b>	<b>N/A</b>	<b>0.0 ac</b>	<b>N/A</b>	<b>Restoration</b>	<b>2.95</b>	<b>1:1</b>	<b>2.95</b>		
<b>Riparian Wetlands (West) (Power Line Easement)</b>	<b>N/A</b>	<b>0.0 ac</b>	<b>N/A</b>	<b>Restoration (Partial Credit)</b>	<b>0.07</b>	<b>4:1</b>	<b>0.02</b>		
Component Summation									
Restoration Level	Stream (LF)	Riparian Wetland (acres)		Non-Riparian Wetland (acres)	Buffer(square feet)	Upland (acres)			
		Riverine	Non-Riverine						
Restoration	16,428	56.68	-	-	-	-			
<b>Restoration At Risk</b>	<b>1,854</b>	<b>3.02</b>	-	-	-	-			
Enhancement I	75								
Enhancement II	154								
Creation		-	-	-					
Preservation		-	-	-					

N/A: not applicable

1. Ratio of 4:1 based on an expected 75% reduction in credits for stream restoration with shrub buffer zone in power line easements

\* Stream credit calculations were originally calculated along the as-built thalweg and updated to be calculated along stream centerlines for Monitoring Year 4 after discussions with NC IRT.

\*\* Riparian Wetlands (West) credit calculations were updated for Monitoring Year 4 based on the performance of groundwater well 10.

Red denotes credits at risk.

**Table 1A. Project Mitigation Credit History**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
**Monitoring Year 5 - 2018**

Mitigation Credits									
Reach ID	Approach	Mit Plan Credits (SMU/WMU)	MY0 Credits (SMU/WMU)	MY1 Credits (SMU/WMU)	MY2 Credits (SMU/WMU)	MY3 Credits (SMU/WMU)	MY4 Credits (SMU/WMU)	MY5 Credits (SMU/WMU)	Notes
<b>Streams</b>									
Devil's Racetrack Creek (West)	P1	5,061	5,061	5,122	5,122	5,122	5,061	5,061	2, 4
Devil's Racetrack Creek (West) (Power Line Easement)	P1	31	31	32	32	32	31	31	2, 4
Devil's Racetrack Creek (East)	P1/2	5,363	5,461	5,364	5,364	5,364	5,363	3509/ <b>1,854</b>	1, 2, 4, 6
Southwest Branch	EII	62	61.60	62	62	62	61.6	61.6	2, 5
Southwest Branch	EI	50	50.67	51	51	51	50	50	2, 4
Southwest Branch	P1/2	812	811	829	829	829	812	812	1, 2, 4
Southwest Branch (Power Line Easement)	P1/2	29	28.50	29	29	29	28.5	28.5	5
Middle Branch	Headwater Wetland	410	400	410	410	410	410	410	1, 2
Middle Branch	P1/2	1,496	1,506	1,505	1,505	1,505	1,496	1,496	1, 2, 4
Southeast Branch	P1	2,860	2,848	2,919	2,916	2,916	2,860	2,860	1, 2, 3, 4
North Branch	P1	2,042	2,418	2,050	2,050	2,050	2,042	2,042	1, 2, 4
<b>Total</b>		<b>18,216</b>	<b>18,677</b>	<b>18,373</b>	<b>18,370</b>	<b>18,370</b>	<b>18,215</b>	<b>18,215</b>	
<b>Wetlands</b>									
Riparian Wetlands (West)	N/A	51.4	57.9	57.9	57.9	57.9	54.65	51.70/ <b>2.95</b>	5, 7, 8, 9, 10
Riparian Wetlands (West) (Power Line Easement)	N/A	0.4	0.4	0.4	0.4	0.4	0.40	0.38/ <b>0.02</b>	5
Riparian Wetlands (East)	N/A	3.4	3.8	3.8	3.8	3.8	3.45	3.45	5, 8, 9, 10
<b>Total</b>		<b>55.2</b>	<b>62.1</b>	<b>62.1</b>	<b>62.1</b>	<b>62.1</b>	<b>58.50</b>	<b>58.50</b>	

**Red denotes credits at risk.**

1. As-Built credit calculations were not calculated correctly.
2. During MY1 credits were updated based on as-built thalweg alignments.
3. During MY2 a section of Southeast Branch was removed from credit because it was an easement crossing and not part of the powerline easement.
4. During MY4 credits were updated based on stream centerlines and Mitigation Plan credits after discussions with the IRT.
5. During MY4 DMS requested mitigation credits be calculated to 3 decimal places.
6. During MY5 the IRT categorized the lower section of Devil's Racetrack (East) as credits at risk due to the lack of vegetation.
7. Wetland credits were miscalculated in the Mitigation Plan on the west side of the project. The IRT was sent a formal letter describing this and approved it.
8. As-Built wetland credits were based on anticipated wetland boundaries.
9. During MY4 wetland credits were reverted back Mitigation Plan credits after discussions with the IRT, and the area around groundwater well 10 was removed.
10. During MY5 the IRT categorized a few areas as credits at risk based on groundwater well performance and soil conditions.

**Table 2. Project Activity and Reporting History**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

Activity or Report	Date Collection Complete	Completion or Scheduled Delivery
Mitigation Plan	September 2011- March 2012	January 2013
Final Design - Construction Plans	September 2011- March 2012	August 2013
Construction	December 2013- February 2014	February 2014
Temporary S&E mix applied to entire project area <sup>1</sup>	February 2014	February 2014
Permanent seed mix applied to reach/segments	February 2014	February 2014
Bare root and live stake plantings for reach/segments	February 2014	February 2014
Baseline Monitoring Document (Year 0)	Stream Survey	February 2014
	Vegetation Survey	February 2014
Year 1 Monitoring	Stream Survey	July 2014
	Vegetation Survey	September 2014
Minor Stream Repairs		May 2014
Year 2 Monitoring	Stream Survey	April 2015
	Vegetation Survey	June 2015
Minor Stream Repairs & Soil Amendments		April 2015
Year 3 Monitoring	Stream Survey	April 2016
	Vegetation Survey	June 2016
Soil Amendments		June 2016
Beaver Dam Removal		September 2016
Year 4 Monitoring	Stream Survey	May 2017
	Vegetation Survey	August 2017
Pine Tree Removal		February 2017
Hugel Beds Installed		May 2017
Soil Amendments		November 2017
Year 5 Monitoring	Stream Survey	April 2018
	Vegetation Survey	August 2018
Soil Amendments		September 2018
Invasive Treatment		October - November 2018
Beaver Removal		December 2018
Pine Tree Removal		January 2019
Year 6 Monitoring	Stream Survey	2019
	Vegetation Survey	2019
Year 7 Monitoring	Stream Survey	2020
	Vegetation Survey	2020

<sup>1</sup>Seed and mulch is added as each section of construction is completed.

**Table 3. Project Contact Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

<b>Designer</b> Jeff Keaton, PE	<b>Wildlands Engineering, Inc.</b> 312 West Millbrook Road, Suite 225 Raleigh, NC 27609 919.851.9986
<b>Construction Contractor (East Side)</b>	<b>Land Mechanic Designs, Inc.</b> 126 Circle G Lane Willow Spring, NC 27592
<b>Construction Contractor (West Side)</b>	<b>Fluvial Solutions</b> P.O. Box 28749 Raleigh, NC 27611
<b>Planting Contractor</b>	<b>Bruton Natural Systems, Inc</b> P.O. Box 1197 Fremont, NC 27830
<b>Seeding Contractor</b>	<b>Bruton Natural Systems, Inc</b> P.O. Box 1197 Fremont, NC 27830
<b>Seed Mix Sources</b>	<b>Green Resource, LLC</b>
<b>Nursery Stock Suppliers</b>	<b>Dykes and Son Nursery and NC Forest Service (Claridge Nursery)</b> <b>Bruton Natural Systems, Inc</b>
<b>Bare Roots</b>	
<b>Live Stakes</b>	
<b>Monitoring Performers</b> Stream, Vegetation, and Wetland Monitoring, POC	<b>Wildlands Engineering, Inc.</b> Jason Lorch 919.851.9986, ext. 107

**Table 4. Project Information and Attributes**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

Project Information						
Project Name	Devil's Racetrack Mitigation Site					
County	Johnston County					
Project Area (acres)	96.065 ac					
Project Coordinates (latitude and longitude)	35° 27'01.58" N, 78° 23' 18.08" W					
Project Watershed Summary Information						
Physiographic Province	Upper Coastal Plain					
River Basin	Neuse					
USGS Hydrologic Unit 8-digit	03020201					
USGS Hydrologic Unit 14-digit	03020201140010					
DWR Sub-basin	03-04-02					
Project Drainage Area (acres)	831 ac					
Project Drainage Area Percentage of Impervious Area	<1%					
CGIA Land Use Classification	62% forest/wetland, 34% farm land, 4% developed					
Reach Summary Information						
Parameters	Southwest Branch	Middle Branch	Southeast Branch	North Branch	Devil's Racetrack Creek (west)	Devil's Racetrack Creek (east)
Length of reach (linear feet) - Post-Restoration	1,155	1,906	2,892	2,042	5,211	5,542
Drainage area (acres)	20.6	10.8	69.9	49.9	493.5	831.4
NCDWR stream identification score	34.5 - 37	30	29 - 30.75	32	38	37.5
NCDWR Water Quality Classification	C/NSW					
Morphological Description (stream type)	P	P	P/I	P	P	P
Evolutionary trend (Simon's Model) - Pre- Restoration	---	---	---	---	---	---
Underlying mapped soils	Altavista fine sandy loam, Bibb sandy loam, Cecil loam, Goldsboro sandy loam, Leaf silt loam, Lynchburg sandy loam, Nason silt loam, Norfolk loamy sand, and Rains sandy loam.					
Drainage class	---	---	---	---	---	---
Soil Hydric status	---	---	---	---	---	---
Slope	---	---	---	---	---	---
FEMA classification	None					
Native vegetation community	Coastal Plain bottomland riparian forest					
Percent composition exotic invasive vegetation -Post-Restoration	0%					
Regulatory Considerations						
Regulation	Applicable?	Resolved?	Supporting Documentation			
Waters of the United States - Section 404	X	X	USACE Nationwide Permit No.27 and DWQ 401 Water Quality Certification No. 3885.			
Waters of the United States - Section 401	X	X				
Division of Land Quality (Dam Safety)	N/A	N/A	N/A			
Endangered Species Act	X	X	Devils Racetrack Mitigation Plan; Wildlands determined "no effect" on Johnston County listed endangered species.			
Historic Preservation Act	X	X	No historic resources were found to be impacted (letter from SHPO dated 7/20/2011).			
Coastal Zone Management Act (CZMA)/Coastal Area Management Act (CAMA)	N/A	N/A	N/A			
FEMA Floodplain Compliance	N/A	N/A	The project streams do not have an associated regulatory flooplaining; however the downstream end of Devil's Racetrack Creek is located within the floodway and flood fringe of the Neuse River (FEMA Zone AE, FIRM panel 1680).			
Essential Fisheries Habitat	N/A	N/A	N/A			

## **APPENDIX 2. Visual Assessment Data**



Legend	
	Stream Restoration
	Stream Restoration - Partial Credit
	Stream Restoration - No Credit
	Enhancement I
	Enhancement II
	Conservation Easement
	Powerline Easement
	Wetland Restoration
	Wetland Restoration - Partial Credit




Figure 3.0 Integrated Current Condition Plan View (Key)  
 Devil's Racetrack Mitigation Site  
 DMS Project No. 95021  
 Monitoring Year 5 - 2018  
 Johnston County, NC





Figure 3.1 Integrated Current Condition Plan View  
 (Sheet 1 of 2)  
 Devil's Racetrack Mitigation Site  
 DMS Project No. 95021  
 Monitoring Year 5 - 2018  
 Johnston County, NC

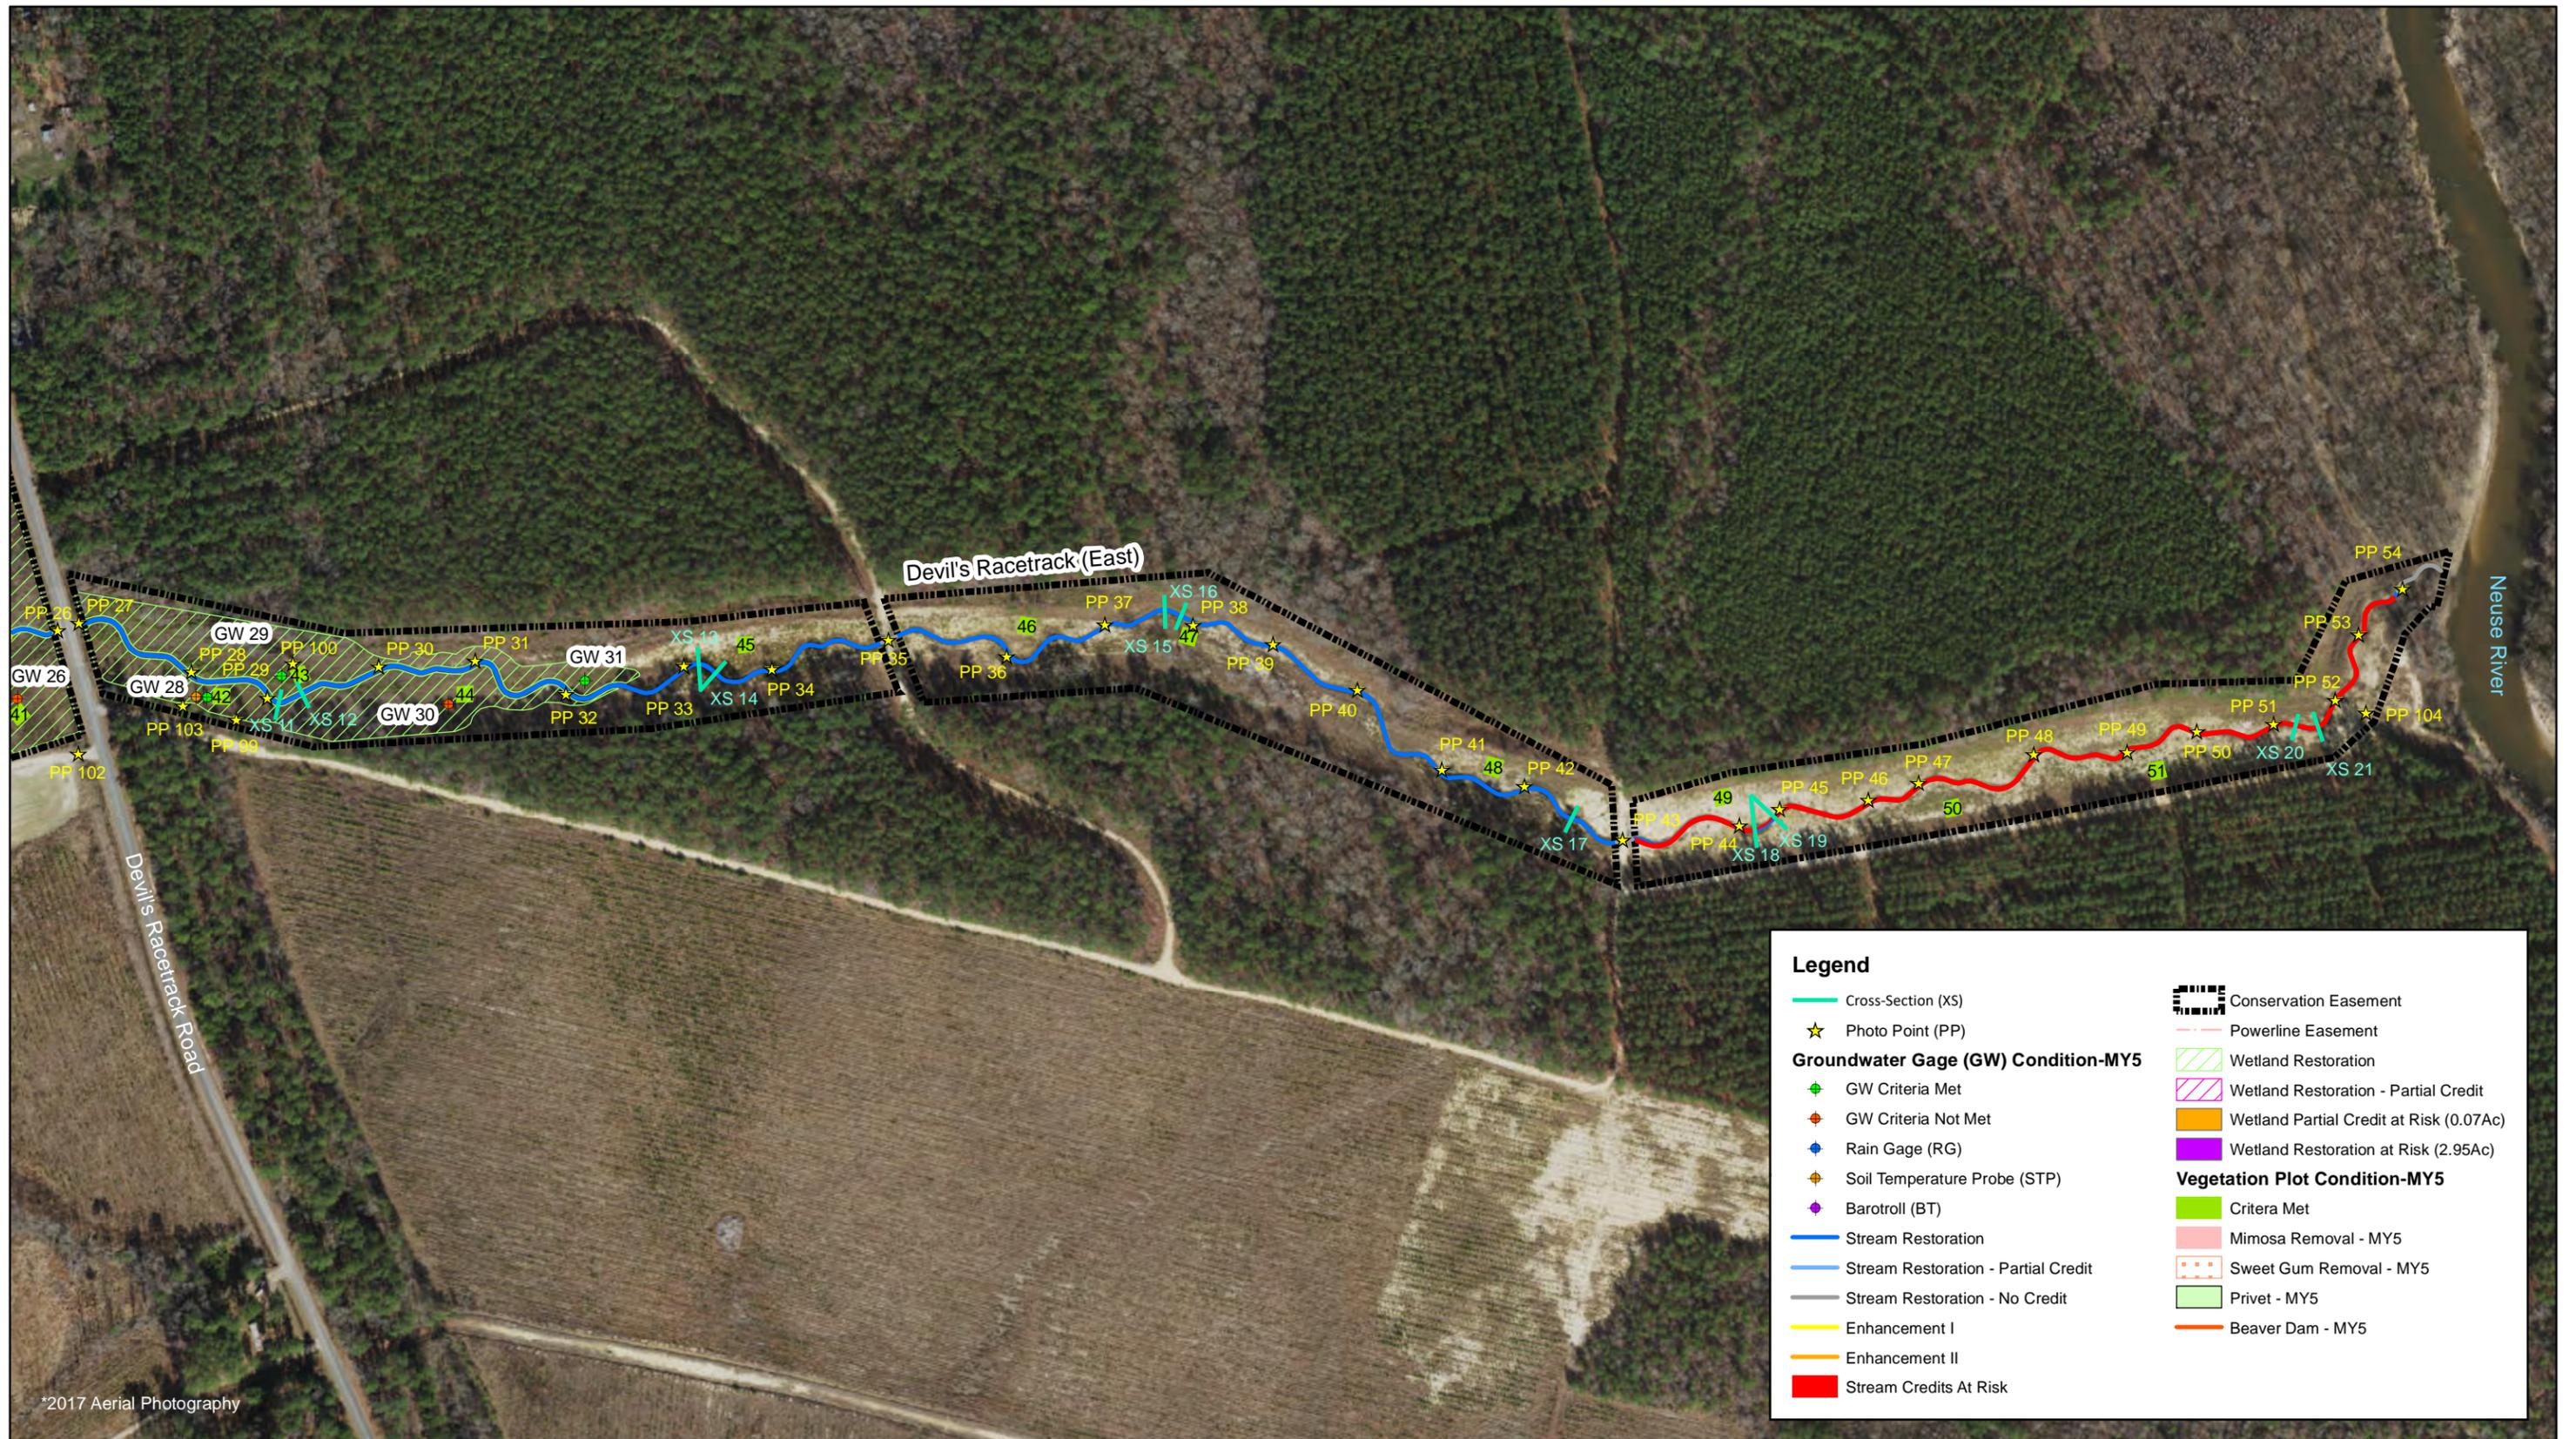

**Table 5a. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Devil's Racetrack (West) (5,211 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
<b>1. Bed</b>	<b>1. Vertical Stability (Riffle and Run units)</b>	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	<b>2. Riffle Condition</b>	Texture/Substrate	74	74			100%			
	<b>3. Meander Pool Condition</b>	Depth Sufficient	74	74			100%			
		Length Appropriate	74	74			100%			
	<b>4. Thalweg Position</b>	Thalweg centering at upstream of meander bend (Run)	74	74			100%			
Thalweg centering at downstream of meander bend (Glide)		74	74	100%						
<b>2. Bank</b>										
	<b>1. Scoured/Eroded</b>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	<b>2. Undercut</b>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	<b>3. Mass Wasting</b>	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
<b>3. Engineered Structures<sup>1</sup></b>										
	<b>1. Overall Integrity</b>	Structures physically intact with no dislodged boulders or logs	6	6			100%			
	<b>2. Grade Control</b>	Grade control structures exhibiting maintenance of grade across the sill	6	6			100%			
	<b>2a. Piping</b>	Structures lacking any substantial flow underneath sills or arms.	6	6			100%			
	<b>3. Bank Protection</b>	Bank erosion within the structures extent of influence does not exceed 15%	6	6			100%			
	<b>4. Habitat</b>	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	6	6			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 5b. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Devil's Racetrack (East) (5,542 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	85	85		100%				
	3. Meander Pool Condition	Depth Sufficient	85	85		100%				
		Length Appropriate	85	85		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	85	85		100%				
Thalweg centering at downstream of meander bend (Glide)		85	85	100%						
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
3. Engineered Structures <sup>1</sup>	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	17	17			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	17	17			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	17	17			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	17	17			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	17	17			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 5c. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Southeast Branch (2,892 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
<b>1. Bed</b>	<b>1. Vertical Stability (Riffle and Run units)</b>	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	<b>2. Riffle Condition</b>	Texture/Substrate	121	121			100%			
	<b>3. Meander Pool Condition</b>	Depth Sufficient	120	120			100%			
		Length Appropriate	120	120			100%			
	<b>4. Thalweg Position</b>	Thalweg centering at upstream of meander bend (Run)	120	120			100%			
Thalweg centering at downstream of meander bend (Glide)		120	120			100%				
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
<b>2. Bank</b>	<b>1. Scoured/Eroded</b>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	<b>2. Undercut</b>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	<b>3. Mass Wasting</b>	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
<b>3. Engineered Structures<sup>1</sup></b>	<b>1. Overall Integrity</b>	Structures physically intact with no dislodged boulders or logs	67	67			100%			
	<b>2. Grade Control</b>	Grade control structures exhibiting maintenance of grade across the sill	67	67			100%			
	<b>2a. Piping</b>	Structures lacking any substantial flow underneath sills or arms.	67	67			100%			
	<b>3. Bank Protection</b>	Bank erosion within the structures extent of influence does not exceed 15%	67	67			100%			
	<b>4. Habitat</b>	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	67	67			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 5d. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Middle Branch (1,906 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	79	79		100%				
	3. Meander Pool Condition	Depth Sufficient	78	78		100%				
		Length Appropriate	78	78		100%				
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	78	78		100%				
		Thalweg centering at downstream of meander bend (Glide)	78	78		100%				
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
3. Engineered Structures <sup>1</sup>	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	52	52			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	52	52			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	52	52			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	52	52			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	52	52			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 5e. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Southwest Branch (1,155 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run units)	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	2. Riffle Condition	Texture/Substrate	48	48			100%			
	3. Meander Pool Condition	Depth Sufficient	47	47			100%			
		Length Appropriate	47	47			100%			
	4. Thalweg Position	Thalweg centering at upstream of meander bend (Run)	47	47			100%			
		Thalweg centering at downstream of meander bend (Glide)	47	47			100%			
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
2. Bank	1. Scoured/Eroded	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	3. Mass Wasting	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
3. Engineered Structures <sup>1</sup>	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs	28	28			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill	28	28			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	28	28			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does not exceed 15%	28	28			100%			
	4. Habitat	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	28	28			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 5f. Visual Stream Morphology Stability Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**North Branch (2,042 LF)**

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-Built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjust % for Stabilizing Woody Vegetation
<b>1. Bed</b>	<b>1. Vertical Stability (Riffle and Run units)</b>	Aggradation			0	0	100%			
		Degradation			0	0	100%			
	<b>2. Riffle Condition</b>	Texture/Substrate	35	35			100%			
	<b>3. Meander Pool Condition</b>	Depth Sufficient	34	34			100%			
		Length Appropriate	34	34			100%			
	<b>4. Thalweg Position</b>	Thalweg centering at upstream of meander bend (Run)	34	34			100%			
		Thalweg centering at downstream of meander bend (Glide)	34	34			100%			
<b>2. Bank</b>	<b>1. Scoured/Eroded</b>	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion			0	0	100%	n/a	n/a	n/a
	<b>2. Undercut</b>	Banks undercut/overhanging to the extent that mass wasting appears likely. Does NOT include undercuts that are modest, appear sustainable and are providing habitat			0	0	100%	n/a	n/a	n/a
	<b>3. Mass Wasting</b>	Bank slumping, caving, or collapse			0	0	100%	n/a	n/a	n/a
<b>Totals</b>					0	0	100%	n/a	n/a	n/a
<b>3. Engineered Structures<sup>1</sup></b>	<b>1. Overall Integrity</b>	Structures physically intact with no dislodged boulders or logs	10	10			100%			
	<b>2. Grade Control</b>	Grade control structures exhibiting maintenance of grade across the sill	10	10			100%			
	<b>2a. Piping</b>	Structures lacking any substantial flow underneath sills or arms.	10	10			100%			
	<b>3. Bank Protection</b>	Bank erosion within the structures extent of influence does not exceed 15%	10	10			100%			
	<b>4. Habitat</b>	Pool forming structures maintaining ~Max Pool Depth : Bankfull Depth ≥ 1.6 Rootwads/logs providing some cover at baseflow	10	10			100%			

<sup>1</sup>Excludes constructed riffles since they are evaluated in section 1.

**Table 6. Vegetation Condition Assessment Table**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Planted Acreage 96**

Vegetation Category	Definitions	Mapping Threshold (Ac)	Number of Polygons	Combined Acreage	% of Planted Acreage
Bare Areas	Very limited cover of both woody and herbaceous material.	0.1	0	0.0	0.0%
Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	0.1	0	0.0	0.0%
			<b>Total</b>	<b>0</b>	<b>0.0%</b>
Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	0.25 Ac	0	0	0%
			<b>Cumulative Total</b>	<b>0</b>	<b>0.0%</b>

**Easement Acreage 96**

Vegetation Category	Definitions	Mapping Threshold (SF)	Number of Polygons	Combined Acreage	% of Planted Acreage
Invasive Areas of Concern	Areas of points (if too small to render as polygons at map scale).	1,000	1	3.4	3.5%
Easement Encroachment Areas	Areas of points (if too small to render as polygons at map scale).	none	0	0	0%

**STREAM PHOTOGRAPHS**  
**Devil's Racetrack West**  
**Monitoring Year 5**



**PHOTO POINT 1** – looking upstream (04/16/2018)



**PHOTO POINT 1** – looking downstream (04/16/2018)



**PHOTO POINT 2** – looking upstream (04/16/2018)



**PHOTO POINT 2** – looking downstream (04/16/2018)





**PHOTO POINT 3** – looking upstream (04/16/2018)



**PHOTO POINT 3** – looking downstream (04/16/2018)



**PHOTO POINT 4** – looking upstream (04/16/2018)



**PHOTO POINT 4** – looking downstream (04/16/2018)



**PHOTO POINT 5** – looking upstream (04/16/2018)



**PHOTO POINT 5** – looking downstream (04/16/2018)





**PHOTO POINT 6** – looking upstream (04/16/2018)



**PHOTO POINT 6** – looking downstream (04/16/2018)



**PHOTO POINT 7** – looking upstream (04/16/2018)



**PHOTO POINT 7** – looking downstream (04/16/2018)



**PHOTO POINT 8** – looking upstream (04/16/2018)



**PHOTO POINT 8** – looking downstream (04/16/2018)





**PHOTO POINT 9** – looking upstream (04/16/2018)



**PHOTO POINT 9** – looking downstream (04/16/2018)



**PHOTO POINT 10** – looking upstream (04/16/2018)



**PHOTO POINT 10** – looking downstream (04/16/2018)



**PHOTO POINT 11** – looking upstream (04/16/2018)



**PHOTO POINT 11** – looking downstream (04/16/2018)





**PHOTO POINT 12** – looking upstream (04/16/2018)



**PHOTO POINT 12** – looking downstream (04/16/2018)



**PHOTO POINT 13** – looking upstream (04/16/2018)



**PHOTO POINT 13** – looking downstream (04/16/2018)



**PHOTO POINT 14** – looking upstream (04/16/2018)



**PHOTO POINT 14** – looking downstream (04/16/2018)





**PHOTO POINT 15** – looking upstream (04/16/2018)



**PHOTO POINT 15** – looking downstream (04/16/2018)



**PHOTO POINT 16** – looking upstream (04/16/2018)



**PHOTO POINT 16** – looking downstream (04/16/2018)



**PHOTO POINT 17** – looking upstream (04/16/2018)



**PHOTO POINT 17** – looking downstream (04/16/2018)





**PHOTO POINT 18** – looking upstream (04/16/2018)



**PHOTO POINT 18** – looking downstream (04/16/2018)



**PHOTO POINT 19** – looking upstream (04/16/2018)



**PHOTO POINT 19** – looking downstream (04/16/2018)



**PHOTO POINT 20** – looking upstream (04/16/2018)



**PHOTO POINT 20** – looking downstream (04/16/2018)





**PHOTO POINT 21** – looking upstream (04/16/2018)



**PHOTO POINT 21** – looking downstream (04/16/2018)



**PHOTO POINT 22** – looking upstream (04/16/2018)



**PHOTO POINT 22** – looking downstream (04/16/2018)



**PHOTO POINT 23** – looking upstream (04/16/2018)



**PHOTO POINT 23** – looking downstream (04/16/2018)





**PHOTO POINT 24** – looking upstream (04/16/2018)



**PHOTO POINT 24** – looking downstream (04/16/2018)



**PHOTO POINT 25** – looking upstream (04/16/2018)




**PHOTO POINT 25** – looking downstream (04/16/2018)



**PHOTO POINT 26** (04/18/2018)



**STREAM PHOTOGRAPHS**  
**Devil's Racetrack East**  
**Monitoring Year 5**

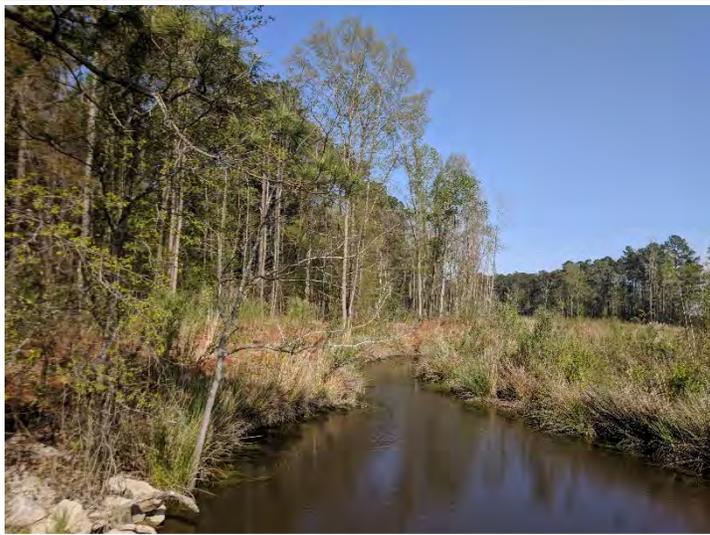

**PHOTO POINT 27** (04/16/2018)



**PHOTO POINT 28** – looking upstream (04/16/2018)



**PHOTO POINT 28** – looking downstream (04/16/2018)





**PHOTO POINT 29** – looking upstream (04/16/2018)



**PHOTO POINT 29** – looking downstream (04/16/2018)



**PHOTO POINT 30** – looking upstream (04/16/2018)



**PHOTO POINT 30** – looking downstream (04/16/2018)



**PHOTO POINT 31** – looking upstream (04/16/2018)



**PHOTO POINT 31** – looking downstream (04/16/2018)





**PHOTO POINT 32** – looking upstream (04/16/2018)



**PHOTO POINT 32** – looking downstream (04/16/2018)



**PHOTO POINT 33** – looking upstream (04/16/2018)



**PHOTO POINT 33** – looking downstream (04/16/2018)



**PHOTO POINT 34** – looking upstream (04/16/2018)



**PHOTO POINT 34** – looking downstream (04/16/2018)





**PHOTO POINT 35** – looking upstream (04/16/2018)



**PHOTO POINT 35** – looking downstream (04/16/2018)



**PHOTO POINT 36** – looking upstream (04/16/2018)



**PHOTO POINT 36** – looking downstream (04/16/2018)



**PHOTO POINT 37** – looking upstream (04/16/2018)



**PHOTO POINT 37** – looking downstream (04/16/2018)





**PHOTO POINT 38** – looking upstream (04/16/2018)



**PHOTO POINT 38** – looking downstream (04/16/2018)



**PHOTO POINT 39** – looking upstream (04/16/2018)



**PHOTO POINT 39** – looking downstream (04/16/2018)



**PHOTO POINT 40** – looking upstream (04/16/2018)



**PHOTO POINT 40** – looking downstream (04/16/2018)





**PHOTO POINT 41** – looking upstream (04/16/2018)



**PHOTO POINT 41** – looking downstream (04/16/2018)



**PHOTO POINT 42** – looking upstream (04/16/2018)



**PHOTO POINT 42** – looking downstream (04/16/2018)



**PHOTO POINT 43** – looking upstream (04/16/2018)



**PHOTO POINT 43** – looking downstream (04/16/2018)





**PHOTO POINT 44** – looking upstream (04/18/2018)



**PHOTO POINT 44** – looking downstream (04/18/2018)



**PHOTO POINT 45** – looking upstream (04/18/2018)



**PHOTO POINT 45** – looking downstream (04/18/2018)



**PHOTO POINT 46** – looking upstream (04/18/2018)



**PHOTO POINT 46** – looking downstream (04/18/2018)





**PHOTO POINT 47** – looking upstream (04/18/2018)



**PHOTO POINT 47** – looking downstream (04/18/2018)



**PHOTO POINT 48** – looking upstream (04/18/2018)



**PHOTO POINT 48** – looking downstream (04/18/2018)



**PHOTO POINT 49** – looking upstream (04/18/2018)



**PHOTO POINT 49** – looking downstream (04/18/2018)






**PHOTO POINT 50** – looking upstream (04/18/2018)



**PHOTO POINT 50** – looking downstream (04/18/2018)




**PHOTO POINT 51** – looking upstream (04/18/2018)

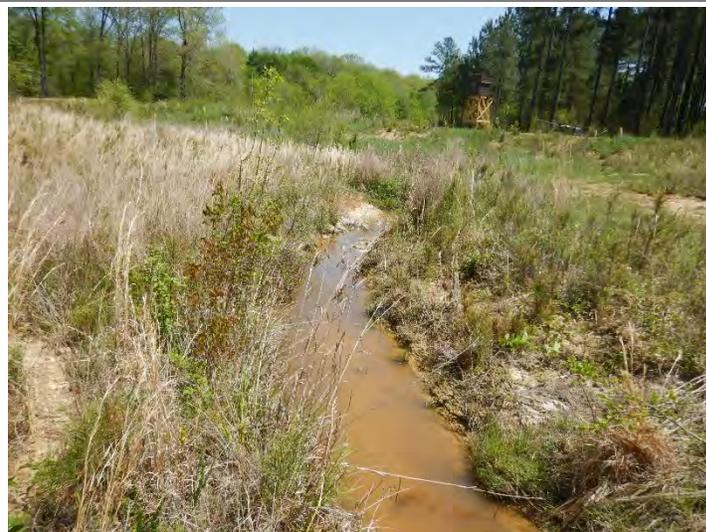

**PHOTO POINT 51** – looking downstream (04/18/2018)



**PHOTO POINT 52** – looking upstream (04/18/2018)

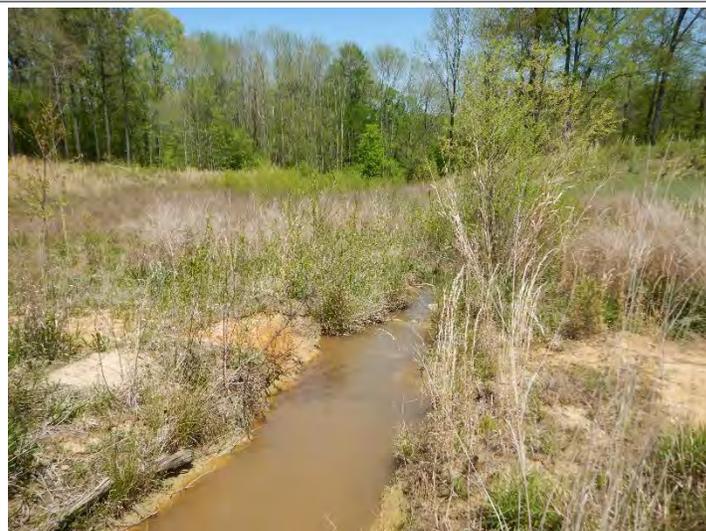

**PHOTO POINT 52** – looking downstream (04/18/2018)





**PHOTO POINT 53** – looking upstream (06/27/2018)



**PHOTO POINT 53** – looking downstream (06/27/2018)



**PHOTO POINT 54** – looking upstream (06/27/2018)



**PHOTO POINT 54** – looking downstream (06/27/2018)



**STREAM PHOTOGRAPHS**  
**Southwest Branch**  
**Monitoring Year 5**



**PHOTO POINT 55** – looking upstream (04/16/2018)



**PHOTO POINT 55** – looking downstream (04/16/2018)



**PHOTO POINT 56** – looking upstream (04/16/2018)



**PHOTO POINT 56** – looking downstream (04/16/2018)





**PHOTO POINT 57** – looking upstream (04/16/2018)



**PHOTO POINT 57** – looking downstream (04/16/2018)



**PHOTO POINT 58** – looking upstream (04/16/2018)



**PHOTO POINT 58** – looking downstream (04/16/2018)



**PHOTO POINT 59** – looking upstream (04/16/2018)



**PHOTO POINT 59** – looking downstream (04/16/2018)





**PHOTO POINT 60** – looking upstream (04/16/2018)



**PHOTO POINT 60** – looking downstream (04/16/2018)



**STREAM PHOTOGRAPHS**  
**Middle Branch**  
**Monitoring Year 5**



**PHOTO POINT 61** – looking upstream (04/16/2018)



**PHOTO POINT 61** – looking downstream (04/16/2018)



**PHOTO POINT 62** – looking upstream (04/16/2018)



**PHOTO POINT 62** – looking downstream (04/16/2018)





**PHOTO POINT 63** – looking upstream (04/16/2018)



**PHOTO POINT 63** – looking downstream (04/16/2018)



**PHOTO POINT 64** – looking upstream (04/16/2018)



**PHOTO POINT 64** – looking downstream (04/16/2018)



**PHOTO POINT 65** – looking upstream (04/16/2018)



**PHOTO POINT 65** – looking downstream (04/16/2018)





**PHOTO POINT 66** – looking upstream (04/16/2018)



**PHOTO POINT 66** – looking downstream (04/16/2018)



**PHOTO POINT 67** – looking upstream (04/16/2018)



**PHOTO POINT 67** – looking downstream (04/16/2018)



**PHOTO POINT 68** – looking upstream (04/16/2018)



**PHOTO POINT 68** – looking downstream (04/16/2018)





**PHOTO POINT 69** – looking upstream (04/16/2018)



**PHOTO POINT 69** – looking downstream (04/16/2018)



**STREAM PHOTOGRAPHS**  
**Southeast Branch**  
**Monitoring Year 5**



**PHOTO POINT 70** – looking upstream (04/16/2018)



**PHOTO POINT 70** – looking downstream (04/16/2018)



**PHOTO POINT 71** – looking upstream (04/16/2018)



**PHOTO POINT 71** – looking downstream (04/16/2018)





**PHOTO POINT 72** – looking upstream (04/16/2018)



**PHOTO POINT 72** – looking downstream (04/16/2018)



**PHOTO POINT 73** – looking upstream (04/16/2018)



**PHOTO POINT 73** – looking downstream (04/16/2018)



**PHOTO POINT 74** – looking upstream (04/16/2018)



**PHOTO POINT 74** – looking downstream (04/16/2018)





**PHOTO POINT 75** – looking upstream (04/16/2018)



**PHOTO POINT 75** – looking downstream (04/16/2018)



**PHOTO POINT 76** – looking upstream (04/16/2018)



**PHOTO POINT 76** – looking downstream (04/16/2018)



**PHOTO POINT 77** – looking upstream (04/16/2018)



**PHOTO POINT 77** – looking downstream (04/16/2018)





**PHOTO POINT 78** – looking upstream (04/16/2018)



**PHOTO POINT 78** – looking downstream (04/16/2018)



**PHOTO POINT 79** – looking upstream (04/16/2018)



**PHOTO POINT 79** – looking downstream (04/16/2018)



**PHOTO POINT 80** – looking upstream (04/16/2018)



**PHOTO POINT 80** – looking downstream (04/16/2018)





**PHOTO POINT 81** – looking upstream (04/16/2018)



**PHOTO POINT 81** – looking downstream (04/16/2018)



**PHOTO POINT 82** – looking upstream (04/16/2018)



**PHOTO POINT 82** – looking downstream (04/16/2018)



**PHOTO POINT 83** – looking upstream (04/16/2018)



**PHOTO POINT 83** – looking downstream (04/16/2018)



**STREAM PHOTOGRAPHS**  
**North Branch**  
**Monitoring Year 5**



**PHOTO POINT 84** – looking upstream (04/16/2018)



**PHOTO POINT 84** – looking downstream (04/16/2018)



**PHOTO POINT 85** – looking upstream (04/16/2018)



**PHOTO POINT 85** – looking downstream (04/16/2018)





**PHOTO POINT 86** – looking upstream (04/16/2018)



**PHOTO POINT 86** – looking downstream (04/16/2018)



**PHOTO POINT 87** – looking upstream (04/16/2018)



**PHOTO POINT 87** – looking downstream (04/16/2018)



**PHOTO POINT 88** – looking upstream (04/16/2018)



**PHOTO POINT 88** – looking downstream (04/16/2018)





**PHOTO POINT 89** – looking upstream (04/16/2018)



**PHOTO POINT 89** – looking downstream (04/16/2018)



**PHOTO POINT 90** – looking upstream (04/16/2018)



**PHOTO POINT 90** – looking downstream (04/16/2018)



**PHOTO POINT 91** – looking upstream (04/16/2018)



**PHOTO POINT 91** – looking downstream (04/16/2018)





**PHOTO POINT 92** – looking upstream (04/16/2018)



**PHOTO POINT 92** – looking downstream (04/16/2018)



**PHOTO POINT 93** – looking upstream (04/16/2018)



**PHOTO POINT 93** – looking downstream (04/16/2018)



**PHOTO POINT 94** – looking upstream (04/16/2018)



**PHOTO POINT 94** – looking downstream (04/16/2018)



**VEGETATION PHOTOGRAPHS**  
**Devil's Racetrack**  
**Monitoring Year 5**



**VEG PLOT 1** (08/21/2018)



**VEG PLOT 2** (08/21/2018)



**VEG PLOT 3** (08/21/2018)



**VEG PLOT 4** (08/21/2018)





**VEG PLOT 5** (08/21/2018)



**VEG PLOT 6** (08/21/2018)



**VEG PLOT 7** (08/21/2018)



**VEG PLOT 8** (08/21/2018)



**VEG PLOT 9** (08/21/2018)



**VEG PLOT 10** (08/21/2018)





**VEG PLOT 11 (08/21/2018)**



**VEG PLOT 12 (08/21/2018)**



**VEG PLOT 13 (08/21/2018)**



**VEG PLOT 14 (08/21/2018)**



**VEG PLOT 15 (08/21/2018)**



**VEG PLOT 16 (08/21/2018)**





**VEG PLOT 17 (08/21/2018)**



**VEG PLOT 18 (08/21/2018)**



**VEG PLOT 19 (08/21/2018)**



**VEG PLOT 20 (08/21/2018)**



**VEG PLOT 21 (08/21/2018)**



**VEG PLOT 22 (08/21/2018)**





**VEG PLOT 23** (08/29/2018)




**VEG PLOT 24** (08/29/2018)




**VEG PLOT 25** (08/29/2018)



**VEG PLOT 26** (08/21/2018)

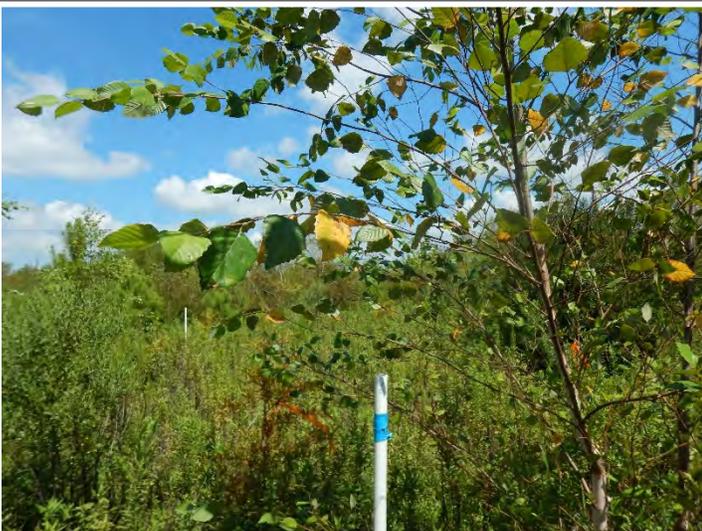

**VEG PLOT 27** (08/29/2018)

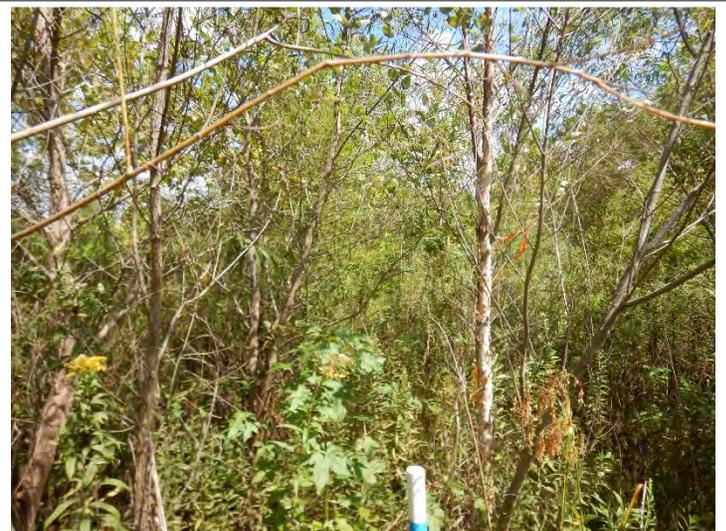

**VEG PLOT 28** (08/29/2018)





**VEG PLOT 29 (08/29/2018)**



**VEG PLOT 30 (08/08/2018)**



**VEG PLOT 31 (08/08/2018)**



**VEG PLOT 32 (08/08/2018)**



**VEG PLOT 33 (08/08/2018)**



**VEG PLOT 34 (08/08/2018)**





**VEG PLOT 35 (08/08/2018)**



**VEG PLOT 36 (08/08/2018)**



**VEG PLOT 37 (08/08/2018)**



**VEG PLOT 38 (08/08/2018)**



**VEG PLOT 39 (08/08/2018)**



**VEG PLOT 40 (08/08/2018)**





**VEG PLOT 41** (08/08/2018)



**VEG PLOT 42** (08/08/2018)



**VEG PLOT 43** (08/08/2018)



**VEG PLOT 44** (08/08/2018)



**VEG PLOT 45** (08/08/2018)



**VEG PLOT 46** (08/08/2018)





**VEG PLOT 47 (08/08/2018)**



**VEG PLOT 48 (08/08/2018)**



**VEG PLOT 49 (08/08/2018)**



**VEG PLOT 50 (08/08/2018)**



**VEG PLOT 51 (08/08/2018)**



**OVERVIEW PHOTOGRAPH COMPARISON**  
**Devil's Racetrack East**  
**Monitoring Year 5**





2016 East Side



2018 East Side





2016 East Side



2018 East Side





2016 East Side



2018 East Side



### **APPENDIX 3. Vegetation Plot Data**

**Table 7. Vegetation Plot Criteria Attainment**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Plot	Success Criteria Met (Y/N)	Tract Mean
1	Y	100%
2	Y	
3	Y	
4	Y	
5	Y	
6	Y	
7	Y	
8	Y	
9	Y	
10	Y	
11	Y	
12	Y	
13	Y	
14	Y	
15	Y	
16	Y	
17	Y	
18	Y	
19	Y	
20	Y	
21	Y	
22	Y	
23	Y	
24	Y	
25	Y	
26	Y	
27	Y	
28	Y	
29	Y	
30	Y	
31	Y	
32	Y	
33	Y	
34	Y	
35	Y	
36	Y	
37	Y	
38	Y	
39	Y	
40	Y	
41	Y	
42	Y	
43	Y	
44	Y	
45	Y	
46	Y	
47	Y	
48	Y	
49	Y	
50	Y	
51	Y	

**Table 8. CVS Vegetation Table - Metadata**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

<b>Database name</b>	Devils Racetrack MY5 cvs-eep-entrytool-v2.3.1.mdb
<b>Database location</b>	F:\Projects\005-02129 Devil's Racetrack\Monitoring\Monitoring Year 5\Vegetation
<b>Computer name</b>	CAROLYN-PC
<b>File size</b>	62914560
<b>DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----</b>	
<b>Metadata</b>	Description of database file, the report worksheets, and a summary of project(s) and project data.
<b>Proj, planted</b>	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
<b>Proj, total stems</b>	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
<b>Plots</b>	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
<b>Vigor</b>	Frequency distribution of vigor classes for stems for all plots.
<b>Vigor by Spp</b>	Frequency distribution of vigor classes listed by species.
<b>Damage</b>	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
<b>Damage by Spp</b>	Damage values tallied by type for each species.
<b>Damage by Plot</b>	Damage values tallied by type for each plot.
<b>Planted Stems by Plot and Spp</b>	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
<b>ALL Stems by Plot and spp</b>	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
<b>PROJECT SUMMARY-----</b>	
<b>Project Code</b>	95021
<b>project Name</b>	Devils Racetrack Mitigation Site
<b>Description</b>	Stream and Wetland Mitigation
<b>River Basin</b>	Neuse
<b>Sampled Plots</b>	51

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0001			95021-01-0002			95021-01-0003			95021-01-0004			95021-01-0005		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree												1			
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub			3									7			
<i>Betula nigra</i>	river birch	Tree	1	1	1	1	1	1	3	3	3	2	2	2	2	2	2
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	3	3	3	4	4	4	3	3	3	1	1	1	2	2	2
<i>Ligustrum sinense</i>	Chinese privet	Exotic			2												
<i>Liquidambar styraciflua</i>	sweetgum	Tree			5			32			6			27			9
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic			1												3
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree				1	1	1									
<i>Nyssa sylvatica</i>	blackgum	Tree	3	3	3	1	1	1	2	2	2						
<i>Pinus</i>	pine	Tree			1						2			3			3
<i>Platanus occidentalis</i>	American sycamore	Tree	2	2	2	2	2	4	2	2	2	3	3	3			
<i>Prunus serotina</i>	black cherry	Tree			1												
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	3	3	3							1	1	1	2	2	2
<i>Quercus pagoda</i>	cherrybark oak	Tree										1	1	1	1	1	1
<i>Quercus phellos</i>	willow oak	Tree	3	3	3	4	4	4	1	1	1			1			
<i>Quercus rubra</i>	northern red oak	Tree															1
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree						2									
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	2	2	2	3	3	3	3	3	3	3	3	3	4	4	4
<i>Ulmus</i>	elm	Tree															
		<b>Stem count</b>	17	17	23	16	16	52	14	14	20	11	11	40	11	11	21
		<b>size (ares)</b>	1			1			1			1			1		
		<b>size (ACRES)</b>	0.02			0.02			0.02			0.02			0.02		
		<b>Species count</b>	7	7	13	7	7	9	6	6	8	6	6	11	5	5	9
		<b>Stems per ACRE</b>	688	688	931	647	647	2,104	567	567	809	445	445	1,619	445	445	850

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0006			95021-01-0007			95021-01-0008			95021-01-0009			95021-01-0010		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree									4			2			
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub									1						
<i>Betula nigra</i>	river birch	Tree	5	5	5	5	5	5	2	2	2	2	2	2	1	1	1
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	2	2	2	1	1	1	4	4	4	1	1	1	3	3	3
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree			9			1			1						
<i>Liriodendron tulipifera</i>	tuliptree	Tree				4	4	4									
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree			1							1	1	1			
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree			1			8						4			
<i>Platanus occidentalis</i>	American sycamore	Tree	2	2	2	2	2	2	1	1	1	5	5	5	5	5	7
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	1	1	1				1	1	1						
<i>Quercus pagoda</i>	cherrybark oak	Tree							1	1	1						
<i>Quercus phellos</i>	willow oak	Tree										2	2	2			
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree			3												1
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	5	5	5				4	4	4	5	5	5	3	3	3
<i>Ulmus</i>	elm	Tree			1									2			
		<b>Stem count</b>	15	15	29	12	12	13	13	13	18	16	16	20	12	12	15
		<b>size (ares)</b>	1			1			1			1			1		
		<b>size (ACRES)</b>	0.02			0.02			0.02			0.02			0.02		
		<b>Species count</b>	5	5	10	4	4	6	6	6	9	6	6	9	4	4	5
		<b>Stems per ACRE</b>	607	607	1,174	486	486	526	526	526	728	647	647	809	486	486	607

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

			Current Plot Data (MY5 2018)														
Scientific Name	Common Name	Species Type	95021-01-0011			95021-01-0012			95021-01-0013			95021-01-0014			95021-01-0015		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree			8			6						1			
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub															
<i>Betula nigra</i>	river birch	Tree	2	2	2	1	1	1	2	2	2						
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	5	5	5	4	4	4				2	2	2	1	1	1
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree			6			4						8			2
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree							1	1	1						
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree			12												
<i>Platanus occidentalis</i>	American sycamore	Tree	2	2	2	5	5	5	3	3	3	3	3	3	4	4	4
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree							1	1	1				2	2	2
<i>Quercus pagoda</i>	cherrybark oak	Tree													1	1	1
<i>Quercus phellos</i>	willow oak	Tree				4	4	4	4	4	4						
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree															5
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	2	2	2	2	2	2	5	5	5	10	10	10	7	7	7
<i>Ulmus</i>	elm	Tree			6												
<b>Stem count</b>			11	11	31	16	16	26	16	16	16	15	15	24	15	15	22
<b>size (ares)</b>			1			1			1			1			1		
<b>size (ACRES)</b>			0.02			0.02			0.02			0.02			0.02		
<b>Species count</b>			4	4	8	5	5	7	6	6	6	3	3	5	5	5	7
<b>Stems per ACRE</b>			445	445	1,255	647	647	1,052	647	647	647	607	607	971	607	607	890

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

**Monitoring Year 5 - 2018**

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0016			95021-01-0017			95021-01-0018			95021-01-0019			95021-01-0020		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree						2									
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub								1						4	
<i>Betula nigra</i>	river birch	Tree	6	6	6	2	2	2									
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	3	3	3	2	2	2	1	1	1	2	2	2			
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree			5			3		1			3			3	
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree	3	3	3				2	2	2	2	2	2	2	2	
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree			1			4					5			3	
<i>Platanus occidentalis</i>	American sycamore	Tree	1	1	1	1	1	1							4	4	4
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree										5	5	5	1	1	1
<i>Quercus pagoda</i>	cherrybark oak	Tree										1	1	1			
<i>Quercus phellos</i>	willow oak	Tree	1	1	1				4	4	4				1	1	1
<i>Quercus rubra</i>	northern red oak	Tree				1	1	1									
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree															
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree				10	10	10	5	5	5	4	4	4	7	7	7
<i>Ulmus</i>	elm	Tree															
		<b>Stem count</b>	14	14	19	16	16	21	12	12	13	14	14	17	15	15	18
		<b>size (ares)</b>	1			1			1			1			1		
		<b>size (ACRES)</b>	0.02			0.02			0.02			0.02			0.02		
		<b>Species count</b>	5	5	7	5	5	8	4	4	6	5	5	7	5	5	8
		<b>Stems per ACRE</b>	567	567	769	647	647	850	486	486	526	567	567	688	607	607	728

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
 P-all: Number of planted stems including live stakes,  
 T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0021			95021-01-0022			95021-01-0023			95021-01-0024			95021-01-0025		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree									1						
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub					1										2
<i>Betula nigra</i>	river birch	Tree	3	3	3				2	2	2				2	2	2
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	5	5	5	3	3	3				6	6	6	3	3	3
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree															2
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree															
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree					19										4
<i>Platanus occidentalis</i>	American sycamore	Tree				1	1	1	7	7	7	4	4	4	4	4	4
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree										2	2	2			
<i>Quercus pagoda</i>	cherrybark oak	Tree				3	3	3									
<i>Quercus phellos</i>	willow oak	Tree				2	2	2	2	2	3	1	1	1			
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree									2						1
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	5	5	5	7	7	7	3	3	3	4	4	4	6	6	6
<i>Ulmus</i>	elm	Tree															
	<b>Stem count</b>		13	13	13	16	16	16	14	14	18	17	17	17	15	15	18
	<b>size (ares)</b>		1			1			1			1			1		
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02		
	<b>Species count</b>		3	3	3	5	5	7	4	4	6	5	5	5	4	4	8
	<b>Stems per ACRE</b>		526	526	526	647	647	647	567	567	728	688	688	688	607	607	728

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0026			95021-01-0027			95021-01-0028			95021-01-0029			95021-01-0030		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree															
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub			3			4									
<i>Betula nigra</i>	river birch	Tree	2	2	2				2	2	2	2	2	2	1	1	1
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	4	4	4	1	1	1	1	1				1	1	1	
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree						2			3						
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub						3									
<i>Nyssa biflora</i>	swamp tupelo	Tree	1	1	1				2	2	2	2	2	2			
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree			1			2									
<i>Platanus occidentalis</i>	American sycamore	Tree	1	1	1	1	1	1	3	3	3	1	1	1			
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree				4	4	4				1	1	1			
<i>Quercus pagoda</i>	cherrybark oak	Tree													8	8	8
<i>Quercus phellos</i>	willow oak	Tree				1	1	1	5	5	5	1	1	1	4	4	4
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree									7						
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	3	3	3	9	9	9	1	1	1	5	5	5	3	3	3
<i>Ulmus</i>	elm	Tree															
	<b>Stem count</b>		11	11	11	16	16	21	14	14	23	12	12	12	17	17	17
	<b>size (ares)</b>		1			1			1			1			1		
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02		
	<b>Species count</b>		5	5	7	5	5	9	6	6	7	6	6	6	5	5	5
	<b>Stems per ACRE</b>		445	445	445	647	647	850	567	567	931	486	486	486	688	688	688

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

**Monitoring Year 5 - 2018**

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0031			95021-01-0032			95021-01-0033			95021-01-0034			95021-01-0035		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree															
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub															
<i>Betula nigra</i>	river birch	Tree	4	4	4				3	3	3	3	3	3	4	4	4
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	1	1	1	7	7	8	2	2	2	2	2	2	2	2	2
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree															
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree	2	2	2	1	1	1	2	2	2	4	4	4	4	4	4
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree															
<i>Platanus occidentalis</i>	American sycamore	Tree	4	4	4	2	2	2	4	4	4	1	1	1	7	7	7
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree															
<i>Quercus pagoda</i>	cherrybark oak	Tree	2	2	2	2	2	2	1	1	1	4	4	4			
<i>Quercus phellos</i>	willow oak	Tree	1	1	1				2	2	2						
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree															
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	2	2	2	7	7	7	4	4	4	2	2	2	2	2	2
<i>Ulmus</i>	elm	Tree															
	<b>Stem count</b>		16	16	16	19	19	20	18	18	18	16	16	16	19	19	19
	<b>size (ares)</b>		1			1			1			1			1		
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02		
	<b>Species count</b>		7	7	7	5	5	5	7	7	7	6	6	6	5	5	5
	<b>Stems per ACRE</b>		647	647	647	769	769	809	728	728	728	647	647	647	769	769	769

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0036			95021-01-0037			95021-01-0038			95021-01-0039			95021-01-0040		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree															
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub															
<i>Betula nigra</i>	river birch	Tree	4	4	4	2	2	2	2	2	2	2	2	2	1	1	1
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	1	1	1	2	2	2	2	2	2	2	2	2			
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree															
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree	1	1	1	2	2	2									
<i>Nyssa sylvatica</i>	blackgum	Tree															
<i>Pinus</i>	pine	Tree															
<i>Platanus occidentalis</i>	American sycamore	Tree	2	2	2	2	2	2				6	6	6	5	5	5
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree															
<i>Quercus pagoda</i>	cherrybark oak	Tree	1	1	1									1	1	1	
<i>Quercus phellos</i>	willow oak	Tree	5	5	5	1	1	1				1	1	1	4	4	4
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree															
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	3	3	3	3	3	3	5	5	5	4	4	4	5	5	5
<i>Ulmus</i>	elm	Tree															
	<b>Stem count</b>		17	17	17	12	12	12	9	9	9	15	15	15	16	16	16
	<b>size (ares)</b>		1			1			1			1			1		
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02		
	<b>Species count</b>		7	7	7	6	6	6	3	3	3	5	5	5	5	5	5
	<b>Stems per ACRE</b>		688	688	688	486	486	486	364	364	364	607	607	607	647	647	647

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

**Monitoring Year 5 - 2018**

Scientific Name	Common Name	Species Type	Current Plot Data (MY5 2018)														
			95021-01-0041			95021-01-0042			95021-01-0043			95021-01-0044			95021-01-0045		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree															
<i>Alnus serrulata</i>	hazel alder	Shrub															
<i>Baccharis</i>	baccharis	Shrub						1									
<i>Betula nigra</i>	river birch	Tree	1	1	1	1	1	1	2	2	2	1	1	1	2	2	2
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub															
<i>Fraxinus pennsylvanica</i>	green ash	Tree	2	2	2				4	4	4	4	4	4	1	1	1
<i>Ligustrum sinense</i>	Chinese privet	Exotic															
<i>Liquidambar styraciflua</i>	sweetgum	Tree								1							
<i>Liriodendron tulipifera</i>	tuliptree	Tree															
<i>Albizia julibrissin</i>	mimosa	Exotic															
<i>Morella cerifera</i>	wax myrtle	shrub															
<i>Nyssa biflora</i>	swamp tupelo	Tree	1	1	1	6	6	6	2	2	2	8	8	8			
<i>Nyssa sylvatica</i>	blackgum	Tree															3
<i>Pinus</i>	pine	Tree															
<i>Platanus occidentalis</i>	American sycamore	Tree	3	3	3	1	1	1							1	1	1
<i>Prunus serotina</i>	black cherry	Tree															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree										1	1	1			
<i>Quercus pagoda</i>	cherrybark oak	Tree															
<i>Quercus phellos</i>	willow oak	Tree	2	2	2	3	3	3				1	1	1	2	2	2
<i>Quercus rubra</i>	northern red oak	Tree															
<i>Rhus copallinum</i>	flameleaf sumac	shrub															
<i>Salix nigra</i>	black willow	Tree															
<i>Salix sericea</i>	silky willow	Shrub															
<i>Taxodium distichum</i>	bald cypress	Tree	6	6	6	1	1	1	4	4	4				6	6	6
<i>Ulmus</i>	elm	Tree															
	<b>Stem count</b>		15	15	15	12	12	12	12	12	13	15	15	15	12	12	15
	<b>size (ares)</b>		1			1			1			1			1		
	<b>size (ACRES)</b>		0.02			0.02			0.02			0.02			0.02		
	<b>Species count</b>		6	6	6	5	5	6	4	4	5	5	5	5	5	5	6
	<b>Stems per ACRE</b>		607	607	607	486	486	486	486	486	526	607	607	607	486	486	607

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
P-all: Number of planted stems including live stakes,  
T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

		Current Plot Data (MY5 2018)																		
Scientific Name	Common Name	Species Type	95021-01-0046			95021-01-0047			95021-01-0048			95021-01-0049			95021-01-0050			95021-01-0051		
			PnoLS	P-all	T															
<i>Acer rubrum</i>	red maple	Tree																		
<i>Alnus serrulata</i>	hazel alder	Shrub																		
<i>Baccharis</i>	baccharis	Shrub						1												
<i>Betula nigra</i>	river birch	Tree	4	4	4							3	3	3	5	5	5	3	3	3
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub																		
<i>Fraxinus pennsylvanica</i>	green ash	Tree				3	3	3	6	6	7	2	2	2	3	3	3	2	2	2
<i>Ligustrum sinense</i>	Chinese privet	Exotic																		
<i>Liquidambar styraciflua</i>	sweetgum	Tree																		
<i>Liriodendron tulipifera</i>	tuliptree	Tree	1	1	1				2	2	3				3	3	3	2	2	3
<i>Albizia julibrissin</i>	mimosa	Exotic																		
<i>Morella cerifera</i>	wax myrtle	shrub																		
<i>Nyssa biflora</i>	swamp tupelo	Tree																		
<i>Nyssa sylvatica</i>	blackgum	Tree			2															
<i>Pinus</i>	pine	Tree																		
<i>Platanus occidentalis</i>	American sycamore	Tree	1	1	1										3	3	3	5	5	5
<i>Prunus serotina</i>	black cherry	Tree																		
<i>Quercus michauxii</i>	swamp chestnut oak	Tree									1			1			1			
<i>Quercus pagoda</i>	cherrybark oak	Tree	3	3	3	2	2	2	5	5	5	1	1	1	2	2	2	4	4	5
<i>Quercus phellos</i>	willow oak	Tree	2	2	2	3	3	3	1	1	1	1	1	1	1	1	1	1	1	1
<i>Quercus rubra</i>	northern red oak	Tree																		
<i>Rhus copallinum</i>	flameleaf sumac	shrub																		
<i>Salix nigra</i>	black willow	Tree																		
<i>Salix sericea</i>	silky willow	Shrub																		
<i>Taxodium distichum</i>	bald cypress	Tree	1	1	1								1	1	1					
<i>Ulmus</i>	elm	Tree																		
		<b>Stem count</b>	12	12	14	8	8	8	14	14	17	8	8	9	17	17	18	17	17	19
		<b>size (ares)</b>	1			1			1			1			1			1		
		<b>size (ACRES)</b>	0.02			0.02			0.02			0.02			0.02			0.02		
		<b>Species count</b>	6	6	7	3	3	4	4	4	5	5	5	6	6	6	7	6	6	6
		<b>Stems per ACRE</b>	486	486	567	324	324	324	567	567	688	324	324	364	688	688	728	688	688	769

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes  
 P-all: Number of planted stems including live stakes,  
 T: Total Stems

**Table 9. Planted and Total Stem Counts**

Devil's Racetrack Mitigation Site (DMS Project Code 95021)

Monitoring Year 5 - 2018

Scientific Name	Common Name	Species Type	Annual Means																	
			MY5 (2018)			MY4 (2017)			MY3 (2016)			MY2 (2015)			MY1 (2014)			MY0 (2014)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Acer rubrum</i>	red maple	Tree			25			8			3			2						
<i>Alnus serrulata</i>	hazel alder	Shrub						3			4									
<i>Baccharis</i>	baccharis	Shrub			28						32									
<i>Betula nigra</i>	river birch	Tree	98	98	98	98	98	98	102	102	102	104	104	104	106	106	106	106	106	
<i>Cephalanthus occidentalis</i>	common buttonbush	Shrub												2						
<i>Fraxinus pennsylvanica</i>	green ash	Tree	116	116	117	117	117	118	119	119	119	123	123	125	124	124	124	126	126	
<i>Ligustrum sinense</i>	Chinese privet	Exotic			2															
<i>Liquidambar styraciflua</i>	sweetgum	Tree			132			135			184			86						
<i>Liriodendron tulipifera</i>	tuliptree	Tree	12	12	14	13	13	13	13	13	13	14	14	14	25	25	25	20	20	
<i>Albizia julibrissin</i>	mimosa	Exotic			4															
<i>Morella cerifera</i>	wax myrtle	shrub			3															
<i>Nyssa biflora</i>	swamp tupelo	Tree	50	50	51	53	53	54	54	54	54	59	59	59	64	64	64	60	60	
<i>Nyssa sylvatica</i>	blackgum	Tree	6	6	11	7	7	9	8	8	8	8	8	8	9	9	9	10	10	
<i>Pinus</i>	pine	Tree			73			232												
<i>Platanus occidentalis</i>	American sycamore	Tree	116	116	121	117	117	118	123	123	126	128	128	128	124	124	124	124	124	
<i>Prunus serotina</i>	black cherry	Tree			1															
<i>Quercus michauxii</i>	swamp chestnut oak	Tree	25	25	28	57	57	57	60	60	60	77	77	77	91	91	91	108	108	
<i>Quercus pagoda</i>	cherrybark oak	Tree	44	44	45	12	12	13	12	12	12	12	12	12	14	14	14			
<i>Quercus phellos</i>	willow oak	Tree	71	71	73	71	71	79	77	77	79	97	97	97	104	104	104	125	125	
<i>Quercus rubra</i>	northern red oak	Tree	1	1	2	1	1	4	1	1	7	1	1	3						
<i>Rhus copallinum</i>	flameleaf sumac	shrub						2												
<i>Salix nigra</i>	black willow	Tree			21			38			13									
<i>Salix sericea</i>	silky willow	Shrub											3							
<i>Taxodium distichum</i>	bald cypress	Tree	186	186	186	186	186	186	189	189	189	190	190	190	189	189	189	206	206	
<i>Ulmus</i>	elm	Tree			9															
		<b>Stem count</b>	725	725	937	732	732	1167	758	758	1005	813	813	910	850	850	850	885	885	
		<b>size (ares)</b>	51			51			51			51			51			51		
		<b>size (ACRES)</b>	1.26			1.26			1.26			1.26			1.26			1.26		
		<b>Species count</b>	11	11	21	11	11	17	11	11	16	11	11	15	10	10	10	9	9	
		<b>Stems per ACRE</b>	575	575	744	581	581	926	601	601	797	645	645	722	674	674	674	702	702	

**Color for Density**

- Exceeds requirements by 10%
- Exceeds requirements, but by less than 10%
- Fails to meet requirements, by less than 10%
- Fails to meet requirements by more than 10%
- Volunteer species included in total

PnoLS: Number of Planted stems excluding live stakes

P-all: Number of planted stems including live stakes,

T: Total Stems

## **APPENDIX 4. Morphological Summary Data and Plots**

Table 10a. Baseline Stream Data Summary  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Devils Racetrack- West

Parameter	Gage	Pre-Restoration Condition		Reference Reach Data								Design				As-Built/Baseline						
		Devil's Racetrack - West		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		Devil's Racetrack - West (Reach 1)		Devil's Racetrack - West (Reach 2)		Devil's Racetrack - West (Reach 1)		Devil's Racetrack - West (Reach 2)		
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
<b>Dimension and Substrate - Shallow</b>																						
Bankfull Width (ft)	N/A	4.8	8.0	2.6	6.3	4.7	6.1	5.6	7.6	9.7	9.3	9.0	11.5	4.7	9.6	7.7						
Floodprone Width (ft)		7.8	18.0	>20	>50	>50	>75	>150	100	300	100	300	>200	>200								
Bankfull Mean Depth		0.8	1.2	0.3	0.5	1.1	1.3	0.7	1.0	0.8	1.2	0.6	0.8	0.4	0.9	0.5						
Bankfull Max Depth		1.3	1.6	0.5	0.7	1.7	1.8	1.2	1.3	1.1	2.3	0.9	1.1	1.1	1.4	0.7						
Bankfull Cross Sectional Area (ft <sup>2</sup> )		5.7	6.3	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6	5.8	9.5	2.1	8.5	4.0					
Width/Depth Ratio		4.0	10.5	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4	14.0	14.5	14.0	10.6	14.8	14.5				
Entrenchment Ratio		1.6	2.2	>2.2	>2.2	>2.2	>2.2	8.0	9.6	16.1	26.9	11.1	33.3	8.7	26.1	>20.9	>42.5	>26.1				
Bank Height Ratio		1.9	4.5	1.1	1.3	1.0	1.1	1.2	1.0	1.0	1.0	1.1	1.0	1.1	1.0	1.1	1.0					
D50 (mm)		0.464																				
<b>Profile</b>																						
Shallow Length (ft)	N/A																					
Shallow Slope (ft/ft)				0.026	0.047	N/A		0.033	0.051	N/A		0.0129	0.0036	0.0277	0.0023	0.0072	0.0013	0.0593	0.0008	0.0195		
Pool Length (ft)																						
Pool Max Depth (ft)		1.2		0.6		N/A		1.7	1.9	1.5		3.1	0.9	2.1	1.1	2.5	1.1	2.9	1.4	1.9		
Pool Spacing (ft)				27	67	N/A		21	27	16	59	32	55	14	63	18	81	9	132	38	104	
Pool Volume (ft <sup>3</sup> )																						
<b>Pattern</b>																						
Channel Beltwidth (ft)	N/A			8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	12.0	72.0	15.0	92.0	13.0	53.0	16.0	73.0	
Radius of Curvature (ft)				3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	14.0	43.0	17.0	55.0	12.0	40.0	17.0	35.0	
Rc:Bankfull Width (ft/ft)				0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.5	4.8	1.5	4.8	2.6	4.2	2.2	4.5	
Meander Length (ft)				39.8	84.8	36.5	63.2	32.5	36.9	50.0		N/A	27	153	35	196	52	133	70	137		
Meander Width Ratio				1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	8.0	1.3	8.0	2.8	5.5	2.1	9.5	
<b>Substrate, Bed and Transport Parameters</b>																						
Ri%/Ru%/P%/G%/S%	N/A																					
SC%/Sa%/G%/C%/B%/Be%																						
d16/d35/d50/d84/d95/d100		0.168/0.33/0.464/1.23/2.0/9.6																				
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		0.18	0.23																			
Max part size (mm) mobilized at bankfull																						
Stream Power (Capacity) W/m <sup>2</sup>																						
<b>Additional Reach Parameters</b>																						
Drainage Area (SM)	N/A	0.77		0.06		0.67		0.34		0.90		1.27		0.60		0.70		0.60		0.70		
Watershed Impervious Cover Estimate (%)		<1%													<1%		<1%		<1%		<1%	
Rosgen Classification		Gc5		E/C5b		E5		E5		E5/C5		E6		E/C5		E/C5		E/C5		C		
Bankfull Velocity (fps)		1.5	1.8	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95		1.7		1.2		1.2		4.8	3.3	
Bankfull Discharge (cfs)		9.2	10.6	2.6		17.5		6.4		14.0		11.0		10.0		13.0		10.0			13.0	
Q-NFF regression																						
Q-USGS extrapolation																						
Q-Mannings																						
Valley Length (ft)																						
Channel Thalweg Length (ft)		4,976													4,245		966		4,239		962	
Sinuosity	1.0		1.1		1.2		1.2		1.2		1.4		1.2	1.6	1.2	1.6		1.2		1.4		
Water Surface Slope (ft/ft) <sup>2</sup>																		0.0054		0.0015		
Bankfull Slope (ft/ft)	0.0041		0.0260		0.0170		0.0040		0.0022		0.0040		0.0025	0.0087	0.0016	0.0022		0.0053	0.0054	0.0017	0.0023	

(---): Data was not provided  
 N/A: Not Applicable

**Table 10b. Baseline Stream Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**Devils Racetrack- East**

Parameter	Gage	Pre-Restoration Condition		Reference Reach Data								Design						As-Built/Baseline							
		Devil's Racetrack - East		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		Devil's Racetrack - East (Reach 1)		Devil's Racetrack - East (Reach 2)		Devil's Racetrack - East (Reach 3)		Devil's Racetrack - East (Reach 1)		Devil's Racetrack - East (Reach 2)		Devil's Racetrack - East (Reach 3)	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																									
Bankfull Width (ft)	N/A	8.1	10.4	2.6	6.3	4.7	6.1	5.6	7.6	9.7		9.3		13.0		8.0		8.0		12.2	13.7	8.2		---	
Floodprone Width (ft)		14.2	18.6	>20		>50		>50		>75		>150		100	500	100	500	100	500	>300		>300		---	
Bankfull Mean Depth		1.0	1.8	0.3	0.5	1.1	1.3	0.7	1.0	0.8		1.2		1.0		0.6		---		0.8	1.1	0.7		---	
Bankfull Max Depth		2.1	2.8	0.5	0.7	1.7	1.8	1.2	1.3	1.1		2.3		1.4	1.8	0.8	1.0	0.9		1.3	1.7	1.1		---	
Bankfull Cross Sectional Area (ft <sup>2</sup> )		14.2	19.1	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6		12.8		4.8		---		10.3	13.9	5.7		---	
Width/Depth Ratio		5.0	7.8	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4		13.0	13.5	14.0	14.5	---		12.1	14.6	11.9		---	
Entrenchment Ratio		1.6	1.8	>2.2		>2.2		>2.2		8.0	9.6	16.1	26.9	7.7	38.5	12.5	62.6	---		>21.9	>24.5	>36.5		---	
Bank Height Ratio		2.6	4.3	1.1	1.3	1.0		1.1	1.2	1.0		1.0		1.0	1.1	1.0	1.1	---		1.0		1.0		---	
D50 (mm)		0.179																		N/A		N/A		---	
<b>Profile</b>																									
Shallow Length (ft)	N/A			---		---		---		---		---		---		---		---		13.0	80.1	20.8	42.4	11.3	25.9
Shallow Slope (ft/ft)		---		0.026	0.047	N/A		0.033	0.051	N/A		0.0129		0.0007	0.0025	0.0377	0.0671	---		0.0004	0.0099	0.0192	0.0318	0.0072	0.0675
Pool Length (ft)		---		---		---		---		---		---		---		---		---		16.0	77.3	16.5	66.1	13.0	34.2
Pool Max Depth (ft)		---		0.6		N/A		1.7	1.9	1.5		3.1		1.4	3.2	0.8	2.0	1.2		1.9	3.4	1.7	2.7	1.4	2.5
Pool Spacing (ft)		---		27	67	N/A		21	27	16	59	32	55	21	91	39	64	---		26	131	43	73	25	70
Pool Volume (ft <sup>3</sup> )		---																							
<b>Pattern</b>																									
Channel Beltwidth (ft)	N/A	---		8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	17.0	65.0	10.0	40.0	---		15.0	55.0	21	41	12	32
Radius of Curvature (ft)		---		3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	20.0	62.0	12.0	36.0	---		18.0	65.0	12	26	10	35
Rc:Bankfull Width (ft/ft)		---		0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.5	4.8	1.5	4.5	---		1.5	4.7	1.5	3.2	---	
Meander Length (ft)		---		39.8	84.8	36.5	63.2	32.5	36.9	50.0		N/A		39	221	64	136	---		62	203	101	140	52	112
Meander Width Ratio		---		1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	5.0	1.3	5.0	---		1.2	4.0	2.6	5.0	---	
<b>Substrate, Bed and Transport Parameters</b>																									
Ri%/Ru%/P%/G%/S%	N/A																								
SC%/Sa%/G%/C%/B%/Be%																									
d16/d35/d50/d84/d95/d100		-/-/0.179/0.642/1.0/9.6		---		---		---		---		---		---		---		---		N/A		N/A		N/A	
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		0.01																		N/A		N/A		N/A	
Max part size (mm) mobilized at bankfull																									
Stream Power (Capacity) W/m <sup>2</sup>																									
<b>Additional Reach Parameters</b>																									
Drainage Area (SM)	N/A	1.30		0.06		0.67		0.34		0.90		1.27		1.14		1.30		---		1.14		1.30		---	
Watershed Impervious Cover Estimate (%)		<1%		---		---		---		---		---		<1%		<1%		<1%		<1%		<1%		<1%	
Rosgen Classification		Gc5		E/CSb		E5		E5		E5/C5		E6		E/C5		E/C5		E/C5		C		C		---	
Bankfull Velocity (fps)		0.3	0.4	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95		1.2		3.5		---		1.2	1.6	3.0		---	
Bankfull Discharge (cfs)		8.5		2.6		17.5		6.4		14.0		11.0		16.0		17.0		---		16.0		17.0		---	
Q-NFF regression		---																							
Q-USGS extrapolation		---																							
Q-Mannings		---																							
Valley Length (ft)		---																							
Channel Thalweg Length (ft)		4,844		---		---		---		---		---		4,840		313		385		4,833		310		372	
Sinuosity		1.0		1.1		1.2		1.2		1.2		1.4		1.1		1.3		1.1		1.2		---		1.1	
Water Surface Slope (ft/ft) <sup>2</sup>	---		---		---		---		---		---		---		---		---		---		---		---		
Bankfull Slope (ft/ft)	0.0003		0.0260		0.0170		0.0040		0.0022		0.0040		0.0004		0.0008		0.0224		0.0251		---		0.0007		

(---): Data was not provided  
 N/A: Not Applicable

Table 10c. Baseline Stream Data Summary  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Southeast Branch

Parameter	Gage	Pre-Restoration Condition		Reference Reach Data								Design						As-Built/Baseline										
		Southeast Branch		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		Southeast Branch (Reach 1)		Southeast Branch (Reach 2)		Southeast Branch (Reach 3)		Southeast Branch (Reach 1)		Southeast Branch (Reach 2)		Southeast Branch (Reach 3)				
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max			
<b>Dimension and Substrate - Shallow</b>																												
Bankfull Width (ft)	N/A	2.7	5.7	2.6	6.3	4.7	6.1	5.6	7.6	9.7	9.3	3.0	3.0	4.0	5.4	3.0	3.8	5.3										
Floodprone Width (ft)		8.6	11.4	>20		>50		>50		>75		>150		25	35	50	70	100	300	>30	>60	>200						
Bankfull Mean Depth		0.2	0.4	0.3	0.5	1.1	1.3	0.7	1.0	0.8	1.2	0.5	0.6	1.0	0.3	0.4	0.4											
Bankfull Max Depth		0.4	1.4	0.5	0.7	1.7	1.8	1.2	1.3	1.1	2.3	0.4	0.6	0.5	0.7	0.8	1.2	0.5	0.5	0.5	0.5	0.5	0.6					
Bankfull Cross Sectional Area (ft <sup>2</sup> )		1.1	1.4	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6	1.0	1.5	2.5	0.8	1.3	2.1										
Width/Depth Ratio		6.8	24.3	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4	9.0	10.0	10.0	12.0	11.0	12.0	11.4	10.8	13.8							
Entrenchment Ratio		1.5	4.2	>2.2		>2.2		>2.2		8.0	9.6	16.1	26.9	8.3	11.7	12.5	17.5	18.5	55.6	>9.9	>15.8	>37.5						
Bank Height Ratio		2.2	6.0	1.1	1.3	1.0	1.1	1.2	1.0	1.0	1.0	1.1	1.0	1.1	1.0	1.1	1.0	1.2	1.0	1.0	1.0	1.0						
D50 (mm)			0.409																	N/A	N/A	N/A						
<b>Profile</b>																												
Shallow Length (ft)	N/A																		2.1	64.4	3.4	144.4	6.0	47.3				
Shallow Slope (ft/ft)				0.026	0.047	N/A	0.033	0.051	N/A	0.0129	0.0162	0.0681	0.0144	0.0384	0.0035	0.0285	0.0010	0.0803	0.0021	0.0272	0.0005	0.0168						
Pool Length (ft)																												
Pool Max Depth (ft)		0.4	0.6	N/A	1.7	1.9	1.5	3.1	0.5	1.1	0.4	1.2	0.5	1.5	0.7	1.5	0.7	1.5	0.5	1.0	0.5	1.1						
Pool Spacing (ft)			27	67	N/A	21	27	16	59	32	55	15	24	20	32	9	38	4	76	8	90	14	52					
Pool Volume (ft <sup>3</sup> )																												
<b>Pattern</b>																												
Channel Beltwidth (ft)	N/A		8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	4.0	9.0	5.0	12.0	7.0	43.0	5.3	11.2	6.8	14.3	12.7	32.8				
Radius of Curvature (ft)				3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	5.0	14.0	6.0	18.0	8.0	26.0	5.0	23.5	10.0	25.6	10.4	29.5			
Rc:Bankfull Width (ft/ft)				0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.5	4.5	1.5	4.5	1.5	4.8	1.7	7.8	2.6	6.7	2.0	5.6			
Meander Length (ft)				39.8	84.8	36.5	63.2	32.5	36.9	50.0	N/A	24	51	32	68	16	92	22	63	33	70	32	74					
Meander Width Ratio				1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	3.0	1.3	3.0	1.3	8.0	1.8	3.7	1.8	3.8	2.4	6.2			
<b>Substrate, Bed and Transport Parameters</b>																												
Ri%/Ru%/P%/G%/S%	N/A																											
SC%/Sa%/G%/C%/B%/Be%																												
d16/d35/d50/d84/d95/d100		0.08/0.28/0.41/0.94/1.6/9.6																										
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		0.51																										
Max part size (mm) mobilized at bankfull																												
Stream Power (Capacity) W/m <sup>2</sup>																												
<b>Additional Reach Parameters</b>																												
Drainage Area (SM)	N/A	0.19	0.06	0.67	0.34	0.90	1.27	0.03	0.07	0.10	0.03	0.07	0.10	0.03	0.07	0.10	0.03	0.07	0.10									
Watershed Impervious Cover Estimate (%)		<1%							<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%	<1%		
Rosgen Classification		G/F5	E/C5b	E5	E5	E5/C5	E6																					
Bankfull Velocity (fps)		2.2	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95	1.7	1.4	1.4	1.9	1.5	1.9	1.5	1.5	1.5	1.4	1.4	1.4	1.4	1.4	1.4		
Bankfull Discharge (cfs)		2.4	2.6	17.5	6.4	14.0	11.0	1.5	2.0	3.0	1.5	2.0	3.0	1.5	2.0	3.0	1.5	2.0	3.0	1.5	2.0	3.0	1.5	2.0	3.0	1.5		
Q-NFF regression																												
Q-USGS extrapolation																												
Q-Mannings																												
Valley Length (ft)																												
Channel Thalweg Length (ft)		2,976																										
Sinuosity		1.0	1.1	1.2	1.2	1.2	1.4	1.1	1.2	1.2	1.4	1.1	1.2	1.1	1.2	1.2	1.6	1.6	1.6	1.6	1.1	1.1	1.3	1.3	1.3	1.3		
Water Surface Slope (ft/ft) <sup>2</sup>																												
Bankfull Slope (ft/ft)		0.0230	0.0260	0.0170	0.0040	0.0022	0.0040	0.0108	0.0227	0.0096	0.0128	0.0025	0.0089	0.0222	0.0015	0.0119	0.0028	0.0030										

(---): Data was not provided  
 N/A: Not Applicable

Table 10d. Baseline Stream Data Summary  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Middle Branch		Pre-Restoration Condition		Reference Reach Data								Design				As-Built/Baseline					
Parameter	Gage	Middle Branch		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		Middle Branch (Reach 1)		Middle Branch (Reach 2)		Middle Branch (Reach 1)		Middle Branch (Reach 2)	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																					
Bankfull Width (ft)	N/A	1.8	2.3	2.6	6.3	4.7	6.1	5.6	7.6	9.7	9.3	3.0		4.0		2.2		3.4			
Floodprone Width (ft)		4.6	6.8	>20		>50		>50		>75		>150		40	60	100	300	>50		>200	
Bankfull Mean Depth		0.2	0.3	0.3	0.5	1.1	1.3	0.7	1.0	0.8		1.2		0.3		0.3		0.3		0.3	
Bankfull Max Depth		0.3	0.6	0.5	0.7	1.7	1.8	1.2	1.3	1.1		2.3		0.4	0.5	0.5	0.6	0.5		0.5	
Bankfull Cross Sectional Area (ft <sup>2</sup> )		0.4	0.5	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6		0.9		1.5		0.7		1.1	
Width/Depth Ratio		6.9	12.0	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4		10.0	10.5	10.0	12.0	6.7		10.1	
Entrenchment Ratio		2.0	3.8	>2.2		>2.2		>2.2		8.0	9.6	16.1	26.9	33.3	100.0	22.2	66.7	>22.9		>58.8	
Bank Height Ratio		5.3	6.5	1.1	1.3	1.0		1.1	1.2	1.0		1.0		1.0	1.1	1.0	1.1	1.0		1.0	
D50 (mm)		0.083															N/A		N/A		
<b>Profile</b>																					
Shallow Length (ft)	N/A			---		---		---		---		---		---		---		2.5	46.6	7.9	16.1
Shallow Slope (ft/ft)		---	---	0.026	0.047	N/A		0.033	0.051	N/A		0.0129	0.0144	0.0489	0.0002	0.0074	0.0008	0.0492	0.0059	0.0236	
Pool Length (ft)		---	---	---		---		---		---		---		---		---		2.9	17.3	11.2	19.8
Pool Max Depth (ft)		---	---	0.6		N/A		1.7	1.9	1.5		3.1		0.4	1.0	0.5	1.0	0.5	1.2	0.6	0.9
Pool Spacing (ft)		---	---	27	67	N/A		21	27	16	59	32	55	15	24	5	22	8	56	18	24
Pool Volume (ft <sup>3</sup> )																					
<b>Pattern</b>																					
Channel Beltwidth (ft)	N/A	---	---	8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	4.0	9.0	6.0	36.0	4.1	9.4	6.7	20.9
Radius of Curvature (ft)		---	---	3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	5.0	14.0	7.0	22.0	7.0	23.9	9.2	23.5
Rc:Bankfull Width (ft/ft)		---	---	0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.7	4.5	1.5	4.8	3.2	10.9	2.7	6.9
Meander Length (ft)		---	---	39.8	84.8	36.5	63.2	32.5	36.9	50.0		N/A		24	51	14	77	23	44	32	57
Meander Width Ratio		---	---	1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	3.0	1.3	8.0	2.2	4.3	2.0	6.1
<b>Substrate, Bed and Transport Parameters</b>																					
Ri%/Ru%/P%/G%/S%	N/A																				
SC%/Sa%/G%/C%/B%/Be%																					
d16/d35/d50/d84/d95/d100				-/-0.083/0.498/0.9/9.6		---		---		---		---		---		---		N/A		N/A	
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		0.24	0.27																N/A	N/A	
Max part size (mm) mobilized at bankfull																					
Stream Power (Capacity) W/m <sup>2</sup>																					
<b>Additional Reach Parameters</b>																					
Drainage Area (SM)	N/A	0.02		0.06		0.67		0.34		0.90		1.27		0.01		0.01		0.01		0.01	
Watershed Impervious Cover Estimate (%)		<1%		---		---		---		---		---		<1%		<1%		<1%		<1%	
Rosgen Classification		G5		E/C5b		E5		E5		E5/C5		E6		N/A		E/C5		E/C5		E/C5	
Bankfull Velocity (fps)		1.4	1.5	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95	1.3	1.3	0.8	1.4	0.9	1.4	0.9		
Bankfull Discharge (cfs)		0.6	0.7	2.6		17.5		6.4		14.0		11.0		1.0		1.0		1.0		1.0	
Q-NFF regression		---		---		---		---		---		---		---		---		---		---	
Q-USGS extrapolation		---		---		---		---		---		---		---		---		---		---	
Q-Mannings		---		---		---		---		---		---		---		---		---		---	
Valley Length (ft)		---		---		---		---		---		---		---		---		985		---	
Channel Thalweg Length (ft)		1,736		---		---		---		---		---		1,060		436		1,058		432	
Sinuosity		1.0		1.1		1.2		1.2		1.2		1.4		1.1	1.2	1.2	1.5	1.1		1.2	
Water Surface Slope (ft/ft) <sup>2</sup>		---		---		---		---		---		---		---		---		0.0145		0.0064	
Bankfull Slope (ft/ft)	0.0240		0.0260		0.0170		0.0040		0.0022		0.0040		0.0096	0.0163	0.0024	0.0077	0.0148	0.0024	0.0066		

(---): Data was not provided  
 N/A: Not Applicable

Table 10e. Baseline Stream Data Summary  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Southwest Branch

		Pre-Restoration Condition		Reference Reach Data								Design				As-Built/Baseline							
Parameter	Gage	Southwest Branch		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		Southwest Branch (Reaches 1 - 3)		Southwest Branch (Reach 4)		Southwest Branch (Reaches 1 - 3)		Southwest Branch (Reach 4)			
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max		
<b>Dimension and Substrate - Shallow</b>																							
Bankfull Width (ft)	N/A	2.8	3.4	2.6	6.3	4.7	6.1	5.6	7.6	9.7	9.3	3.0		3.3		---		2.4					
Floodprone Width (ft)		4.9	6.2	>20		>50		>50		>75		>150		40	60	100	300	---		>200			
Bankfull Mean Depth		0.2	0.3	0.3	0.5	1.1	1.3	0.7	1.0	0.8		1.2		0.3		0.3		---		0.3			
Bankfull Max Depth		0.3	0.9	0.5	0.7	1.7	1.8	1.2	1.3	1.1		2.3		0.5	0.6	0.4	0.5	---		0.4			
Bankfull Cross Sectional Area (ft <sup>2</sup> )		0.8	0.9	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6		1.0		1.0		---		0.6			
Width/Depth Ratio		10.0	14.0	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4		9.0	10.0	10.0	12.0	---		9.7			
Entrenchment Ratio		1.5	1.9	>2.2		>2.2		>2.2		8.0	9.6	16.1	26.9	13.3	20.0	30.3	90.9	---		82.3			
Bank Height Ratio		10.0	10.7	1.1	1.3	1.0		1.1	1.2	1.0		1.0		1.0	1.1	1.0	1.1	---		1.0			
D50 (mm)	0.105																---		N/A				
<b>Profile</b>																							
Shallow Length (ft)	N/A	---		---		---		---		---		---		---		---		3.8	51.6	8.3	44.1		
Shallow Slope (ft/ft)		---	---	0.026	0.047	N/A		0.033	0.051	N/A		0.0129	0.0257	0.0648	0.0109	0.0308	0.0015	0.0339	0.0032	0.0228			
Pool Length (ft)		---		---		---		---		---		---		---		---		1.7	19.9	4.3	23.4		
Pool Max Depth (ft)		---	---	0.6		N/A		1.7	1.9	1.5		3.1		0.5	1.1	0.4	1.0	0.3	1.2	0.6	1.4		
Pool Spacing (ft)		---	---	27	67	N/A		21	27	16	59	32	55	15	24	5	23	8	53	12	51		
Pool Volume (ft <sup>3</sup> )																							
<b>Pattern</b>																							
Channel Beltwidth (ft)	N/A	---	---	8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	4.0	9.0	4.0	26.0	3.9	10.2	5.2	18.9		
Radius of Curvature (ft)		---	---	3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	5.0	14.0	5.0	16.0	10.0	19.0	7.4	20.3		
Rc:Bankfull Width (ft/ft)		---	---	0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.7	4.5	1.5	4.8	---		3.1	8.5		
Meander Length (ft)		---	---	39.8	84.8	36.5	63.2	32.5	36.9	50.0		N/A		24	51	10	56	27	50	28	54		
Meander Width Ratio		---	---	1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	3.0	1.3	8.0	---		2.2	7.9		
<b>Substrate, Bed and Transport Parameters</b>																							
Ri%/Ru%/P%/G%/S%	N/A																						
SC%/Sa%/G%/C%/B%/Be%																							
d16/d35/d50/d84/d95/d100		-/0.065/0.105/0.336/0.4/9.6		---		---		---		---		---		---		---		---		N/A		N/A	
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		0.37	0.42																				
Max part size (mm) mobilized at bankfull																							
Stream Power (Capacity) W/m <sup>2</sup>																							
<b>Additional Reach Parameters</b>																							
Drainage Area (SM)	N/A	0.03		0.06		0.67		0.34		0.90		1.27		0.02		0.02		0.02		0.02			
Watershed Impervious Cover Estimate (%)		<1%		---		---		---		---		---		<1%		<1%		<1%		<1%			
Rosgen Classification		G5		E/C5b		E5		E5		E5/C5		E6		NA		E/C5		N/A		E/C5			
Bankfull Velocity (fps)		1.8	1.9	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95		1.7	1.3	1.3		N/A		2.5			
Bankfull Discharge (cfs)		1.6	1.7	2.6		17.5		6.4		14.0		11.0		1.5		1.5		1.5		1.5			
Q-NFF regression																							
Q-USGS extrapolation																							
Q-Mannings																							
Valley Length (ft)																							
Channel Thalweg Length (ft)		1,080		---		---		---		---		---		650		482		646		479			
Sinuosity		1.0		1.1		1.2		1.2		1.2		1.4		1.1	1.2	1.1	1.5	1.0		1.3			
Water Surface Slope (ft/ft) <sup>2</sup>																							
Bankfull Slope (ft/ft)	0.0320		0.0260		0.0170		0.0040		0.0022		0.0040		0.0171	0.0216	0.0078	0.0096	0.0186	0.0191	0.0085	0.0088			

(---): Data was not provided  
 N/A: Not Applicable

**Table 10f. Baseline Stream Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**North Branch**

Parameter	Gage	Pre-Restoration Condition		Reference Reach Data								Design		As-Built/Baseline			
		North Branch		Scout West 1		Scout East 2		Scout West 2		Johanna Creek		Jarman Oak		North Branch		North Branch	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																	
Bankfull Width (ft)	N/A	---	2.6	6.3	4.7	6.1	5.6	7.6	9.7	9.3	9.2	8.6	9.3				
Floodprone Width (ft)		---	>20	>50	>50	>75	>150	100	300	>200							
Bankfull Mean Depth		---	0.3	0.5	1.1	1.3	0.7	1.0	0.8	1.2	0.6	0.7	0.7				
Bankfull Max Depth		---	0.5	0.7	1.7	1.8	1.2	1.3	1.1	2.3	0.9	1.1	1.0	1.2			
Bankfull Cross Sectional Area (ft <sup>2</sup> )		---	1.3	2.0	6.0	6.9	5.3	5.4	7.2	7.8	11.6	5.9	5.7	6.5			
Width/Depth Ratio		---	5.4	19.4	3.6	5.4	5.7	11.0	10.1	19.7	7.4	14.0	14.5	13.1	13.2		
Entrenchment Ratio		---	>2.2	>2.2	>2.2	>2.2	8.0	9.6	16.1	26.9	10.9	32.6	>21.6	>23.2			
Bank Height Ratio		---	1.1	1.3	1.0	1.1	1.2	1.0	1.0	1.0	1.0	1.1	1.0				
D50 (mm)	---												N/A				
<b>Profile</b>																	
Shallow Length (ft)	N/A	---	0.026	0.047	N/A	0.033	0.051	N/A	0.0129	0.0010	0.0065	0.0013	0.0163	5.3	35.8		
Shallow Slope (ft/ft)		---												8.5	80.8		
Pool Length (ft)		---	0.6	N/A	1.7	1.9	1.5	3.1	0.9	2.1	1.0	3.8					
Pool Max Depth (ft)		---	27	67	N/A	21	27	16	59	32	55	15	64	17	101		
Pool Spacing (ft)		---															
Pool Volume (ft <sup>3</sup> )	---																
<b>Pattern</b>																	
Channel Beltwidth (ft)	N/A	---	8.7	14.3	7.2	16.2	9.1	9.8	14.0	20.0	21.0	36.0	12.0	74.0	16	72	
Radius of Curvature (ft)		---	3.1	9.0	5.5	16.0	5.4	6.8	15.0	27.0	13.7	18.6	14.0	44.0	15	40	
Rc:Bankfull Width (ft/ft)		---	0.6	1.6	1.0	3.0	0.8	1.0	1.5	2.8	1.5	2.0	1.5	4.8	1.7	4.3	
Meander Length (ft)		---	39.8	84.8	36.5	63.2	32.5	36.9	50.0	N/A	28	156	79	129			
Meander Width Ratio		---	1.6	2.6	1.3	3.0	1.4	1.5	1.4	2.1	2.3	2.9	1.3	8.0	1.9	7.7	
<b>Substrate, Bed and Transport Parameters</b>																	
Ri%/Ru%/P%/G%/S%	N/A																
SC%/Sa%/G%/C%/B%/Be%																	
d16/d35/d50/d84/d95/d100		---														N/A	
Reach Shear Stress (Competency) lb/ft <sup>2</sup>		---														N/A	
Max part size (mm) mobilized at bankfull																	
Stream Power (Capacity) W/m <sup>2</sup>																	
<b>Additional Reach Parameters</b>																	
Drainage Area (SM)	N/A	0.08	0.06	0.67	0.34	0.90	1.27	0.19	0.19								
Watershed Impervious Cover Estimate (%)		<1%							<1%	<1%							
Rosgen Classification		N/A	E/C5b	E5	E5	E5/C5	E6	E/C5	C5								
Bankfull Velocity (fps)		---	1.3	2.0	2.5	2.9	1.2	1.2	1.8	1.9	0.95	0.9	0.8	0.9			
Bankfull Discharge (cfs)		---	2.6	17.5	6.4	14.0	11.0	5.0	5.0								
Q-NFF regression		---															
Q-USGS extrapolation		---															
Q-Mannings		---															
Valley Length (ft)		---															
Channel Thalweg Length (ft)		---															
Sinuosity		---	1.1	1.2	1.2	1.2	1.4	1.2	1.6	1.31							
Water Surface Slope (ft/ft) <sup>2</sup>		---								0.0016							
Bankfull Slope (ft/ft)		---	0.0260	0.0170	0.0040	0.0022	0.0040	0.0007	0.0020	0.0004	0.0020						

(---): Data was not provided  
 N/A: Not Applicable

**Table 11a. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Devil's Racetrack (West)**

Dimension and Substrate	Cross Section 1 (Shallow)								Cross Section 2 (Pool)								Cross Section 3 (Shallow)								Cross Section 4 (Pool)									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7		
Bankfull Elevation (ft) <sup>1</sup>	135.4	135.4	135.4	135.4	135.4	135.5			135.1	135.1	135.1	135.1	135.1	135.2			131.0	131.0	131.0	131.0	131.0	131.0	131.2			130.6	130.6	130.6	130.6	130.6	130.6	130.8		
Low Bank Elevation (ft)	135.4	135.4	135.4	135.4	135.4	135.4			135.1	135.1	135.1	135.1	135.1	135.1			131.0	131.0	131.0	131.0	131.0	131.0				130.6	130.6	130.6	130.6	130.6	130.6			
Bankfull Width (ft)	9.6	7.6	7.7	7.6	7.8	9.0			10.7	10.1	10.2	9.8	9.2	8.1			9.5	10.0	10.0	10.0	9.3	10.0				11.1	11.4	11.4	11.4	11.2	11.8			
Floodprone Width (ft)	>200	>200	>200	>200	>200	>200			N/A	N/A	N/A	N/A	N/A	N/A			>200	>200	>200	>200	>200	>200				N/A	N/A	N/A	N/A	N/A	N/A			
Bankfull Mean Depth (ft)	0.6	0.7	0.8	0.8	0.7	0.7			0.7	0.8	0.8	0.8	0.9	1.0			0.9	0.8	0.8	0.7	0.8	0.8				1.0	0.8	0.9	0.8	0.7	0.9			
Bankfull Max Depth (ft)	1.1	1.5	1.5	1.4	1.4	1.3			1.7	1.9	2.0	1.9	2.0	1.8			1.4	1.4	1.4	1.4	1.4	1.5				1.7	1.7	1.7	1.7	1.6	1.7			
Bankfull Cross Sectional Area (ft <sup>2</sup> )	6.2	5.6	5.8	5.8	5.3	6.2			7.8	7.6	8.6	8.1	8.1	7.8			8.5	8.1	8.2	7.4	7.1	8.5				10.7	9.4	9.9	8.6	8.0	10.7			
Bankfull Width/Depth Ratio	14.8	10.4	10.1	10.0	11.5	13.2			14.6	13.4	12.2	12.0	10.6	8.4			10.6	12.3	12.2	13.5	12.1	11.8				11.4	13.9	13.1	15.1	15.6	13.0			
Entrenchment Ratio <sup>2</sup>	>20.9	>26.2	>26.1	>26.3	>25.7	>22.2			N/A	N/A	N/A	N/A	N/A	N/A			>21.1	>20.0	>20.1	>20.0	>21.5	>20.0				N/A	N/A	N/A	N/A	N/A	N/A			
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	<1.0			N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	<1.0				N/A	N/A	N/A	N/A	N/A	N/A			
Dimension and Substrate	Cross Section 5 (Pool)								Cross Section 6 (Shallow)								Cross Section 7 (Pool)								Cross Section 8 (Shallow)									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7		
Bankfull Elevation (ft) <sup>1</sup>	125.3	125.3	125.3	125.3	125.3	125.4			124.7	124.7	124.7	124.7	124.7	124.9			120.8	120.8	120.8	120.8	120.8	120.9				119.9	119.9	119.9	119.9	119.9	119.9	119.4		
Low Bank Elevation (ft)	125.3	125.3	125.3	125.3	125.3	125.3			124.7	124.7	124.7	124.7	124.7	124.9			120.8	120.8	120.8	120.8	120.8	120.8				119.9	119.9	119.9	119.9	119.9	119.9			
Bankfull Width (ft)	8.9	8.6	8.6	8.6	9.3	10.1			8.7	8.2	8.6	8.5	8.0	9.1			9.5	8.0	8.0	8.7	8.7	10.3				4.7	4.8	4.8	4.2	4.2	2.8			
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>200	>200	>200	>200	>200	N/A			N/A	N/A	N/A	N/A	N/A	N/A				>200	>200	>200	>200	>200	>200			
Bankfull Mean Depth (ft)	0.8	0.8	0.8	0.7	0.7	0.7			0.7	0.7	0.6	0.6	0.5	0.7			0.8	0.9	0.9	0.8	0.8	0.7				0.4	0.7	1.2	0.8	1.0	0.8			
Bankfull Max Depth (ft)	1.5	1.5	1.5	1.5	1.4	1.4			1.1	1.2	1.2	1.1	1.0	1.2			1.6	1.7	1.7	1.7	1.8	1.8				1.3	1.3	1.7	1.2	1.7	1.0			
Bankfull Cross Sectional Area (ft <sup>2</sup> )	7.5	7.0	6.8	6.2	6.5	7.5			6.0	5.3	5.6	5.2	4.3	6.0			7.6	7.4	7.3	7.0	7.0	7.6				2.1	3.3	5.7	3.3	4.4	2.1			
Bankfull Width/Depth Ratio	10.7	10.6	10.9	11.9	13.4	13.5			12.6	12.6	13.4	14.0	14.7	13.7			11.7	8.7	8.8	10.8	10.8	13.8				10.6	6.9	4.0	5.4	4.0	3.7			
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>23.0	>24.4	>23.2	>23.5	>25.1	>22.1			N/A	N/A	N/A	N/A	N/A	N/A				>42.5	>42.1	>41.9	>47.4	>47.4	>71.9			
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	<1.0			N/A	N/A	N/A	N/A	N/A	N/A				1.0	1.0	1.0	1.0	1.0	2.0			
Dimension and Substrate	Cross Section 9 (Shallow)								Cross Section 10 (Pool)																									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7																		
Bankfull Elevation (ft) <sup>1</sup>	116.4	116.4	116.4	116.4	116.4	116.3			116.1	116.1	116.1	116.1	116.1	116.1																				
Low Bank Elevation (ft)	116.4	116.4	116.4	116.4	116.4	116.4			116.1	116.1	116.1	116.1	116.1	116.1																				
Bankfull Width (ft)	7.7	7.5	7.5	7.5	7.5	7.9			6.8	5.9	5.9	6.2	6.0	7.9																				
Floodprone Width (ft)	>200	>200	>200	>200	>200	>200			N/A	N/A	N/A	N/A	N/A	N/A																				
Bankfull Mean Depth (ft)	0.5	0.7	0.7	0.6	0.6	0.5			0.6	0.8	0.8	0.7	0.7	0.6																				
Bankfull Max Depth (ft)	0.7	1.0	1.0	1.1	1.0	0.9			0.9	1.0	1.0	1.0	0.9	0.9																				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	4.0	5.4	4.9	4.7	4.6	4.0			4.4	4.7	4.6	4.5	4.0	4.4																				
Bankfull Width/Depth Ratio	14.5	10.4	11.4	12.1	12.4	15.5			10.6	7.5	7.6	8.5	9.0	14.0																				
Entrenchment Ratio <sup>2</sup>	>26.1	>26.7	>26.7	>26.7	>26.7	>25.4			N/A	N/A	N/A	N/A	N/A	N/A																				
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	1.1			N/A	N/A	N/A	N/A	N/A	N/A																				

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 11b. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Devil's Racetrack (East)**

Dimension and Substrate	Cross Section 11 (Pool)								Cross Section 12 (Shallow)								Cross Section 13 (Pool)								Cross Section 14 (Shallow)									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7		
Bankfull Elevation (ft) <sup>1</sup>	115.4	115.4	115.4	115.4	115.4	115.5			115.1	115.1	115.1	115.1	115.1	115.3			115.0	115.0	115.0	115.0	115.0	115.0	115.3			114.6	114.6	114.6	114.6	114.6	114.6	114.9		
Low Bank Elevation (ft)	115.4	115.4	115.4	115.4	115.4	115.3			115.1	115.1	115.1	115.1	115.1	115.0			115.0	115.0	115.0	115.0	115.0	115.0				114.6	114.6	114.6	114.6	114.6	114.6			
Bankfull Width (ft)	15.0	15.1	15.1	15.1	15.1	14.0			12.2	12.5	12.3	12.2	12.2	12.7			19.8	20.5	20.8	21.1	21.8	22.2				12.7	11.8	12.4	12.2	12.0	12.6			
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>300	>300	>300	>300	>300	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A			>300	>300	>300	>300	>300	>300				
Bankfull Mean Depth (ft)	1.2	1.1	1.1	1.1	1.1	1.3			0.8	0.7	0.8	0.7	0.7	0.8			1.5	1.2	1.3	1.1	1.1	1.4				1.1	0.9	0.9	0.9	0.9	1.1			
Bankfull Max Depth (ft)	2.1	2.0	2.0	2.5	2.0	2.2			1.3	1.3	1.3	1.2	1.3	1.4			2.7	2.5	2.5	2.3	2.5	2.7				1.6	1.6	1.6	1.5	1.6	1.8			
Bankfull Cross Sectional Area (ft <sup>2</sup> )	18.8	16.5	17.3	16.1	15.9	18.8			10.3	8.9	9.3	8.0	8.4	10.3			30.2	24.6	26.2	23.2	23.2	30.2				13.3	10.4	10.9	10.5	10.6	13.3			
Bankfull Width/Depth Ratio	12.0	13.8	13.1	14.2	14.3	10.4			14.6	17.6	16.1	18.6	17.6	15.7			13.0	17.1	16.6	19.2	20.5	16.3				12.1	13.4	14.0	14.1	13.7	11.9			
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>24.5	>23.9	>24.5	>24.5	>24.6	>23.6			N/A	N/A	N/A	N/A	N/A	N/A				>23.7	>25.4	>24.3	>24.6	>24.9	>23.8			
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	<1.0			N/A	N/A	N/A	N/A	N/A	N/A				1.0	1.0	1.0	1.0	1.0	<1.0			
Dimension and Substrate	Cross Section 15 (Pool)								Cross Section 16 (Shallow)								Cross Section 17 (Shallow)								Cross Section 18 (Pool)									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7		
Bankfull Elevation (ft) <sup>1</sup>	114.2	114.2	114.2	114.2	114.2	114.5			114.1	114.1	114.1	114.1	114.1	114.3			113.3	113.3	113.3	113.3	113.3	113.4			112.6	112.6	112.6	112.6	112.6	112.6	113.0			
Low Bank Elevation (ft)	114.2	114.2	114.2	114.2	114.2	114.1			114.1	114.1	114.1	114.1	114.1	114.4			113.3	113.3	113.3	113.3	113.3	113.3			112.6	112.6	112.6	112.6	112.6	112.6				
Bankfull Width (ft)	15.6	12.4	12.4	12.4	12.3	13.2			13.4	12.6	12.7	12.4	12.4	13.8			13.7	12.5	12.7	12.7	13.6	13.5			15.5	15.3	15.3	15.3	15.3	17.1				
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>300	>300	>300	>300	>300	N/A	N/A	>300	>300	>300	>300	>300	>300			N/A	N/A	N/A	N/A	N/A	N/A					
Bankfull Mean Depth (ft)	1.1	1.2	1.2	1.1	1.1	1.3			1.0	1.0	1.0	0.9	0.9	1.0			1.0	1.0	1.0	1.0	1.0	1.0			1.6	1.5	1.4	1.2	1.1	1.5				
Bankfull Max Depth (ft)	2.1	1.9	1.9	1.8	1.8	2.1			1.7	1.8	1.7	1.7	1.7	1.8			1.7	1.7	1.7	2.1	2.1	2.1			2.8	2.7	2.6	2.1	2.0	2.6				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	17.3	14.5	14.3	13.5	13.3	17.3			13.2	12.0	12.3	11.5	11.3	13.2			13.9	12.5	12.7	13.2	13.4	13.9			25.0	22.4	21.0	18.8	16.6	25.0				
Bankfull Width/Depth Ratio	14.0	10.6	10.7	11.4	11.4	10.1			13.6	13.2	13.0	13.4	13.5	14.3			13.4	12.5	12.6	12.2	13.8	13.1			9.5	10.5	11.2	12.4	14.1	11.8				
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>22.3	>23.9	>23.6	>24.1	>24.3	>21.8			>21.9	>24.0	>23.6	>23.7	>22.1	>22.2			N/A	N/A	N/A	N/A	N/A	N/A				
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	1.1			1.0	1.0	1.0	1.0	1.0	1.0			N/A	N/A	N/A	N/A	N/A	N/A				
Dimension and Substrate	Cross-Section 19 (Shallow)								Cross Section 20 (Shallow)								Cross Section 21 (Pool)																	
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7										
Bankfull Elevation (ft) <sup>1</sup>	112.7	112.7	112.7	112.7	112.7	112.9			109.0	109.0	109.0	109.0	109.0	109.0			108.1	108.1	108.1	108.1	108.1	108.1												
Low Bank Elevation (ft)	112.7	112.7	112.7	112.7	112.7	112.8			109.0	109.0	109.0	109.0	109.0	109.2			108.1	108.1	108.1	108.1	108.1	108.2												
Bankfull Width (ft)	13.3	14.3	14.2	12.6	14.0	14.1			8.2	7.9	7.9	8.3	8.2	8.1			8.8	8.9	9.1	7.8	7.8	9.0												
Floodprone Width (ft)	>300	>300	>300	>300	>300	>300			>300	>300	>300	>300	>300	>300			N/A	N/A	N/A	N/A	N/A	N/A												
Bankfull Mean Depth (ft)	0.9	0.8	0.8	0.8	0.7	0.9			0.7	0.7	0.8	0.8	0.8	0.7			1.2	1.1	1.3	1.2	1.4	1.2												
Bankfull Max Depth (ft)	1.6	1.6	1.6	1.6	1.4	1.7			1.1	1.1	1.2	1.2	1.2	1.2			2.0	1.9	2.1	2.1	2.0	2.0												
Bankfull Cross Sectional Area (ft <sup>2</sup> )	12.5	11.2	11.9	9.9	9.6	12.5			5.7	5.9	6.1	6.3	6.3	5.7			10.8	9.7	11.5	9.4	10.6	10.8												
Bankfull Width/Depth Ratio	14.1	18.4	17.1	16.1	20.4	15.9			11.9	10.6	10.3	10.9	10.6	11.4			7.3	8.1	7.2	6.5	5.7	7.6												
Entrenchment Ratio <sup>2</sup>	>22.6	>20.9	>21.1	>23.8	>21.5	>21.3			>36.5	>37.8	>37.8	>36.3	>36.6	>37.2			N/A	N/A	N/A	N/A	N/A	N/A												
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	<1.0			1.0	1.0	1.0	1.0	1.0	1.2			N/A	N/A	N/A	N/A	N/A	N/A												

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 11c. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Southeast Branch**

Dimension and Substrate	Cross Section 28 (Pool)								Cross Section 29 (Shallow)							Cross Section 30 (Pool)								
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Elevation (ft) <sup>1</sup>	137.7	137.7	137.7	137.7	137.7	137.7			137.1	137.1	137.1	137.1	137.1	137.2			122.8	122.8	122.8	122.8	122.8	123.0		
Low Bank Elevation (ft)	137.7	137.7	137.7	137.7	137.7	137.8			137.1	137.1	137.1	137.1	137.1	137.2			122.8	122.8	122.8	122.8	122.8	123.0		
Bankfull Width (ft)	3.8	3.3	3.3	3.2	3.3	3.6			3.0	2.9	2.6	2.8	2.4	2.6			3.8	4.1	3.5	3.5	3.0	4.1		
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>30	>30	>30	>30	>30	>30			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Mean Depth (ft)	0.4	0.5	0.5	0.5	0.4	0.4			0.3	0.4	0.3	0.3	0.3	0.3			0.3	0.4	0.3	0.3	0.2	0.3		
Bankfull Max Depth (ft)	0.8	1.2	1.2	1.1	1.1	1.1			0.5	0.7	0.7	0.7	0.7	0.7			0.4	0.7	0.5	0.4	0.4	0.5		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	1.5	1.7	1.6	1.5	1.5	1.5			0.8	1.1	0.8	0.9	0.7	0.8			1.3	1.7	1.1	0.9	0.7	1.3		
Bankfull Width/Depth Ratio	9.3	6.6	7.1	7.2	7.3	8.8			11.4	7.7	8.3	8.2	7.9	8.6			11.2	9.4	11.7	13.5	12.7	12.9		
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>9.9	>10.4	>11.4	>10.9	>12.5	>11.5			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	1.1			N/A	N/A	N/A	N/A	N/A	N/A		
Dimension and Substrate	Cross Section 31 (Shallow)								Cross Section 32 (Shallow)							Cross Section 33 (Pool)								
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Elevation (ft) <sup>1</sup>	122.7	122.7	122.7	122.7	122.7	122.9			116.5	116.5	116.5	116.5	116.5	116.8			116.4	116.4	116.4	116.4	116.4	116.7		
Low Bank Elevation (ft)	122.7	122.7	122.7	122.7	122.7	122.8			116.5	116.5	116.5	116.5	116.5	116.6			116.4	116.4	116.4	116.4	116.4	116.5		
Bankfull Width (ft)	3.8	3.9	3.8	2.7	2.4	3.6			5.3	5.1	3.9	3.5	3.5	8.5			6.3	5.8	5.0	3.6	3.7	4.9		
Floodprone Width (ft)	>60	>60	>60	>60	>60	>60			>200	>200	>200	>200	>200	>200			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Mean Depth (ft)	0.4	0.5	0.3	0.3	0.3	0.4			0.4	0.4	0.3	0.3	0.3	0.2			0.4	0.3	0.4	0.3	0.3	0.5		
Bankfull Max Depth (ft)	0.5	0.8	0.5	0.6	0.5	0.7			0.6	0.5	0.5	0.5	0.4	0.7			0.8	0.6	0.6	0.5	0.4	0.7		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	1.3	2.0	1.3	0.9	0.7	1.3			2.1	1.8	1.2	1.0	0.9	2.1			2.4	1.7	1.8	1.1	0.9	2.4		
Bankfull Width/Depth Ratio	10.8	7.8	11.2	8.3	7.9	10.0			13.8	14.6	13.0	12.5	13.7	34.4			16.8	19.7	13.7	11.6	14.7	10.0		
Entrenchment Ratio <sup>2</sup>	>15.8	>15.4	>15.8	>22.4	>24.9	>16.7			>37.5	>38.9	>51.3	>57.9	>56.4	>23.5			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	<1.0			1.0	1.0	1.0	1.0	1.0	<1.0			N/A	N/A	N/A	N/A	N/A	N/A		

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 11d. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Middle Branch**

Dimension and Substrate	Cross Section 24 (Shallow)								Cross Section 25 (Pool)								Cross Section 26 (Pool)							
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Elevation (ft) <sup>1</sup>	136.4	136.4	136.4	136.4	136.4	136.6			136.4	136.4	136.4	136.4	136.4	136.4			124.7	124.7	124.7	124.7	124.7	124.7		
Low Bank Elevation (ft)	136.4	136.4	136.4	136.4	136.4	136.5			136.4	136.4	136.4	136.4	136.4	136.4			124.7	124.7	124.7	124.7	124.7	124.8		
Bankfull Width (ft)	2.2	2.3	2.2	1.3	1.2	1.6			3.1	3.1	3.2	3.0	2.7	2.5			4.1	4.8	5.0	5.2	4.4	5.0		
Floodprone Width (ft)	>50	>50	>50	>50	>50	>50			N/A	N/A	N/A	N/A	N/A	N/A			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Mean Depth (ft)	0.3	0.3	0.3	0.3	0.3	0.4			0.4	0.5	0.3	0.4	0.5	0.5			0.3	0.2	0.2	0.3	0.2	0.3		
Bankfull Max Depth (ft)	0.5	0.6	0.6	0.4	0.5	0.6			0.7	0.9	0.6	0.8	0.8	0.8			0.9	0.5	0.5	0.6	0.5	0.6		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	0.7	0.8	0.7	0.4	0.4	0.7			1.2	1.6	1.1	1.2	1.2	1.2			1.4	1.0	1.0	1.5	1.0	1.4		
Bankfull Width/Depth Ratio	6.7	6.8	6.8	4.0	3.5	3.7			8.1	6.0	9.1	7.6	5.8	5.1			11.9	21.9	24.3	17.7	19.7	17.6		
Entrenchment Ratio <sup>2</sup>	>22.9	>21.5	>23.2	>38.4	>42.9	>31.3			N/A	N/A	N/A	N/A	N/A	N/A			N/A	N/A	N/A	N/A	N/A	N/A		
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	<1.0			N/A	N/A	N/A	N/A	N/A	N/A			N/A	N/A	N/A	N/A	N/A	N/A		
Cross Section 27 (Shallow)																								
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7																
Bankfull Elevation (ft) <sup>1</sup>	124.6	124.6	124.6	124.6	124.6	124.7																		
Low Bank Elevation (ft)	124.6	124.6	124.6	124.6	124.6	124.63																		
Bankfull Width (ft)	3.4	3.2	3.1	3.5	2.9	3.3																		
Floodprone Width (ft)	>200	>200	>200	>200	>200	>200																		
Bankfull Mean Depth (ft)	0.3	0.3	0.3	0.4	0.3	0.3																		
Bankfull Max Depth (ft)	0.5	0.6	0.6	0.7	0.6	0.6																		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	1.1	1.0	1.0	1.3	0.9	1.1																		
Bankfull Width/Depth Ratio	10.1	10.7	10.2	9.5	8.7	9.9																		
Entrenchment Ratio <sup>2</sup>	>58.8	>62.5	>64.3	>57.5	>69.8	>60.6																		
Bankfull Bank Height Ratio <sup>3</sup>	1.0	1.0	1.0	1.0	1.0	<1.0																		

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 11e. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**Southwest Branch**

Dimension and Substrate	Cross Section 22 (Pool)								Cross Section 23 (Shallow)							
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Elevation (ft) <sup>1</sup>	136.4	136.4	136.4	136.4	136.4	136.3			136.4	136.4	136.4	136.4	136.4	136.5		
Low Bank Elevation (ft)	136.4	136.4	136.4	136.4	136.4	136.4			136.4	136.4	136.4	136.4	136.4	136.6		
Bankfull Width (ft)	4.9	4.8	5.0	4.5	4.2	4.2			2.4	2.9	3.0	2.5	1.8	2.0		
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>200	>200	>200	>200	>200	>200		
Bankfull Mean Depth (ft)	0.4	0.4	0.4	0.3	0.3	0.4			0.3	0.3	0.3	0.3	0.2	0.3		
Bankfull Max Depth (ft)	0.8	1.0	0.9	0.7	0.6	0.7			0.4	0.4	0.5	0.4	0.3	0.4		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	1.8	1.9	2.1	1.5	1.3	1.8			0.6	0.8	0.9	0.7	0.3	0.6		
Bankfull Width/Depth Ratio	13.2	11.9	11.7	13.7	13.2	9.6			9.7	11.2	10.1	8.9	12.0	6.8		
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>82.3	>68.6	>67.5	>79.4	>108.7	>98.8		
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	1.3		

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 11f. Morphology and Hydraulic Summary (Dimensional Parameters - Cross Section)**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**North Branch**

Dimension and Substrate	Cross Section 34 (Pool)								Cross Section 35 (Shallow)								Cross Section 36 (Shallow)							
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Elevation (ft) <sup>1</sup>	118.6	118.6	118.6	118.6	118.6	118.7			118.73	118.7	118.7	118.7	118.7	118.8			116.8	116.8	116.8	116.8	116.8	116.7		
Low Bank Elevation (ft)	118.6	118.6	118.6	118.6	118.6	118.7			118.73	118.7	118.7	118.7	118.7	118.74			116.8	116.8	116.8	116.8	116.8	116.74		
Bankfull Width (ft)	9.8	10.0	10.2	9.7	9.5	10.1			8.6	9.2	9.2	9.2	8.9	9.6			9.3	9.0	9.0	9.0	9.0	9.0		
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A			>200	>200	>200	>200	>200	>200			>200	>200	>200	>200	>200	>200		
Bankfull Mean Depth (ft)	0.8	0.7	0.7	0.7	0.7	0.7			0.7	0.7	0.7	0.6	0.6	0.6			0.7	0.8	0.8	0.8	0.7	0.7		
Bankfull Max Depth (ft)	1.3	1.4	1.4	1.3	1.4	1.4			1.0	1.2	1.2	1.1	1.1	1.2			1.2	1.4	1.4	1.4	1.3	1.3		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	7.5	7.2	7.5	6.7	6.9	7.5			5.7	6.0	6.4	5.4	5.1	5.7			6.5	7.0	6.9	6.9	6.7	6.5		
Bankfull Width/Depth Ratio	12.8	14.0	13.9	14.0	12.9	13.5			13.1	14.1	13.2	15.6	15.4	16.3			13.2	11.5	11.7	11.8	12.0	12.5		
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A			>23.2	>21.7	>21.7	>21.7	>22.5	>20.8			>21.6	>22.2	>22.2	>22.2	>22.2	>22.2		
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A			1.0	1.0	1.0	1.0	1.0	1.0			1.0	1.0	1.0	1.0	1.0	1.0		
Cross Section 37 (Pool)																								
Dimension and Substrate	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7																
Bankfull Elevation (ft) <sup>1</sup>	116.5	116.5	116.5	116.5	116.5	116.6																		
Low Bank Elevation (ft)	116.5	116.5	116.5	116.5	116.5	116.6																		
Bankfull Width (ft)	10.6	11.1	10.7	11.1	11.7	11.6																		
Floodprone Width (ft)	N/A	N/A	N/A	N/A	N/A	N/A																		
Bankfull Mean Depth (ft)	0.9	0.8	0.9	0.8	0.8	0.8																		
Bankfull Max Depth (ft)	1.4	1.4	1.5	1.4	1.4	1.4																		
Bankfull Cross Sectional Area (ft <sup>2</sup> )	9.2	9.2	9.2	8.9	8.9	9.2																		
Bankfull Width/Depth Ratio	12.3	13.4	12.5	13.8	15.4	14.7																		
Entrenchment Ratio <sup>2</sup>	N/A	N/A	N/A	N/A	N/A	N/A																		
Bankfull Bank Height Ratio <sup>3</sup>	N/A	N/A	N/A	N/A	N/A	N/A																		

<sup>1</sup>For MY5 through MY7 bankfull elevation was calculated using the Standard Measurement of the BHR Monitoring Parameter provided by NCIRT and NCDMS.

<sup>2</sup>Entrenchment Ratio is the flood prone width divided by the bankfull width.

<sup>3</sup>Bank Height Ratio is the bank height divided by the max depth of the bankfull channel.

**Table 12a. Monitoring Data - Stream Reach Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**Devil's Racetrack (West)**

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	4.7	9.6	4.8	10.0	4.8	10.0	4.2	10.0	4.2	9.3	2.8	10.0				
Floodprone Width (ft)	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200				
Bankfull Mean Depth	0.4	0.9	0.7	0.8	0.6	1.2	0.6	0.8	0.5	1.0	0.5	0.8				
Bankfull Max Depth	0.7	1.4	1.0	1.5	1.0	1.7	1.1	1.4	1.0	1.7	0.9	1.5				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	2.1	8.5	3.3	8.1	4.9	8.2	3.3	7.4	4.3	7.1	2.1	8.5				
Width/Depth Ratio	10.6	14.8	6.9	12.6	4.0	13.4	4.7	14.0	4.0	14.7	3.7	15.5				
Entrenchment Ratio	>20.9	>42.5	>20	>42.1	>20.1	>41.9	>20.0	>47.4	>21.5	>47.4	>20.0	>71.9				
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	<1.0	2.0				
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			0%		0%		0%		0%		0%		0%			

\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

**Table 12b. Monitoring Data - Stream Reach Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**Devil's Racetrack (East)**

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	8.2	13.7	7.9	14.3	7.9	14.2	8.3	12.7	8.2	14.0	8.1	14.1				
Floodprone Width (ft)	>300	>300	>300	>300	>300	>300	>300	>300	>300	>300	>300	>300				
Bankfull Mean Depth	0.7	1.1	0.7	1.0	0.8	1.0	0.7	1.0	0.7	1.0	0.7	1.1				
Bankfull Max Depth	1.1	1.7	1.1	1.8	1.2	1.7	1.2	2.1	1.2	2.1	1.2	2.1				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	5.7	14.1	5.9	12.5	6.1	12.7	6.3	13.2	6.3	13.4	5.7	13.9				
Width/Depth Ratio	11.9	14.6	10.6	18.4	10.3	17.1	10.9	18.6	10.6	20.4	11.4	15.9				
Entrenchment Ratio	>21.9	>36.5	>20.9	>37.8	>21.1	>37.8	>23.7	>36.3	>21.5	>36.6	>21.3	>37.2				
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	<1.0	1.2				
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			0%		0%		0%		0%		0%		0%			

\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

**Table 12c. Monitoring Data - Stream Reach Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**Southeast Branch**

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	3.0	5.3	2.9	5.1	2.6	3.9	2.7	3.5	2.4	3.5	2.6	8.5				
Floodprone Width (ft)	>30	>200	>30	>200	>30	>200	>30	>200	>30	>200	>30	>200				
Bankfull Mean Depth	0.3	0.4	0.4	0.5	0.3	0.3	0.3	0.3	0.3	0.3	0.2	0.4				
Bankfull Max Depth	0.5	0.6	0.5	0.8	0.5	0.7	0.5	0.7	0.4	0.7	0.7	0.7				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	0.8	2.1	1.1	2.0	0.8	1.3	0.9	1.0	0.7	0.9	0.8	2.1				
Width/Depth Ratio	10.8	13.8	7.7	14.6	8.3	13.0	8.2	12.5	7.9	13.7	8.6	34.4				
Entrenchment Ratio	>9.9	>37.5	>10.4	>38.9	>11.4	>51.3	>10.9	>57.9	>12.5	>56.4	>11.5	>23.5				
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	<1.0	1.1				
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			10%		0%		0%		0%		0%		0%			

\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

**Table 12d. Monitoring Data - Stream Reach Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	2.2	3.4	2.3	3.2	2.2	3.1	1.3	3.5	1.2	2.9	1.6	3.3				
Floodprone Width (ft)	>50	>200	>50	>200	>50	>200	>50	>200	>50	>200	>50	>200				
Bankfull Mean Depth	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.3	0.3	0.3	0.4				
Bankfull Max Depth	0.5	0.5	0.6	0.6	0.6	0.6	0.4	0.7	0.5	0.6	0.6	0.6				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	0.7	1.1	0.8	1.0	0.7	1.0	0.4	1.3	0.4	0.9	0.7	1.1				
Width/Depth Ratio	6.7	10.1	6.8	10.7	6.8	10.2	4.0	9.5	3.5	8.7	3.7	9.9				
Entrenchment Ratio	>22.9	>58.8	>21.5	>62.5	>23.2	>64.3	>38.4	>57.5	>42.9	>69.8	>31.3	>60.6				
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	<1.0	<1.0				
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			0%		0%		0%		0%		0%		0%			

\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

**Table 12e. Monitoring Data - Stream Reach Data Summary**  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018

**Southwest Branch**

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	2.4		2.9		3.0		2.5		1.8		2.0					
Floodprone Width (ft)	>200		>200		>200		>200		>200		>200					
Bankfull Mean Depth	0.3		0.3		0.3		0.3		0.2		0.3					
Bankfull Max Depth	0.4		0.4		0.5		0.4		0.3		0.4					
Bankfull Cross Sectional Area (ft <sup>2</sup> )	0.6		0.8		0.9		0.7		0.3		0.6					
Width/Depth Ratio	9.7		11.2		10.1		8.9		12.0		6.8					
Entrenchment Ratio	>82.3		>68.6		>67.5		>79.4		>108.7		>98.8					
Bank Height Ratio	1.0		1.0		1.0		1.0		1.0		1.3					
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Rt%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			0%		0%		0%		0%		0%		0%			

\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

**Table 12f. Monitoring Data - Stream Reach Data Summary**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

**North Branch**

Parameter	As-Built/Baseline		MY1		MY2		MY3		MY4		MY5		MY6		MY7	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
<b>Dimension and Substrate - Shallow</b>																
Bankfull Width (ft)	8.6	9.3	9.0	9.2	9.0	9.2	9.0	9.2	8.9	9.0	9.0	9.6				
Floodprone Width (ft)	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200	>200				
Bankfull Mean Depth	0.7	0.7	0.7	0.8	0.7	0.8	0.6	0.8	0.6	0.7	0.6	0.7				
Bankfull Max Depth	1.0	1.2	1.2	1.4	1.2	1.4	1.1	1.4	1.1	1.3	1.2	1.3				
Bankfull Cross Sectional Area (ft <sup>2</sup> )	5.7	6.5	6.0	7.0	6.4	6.9	5.4	6.9	5.1	6.7	5.7	6.5				
Width/Depth Ratio	13.1	13.2	11.5	14.1	11.7	13.2	11.8	15.6	12.0	15.4	12.5	16.3				
Entrenchment Ratio	>21.6	>23.2	>21.7	>22.2	>21.7	>22.2	>21.7	>22.2	>22.2	>22.5	>20.8	>22.2				
Bank Height Ratio	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0				
D50 (mm)																
<b>Profile</b>																
Shallow Length (ft)																
Shallow Slope (ft/ft)																
Pool Length (ft)																
Pool Max Depth (ft)																
Pool Spacing (ft)																
Pool Volume (ft <sup>3</sup> )																
<b>Pattern</b>																
Channel Beltwidth (ft)																
Radius of Curvature (ft)																
Rc:Bankfull Width (ft/ft)																
Meander Wave Length (ft)																
Meander Width Ratio																
<b>Additional Reach Parameters</b>																
Rosgen Classification																
Channel Thalweg Length (ft)																
Sinuosity (ft)																
Water Surface Slope (ft/ft)																
Bankfull Slope (ft/ft)																
Ri%/Ru%/P%/G%/S%																
SC%/Sa%/G%/C%/B%/Be%																
d16/d35/d50/d84/d95/d100																
% of Reach with Eroding Banks			0%		0%		0%		0%		0%		0%			


\*Baseline, MY1, and MY2 data was updated during MY3 to include only shallow data.

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 1-DRC West

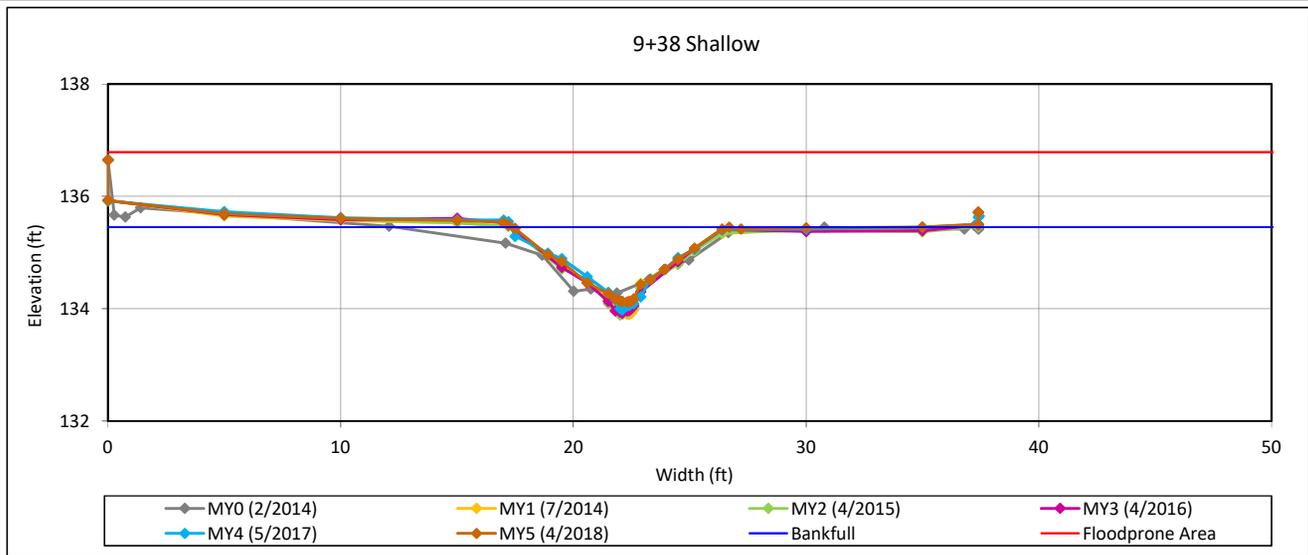

#### Bankfull Dimensions

6.2	x-section area (ft.sq.)
9.0	width (ft)
0.7	mean depth (ft)
1.3	max depth (ft)
9.5	wetted perimeter (ft)
0.7	hyd radi (ft)
13.2	width-depth ratio
200.0	W flood prone area (ft)
22.2	entrenchment ratio
1.0	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

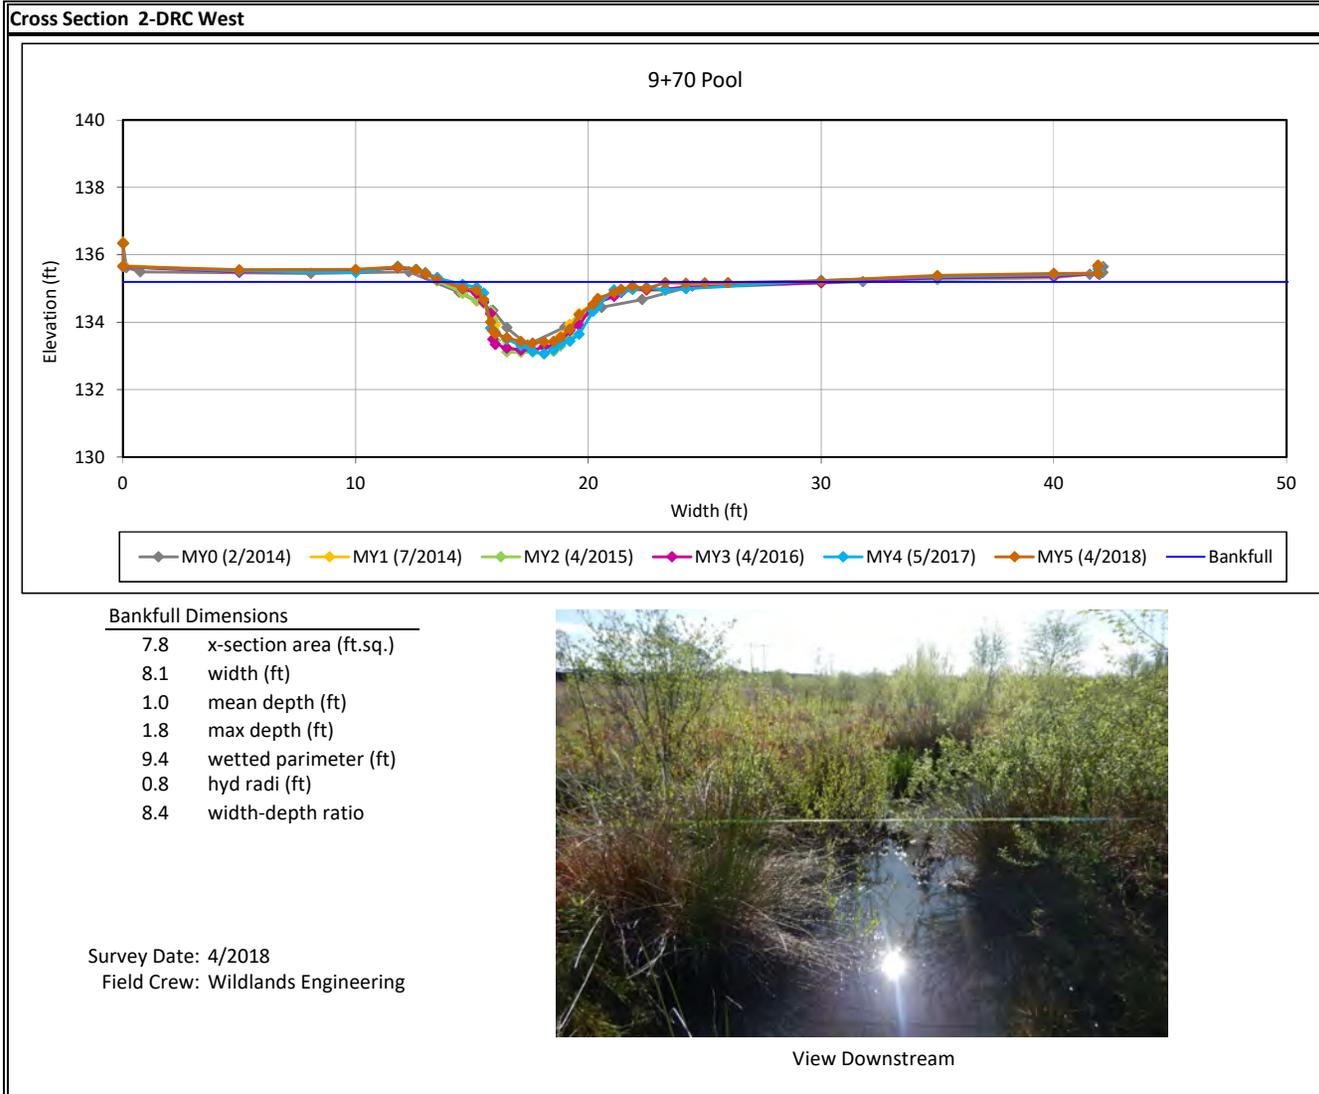

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

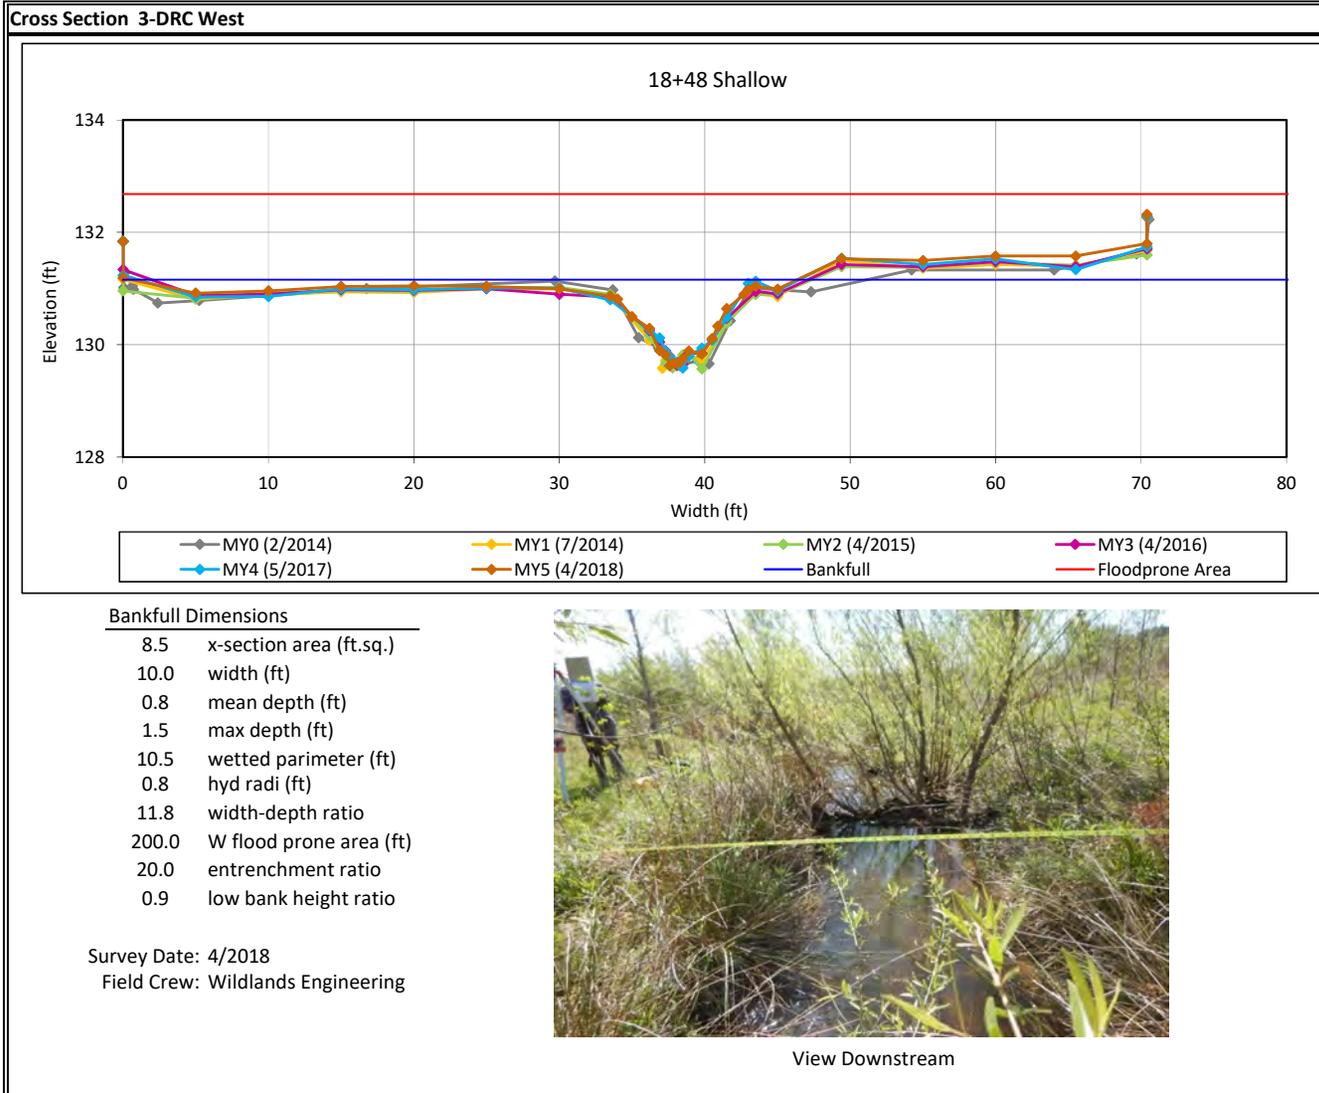

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

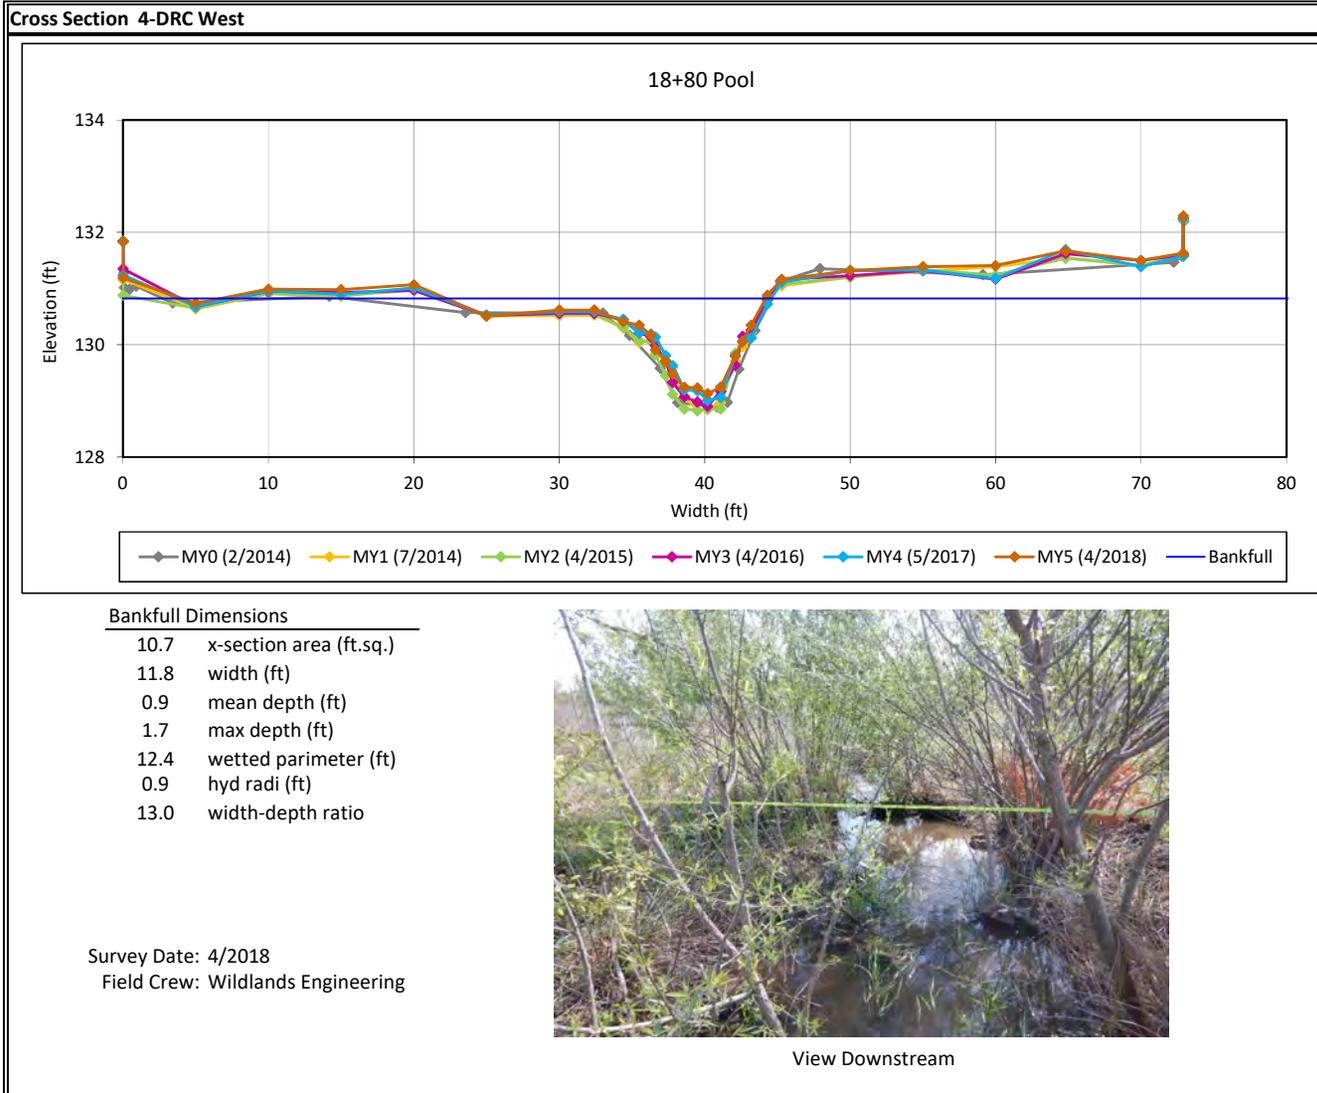

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

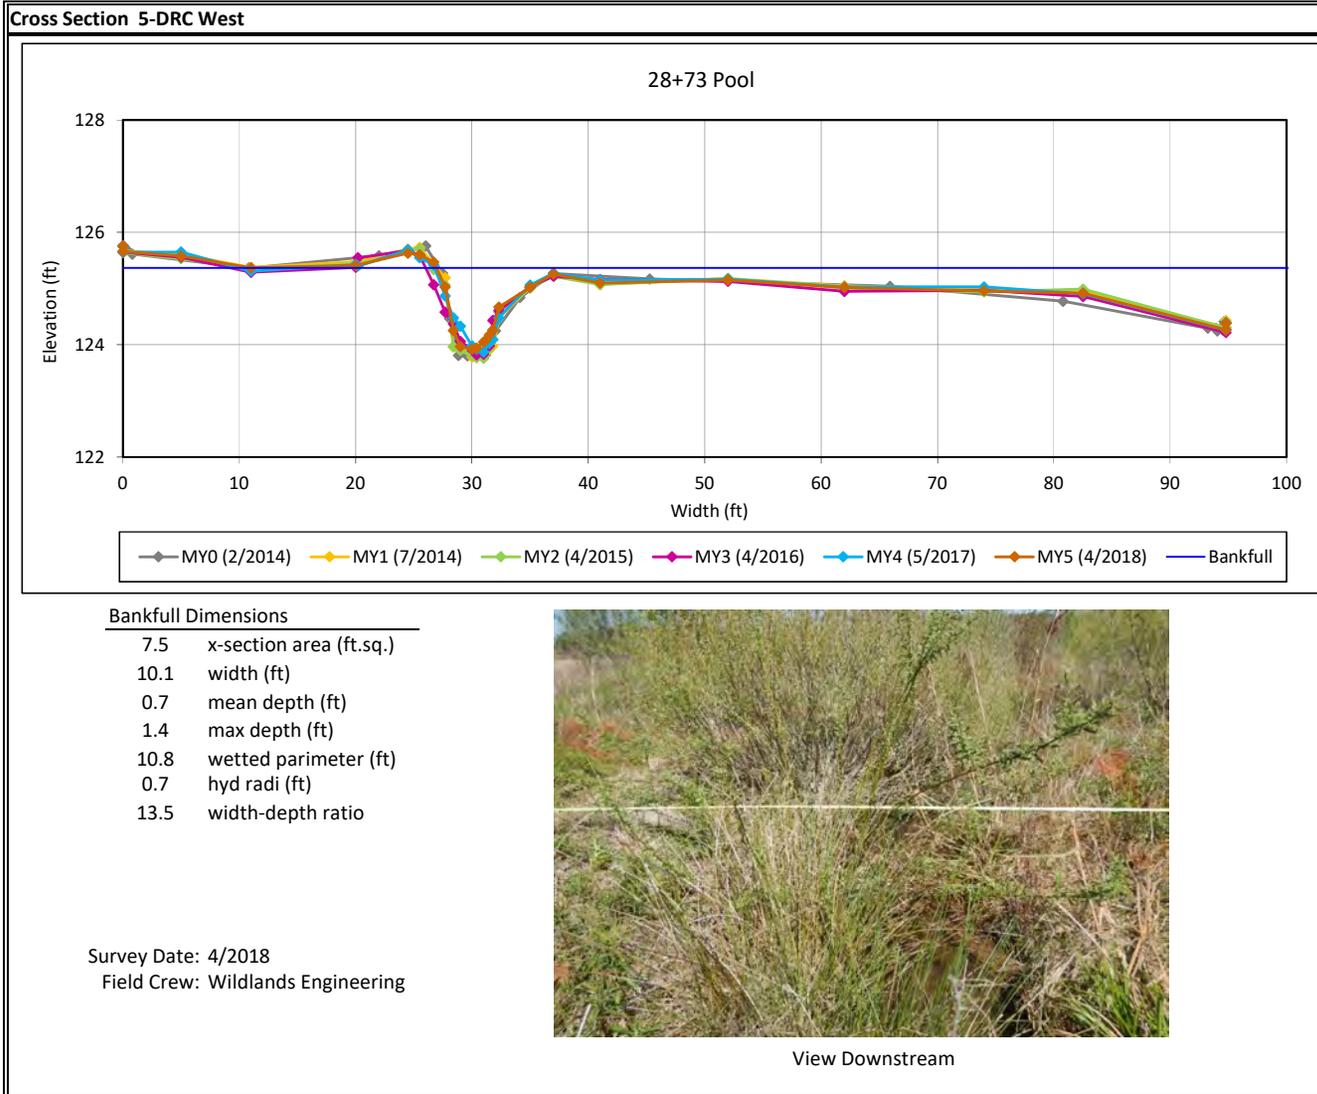

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

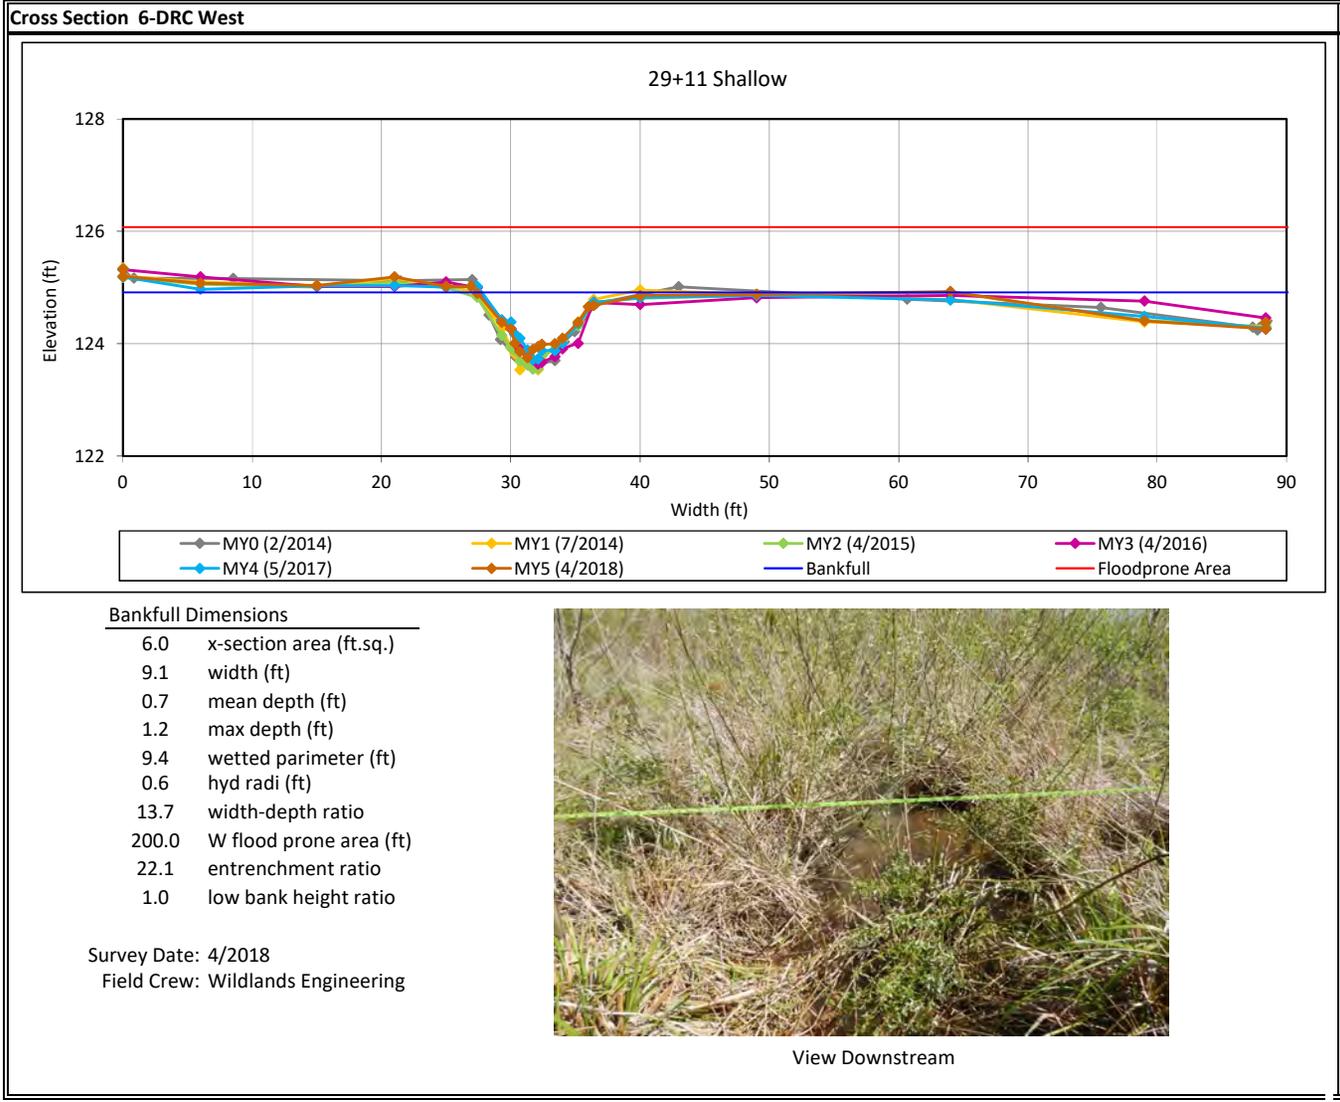

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

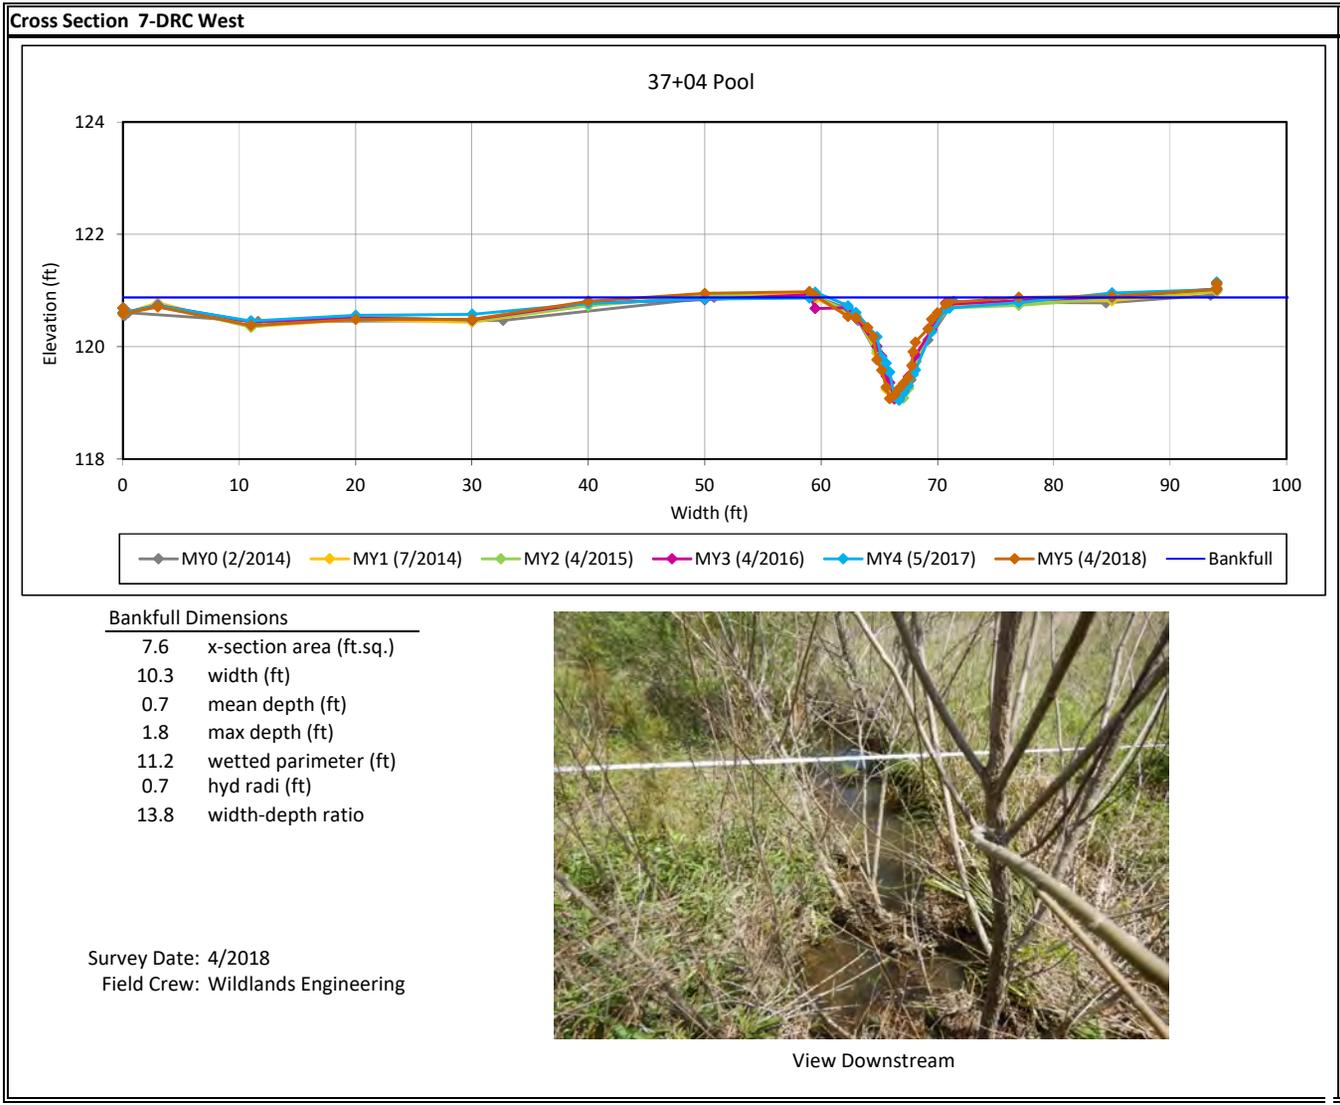


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 8-DRC West

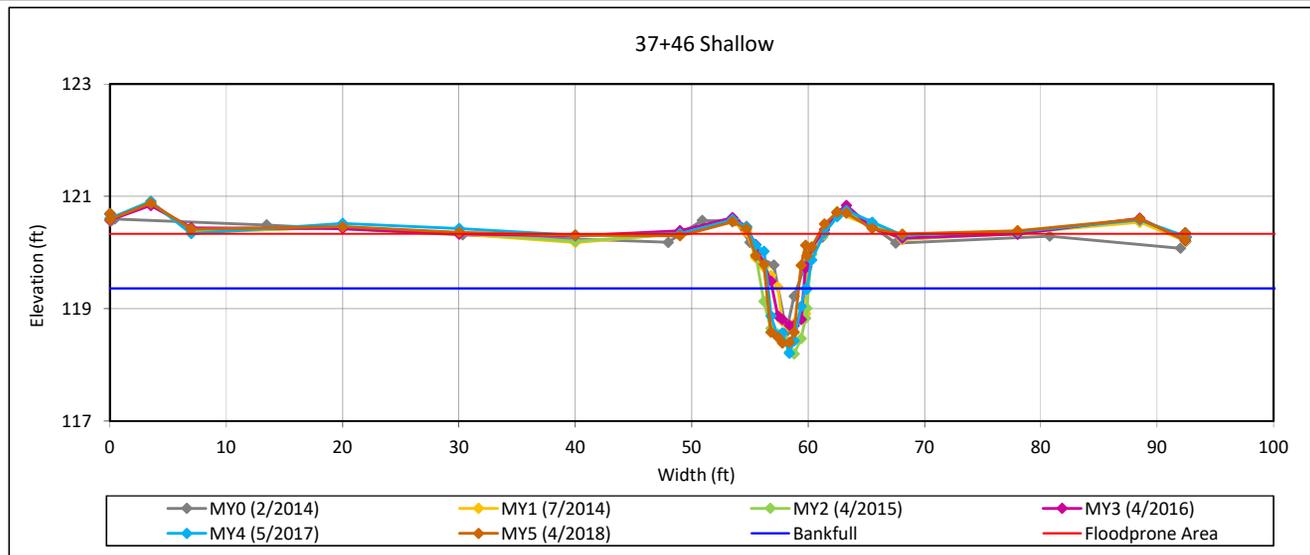

#### Bankfull Dimensions

2.1	x-section area (ft.sq.)
2.8	width (ft)
0.8	mean depth (ft)
1.0	max depth (ft)
3.8	wetted perimeter (ft)
0.6	hyd radi (ft)
3.7	width-depth ratio
200.0	W flood prone area (ft)
71.9	entrenchment ratio
2.0	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

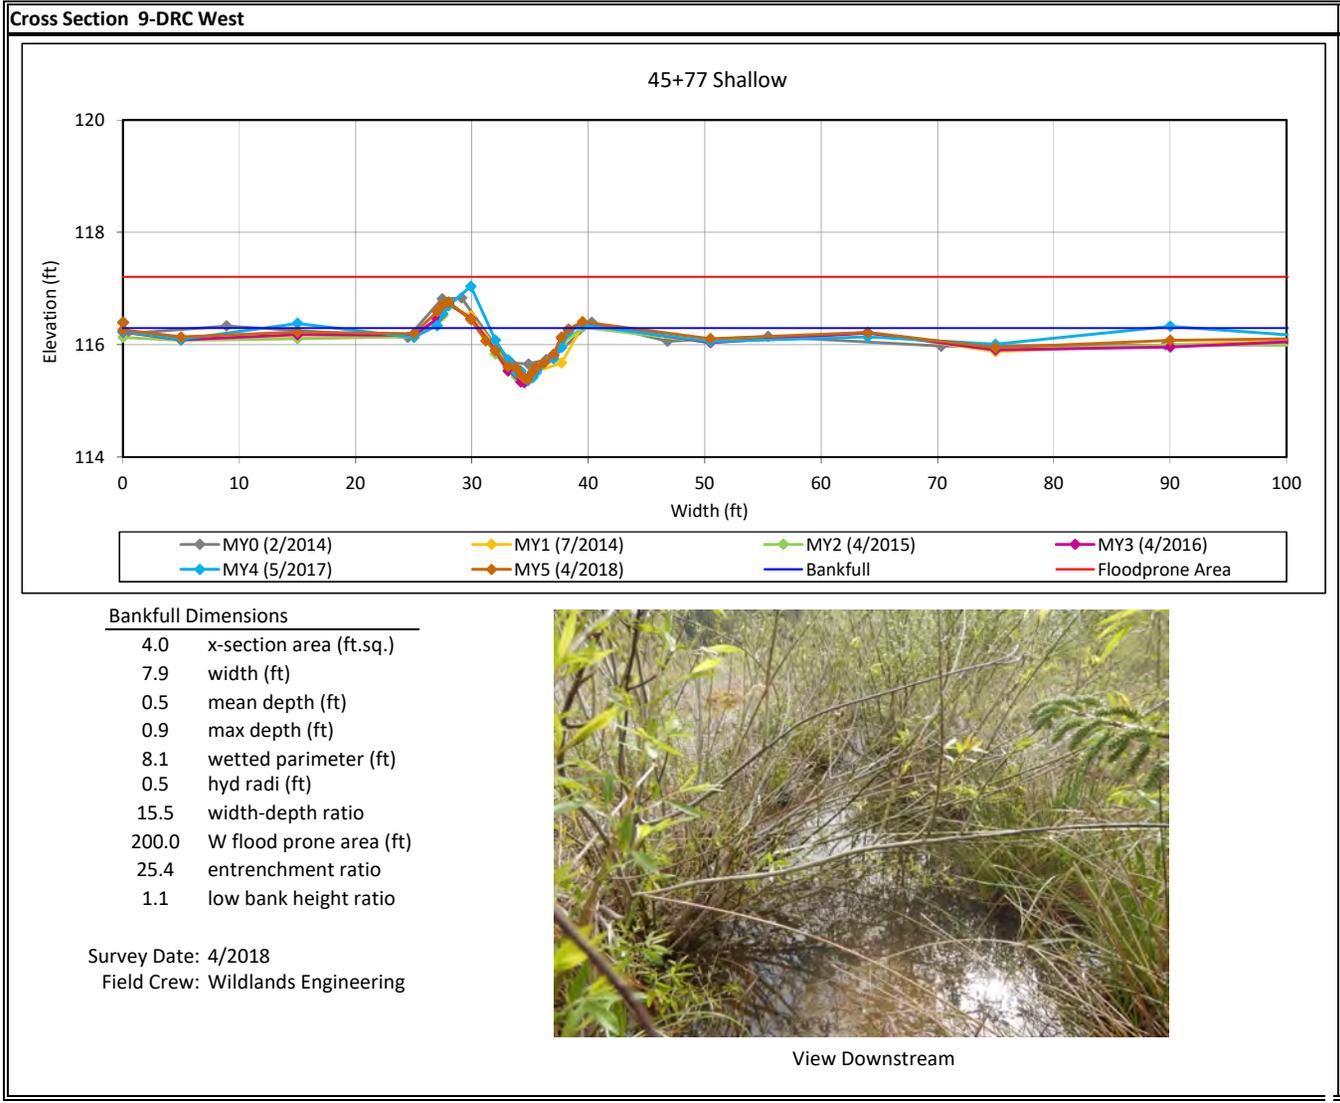


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 10-DRC West

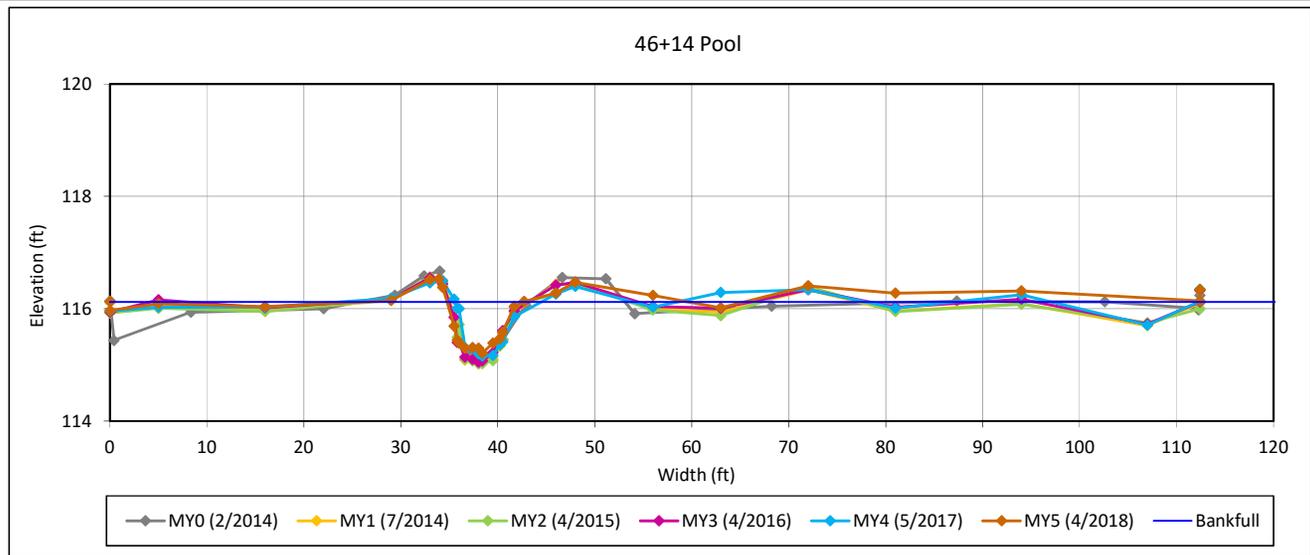

#### Bankfull Dimensions

4.4	x-section area (ft.sq.)
7.9	width (ft)
0.6	mean depth (ft)
0.9	max depth (ft)
8.2	wetted parimeter (ft)
0.5	hyd radi (ft)
14.0	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

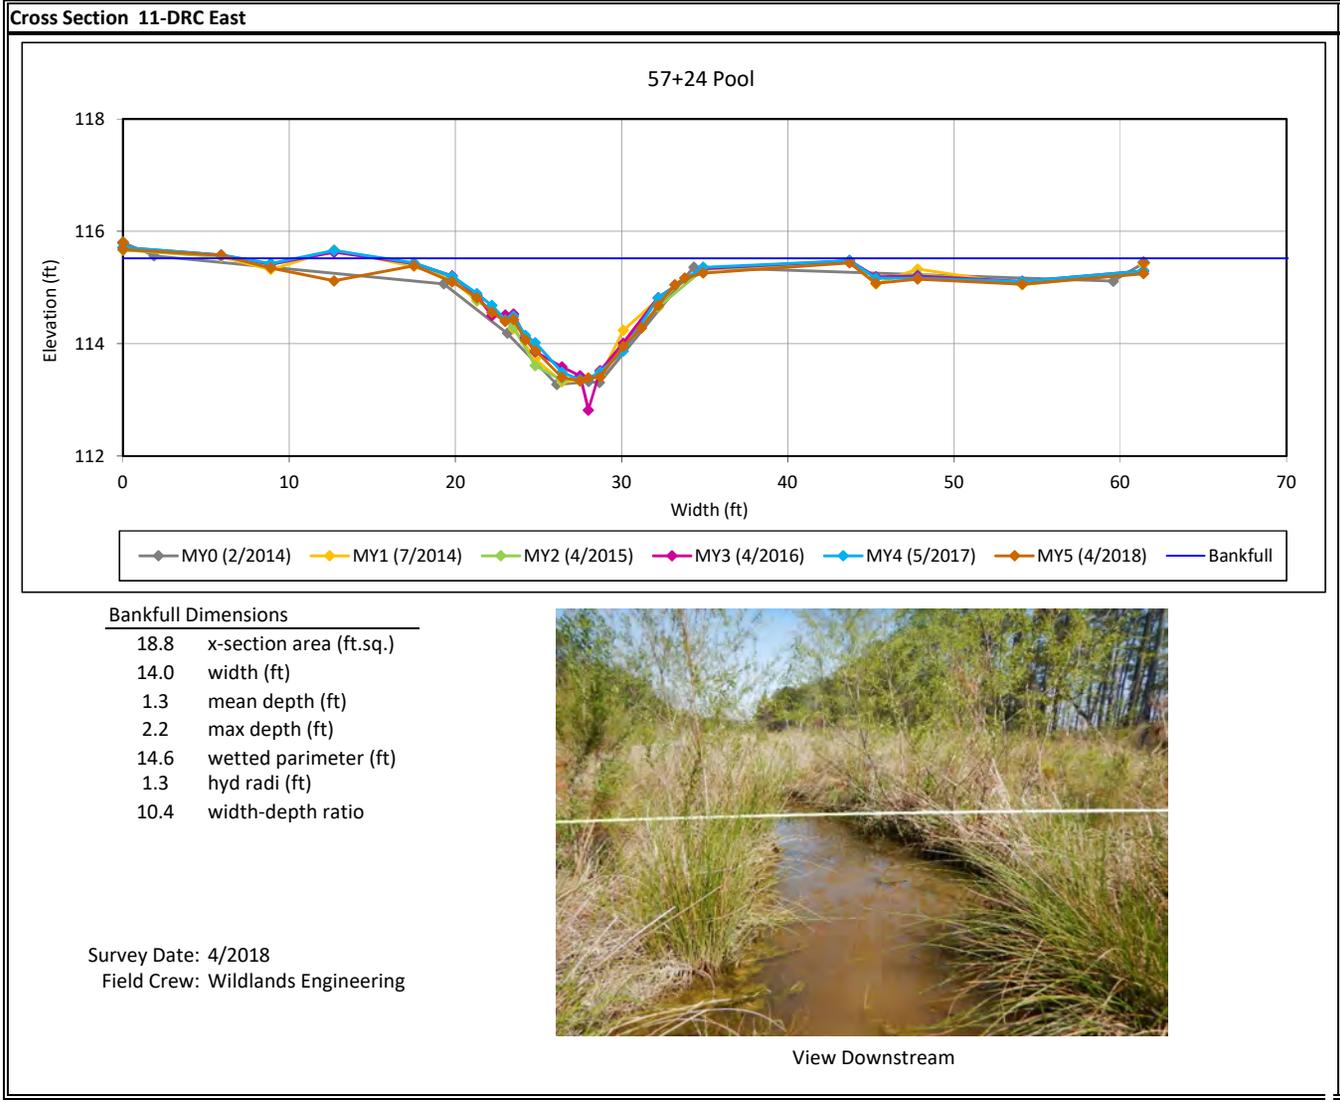


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 12-DRC East

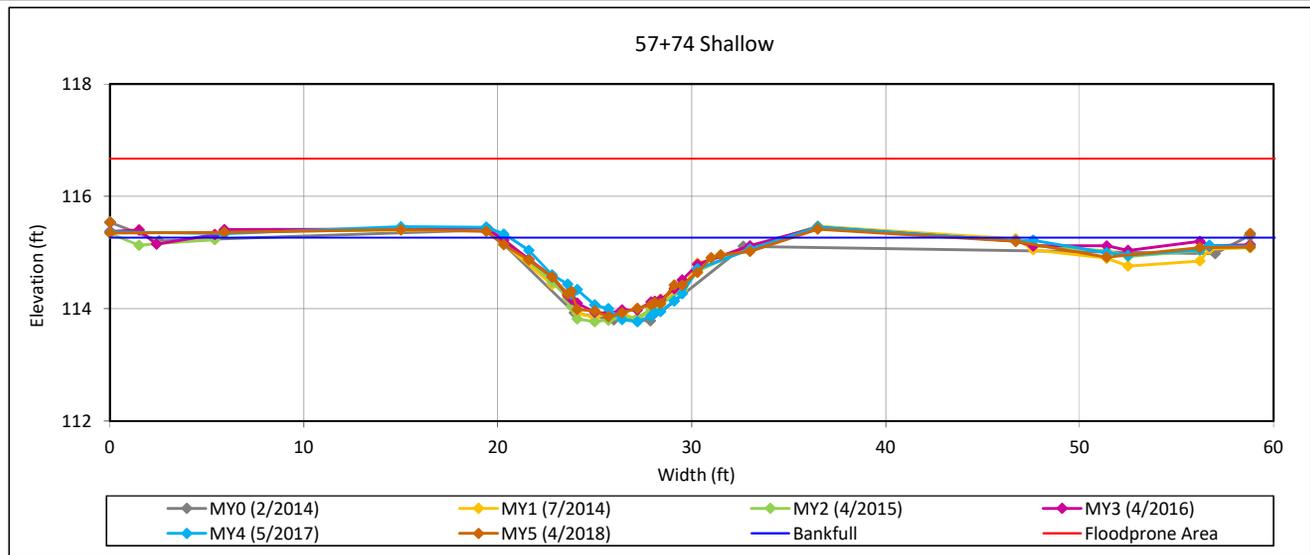

#### Bankfull Dimensions

10.3	x-section area (ft.sq.)
12.7	width (ft)
0.8	mean depth (ft)
1.4	max depth (ft)
13.1	wetted parimeter (ft)
0.8	hyd radi (ft)
15.7	width-depth ratio
300.0	W flood prone area (ft)
23.6	entrenchment ratio
0.8	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 13-DRC East

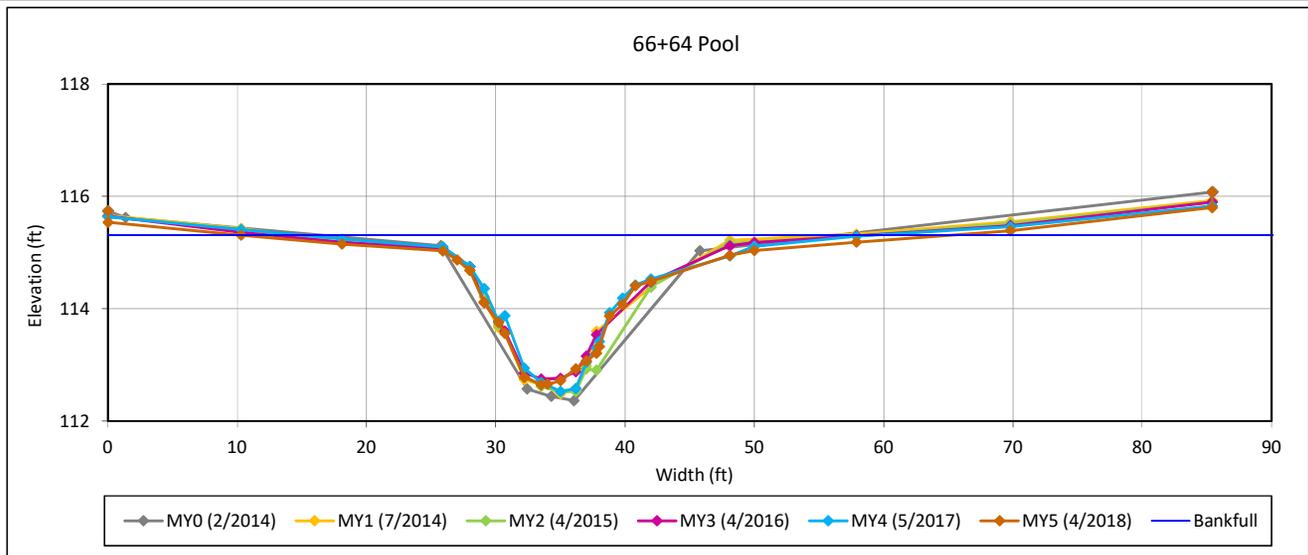

#### Bankfull Dimensions

30.2	x-section area (ft.sq.)
22.2	width (ft)
1.4	mean depth (ft)
2.7	max depth (ft)
23.0	wetted parimeter (ft)
1.3	hyd radi (ft)
16.3	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

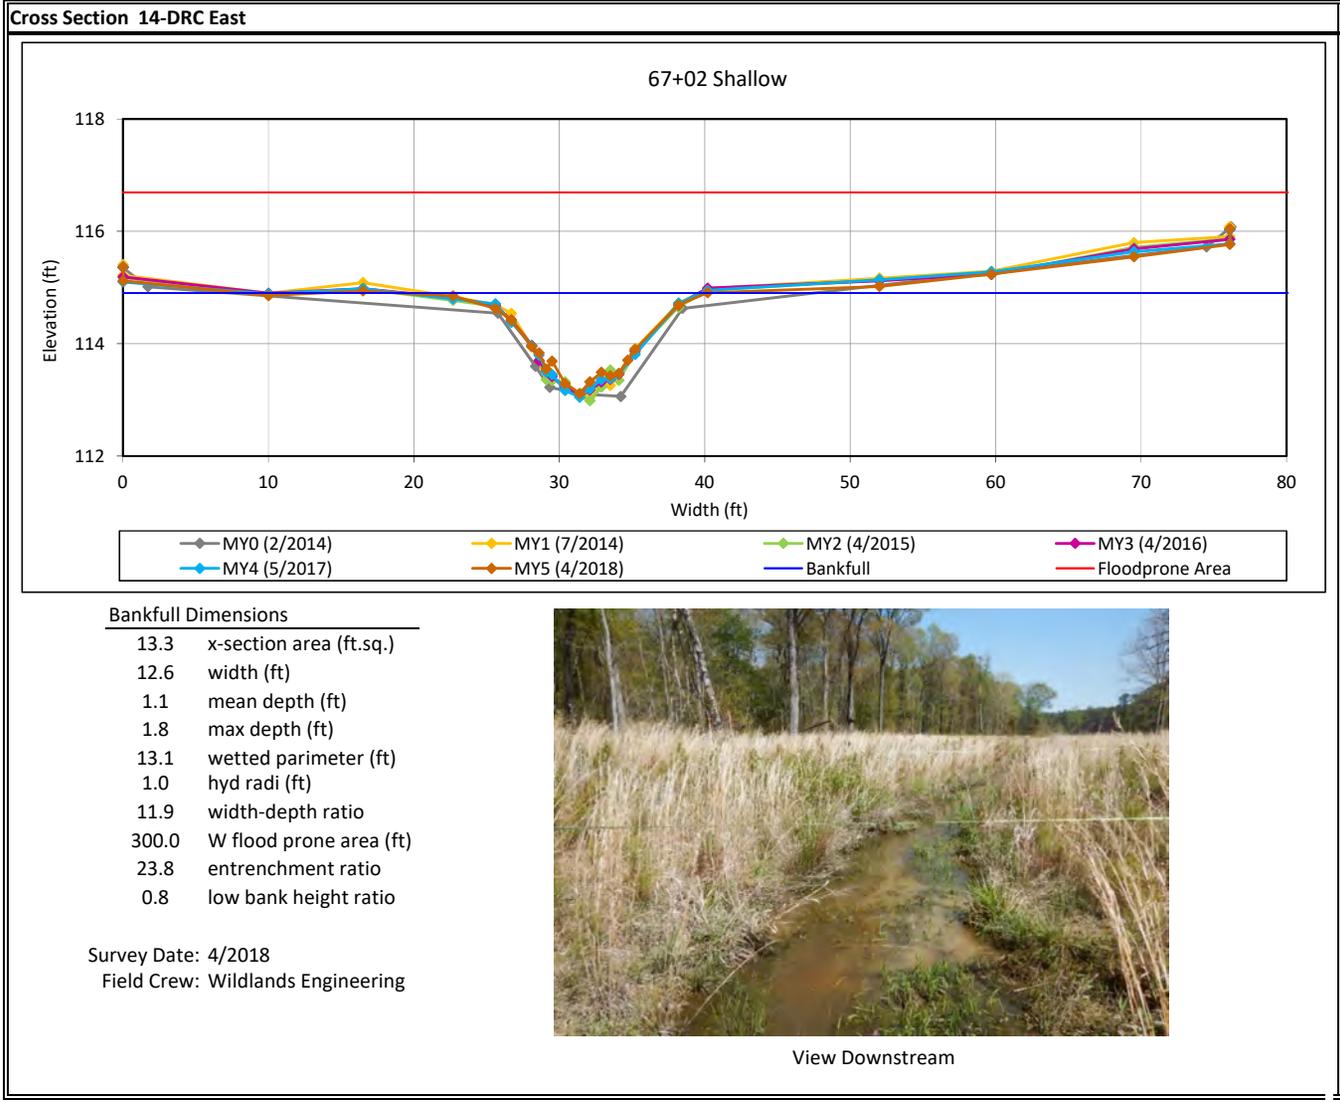


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 15-DRC East

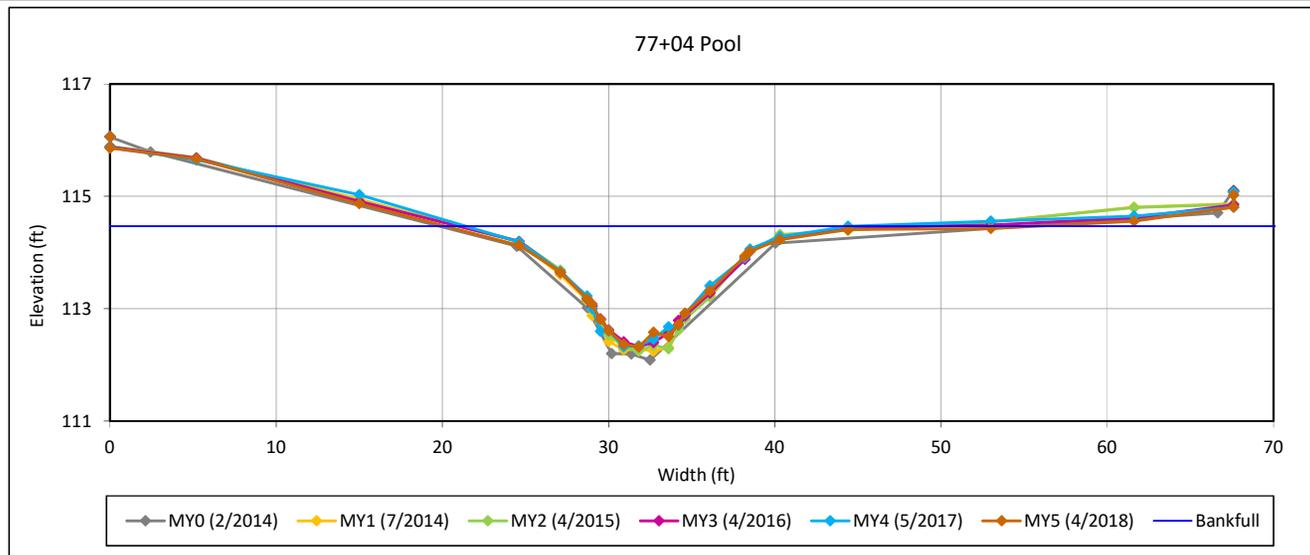

#### Bankfull Dimensions

17.3	x-section area (ft.sq.)
13.2	width (ft)
1.3	mean depth (ft)
2.1	max depth (ft)
13.7	wetted parimeter (ft)
1.3	hyd radi (ft)
10.1	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

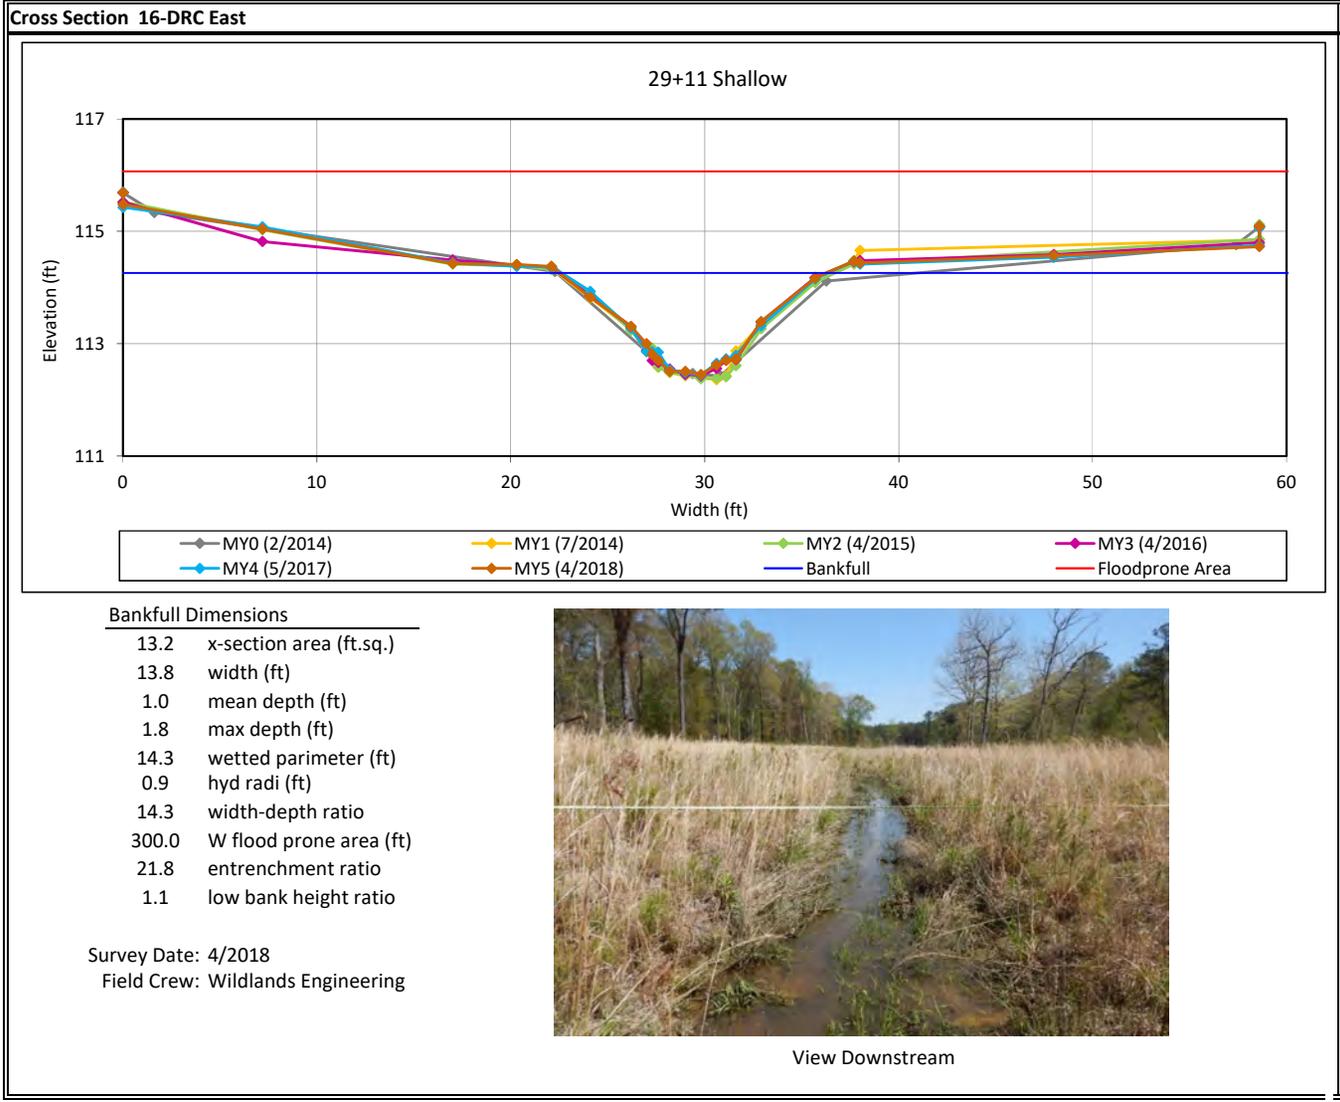


**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

**Cross Section 17-DRC East**

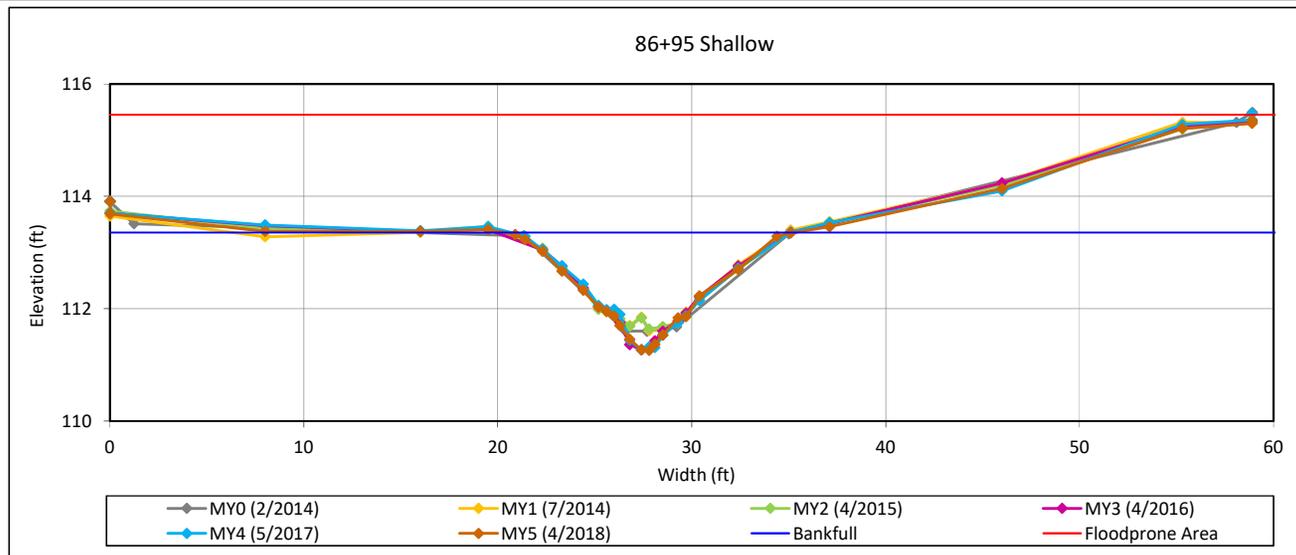

**Bankfull Dimensions**

13.9	x-section area (ft.sq.)
13.5	width (ft)
1.0	mean depth (ft)
2.1	max depth (ft)
14.2	wetted parimeter (ft)
1.0	hyd radi (ft)
13.1	width-depth ratio
300.0	W flood prone area (ft)
22.2	entrenchment ratio
1.0	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

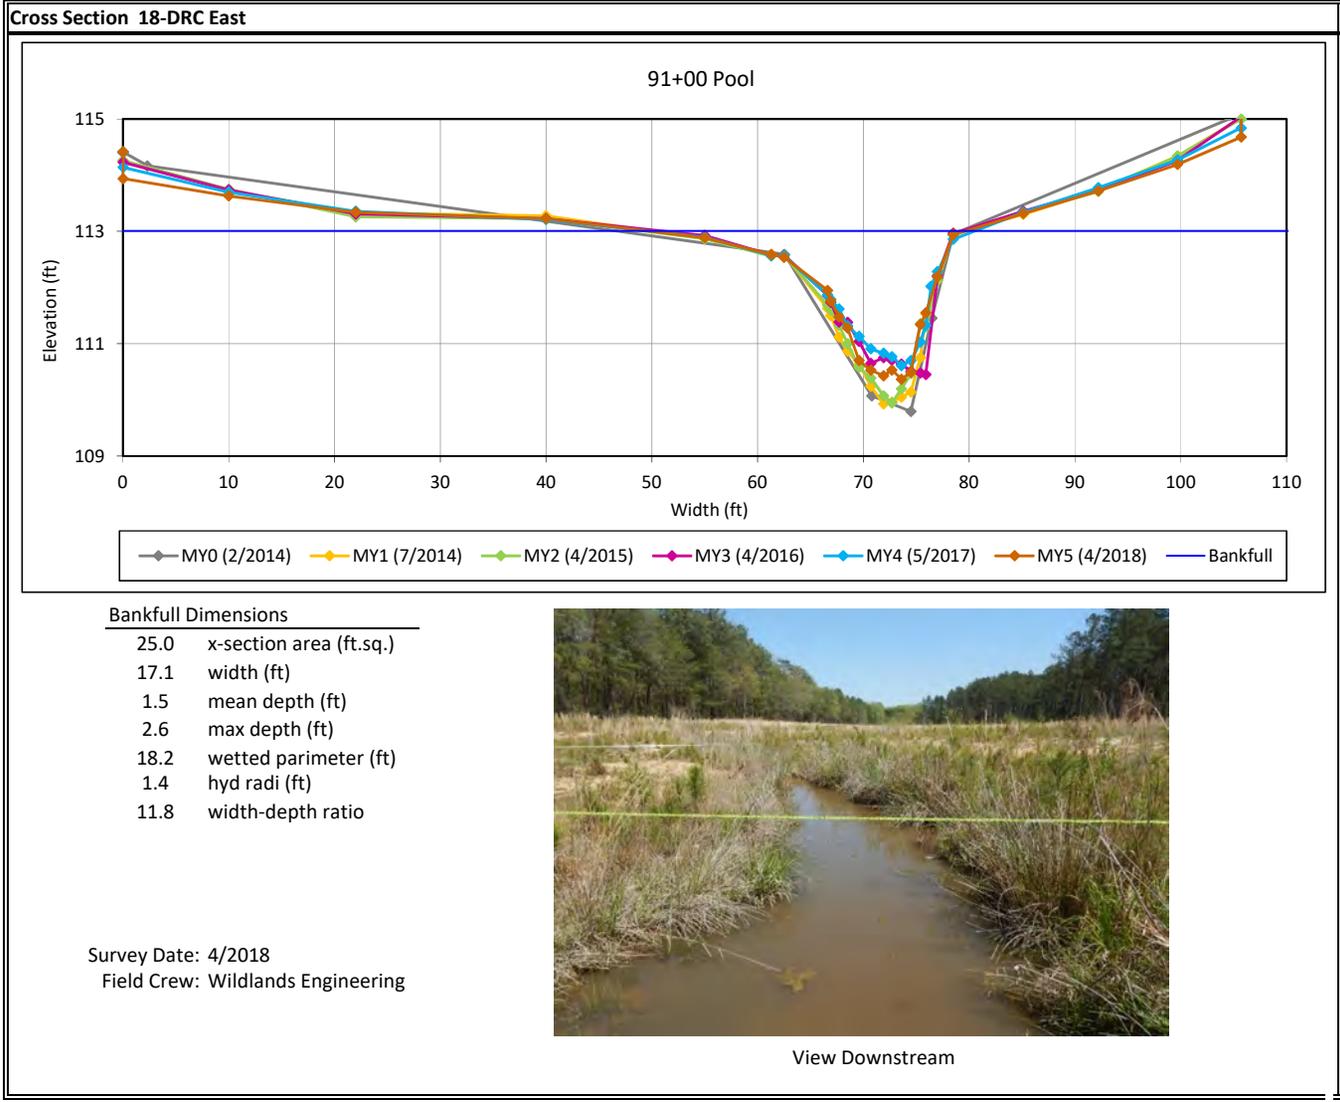


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 19-DRC East

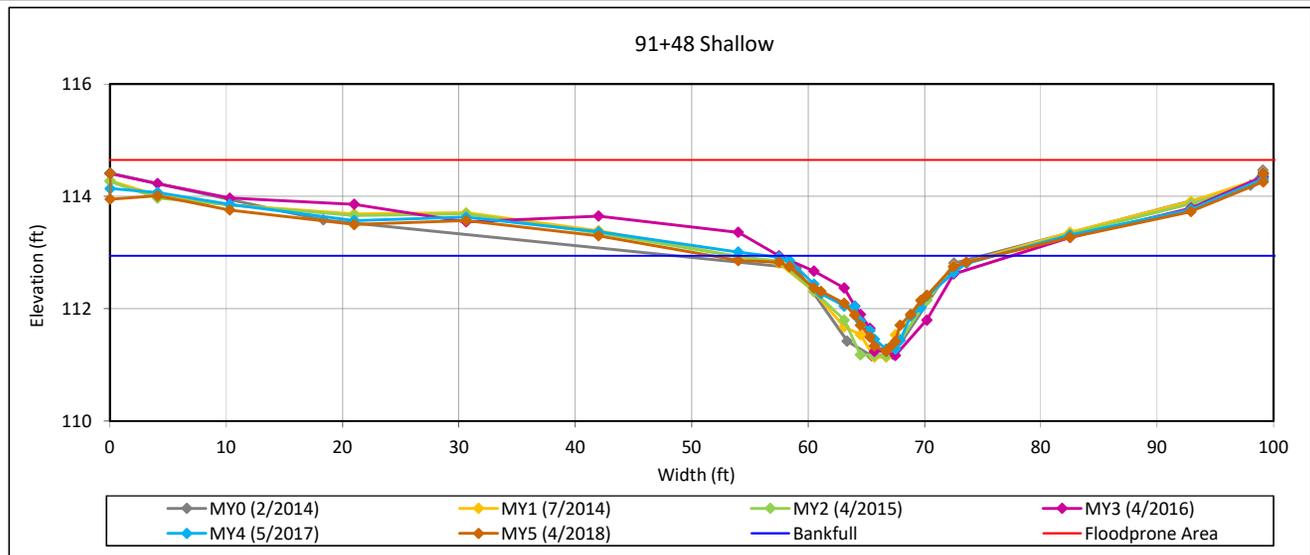

#### Bankfull Dimensions

12.5	x-section area (ft.sq.)
14.1	width (ft)
0.9	mean depth (ft)
1.7	max depth (ft)
14.5	wetted parimeter (ft)
0.9	hyd radi (ft)
15.9	width-depth ratio
300.0	W flood prone area (ft)
21.3	entrenchment ratio
0.9	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

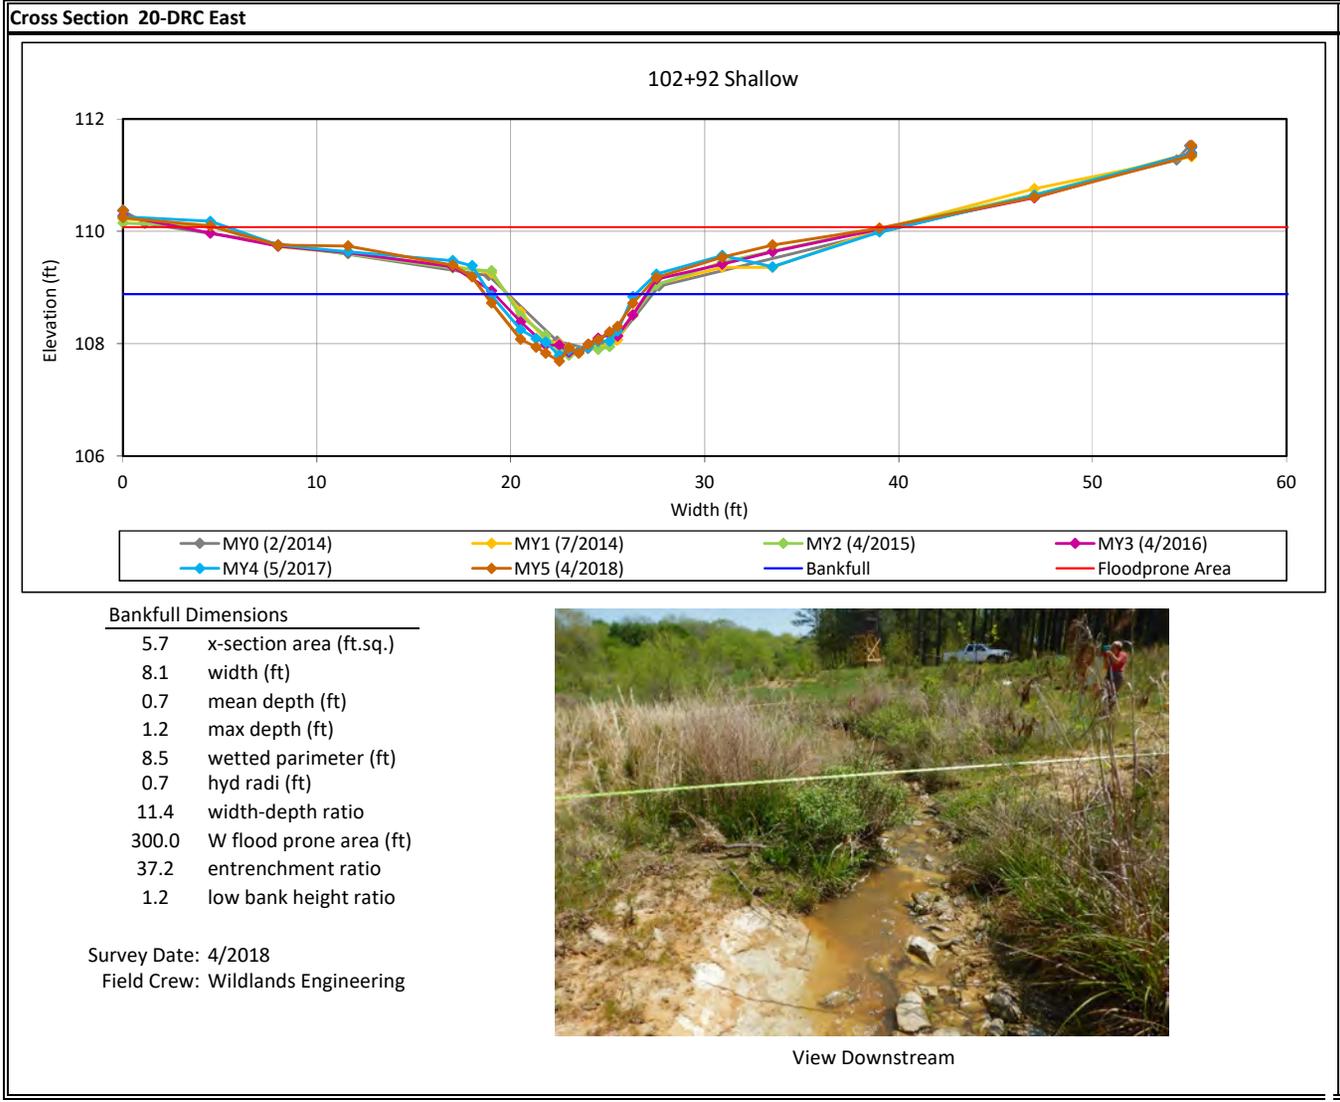


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 21-DRC East

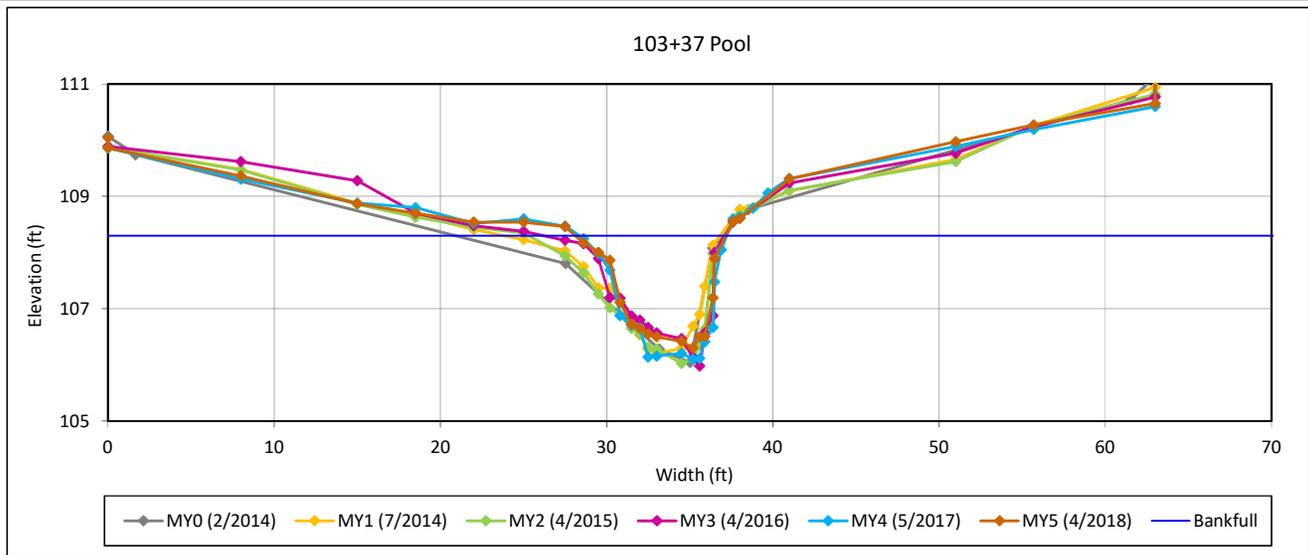

#### Bankfull Dimensions

10.8	x-section area (ft.sq.)
9.0	width (ft)
1.2	mean depth (ft)
2.0	max depth (ft)
10.7	wetted parimeter (ft)
1.0	hyd radi (ft)
7.6	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 22-Southwest Branch

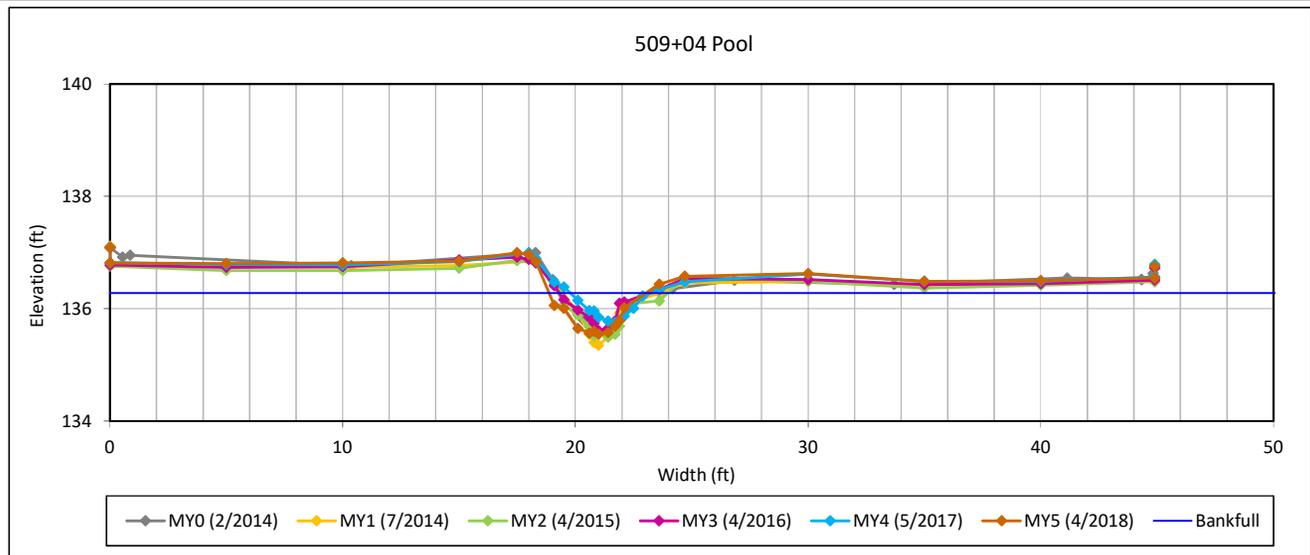

#### Bankfull Dimensions

1.8	x-section area (ft.sq.)
4.2	width (ft)
0.4	mean depth (ft)
0.7	max depth (ft)
4.6	wetted parimeter (ft)
0.4	hyd radi (ft)
9.6	width-depth ratio

Survey Date:  
Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

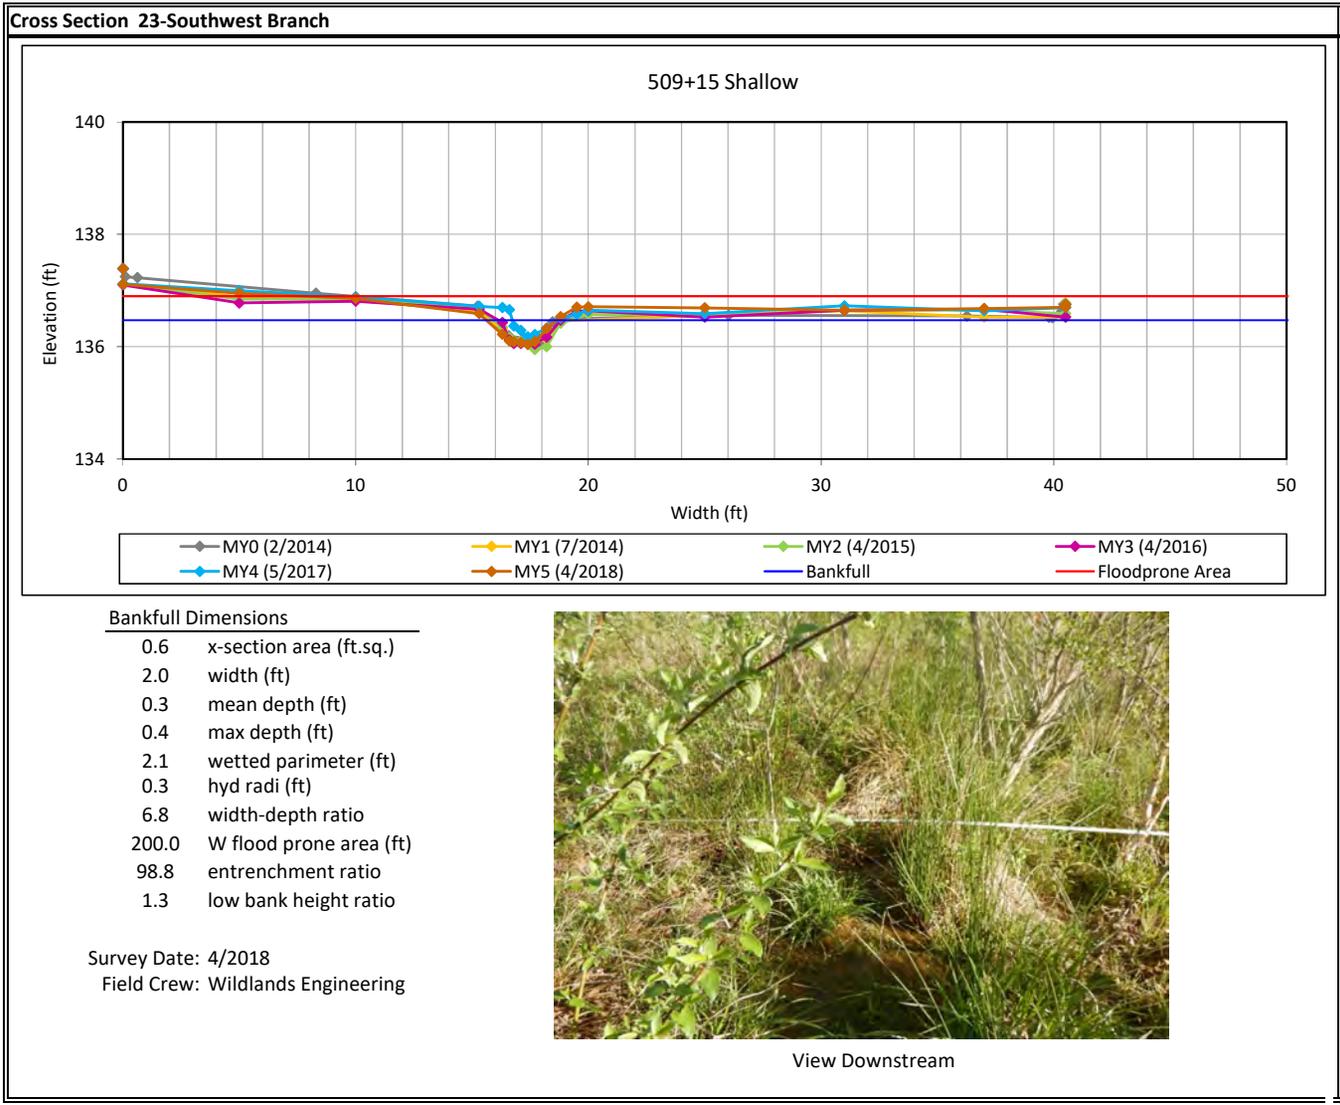

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

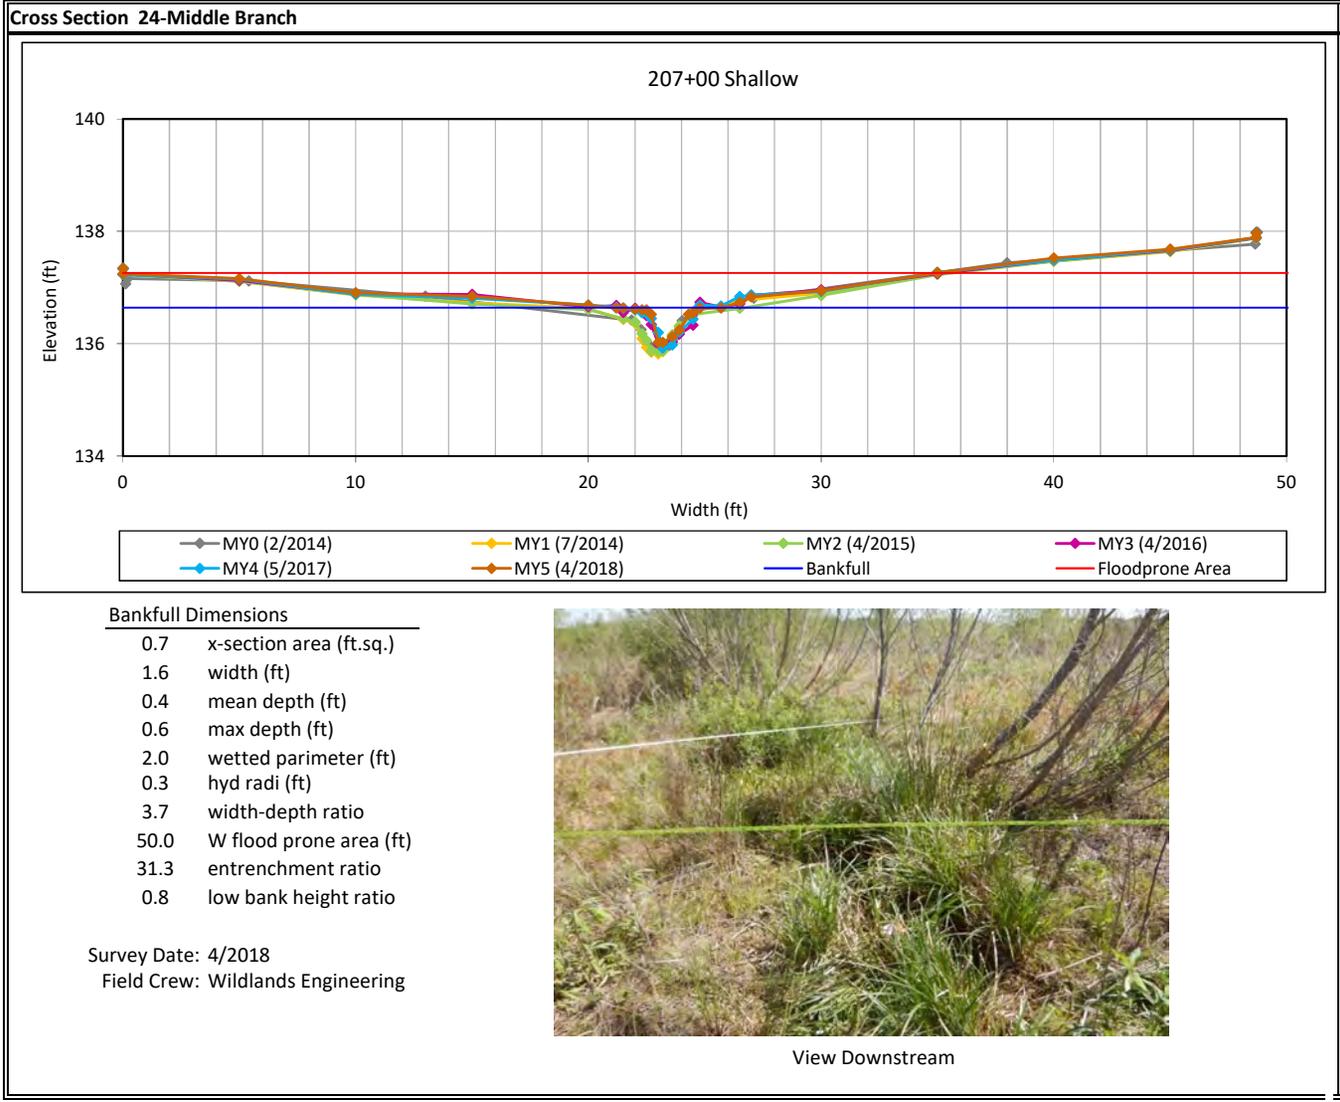

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

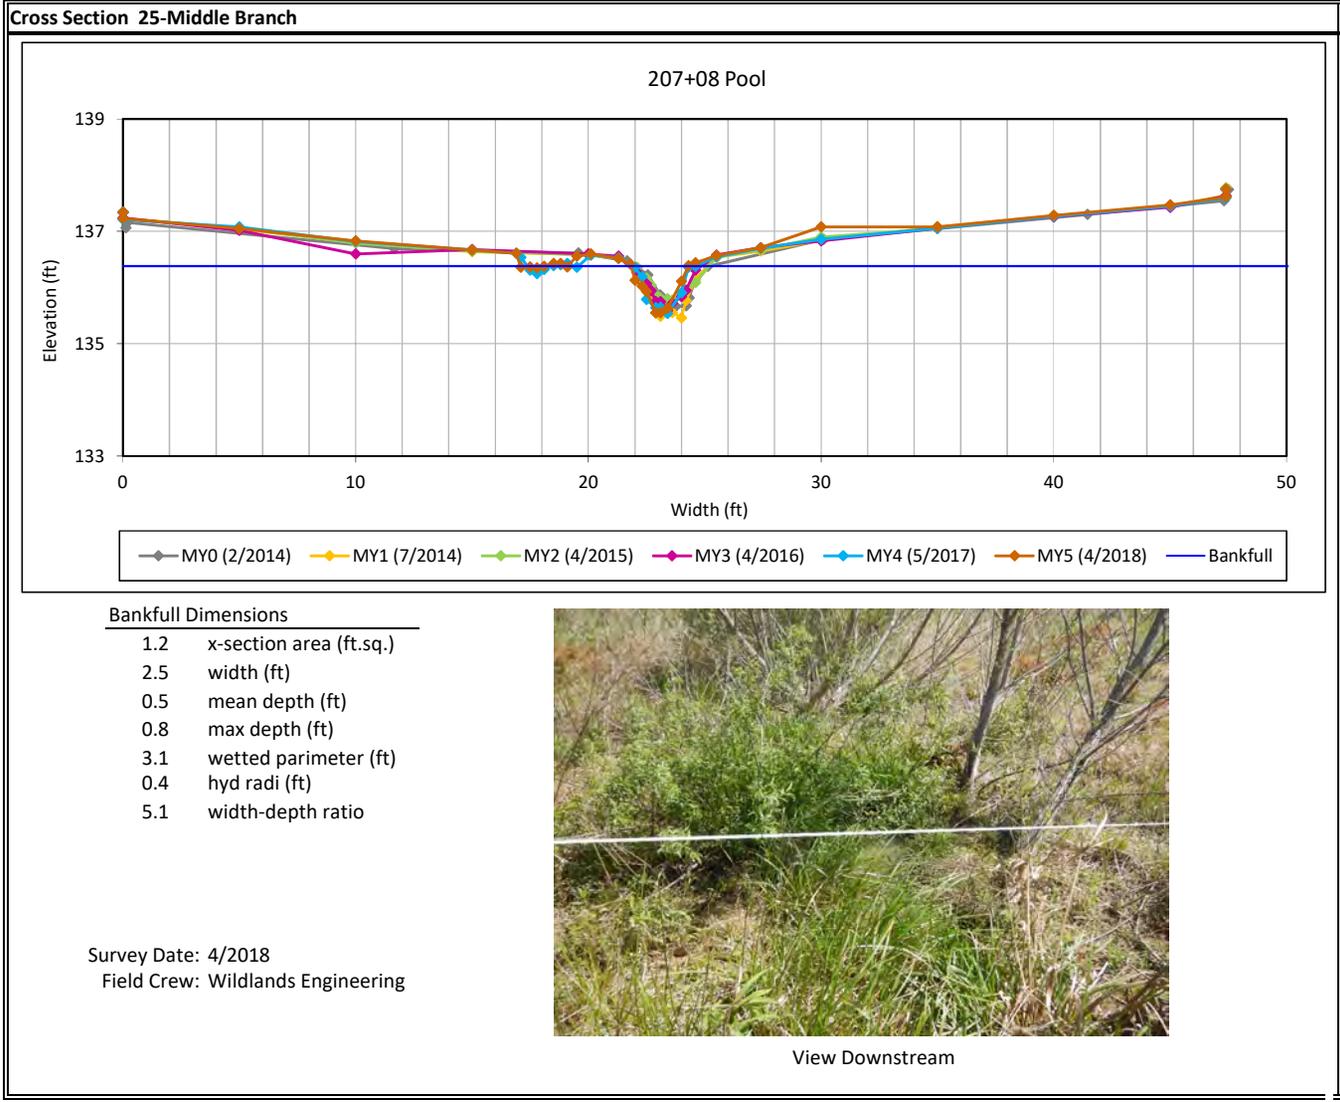

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

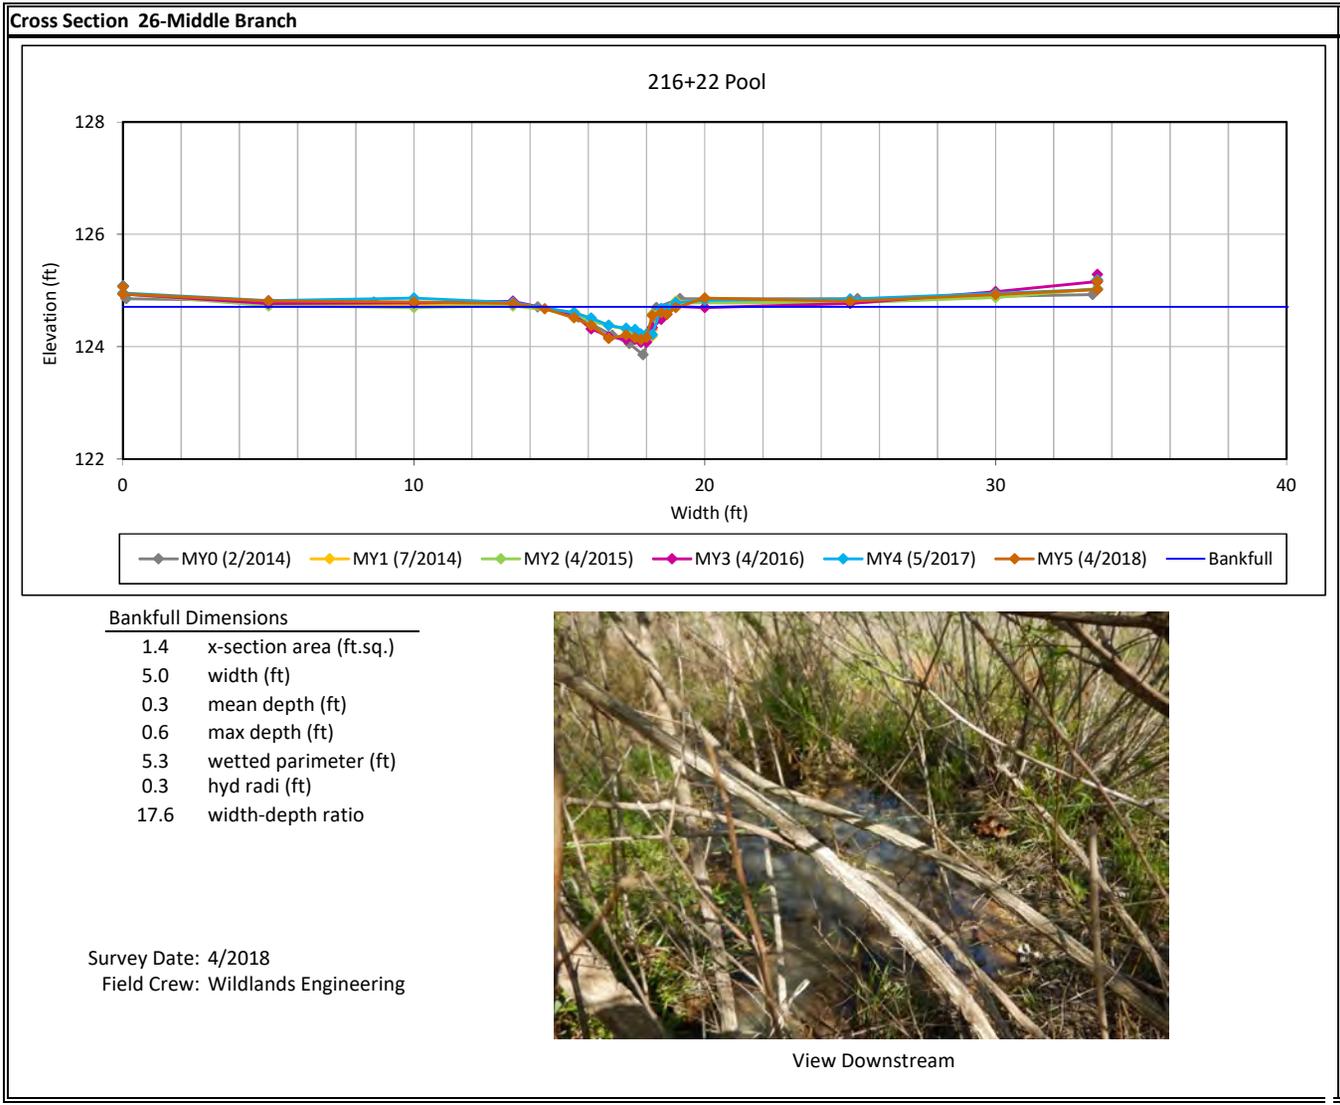

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

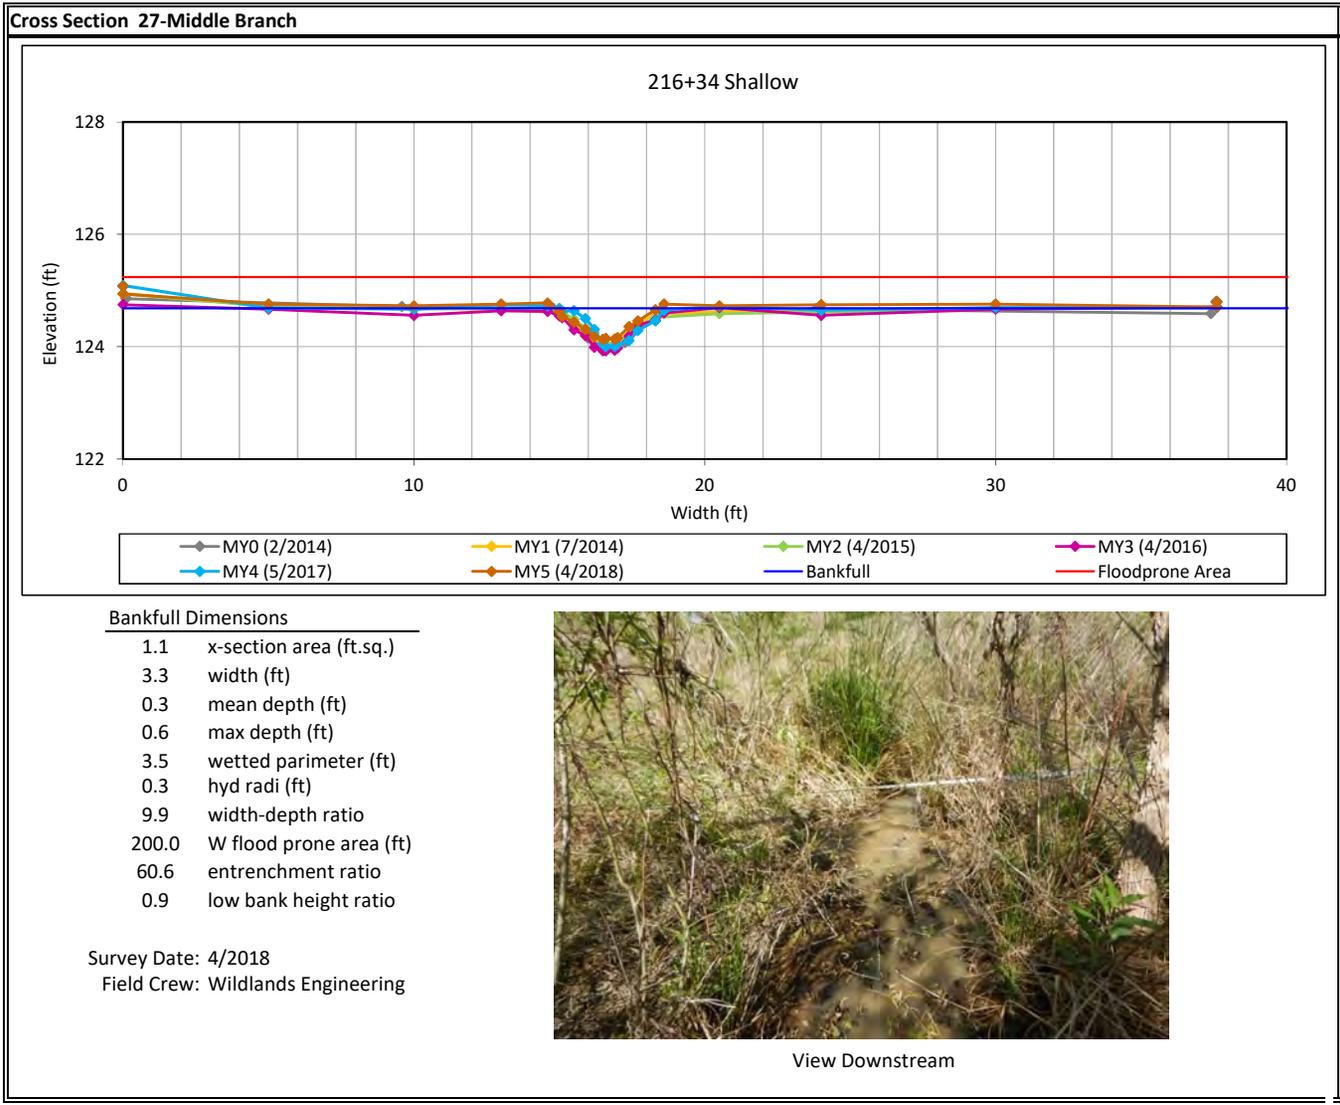


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 28-Southeast Branch

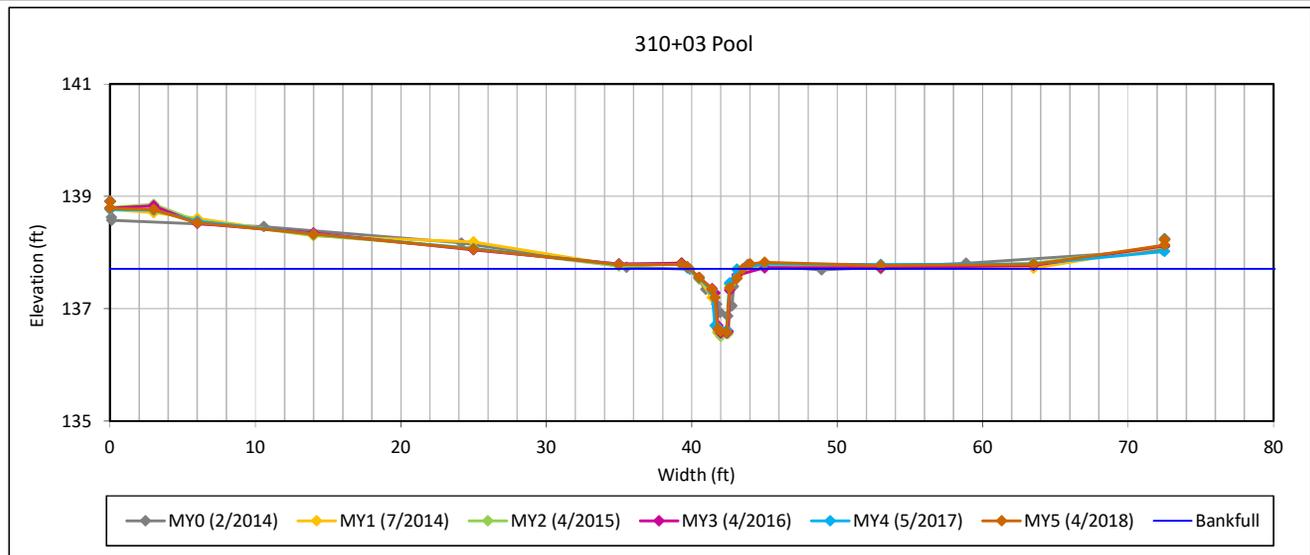

#### Bankfull Dimensions

1.5	x-section area (ft.sq.)
3.6	width (ft)
0.4	mean depth (ft)
1.1	max depth (ft)
4.8	wetted parimeter (ft)
0.3	hyd radi (ft)
8.8	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 29-Southeast Branch

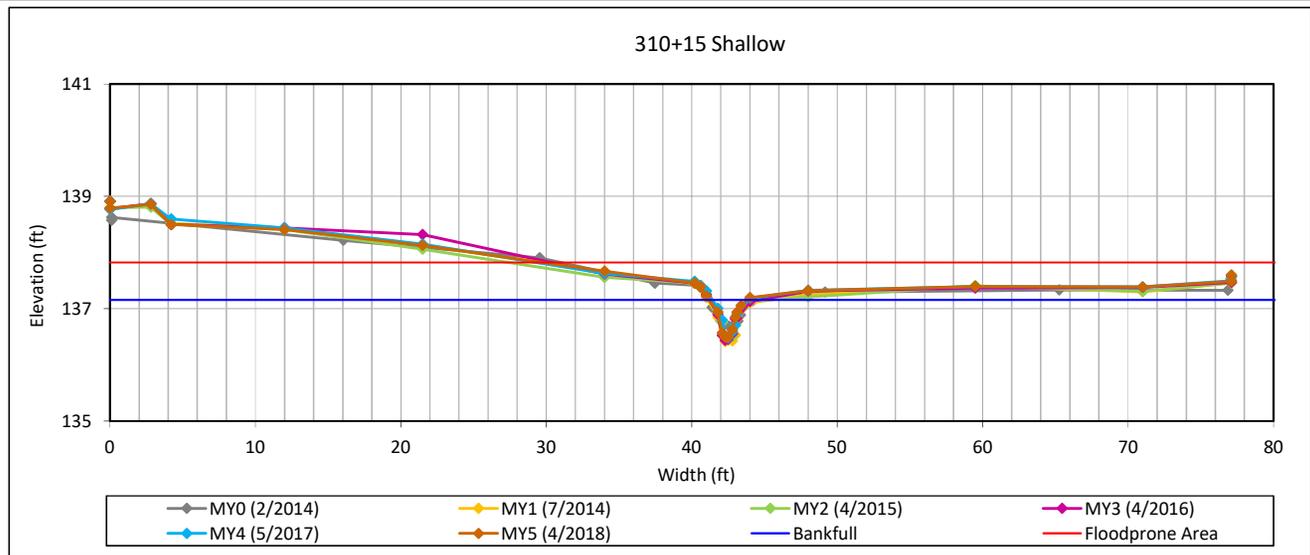

#### Bankfull Dimensions

0.8	x-section area (ft.sq.)
2.6	width (ft)
0.3	mean depth (ft)
0.7	max depth (ft)
3.0	wetted perimeter (ft)
0.3	hyd radi (ft)
8.6	width-depth ratio
30.0	W flood prone area (ft)
11.5	entrenchment ratio
1.1	low bank height ratio

Survey Date: 4/2018

Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 30-Southeast Branch

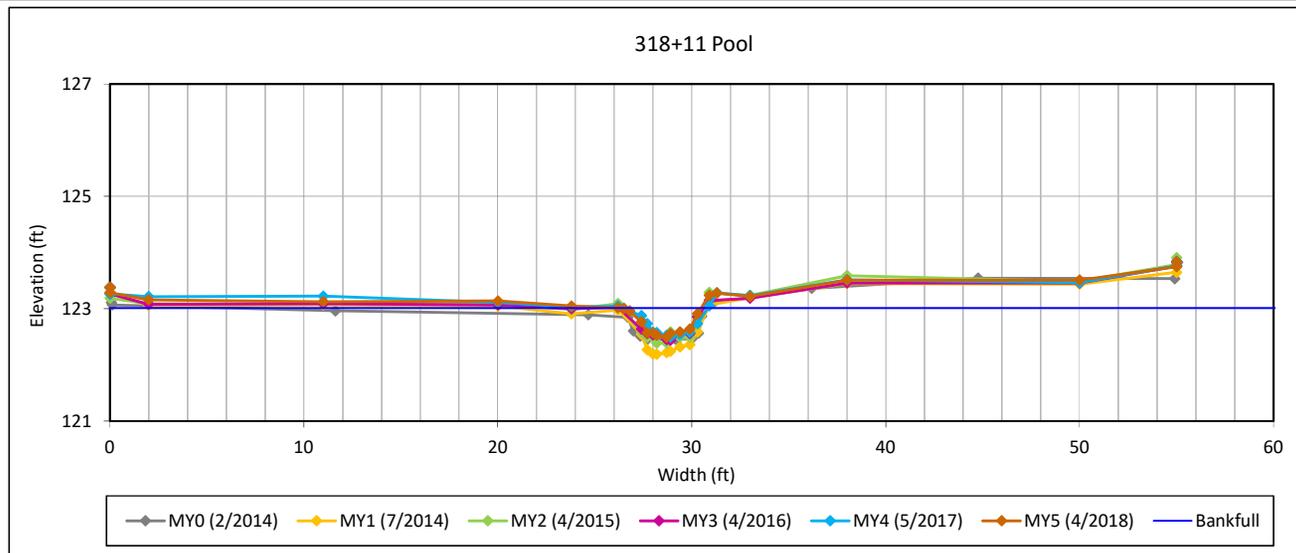

#### Bankfull Dimensions

1.3	x-section area (ft.sq.)
4.1	width (ft)
0.3	mean depth (ft)
0.5	max depth (ft)
4.3	wetted parimeter (ft)
0.3	hyd radi (ft)
12.9	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

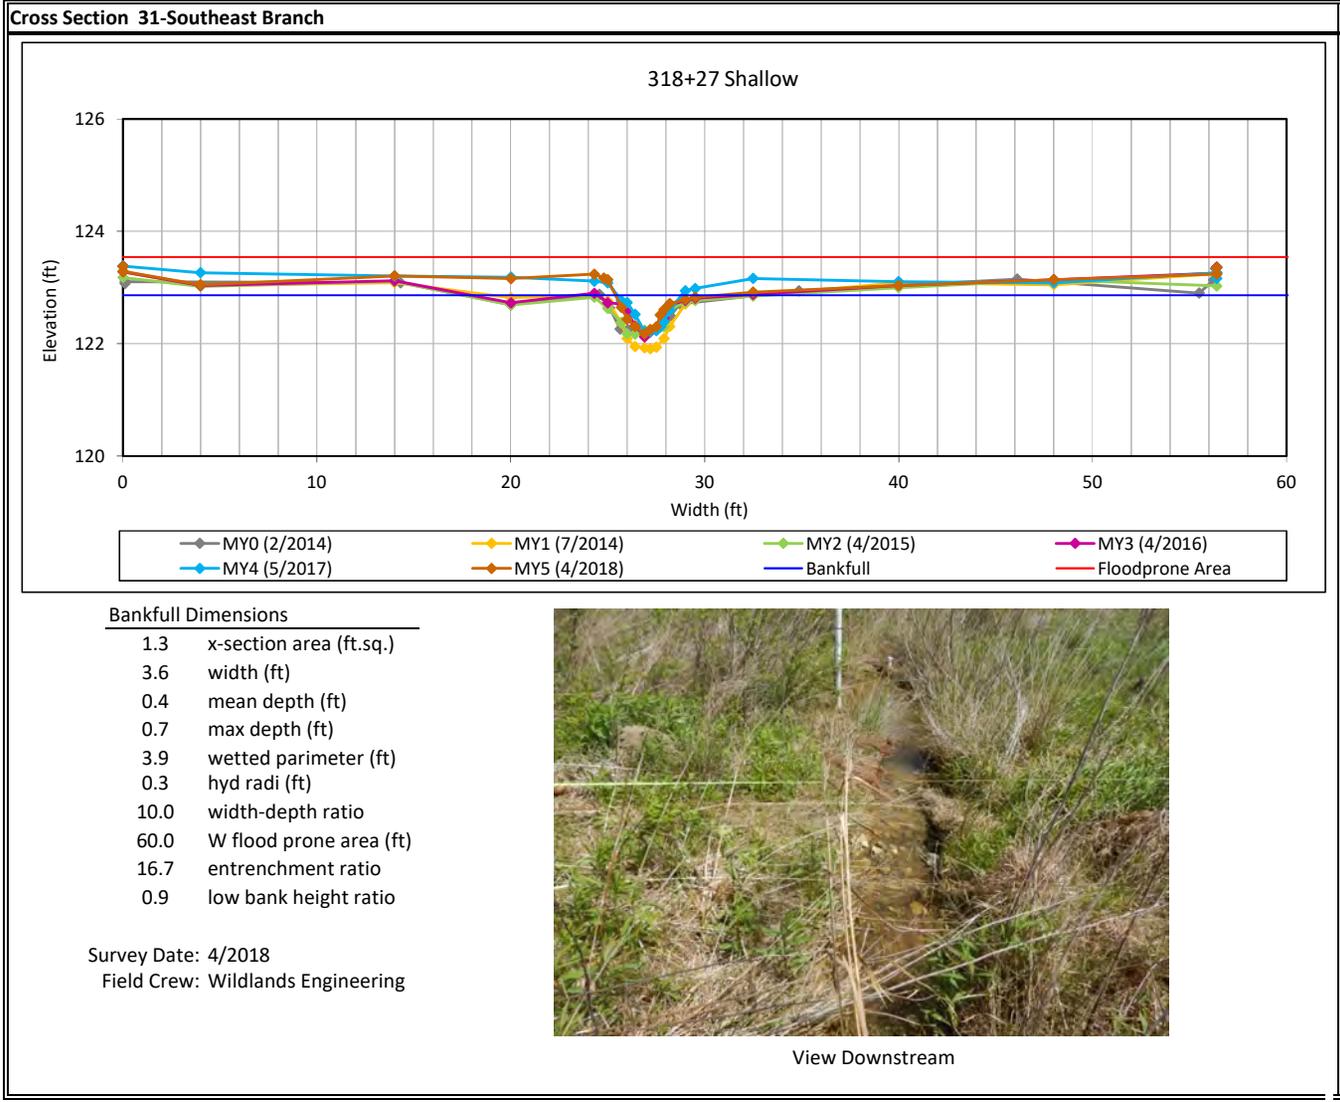

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

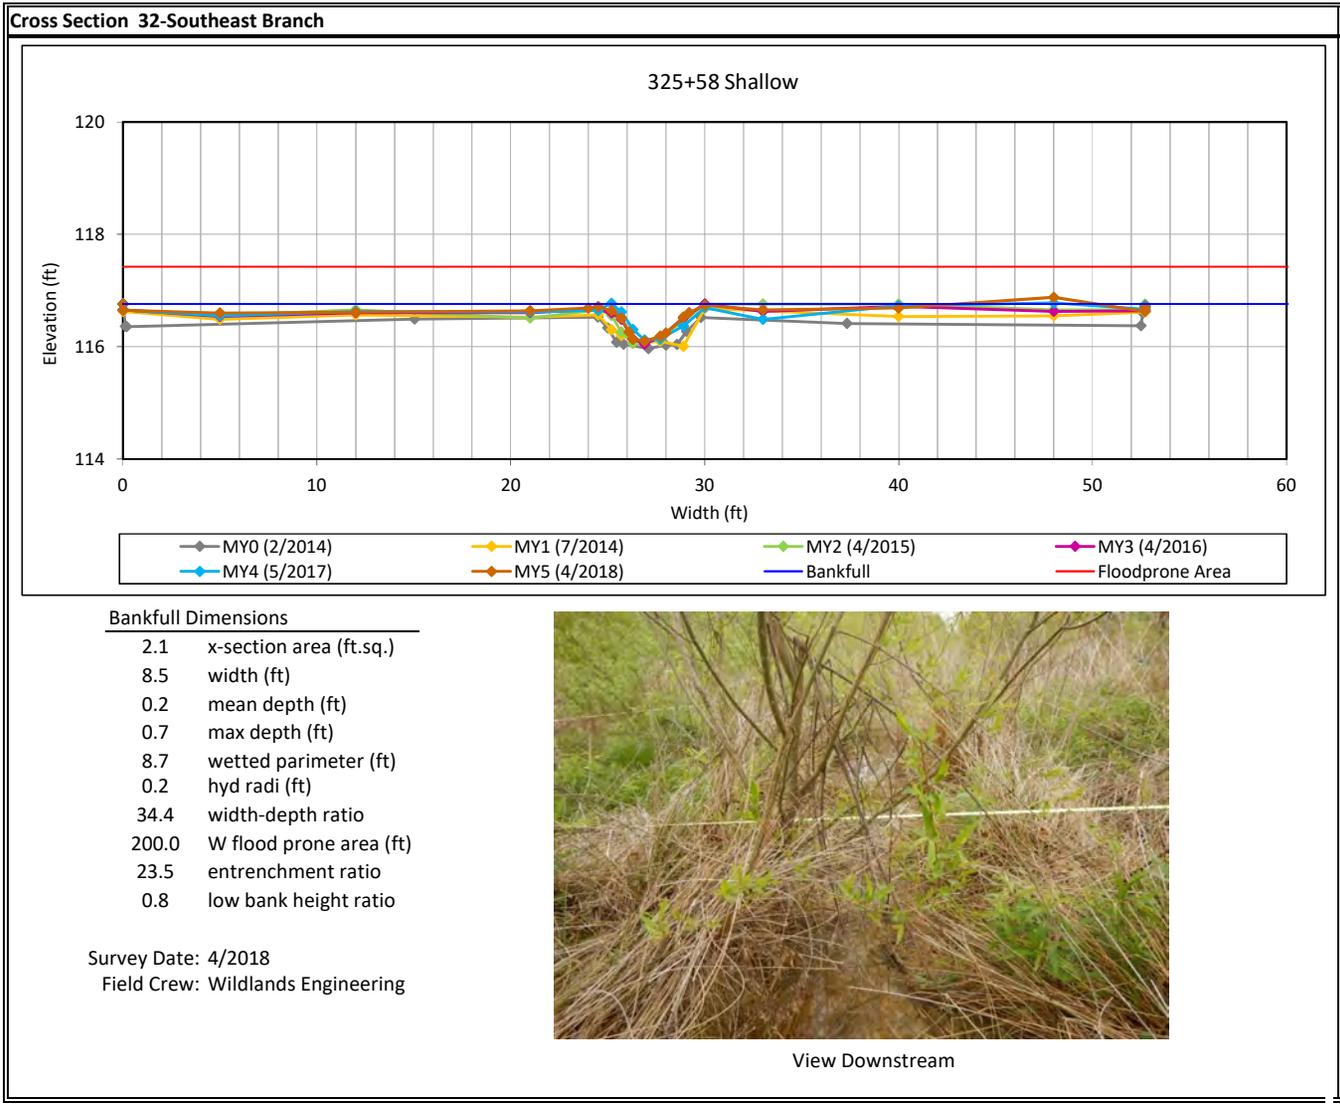


### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

#### Cross Section 33-Southeast Branch

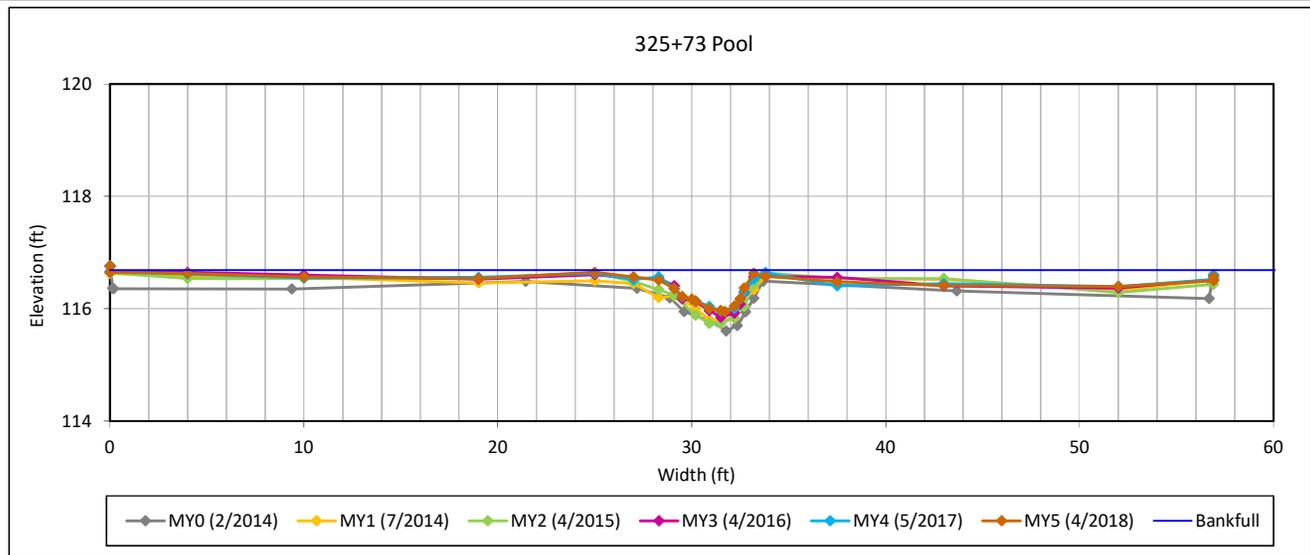

#### Bankfull Dimensions

2.4	x-section area (ft.sq.)
4.9	width (ft)
0.5	mean depth (ft)
0.7	max depth (ft)
5.1	wetted parimeter (ft)
0.5	hyd radi (ft)
10.0	width-depth ratio

Survey Date: 4/2018  
Field Crew: Wildlands Engineering




View Downstream

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

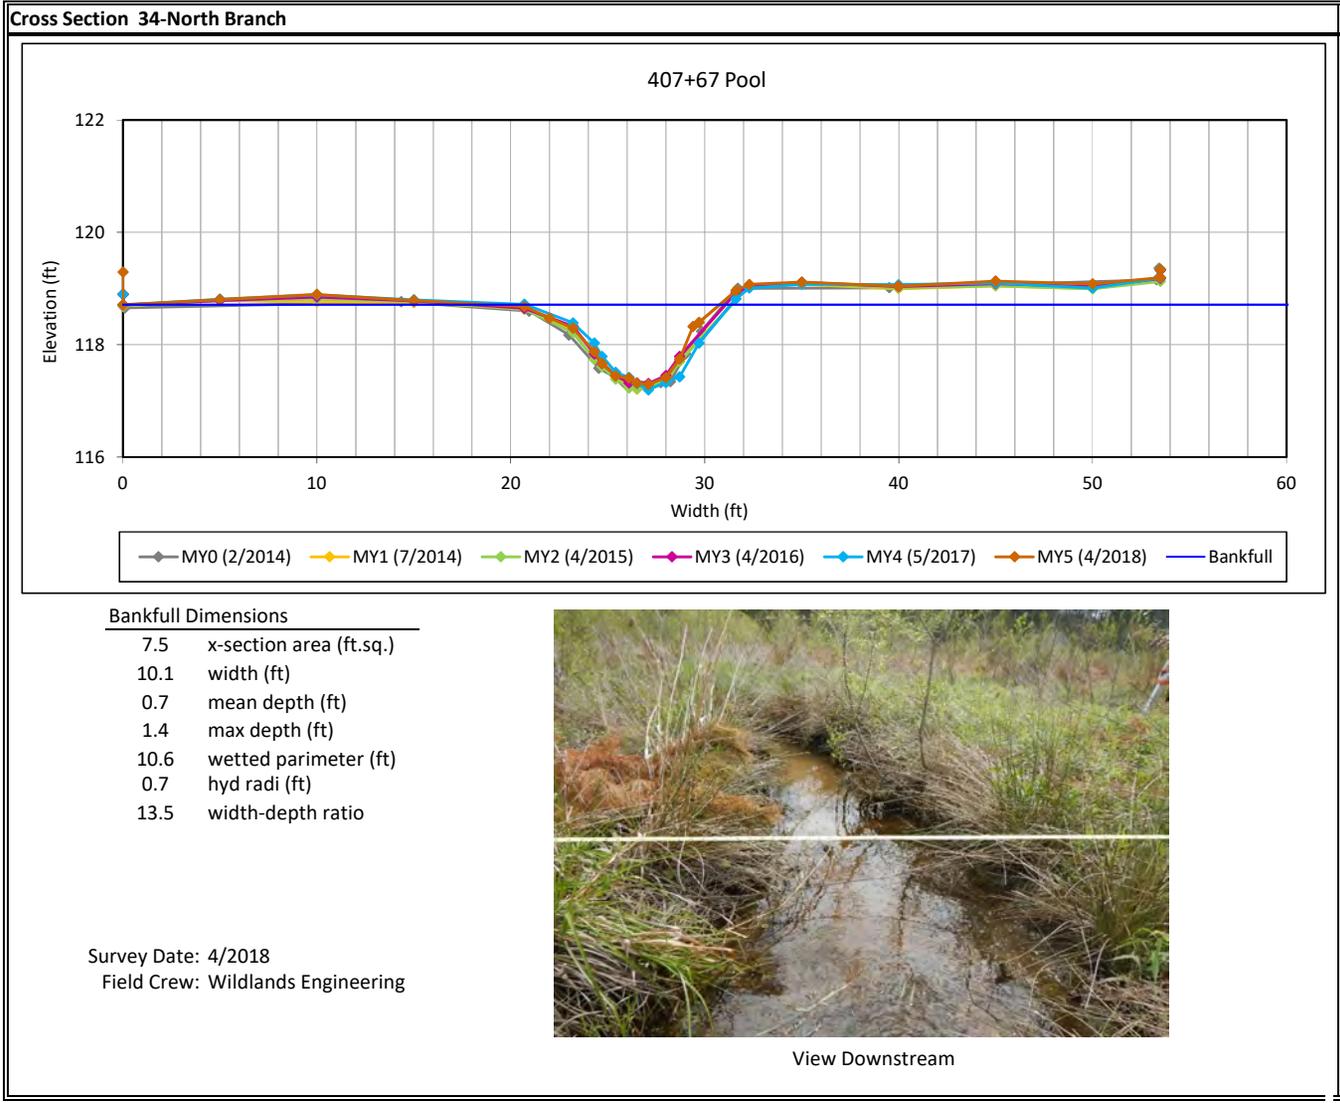

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

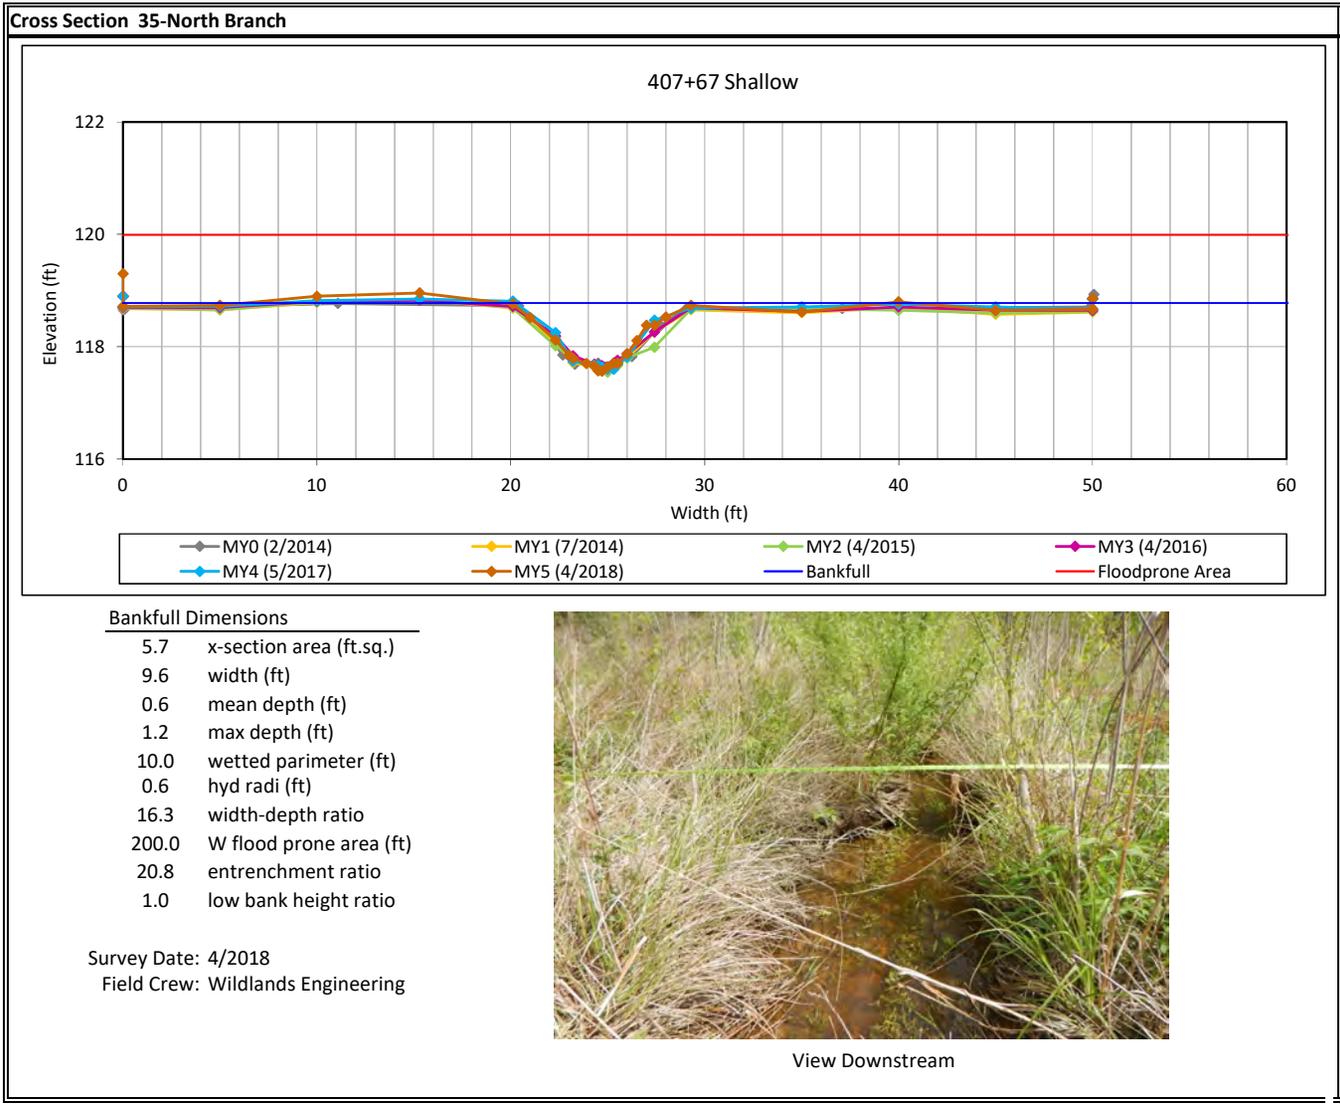

**Cross Section Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

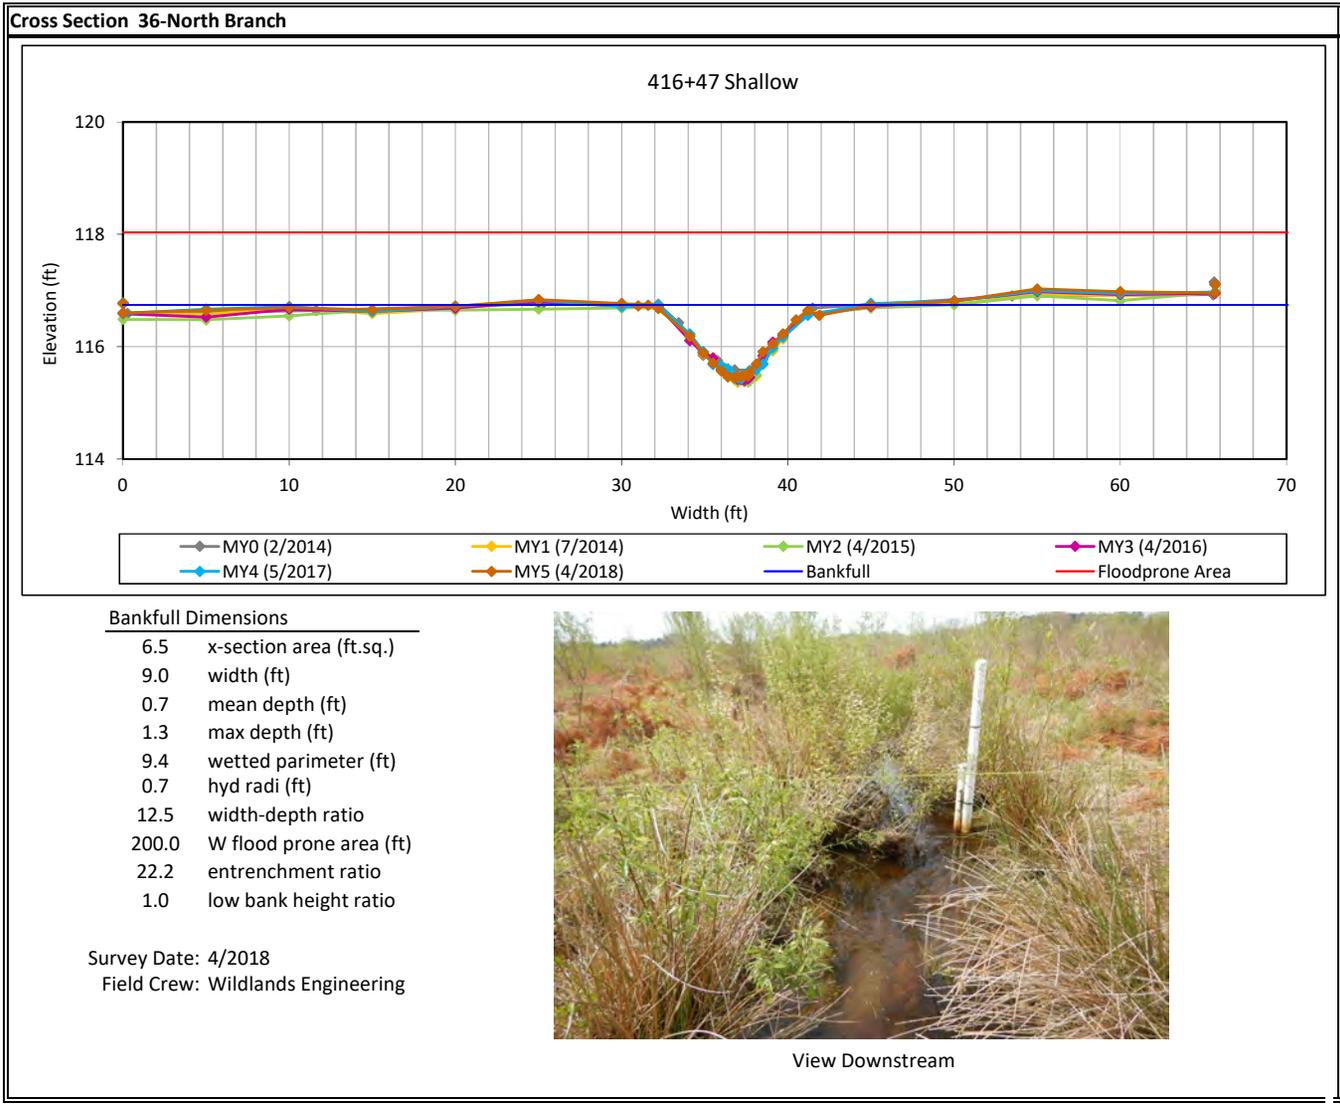

### Cross Section Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

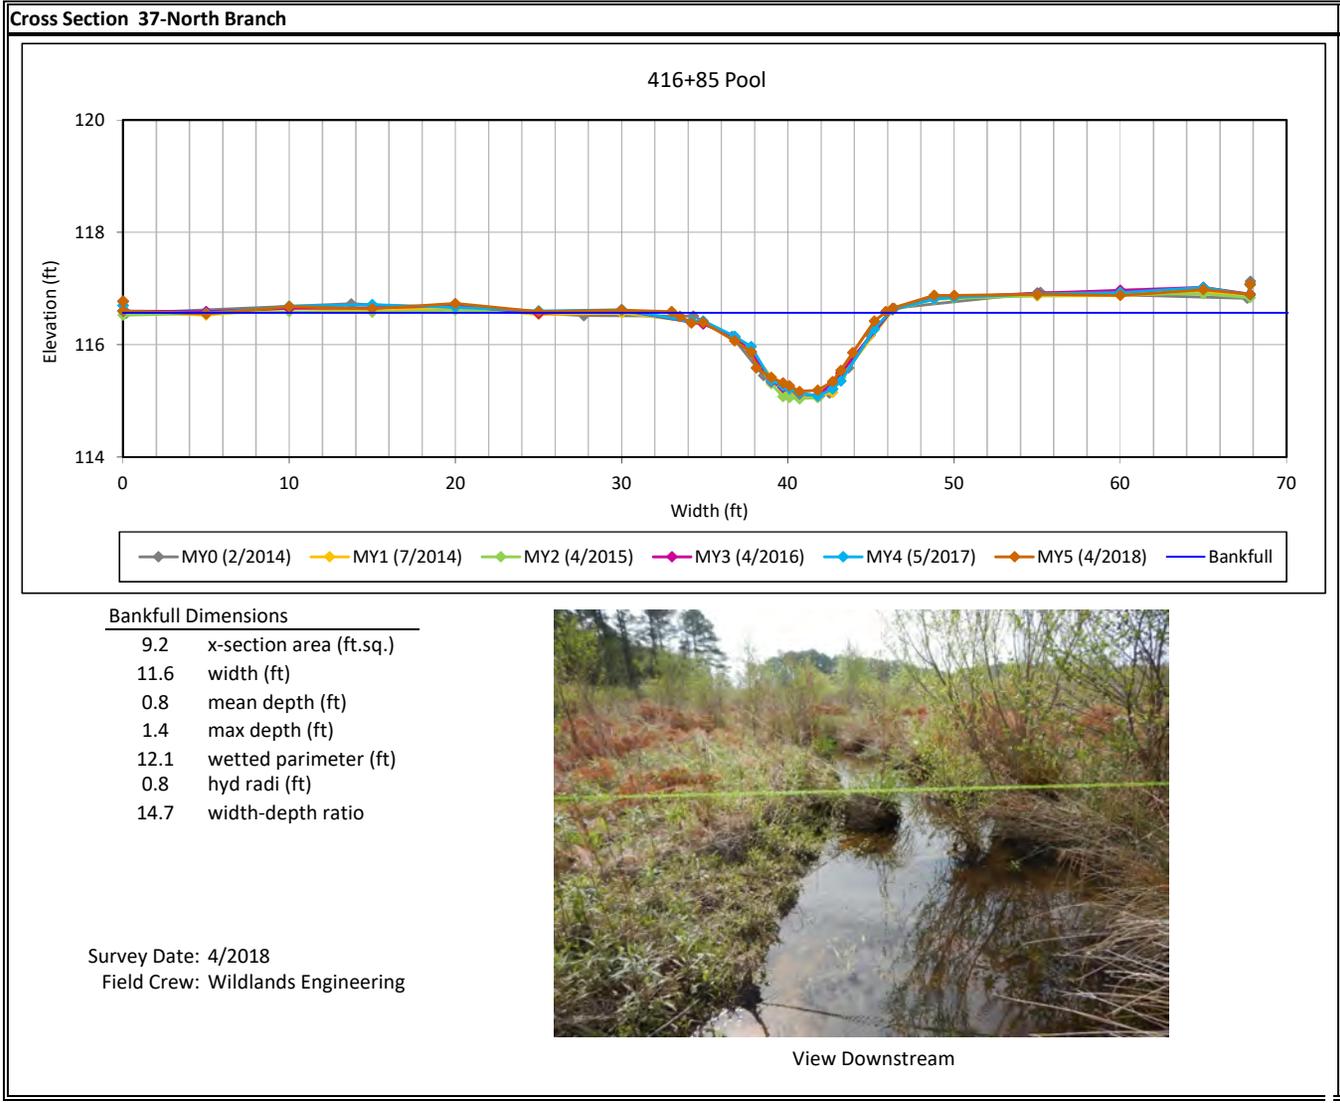

## **APPENDIX 5. Hydrology Summary Data and Plots**

**Table 13. Verification of Bankfull Events**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

**Monitoring Year 5 - 2018**

Reach	Date of Data Collection	Date of Occurrence	Method
Devil's Racetrack (West)	2/22/2018	1/3/2018	Crest Gage/ Pressure Transducer
	2/22/2018	1/29/2018	
	4/16/2018	3/20/2018	
	11/27/2018	4/24/2018	
	11/27/2018	5/29/2018	
	11/27/2018	8/21/2018	
	11/27/2018	9/15/2018	
	11/27/2018	10/11/2018	
	11/27/2018	11/13/2018	
	11/27/2018	11/24/2018	
Devil's Racetrack (East)	2/22/2018	1/3/2018	
	2/22/2018	1/29/2018	
	4/16/2018	3/20/2018	
	11/27/2018	4/24/2018	
	11/27/2018	5/29/2018	
	11/27/2018	8/21/2018	
	11/27/2018	9/15/2018	
	11/27/2018	10/11/2018	
	11/27/2018	11/13/2018	
	11/27/2018	11/24/2018	
Southwest Branch	2/22/2018	1/13/2018	
	2/22/2018	2/12/2018	
	11/27/2018	9/15/2018	
	11/27/2018	11/13/2018	
Middle Branch	2/22/2018	1/29/2018	
	11/27/2018	4/24/2018	
	11/27/2018	5/29/2018	
	11/27/2018	9/15/2018	
Southeast Branch	11/27/2018	11/13/2018	
	2/22/2018	1/29/2018	
	11/27/2018	4/24/2018	
	11/27/2018	5/29/2018	
	11/27/2018	9/15/2018	
North Branch	11/27/2018	11/13/2018	
	2/22/2018	1/3/2018	
	2/22/2018	1/29/2018	
	4/16/2018	3/20/2018	
	11/27/2018	5/29/2018	
	11/27/2018	9/15/2018	

Table 14. Wetland Gage Attainment Summary  
 Devil's Racetrack Mitigation Site (DMS Project No. 95021)  
 Monitoring Year 5 - 2018


Summary of Groundwater Gage Results for Monitoring Years 1 through 7							
Gage	Success Criteria Achieved/Max Consecutive Days During Growing Season (Percentage)						
	Year 1 (2014)*	Year 2 (2015)	Year 3 (2016)	Year 4 (2017)	Year 5 (2018)	Year 6 (2019)	Year 7 (2020)
1	No/7.5 Days (3.1%)	No/16 Days (6.0%)	Yes/31 Days (11.9%)	Yes/28 Days (10.8%)	Yes/37 Days (14.2%)		
2	No/14.5 Days (6.0%)	Yes/ 58 Days (22.3%)	No/21 Days (8.1%)	No/15 Days (5.8%)	Yes/35 Days (13.4%)		
3	No/2.5 Days (1.0%)	Yes/33 Days (12.8%)	No/9 Days (3.5%)	No/11 Days (4.2%)	Yes/35 Days (13.4%)		
4	No/13.5 Days (5.6%)	Yes/57 Days (21.9%)	Yes/25 Days (9.6%)	Yes/30 Days (11.5%)	Yes/67 Days (25.7%)		
5	No/12.5 Days (5.2%)	Yes/34 Days (13.0%)	No/18 Days (6.9%)	No/12 Days (4.6%)	Yes/36 Days (13.8%)		
6	No/11.0 Days (4.6%)	Yes/53 Days (20.3%)	Yes/23 Days (8.8%)	No/13 Days (5.0%)	No/14 Days (5.4%)		
7	Yes/21.5 Days (9.0%)	Yes/66 Days (25.6%)	Yes/25 Days (9.6%)	Yes/23 Days (8.8%)	Yes/51 Days (19.5%)		
8	No/5.0 Days (2.1%)	Yes/31 Days (12.0%)	No/8 Days (3.1%)	No/10 Days (3.8%)	Removed During MYS		
9	Yes/ 22.0 Days (9.2%)	Yes/80 Days (31.0%)	Yes/ 39.0 Days (15.0%)	Yes/28 Days (10.8%)	Yes/36 Days (13.8%)		
10	No/ 1.5 Days (0.6%)	No/10 Days (3.9%)	No/ 3 Days (1.2%)	No/3 Days (1.2%)	Removed During MY4		
11	No/9.0 Days (3.8%)	Yes/65 Days (25.2%)	Yes/23 Days (8.8%)	Yes/31 Days (11.9%)	Yes/52 Days (19.9%)		
12	No/7.5 Days (3.1%)	Yes/31 Days (12.0%)	No/13 Days (5.0%)	Yes/30 Days (11.5%)	Yes/52 Days (20.3%)		
13	No/8.0 Days (3.3%)	Yes/34 Days (13.0%)	No/11 Days (4.2%)	No/10 Days (3.8%)	No/14 Days (5.4%)		
14	No/ 8.5 Days (3.5%)	Yes/32 Days (12.4%)	No/12 Days (4.6%)	No/12 Days (4.6%)	Yes/35 Days (13.4%)		
15	No/12.5 Days (5.2%)	Yes/33 Days (12.8%)	No/14 Days (5.4%)	Yes/30 Days (11.5%)	Yes/37 Days (14.2%)		
16	No/12.5 Days (5.2%)	Yes/33 Days (12.8%)	Yes/39 Days (15.0%)	Yes/29 Days (11.2%)	Yes/36 Days (13.8%)		
17	No/15.0 Days (6.3%)	Yes/34 Days (13.2%)	Yes/23 Days (8.8%)	No/16 Days (6.2%)	Yes/37 Days (14.2%)		
18	Yes/69.5 Days (29.0%)	Yes/66 Days (25.6%)	Yes/22 Days (8.5%)	No/14 Days (5.4%)	Yes/36 Days (13.8%)		
19	Yes/31.5 Days (13.1%)	Yes/66 Days (25.6%)	Yes/26 Days (10.0%)	Yes/30 Days (11.5%)	Yes/37 Days (14.2%)		
20	No/19.5 Days (8.1%)	Yes/35 Days (13.4%)	No/12 Days (4.6%)	No/5 Days (1.9%)	No/13 Days (5.0%)		
21	Yes/69.5 Days (29.0%)	Yes/79 Days (30.4%)	Yes/38 Days (14.6%)	Yes/31 Days (11.9%)	Yes/37 Days (14.2%)		
22	Yes/ 31.0 Days (12.9%)	Yes/66 Days (25.6%)	Yes/24 Days (9.2%)	No/16 Days (6.2%)	Yes/37 Days (14.2%)		
23	No/8.0 Days (3.3%)	Yes/31 Days (11.8%)	No/6 Days (2.3%)	No/5 Days (1.9%)	No/5 Days (1.9%)		
24	No/13.0 Days (5.4%)	Yes/33 Days (12.8%)	No/ 5 Days (1.9%)	No/9 Days (3.5%)	No/12 Days (4.6%)		
25	Yes/25.5 Days (10.6%)	Yes/66 Days (25.6%)	Yes/23 Days (8.8%)	No/16 Days (6.2%)	Yes/52 Days (19.9%)		
26	Yes/39.0 Days (16.3%)	Yes/83 Days (32.2%)	Yes/25 Days (9.6%)	No/14 Days (5.4%)	No/14 Days (5.4%)		
27	Yes/29.5 Days (12.3%)	Yes/67 Days (26.0%)	Yes/31 Days (11.9%)	Yes/32 Days (12.3%)	Yes/37 Days (14.2%)		
28	No/19.5 Days (8.1%)	Yes/81 Days (31.2%)	Yes/106 Days (40.8%)	Yes/102 Days (39.2%)	Yes/111 Days (42.5%)		
29	Yes/70.0 Days (29.2%)	Yes/81 Days (31.4%)	Yes/56 Days (21.5%)	Yes/78 Days (30.0%)	Yes/76 Days (29.1%)		
30	Yes/52.5 Days (21.9%)	Yes/83 Days (32.0%)	No/11 Days (4.2%)	No/9 Days (3.5%)	No/22 Days (8.4%)		
31	No/9.0 Days (3.8%)	Yes/77 Days (29.7%)	Yes/40 Days (15.4%)	Yes/32 Days (12.3%)	Yes/66 Days (25.3%)		
32	No/ 7.0 Days (2.9%)	Yes/78 Days (30.2%)	No/11 Days (4.2%)	No/3 Days (1.2%)	Removed During MYS		
33	Yes/69.5 Days (29.0%)	Yes/84 Days (32.4%)	Yes/51 Days (19.6%)	Yes/46 Days (17.7%)	Yes/64 Days (24.5%)		
34	No/2.0 Days (0.8%)	No/16 Days (6.0%)	No/10 Days (3.8%)	No/4 Days (1.5%)	No/9 Days (3.4%)		
35	Added During MY2	Yes/33 Days (12.8%)	Yes/42 Days (16.2%)	Yes/31 Days (11.9%)	Yes/67 Days (25.7%)		
36	Added During MY2	Yes/34 Days (13.0%)	Yes/40 Days (15.4%)	Yes/31 Days (11.9%)	Yes/53 Days (20.3%)		
37	Added During MY2	Yes/33 Days (12.8%)	Yes/22 Days (8.5%)	No/15 Days (5.8%)	Yes/36 Days (13.8%)		
38	Added During MY2	Yes/33 Days (12.8%)	No/6 Days (2.3%)	No/11 Days (4.2%)	Yes/36 Days (13.8%)		

\* NRCS WETS data was used to determine the growing season for monitoring year 1. After discussions with the US Army Corps of Engineers, on-site soil temperature probe data is being used to determine the beginning of the growing season.

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

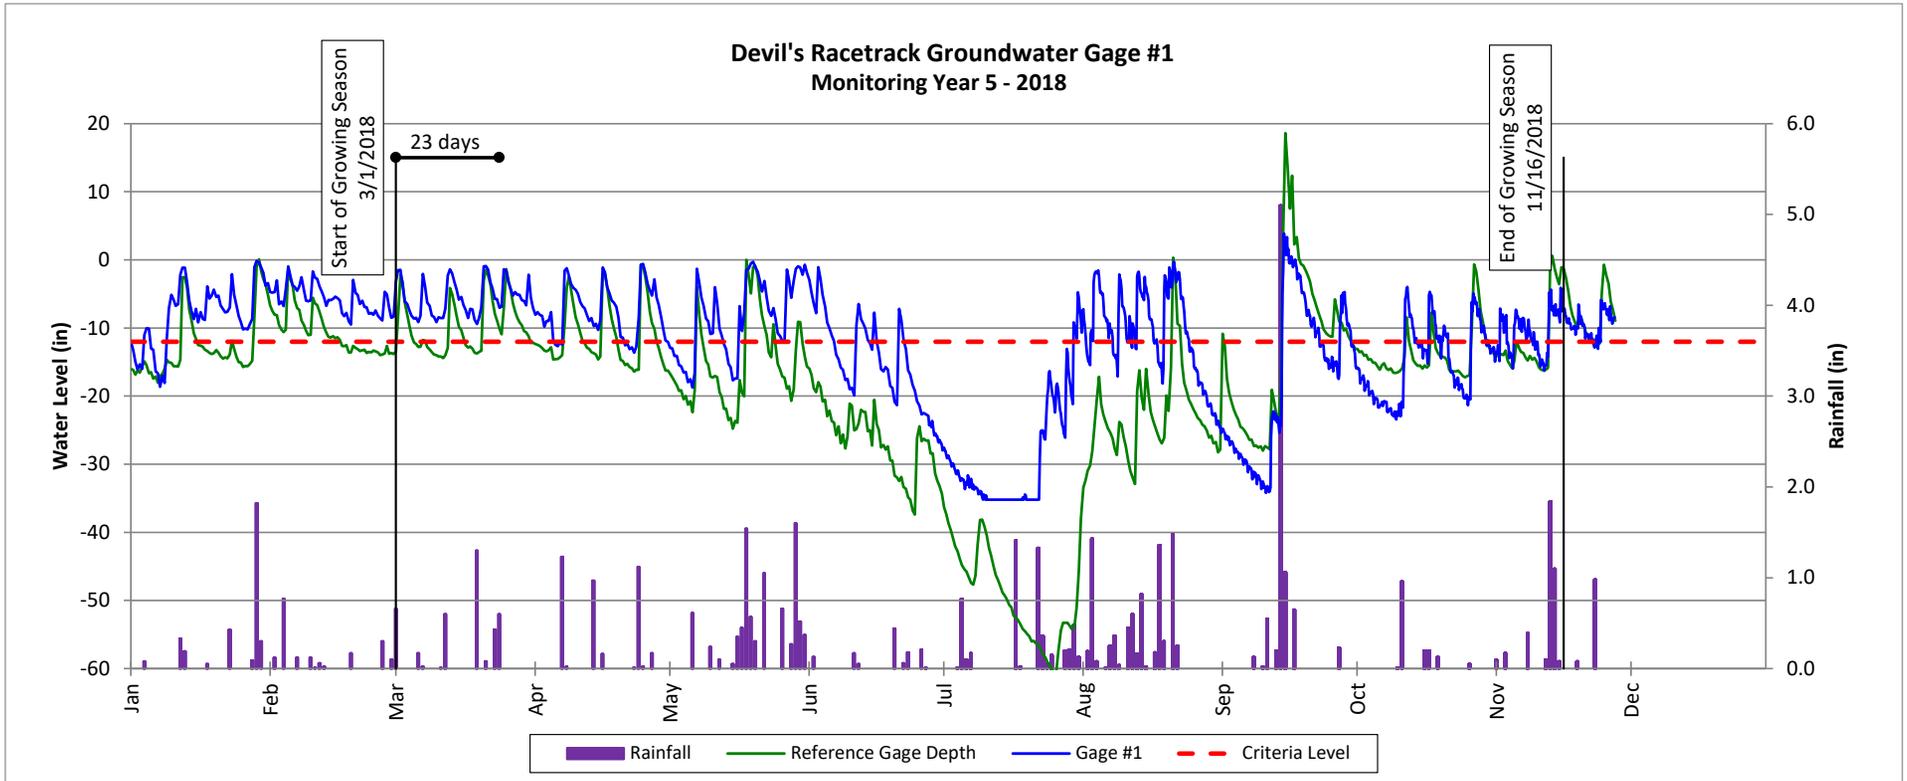

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

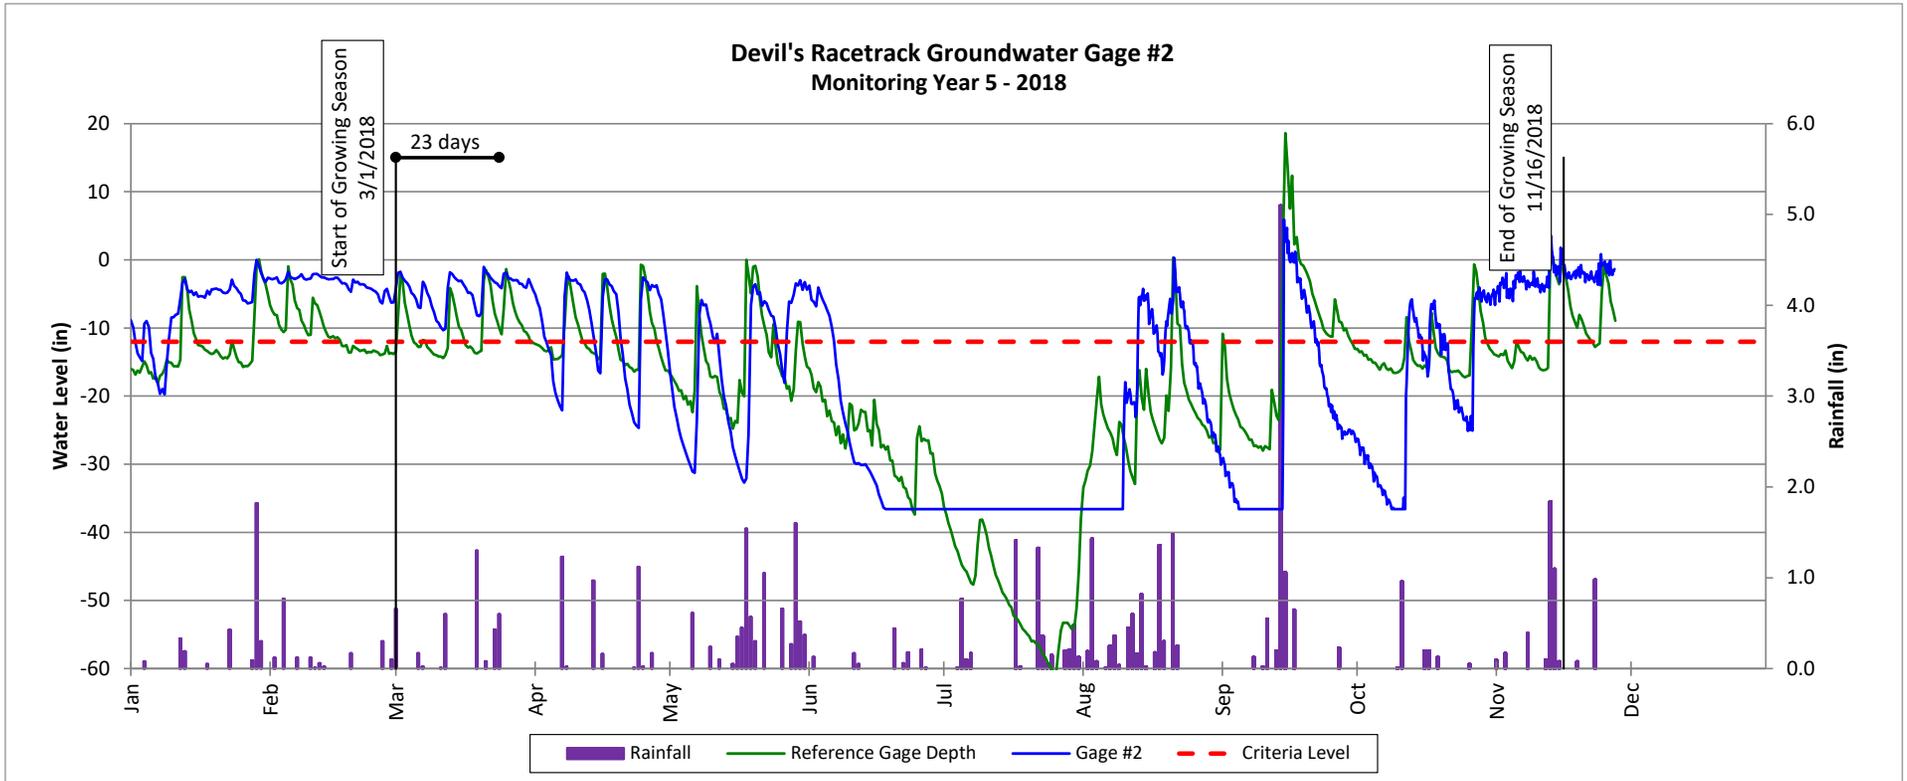

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

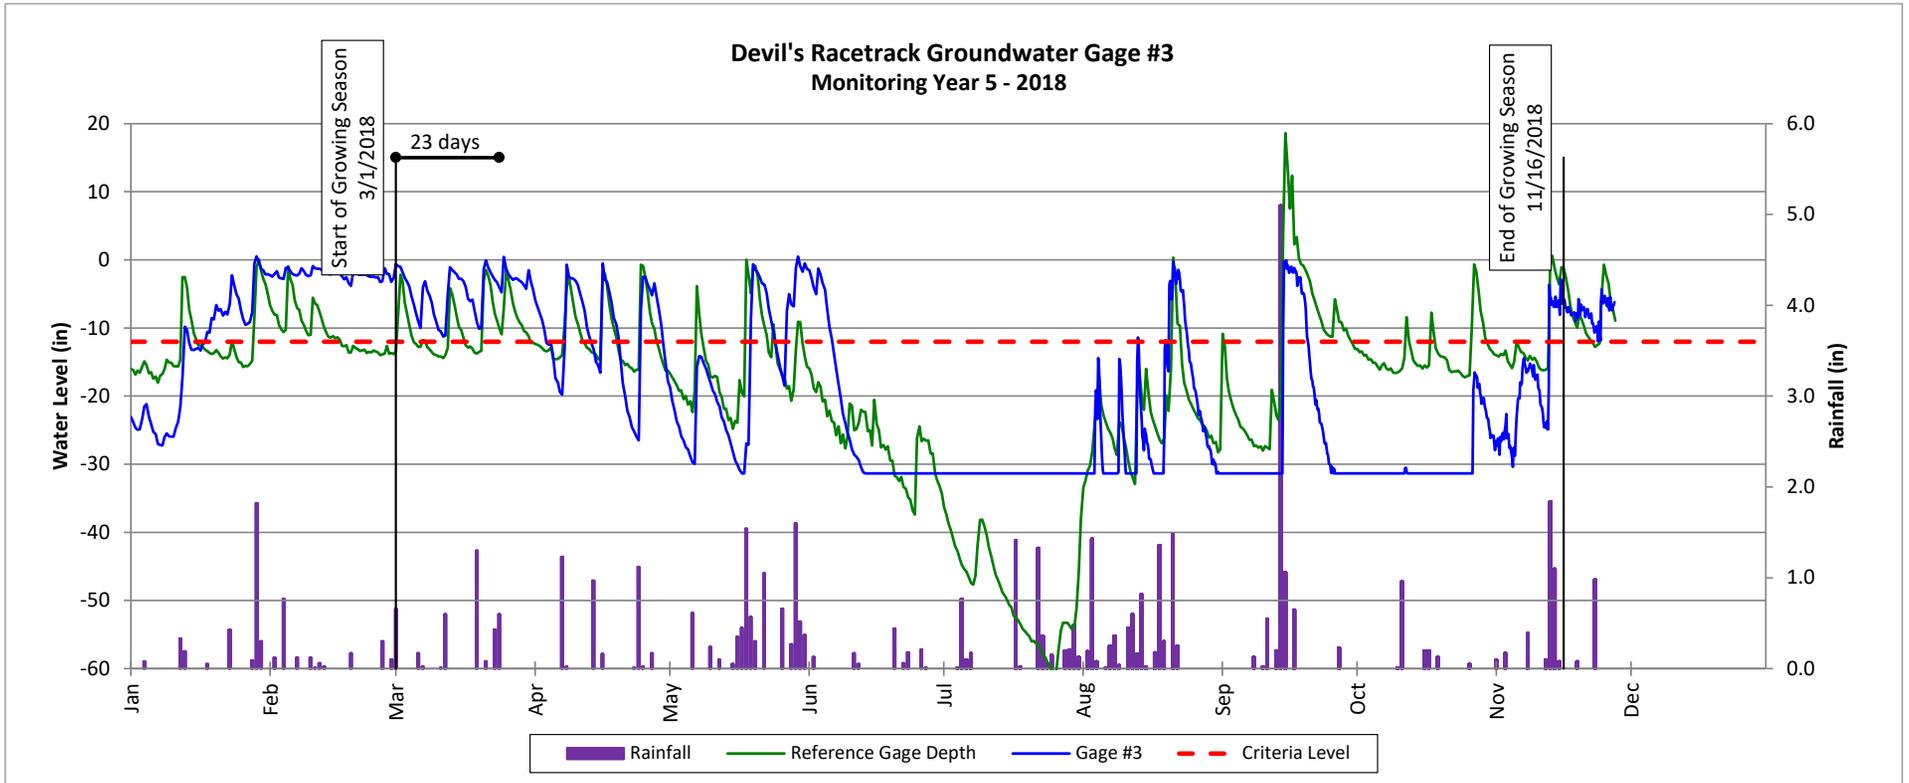

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

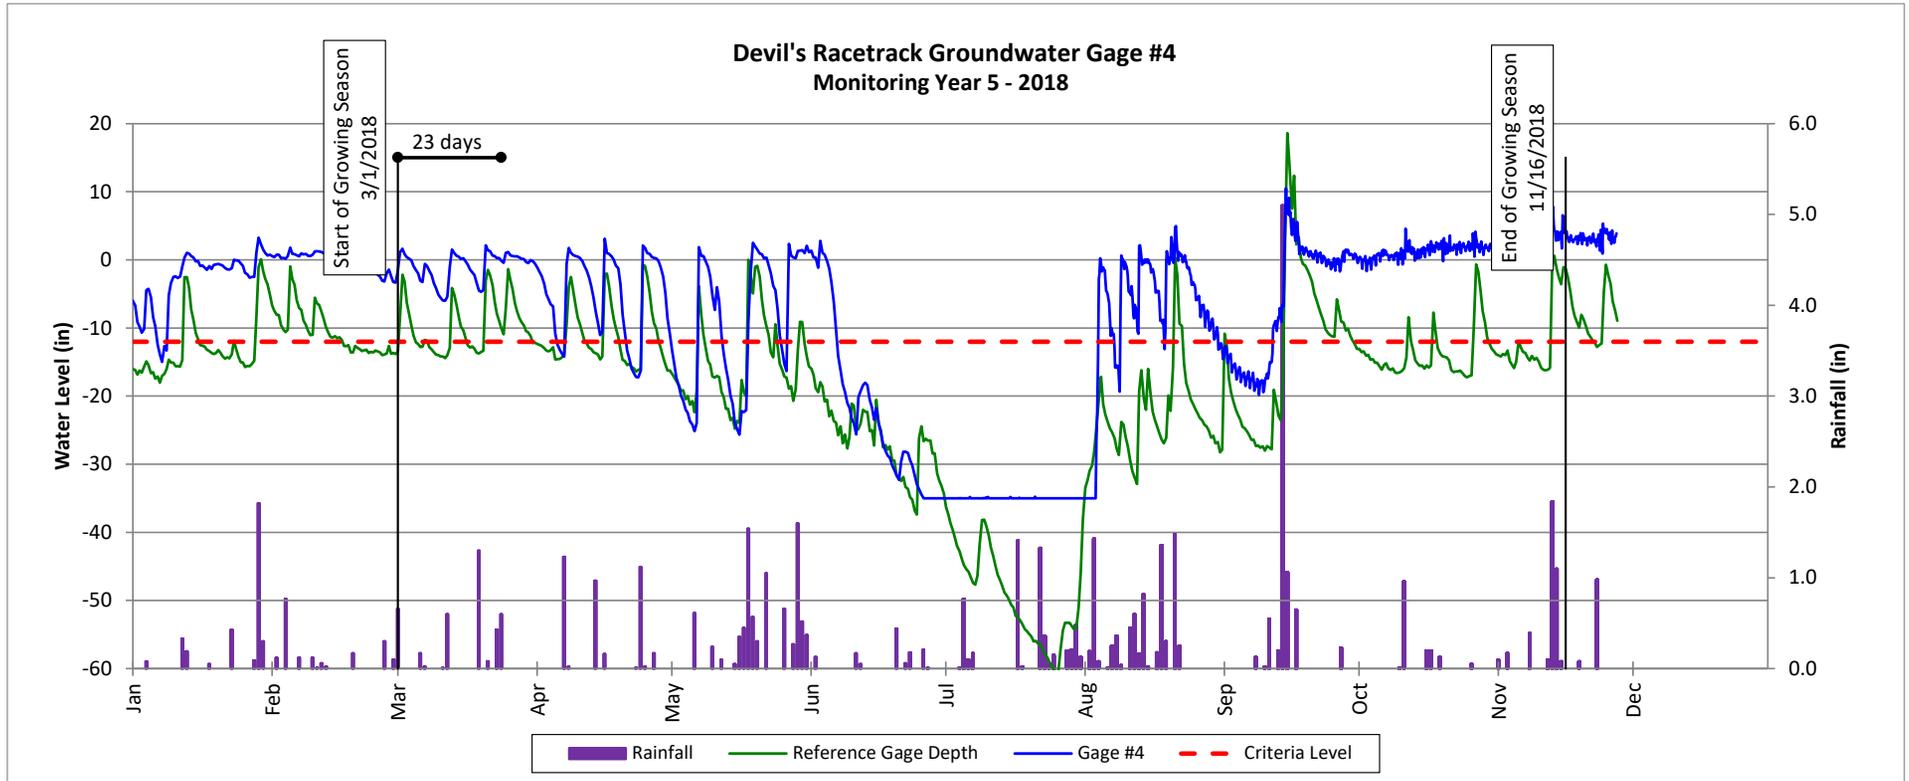

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

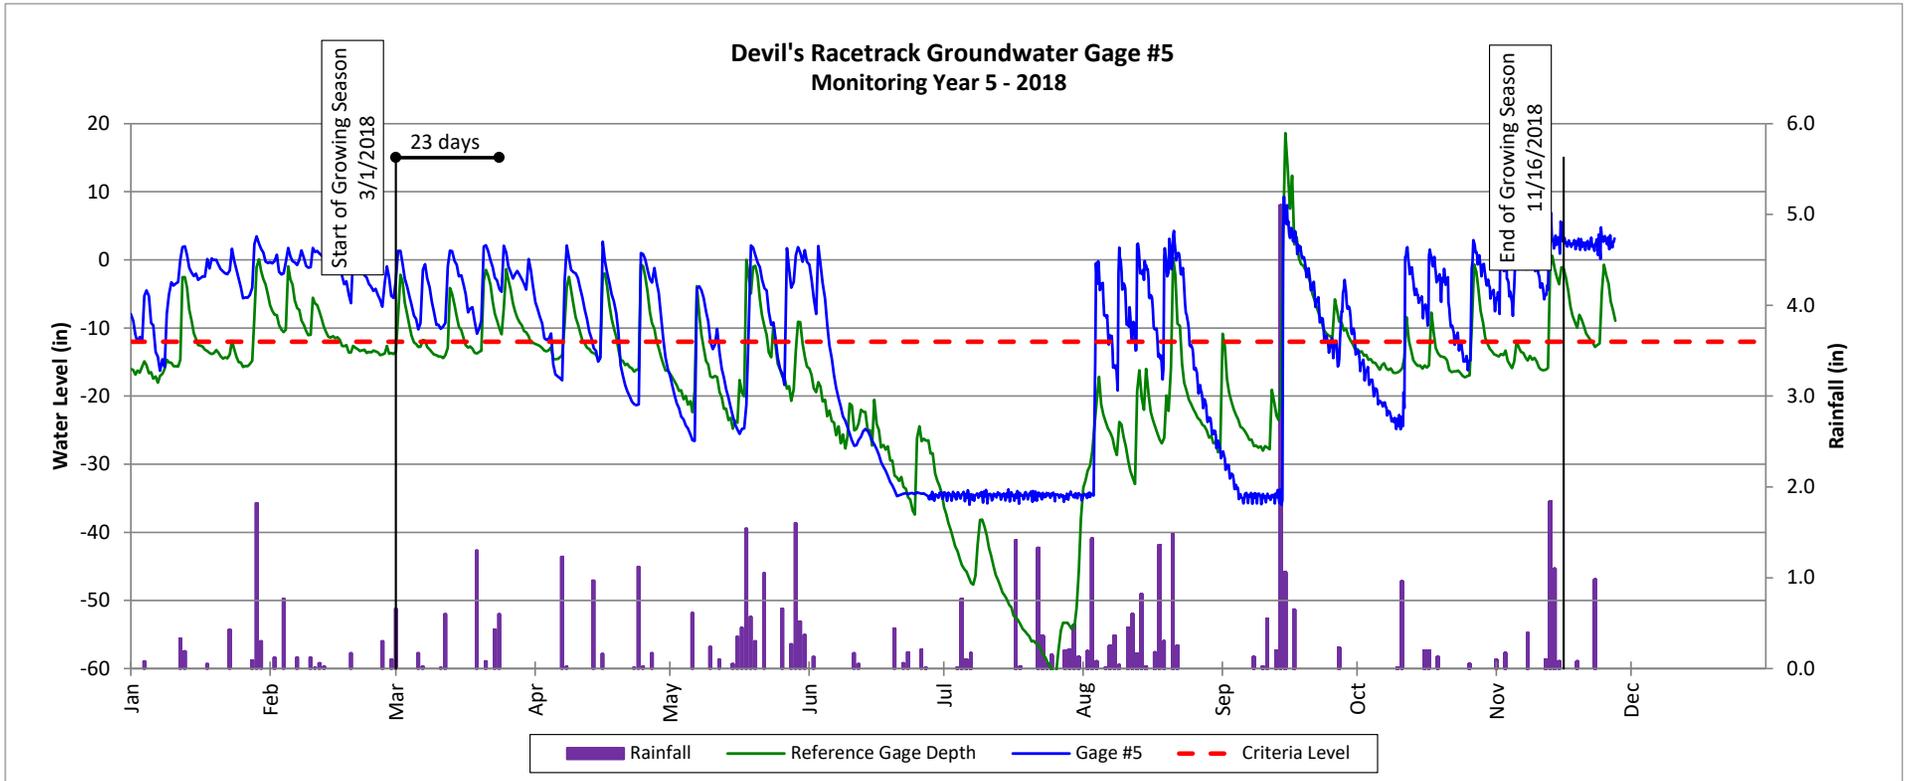

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

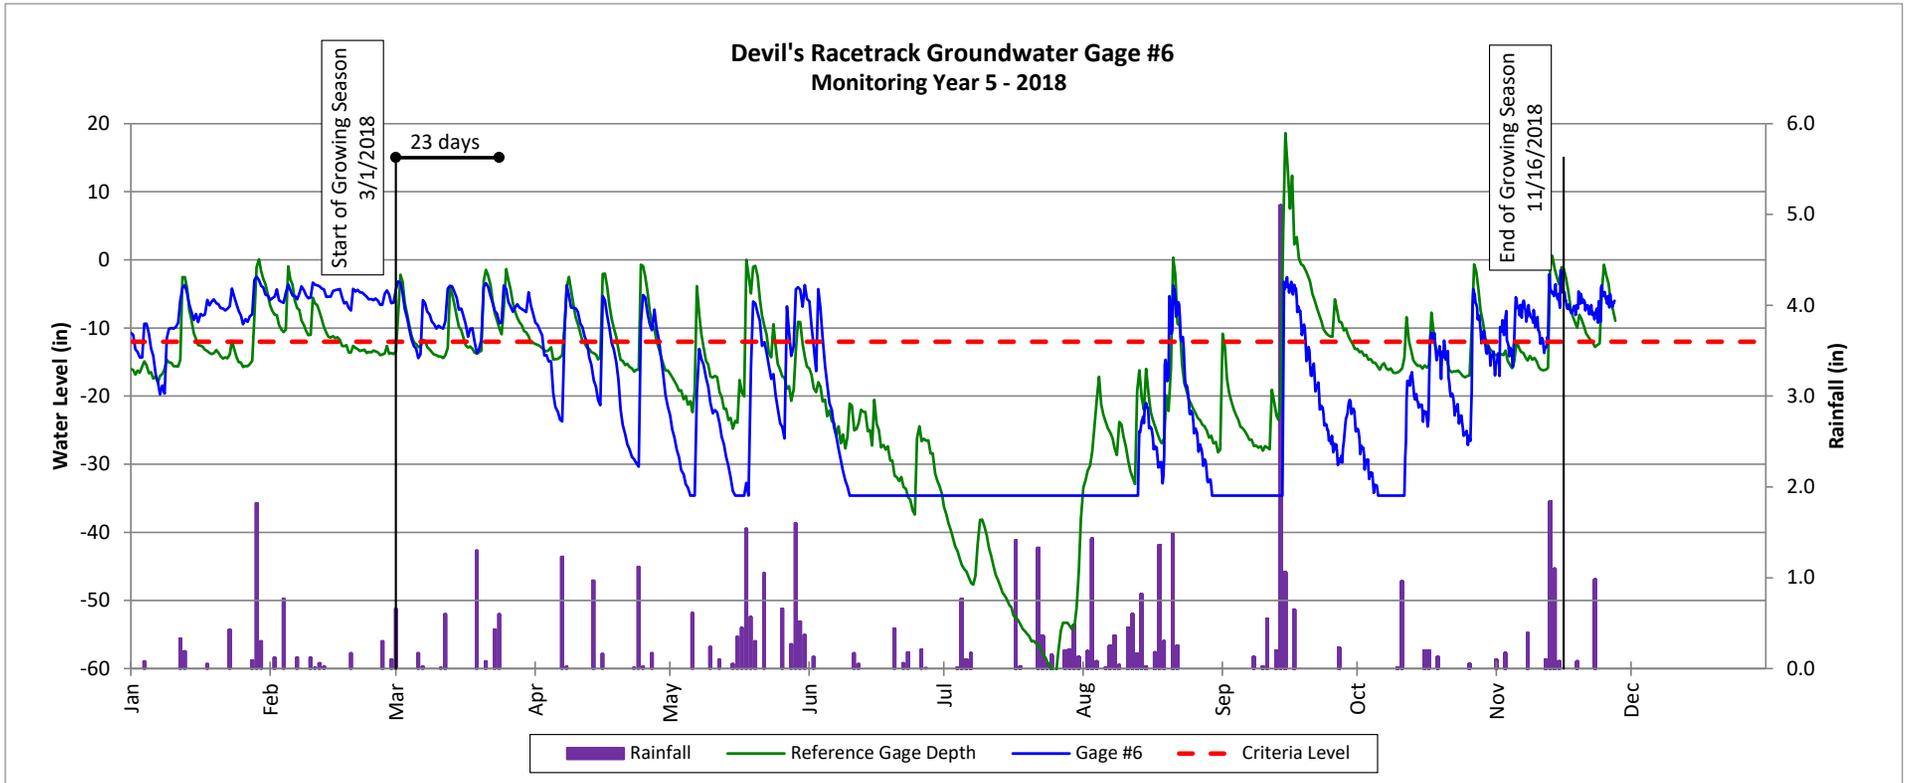

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

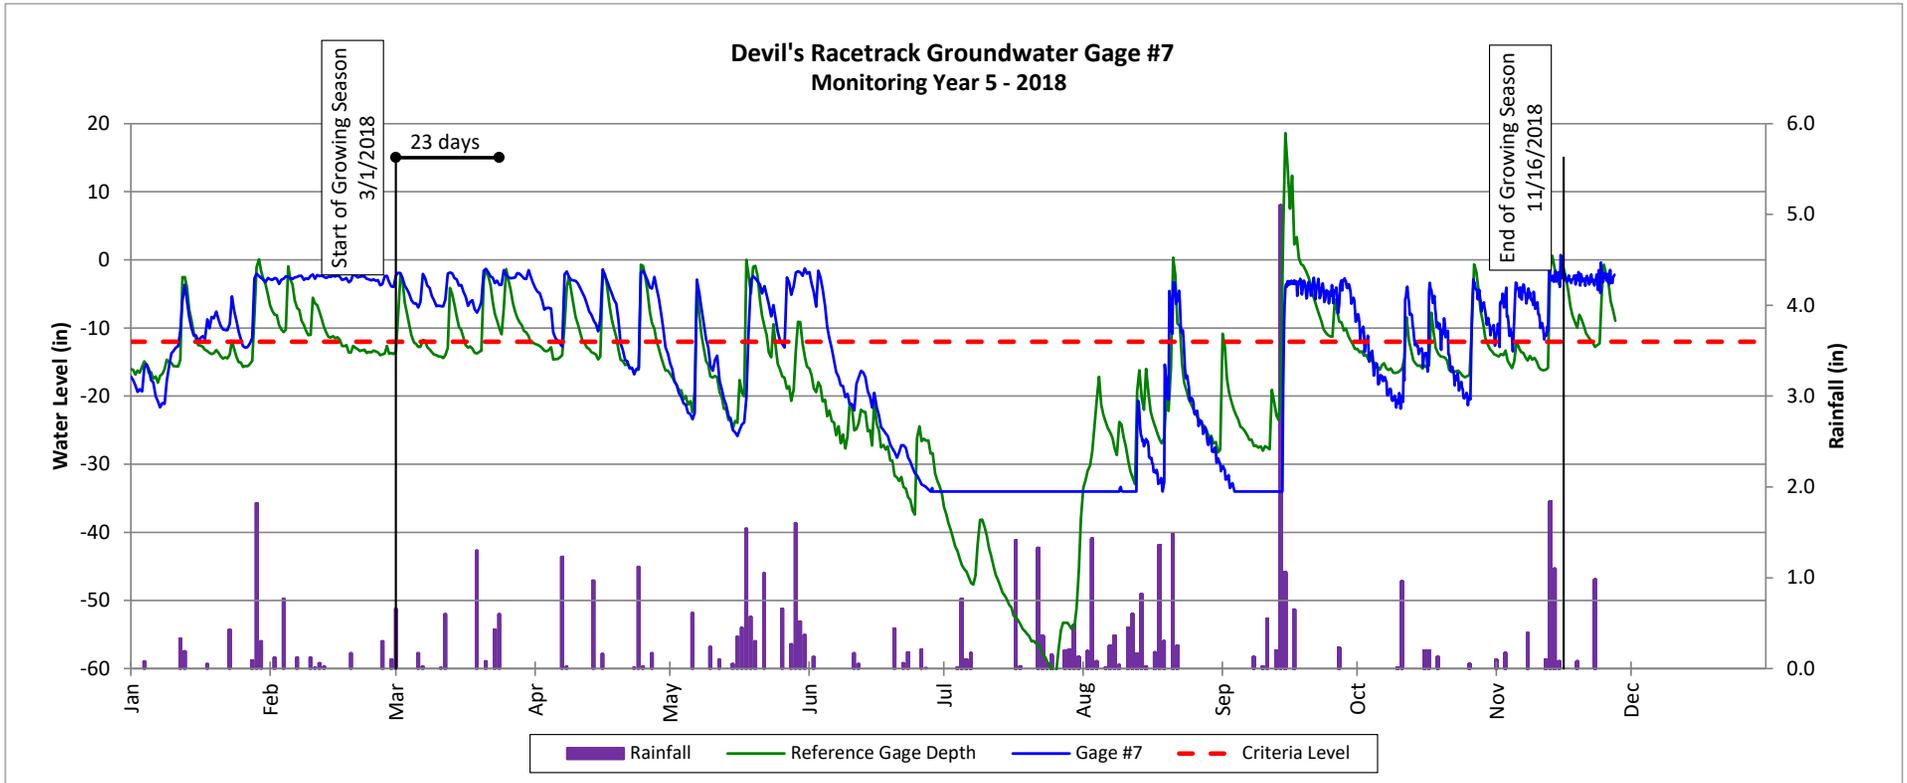

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

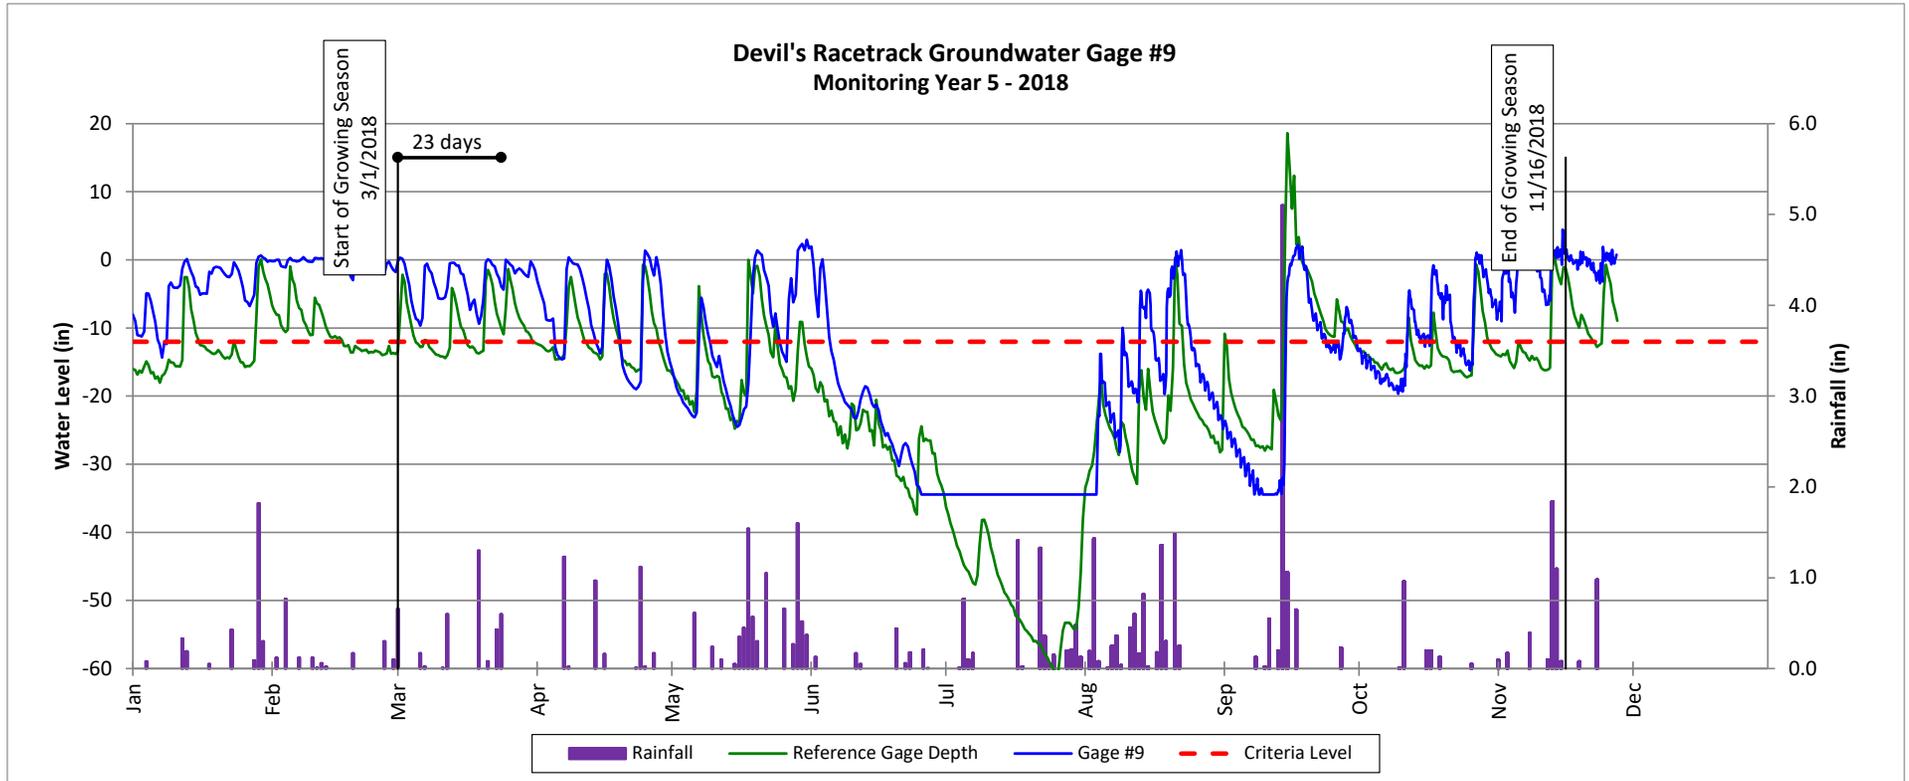

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

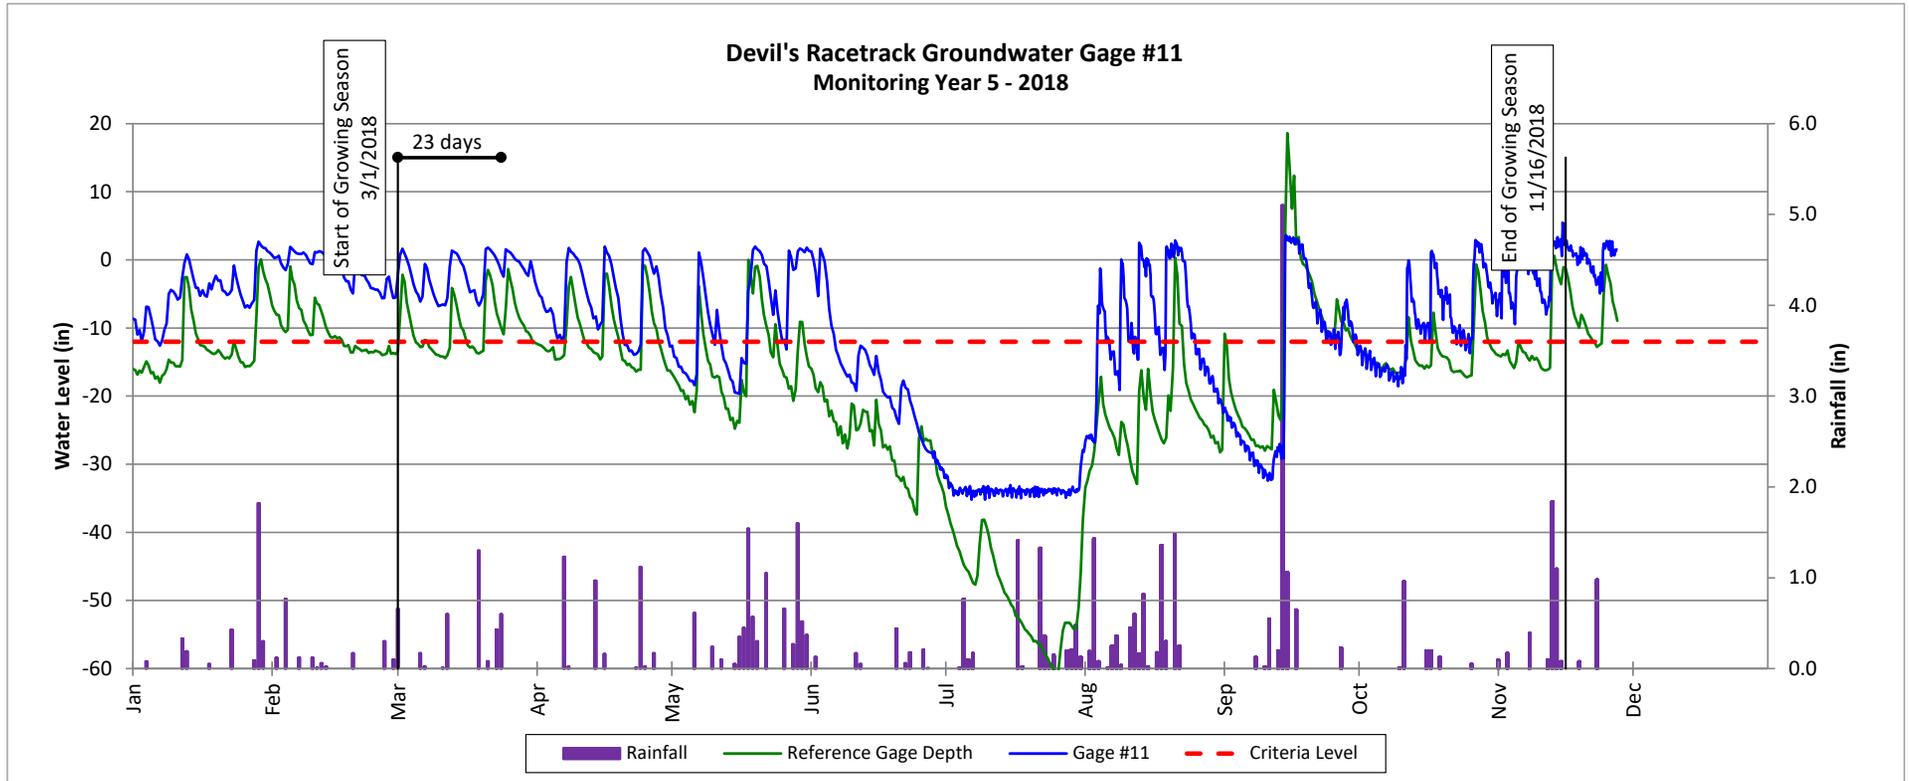

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

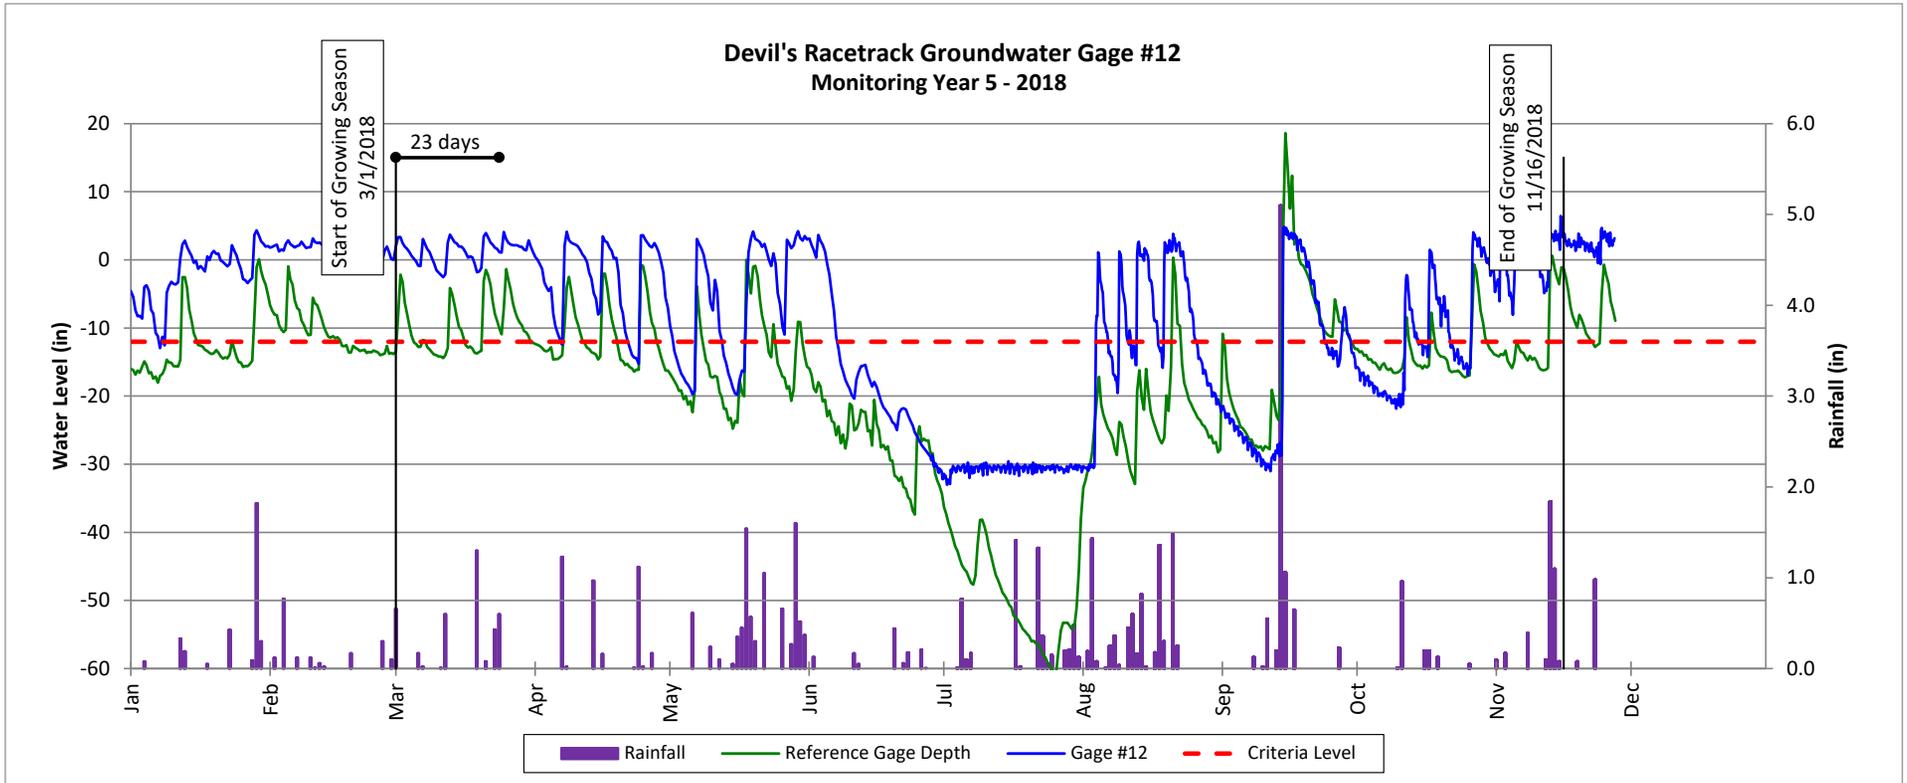

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

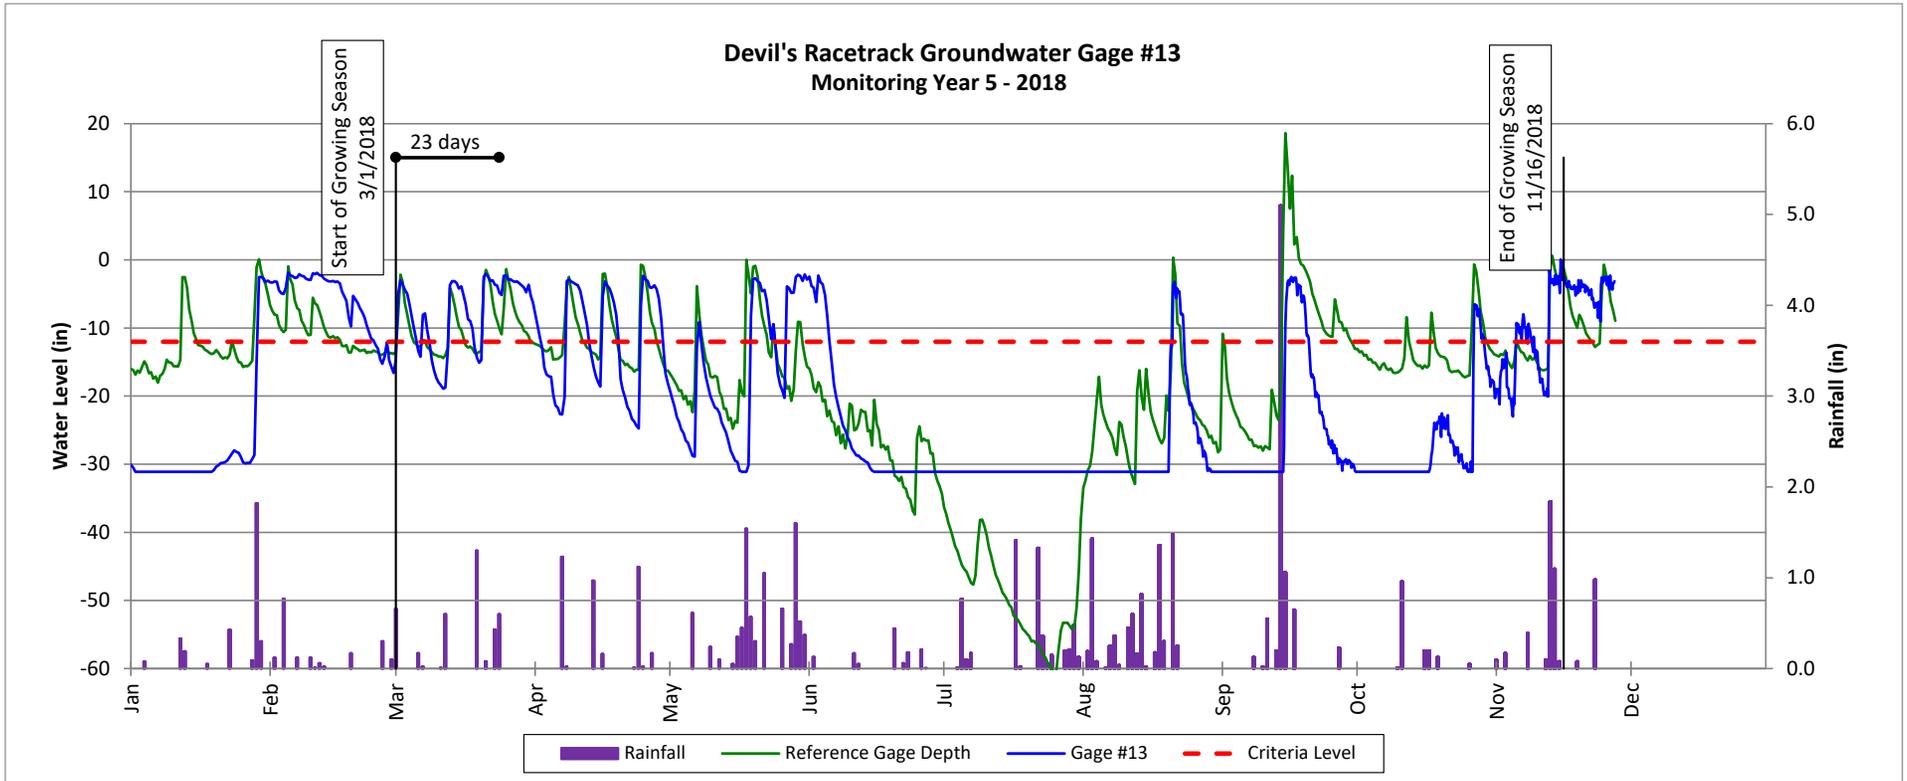

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

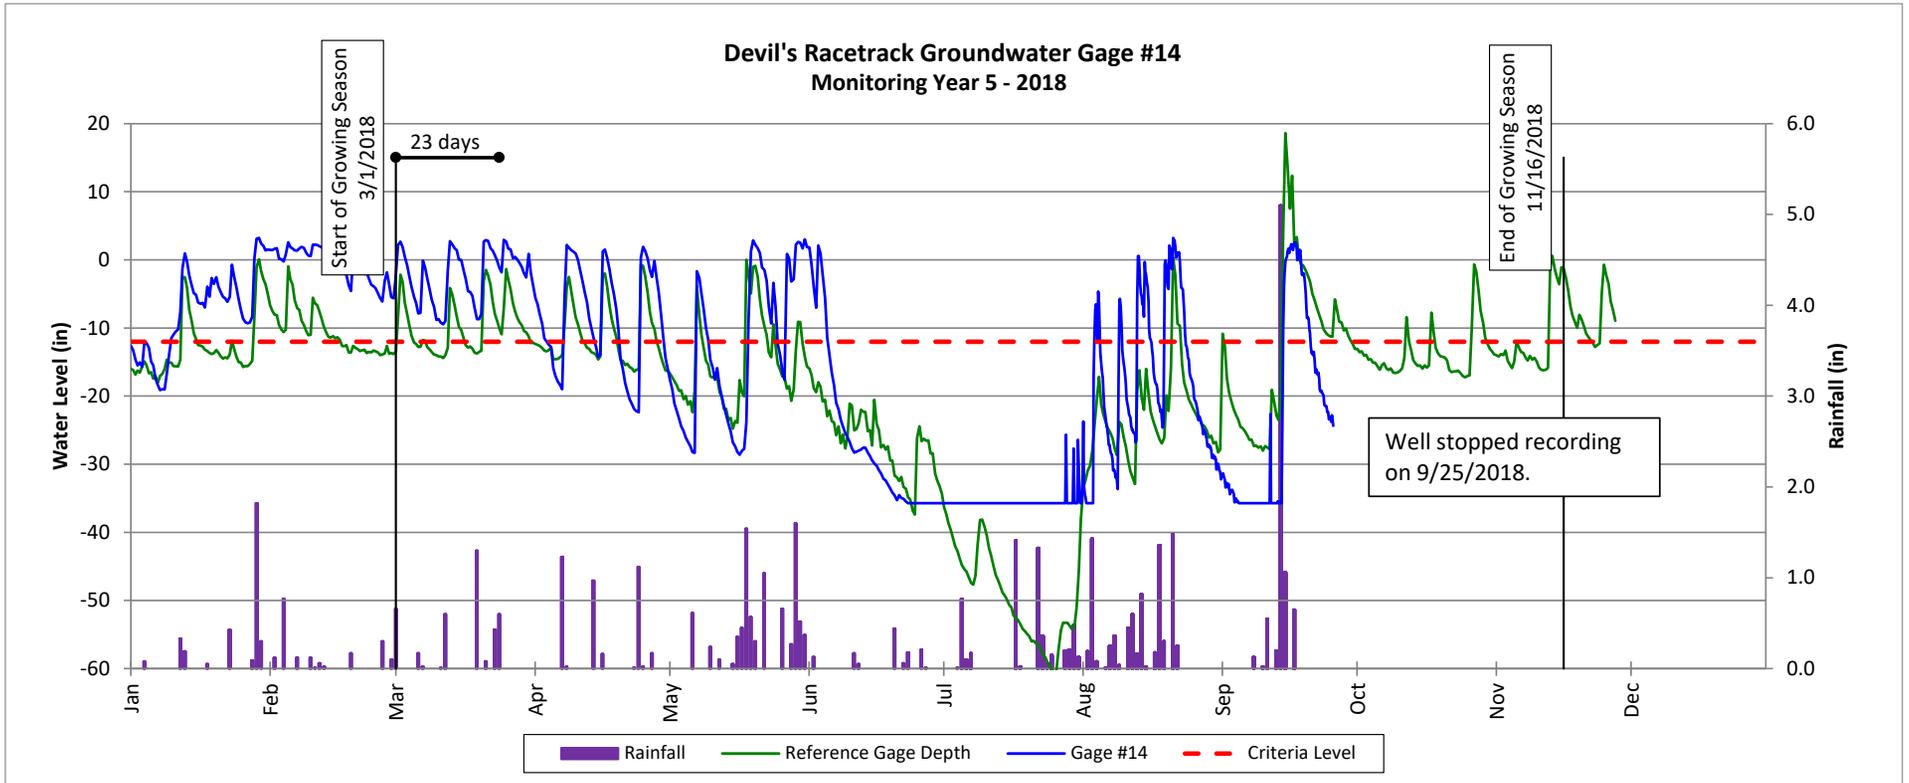

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

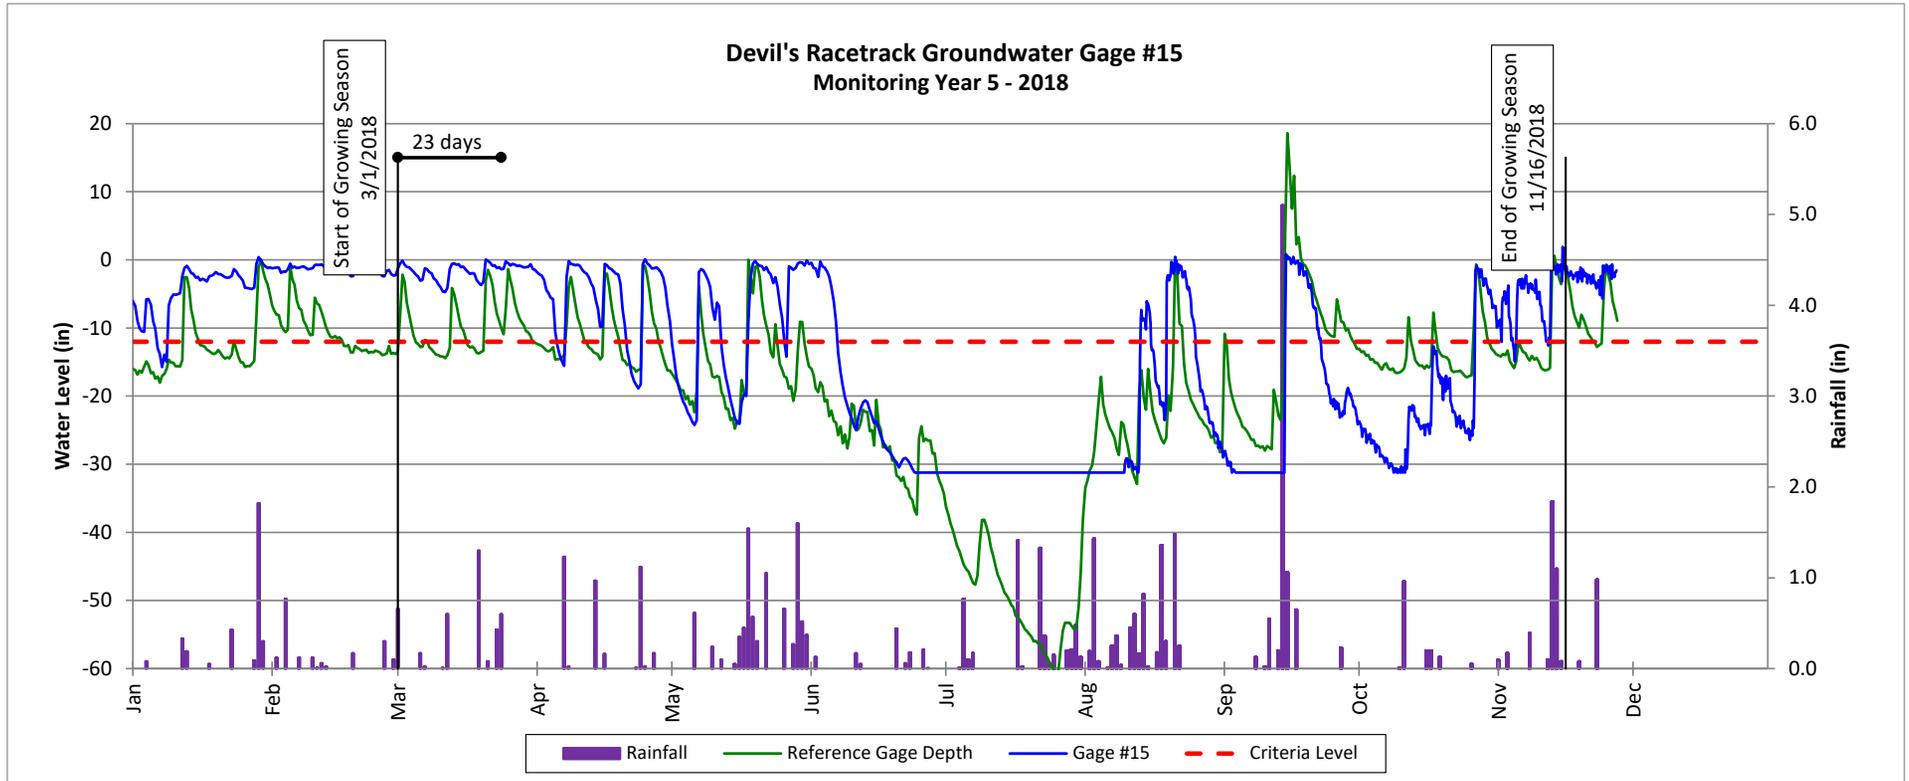

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

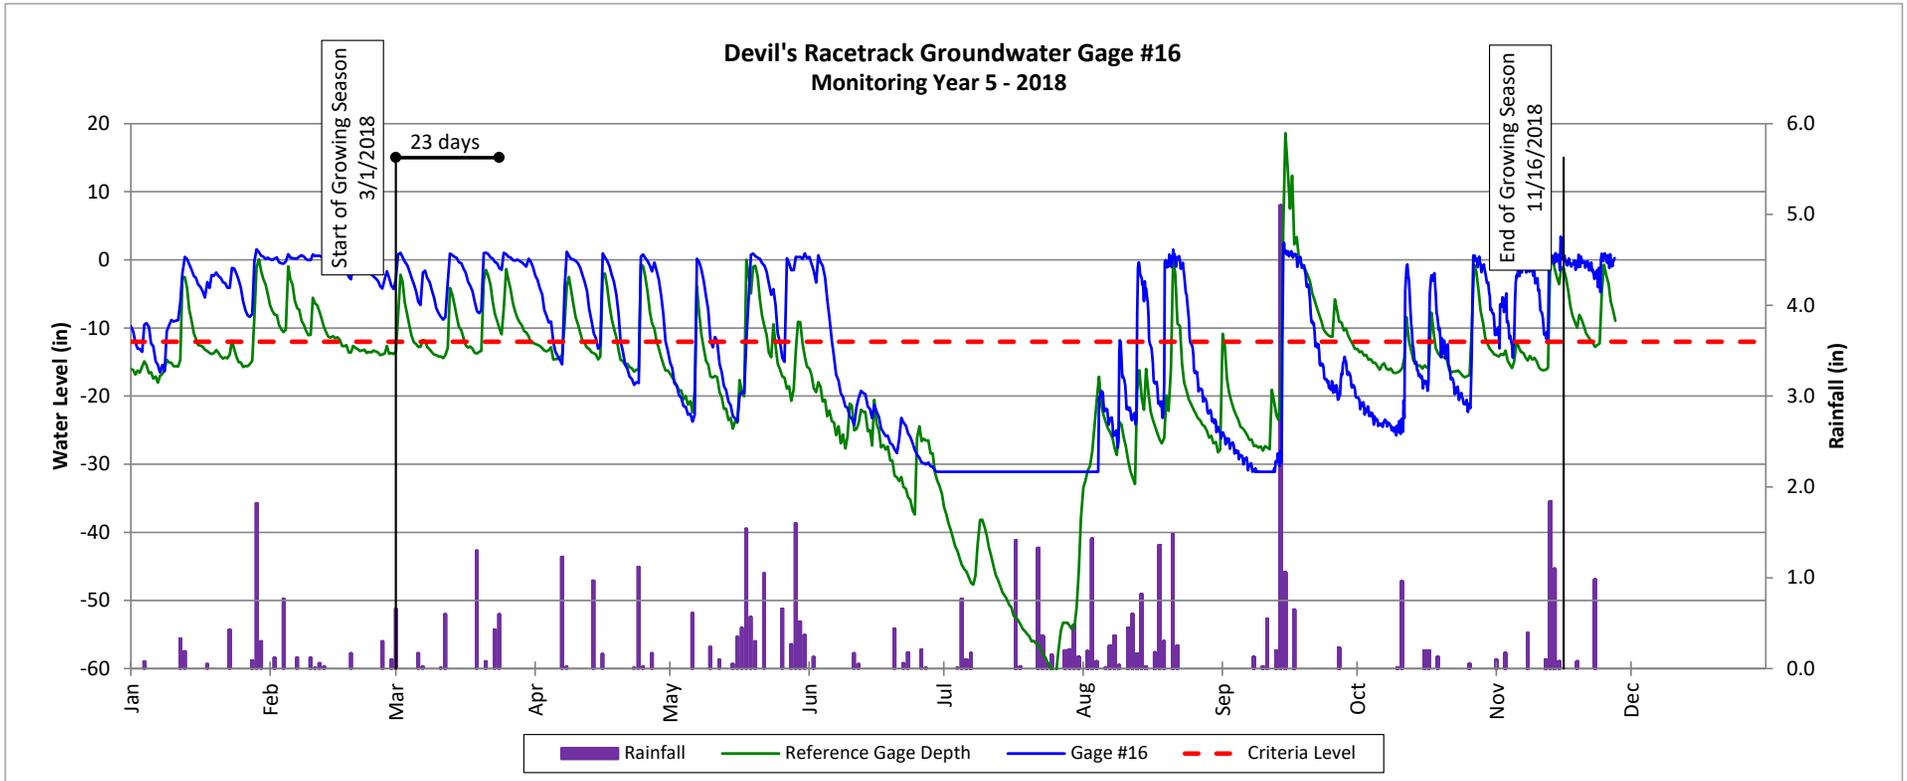

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

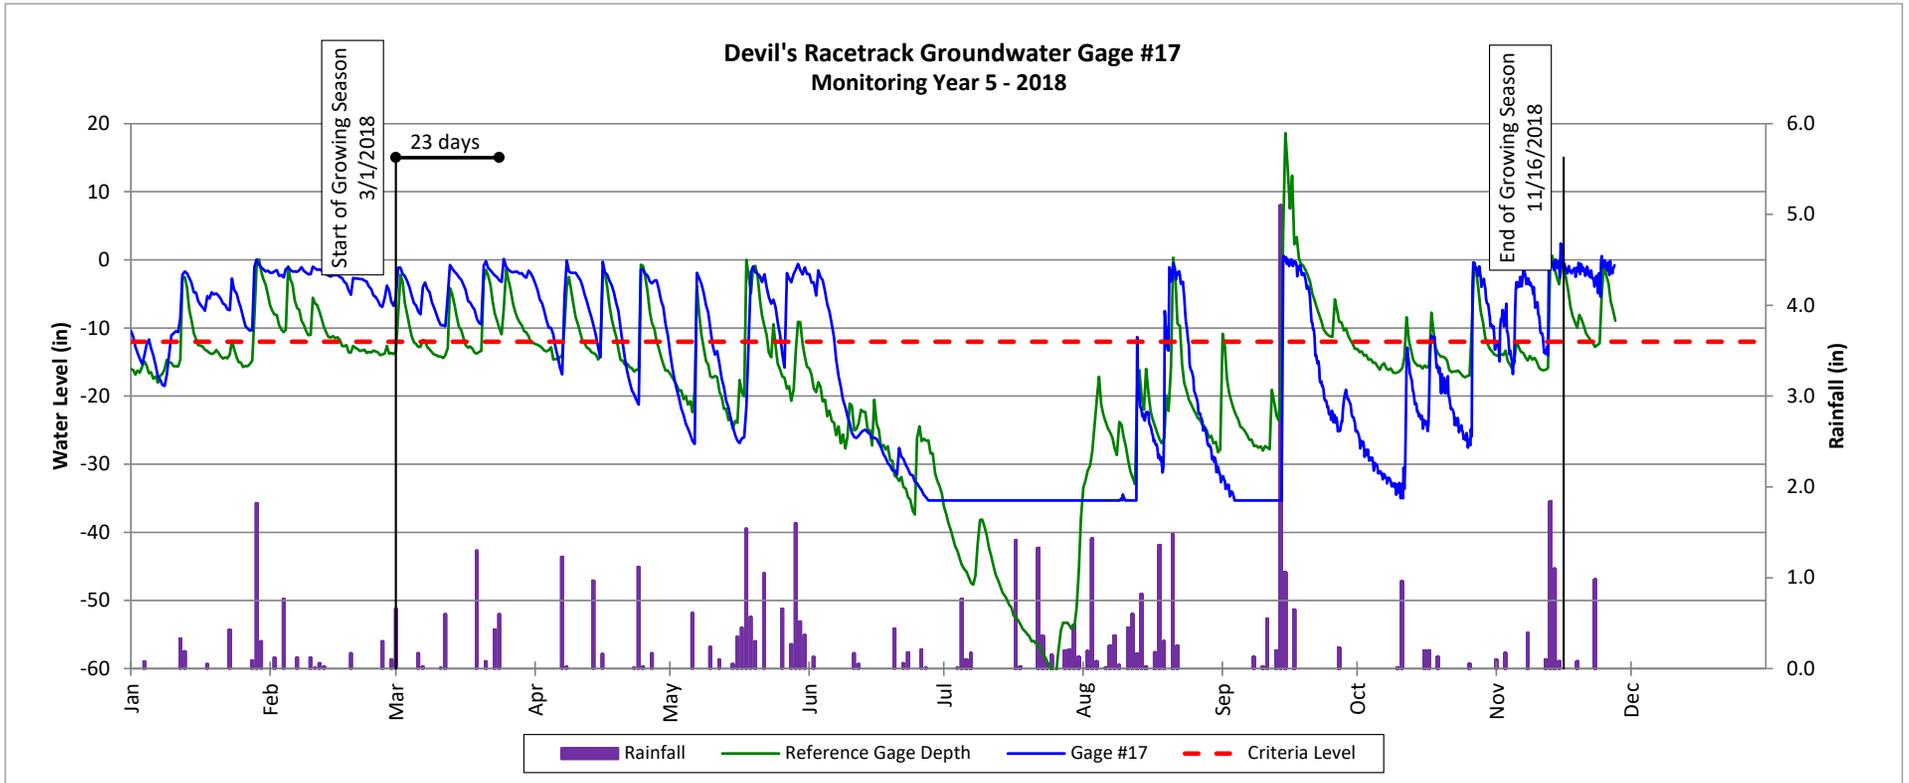

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

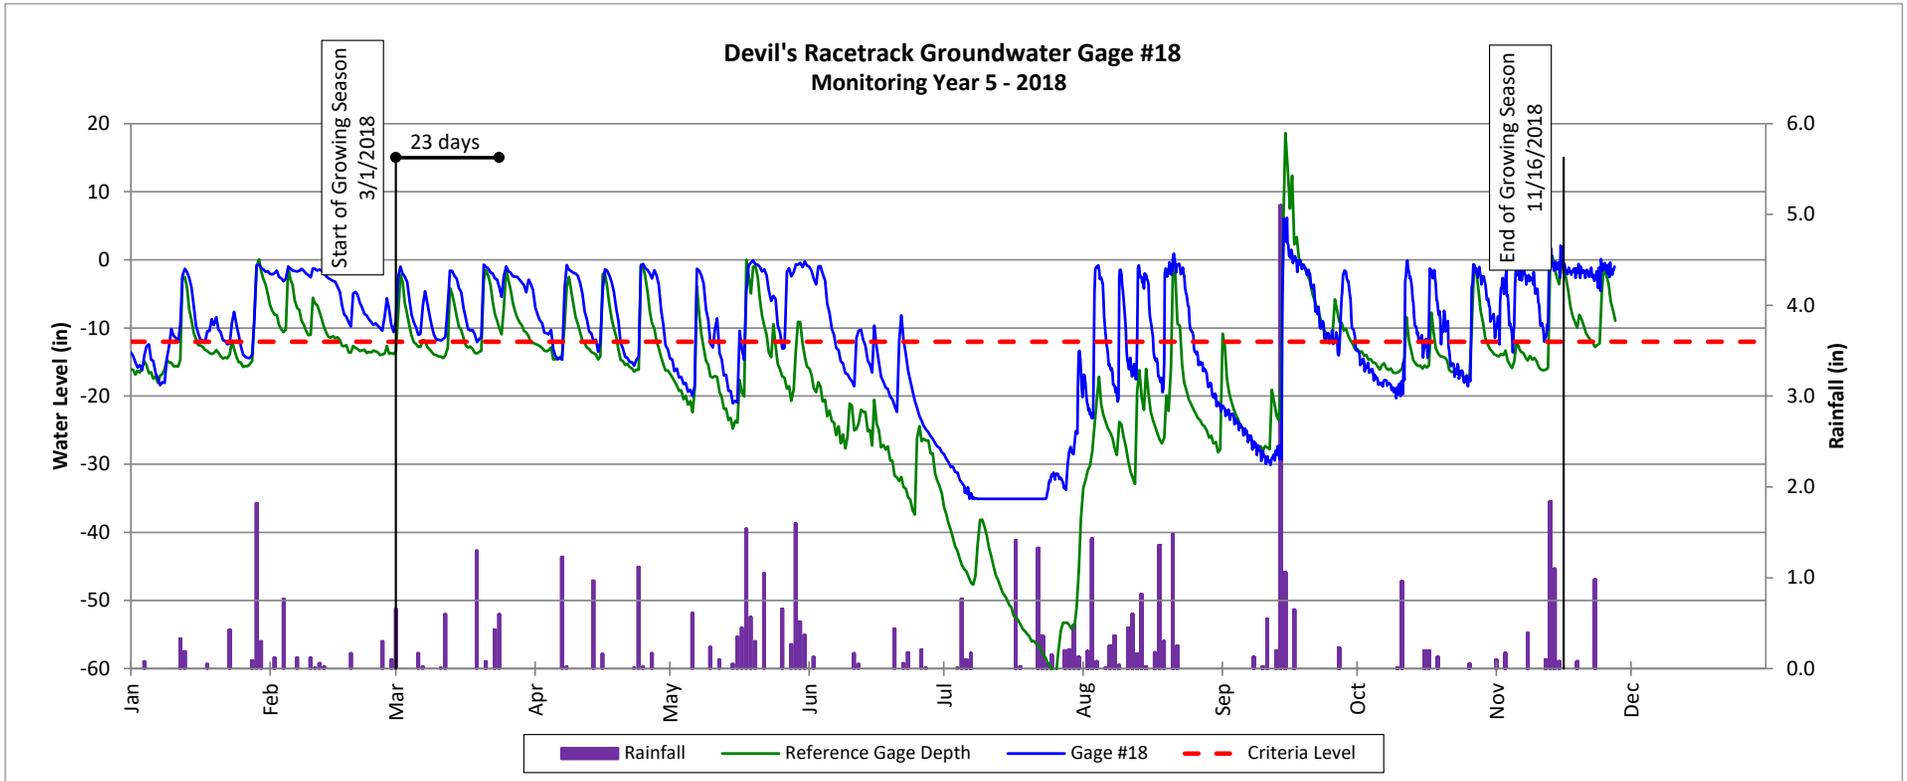

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

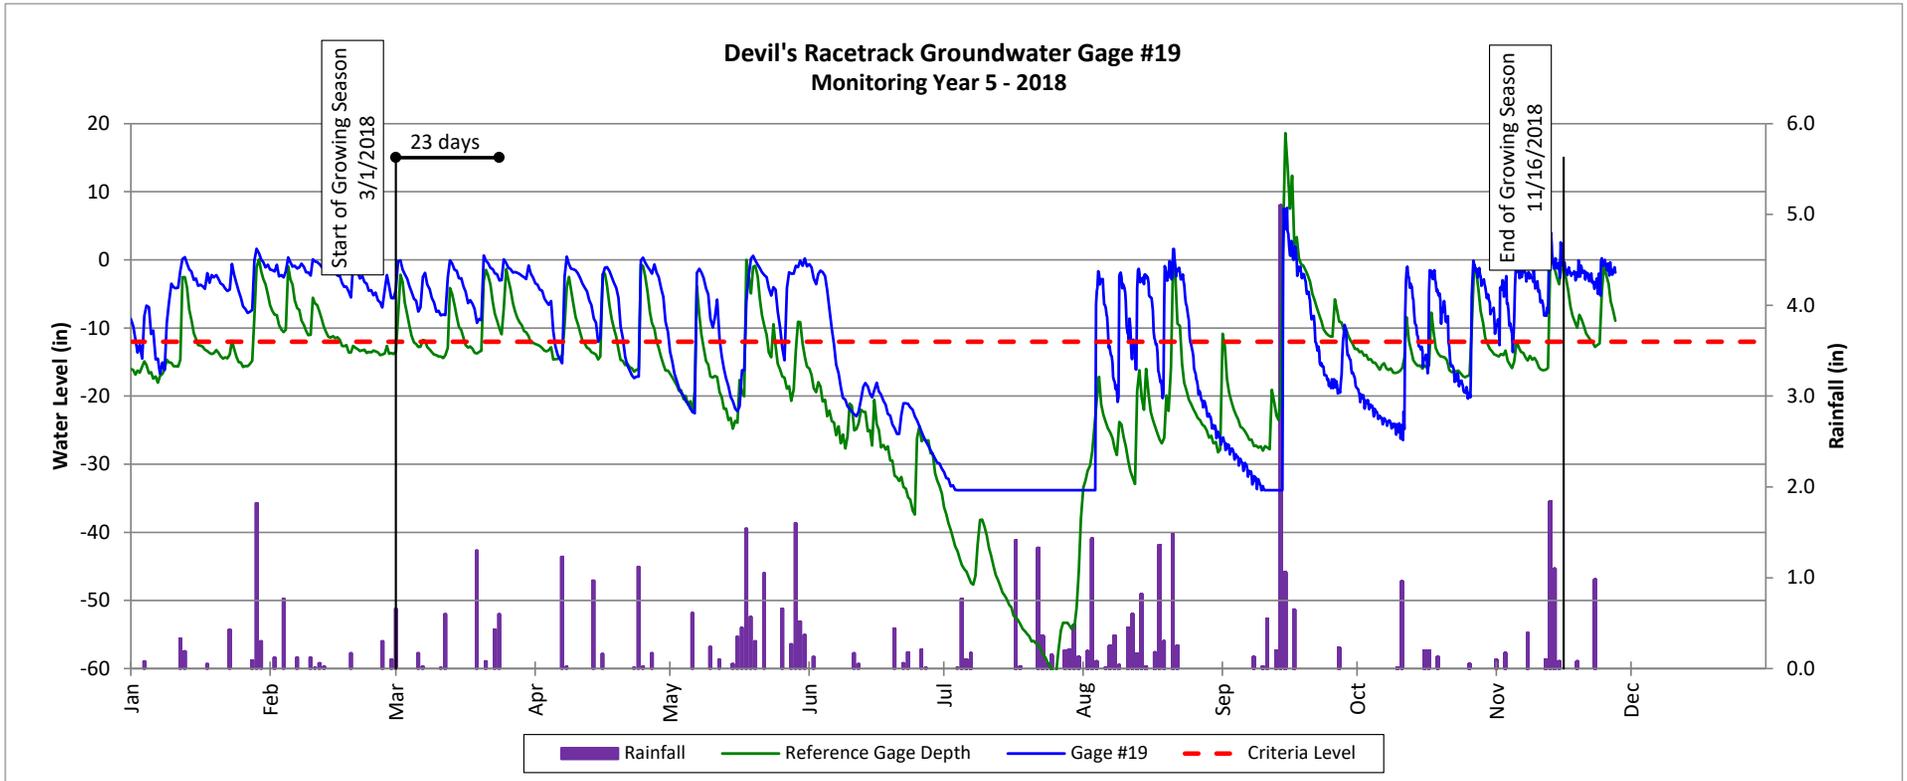

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

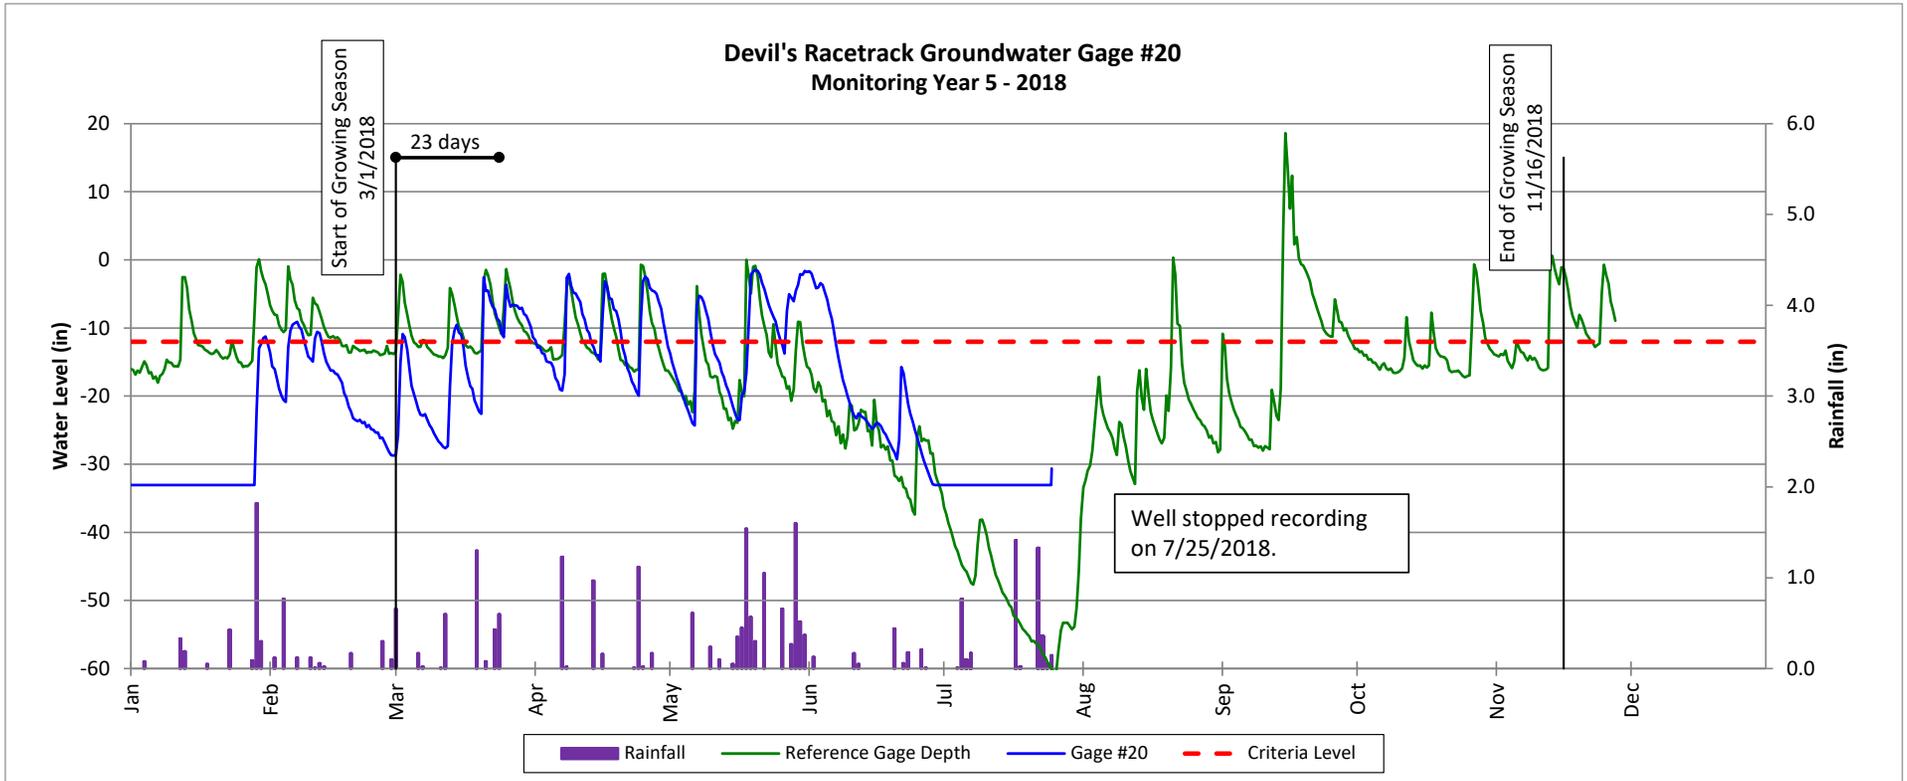

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

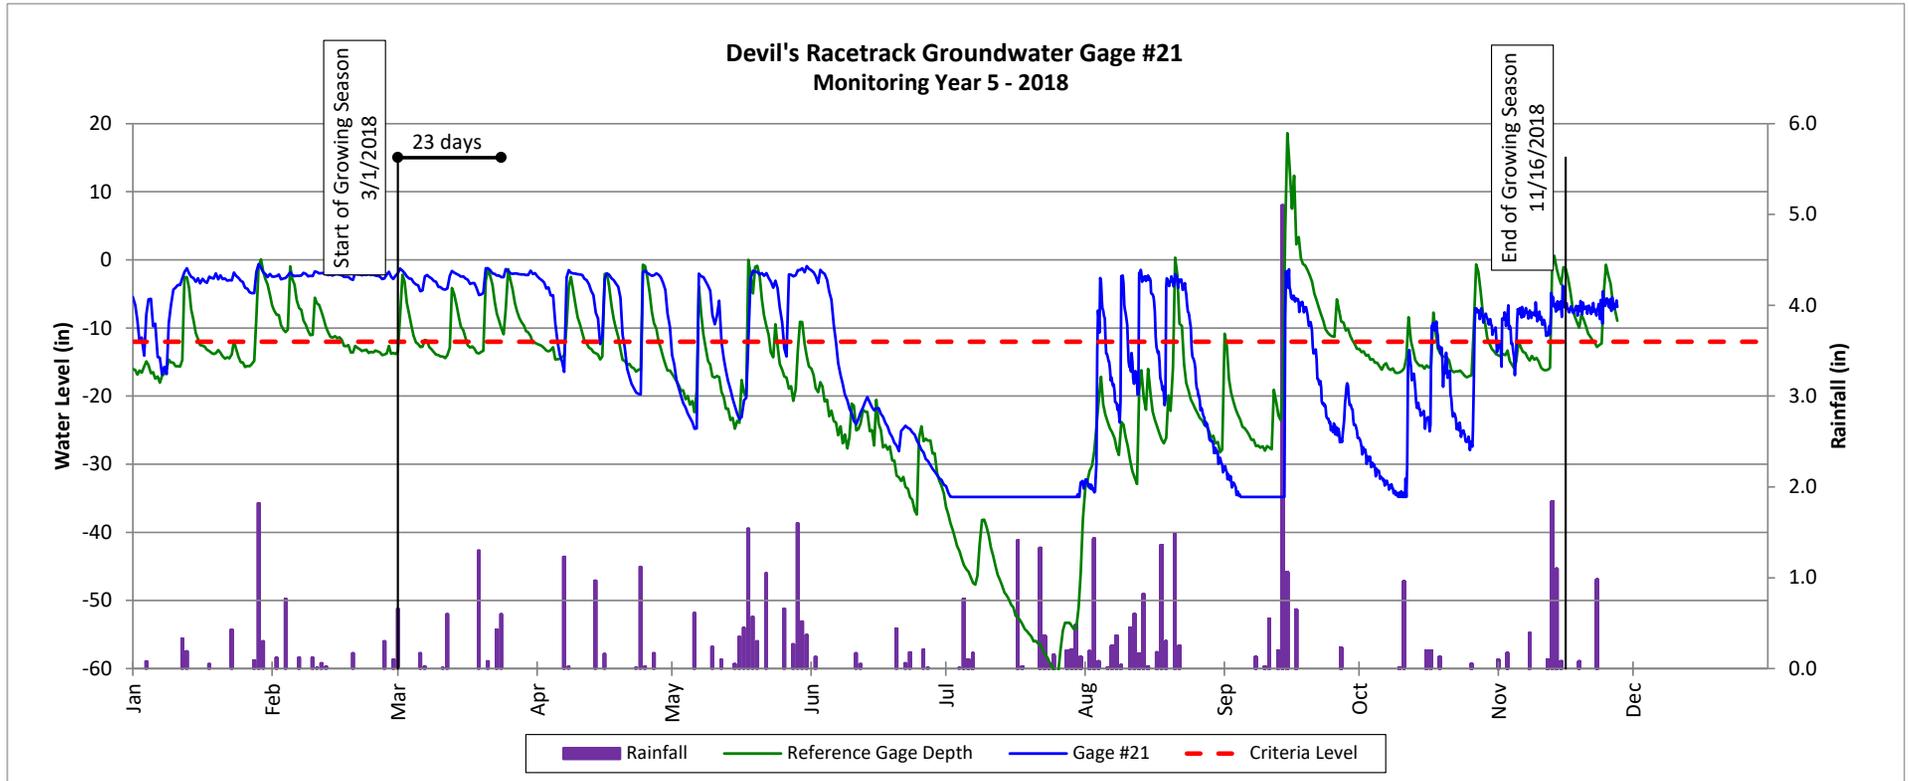

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

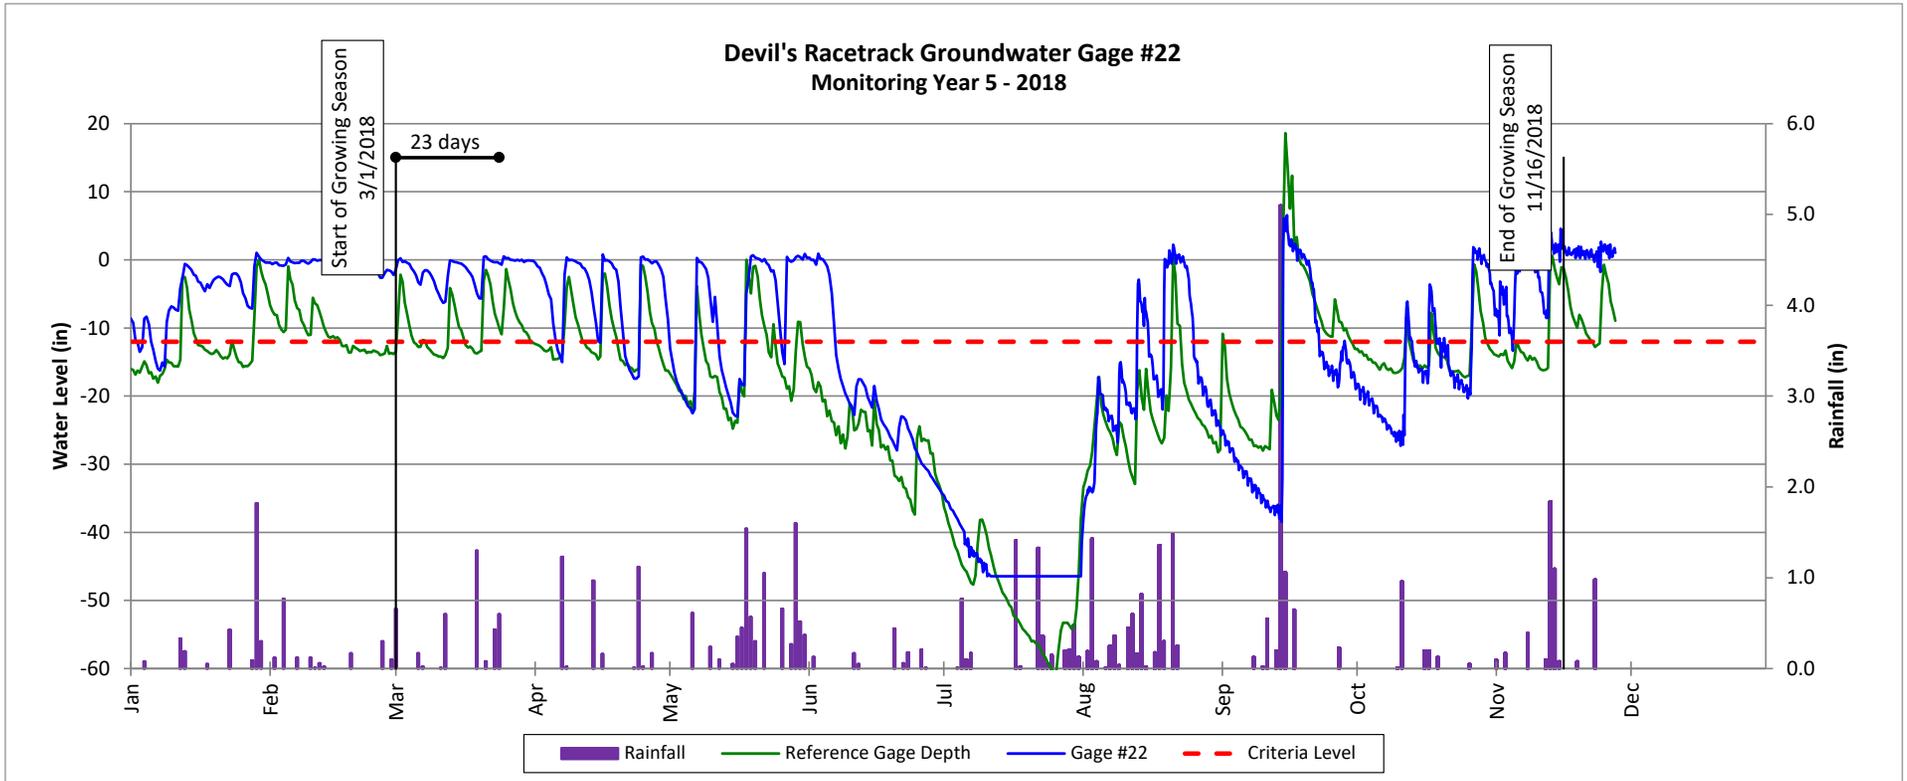

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

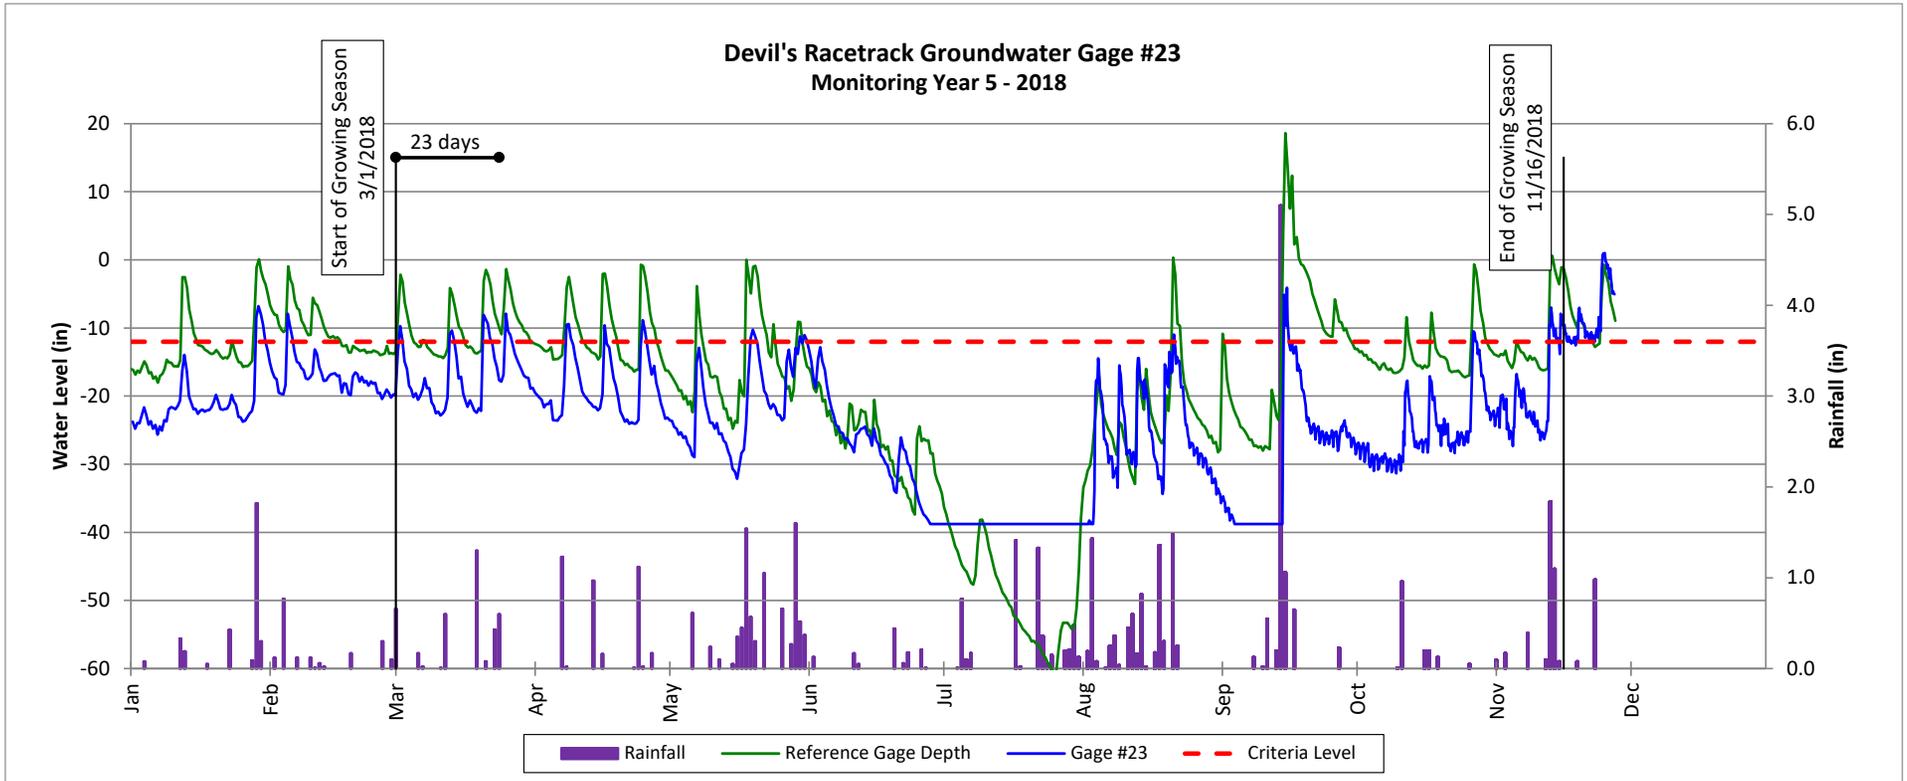

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

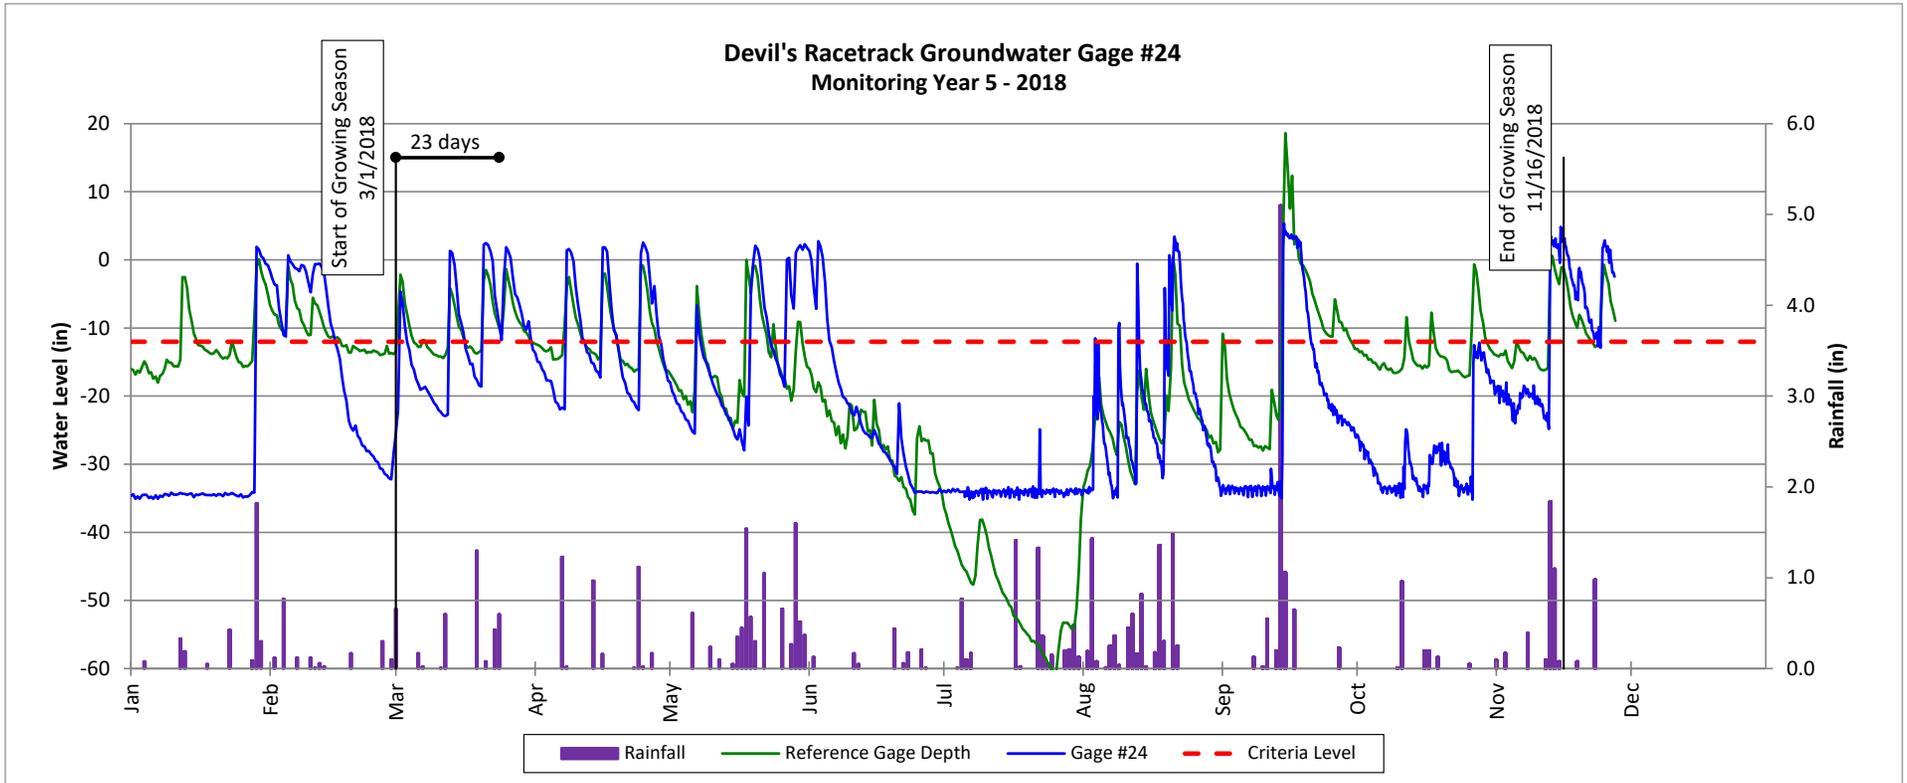

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

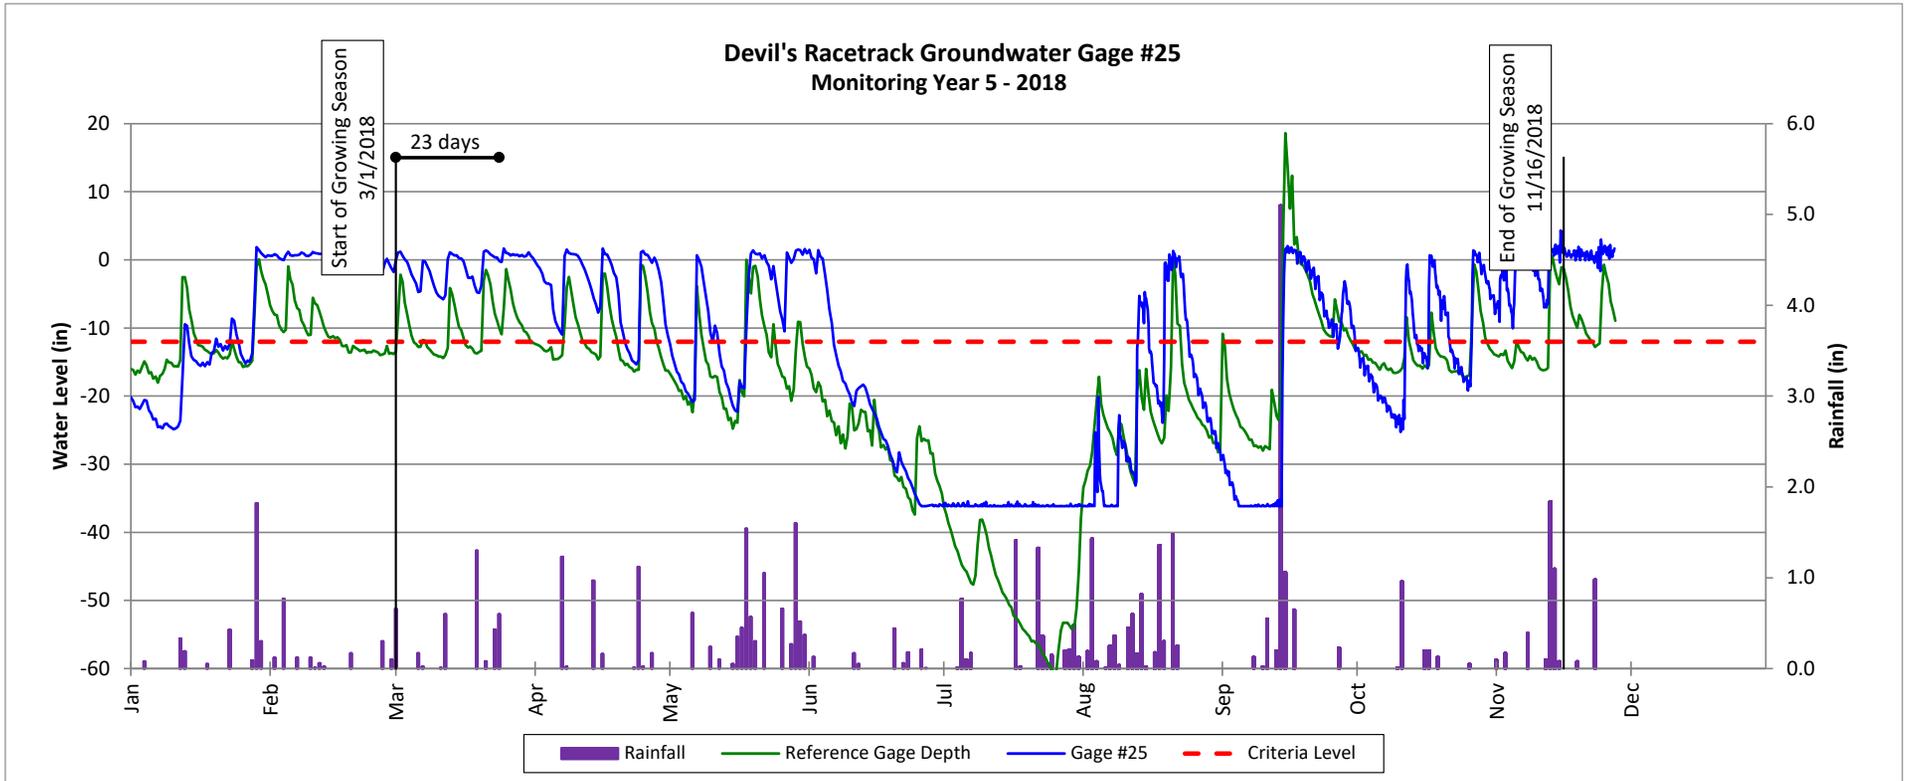

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

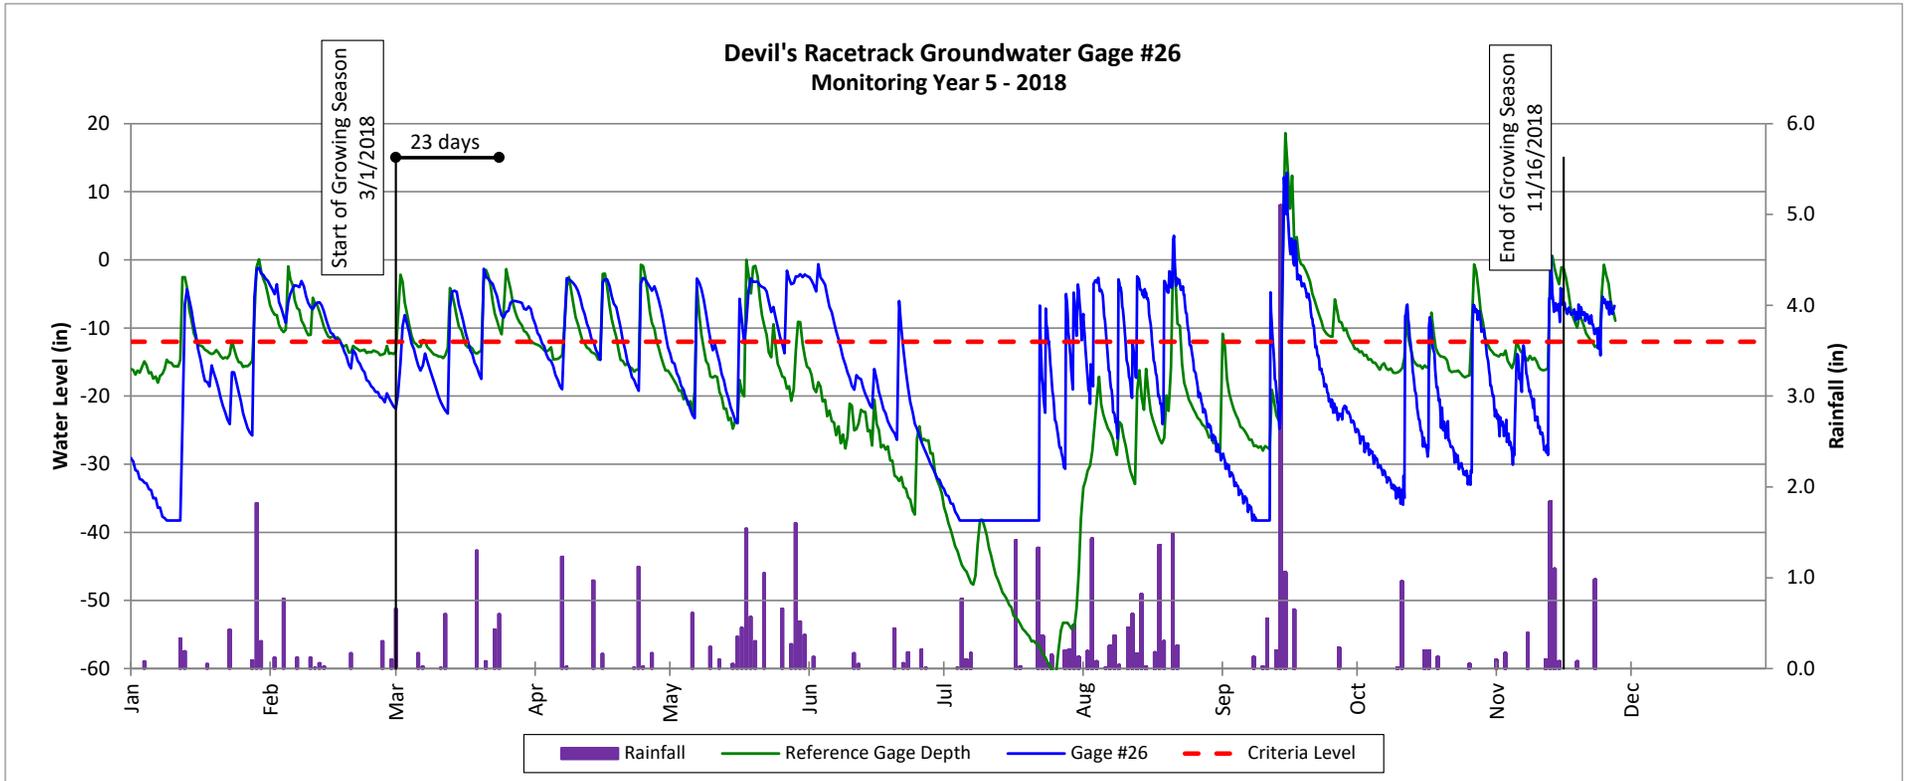

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

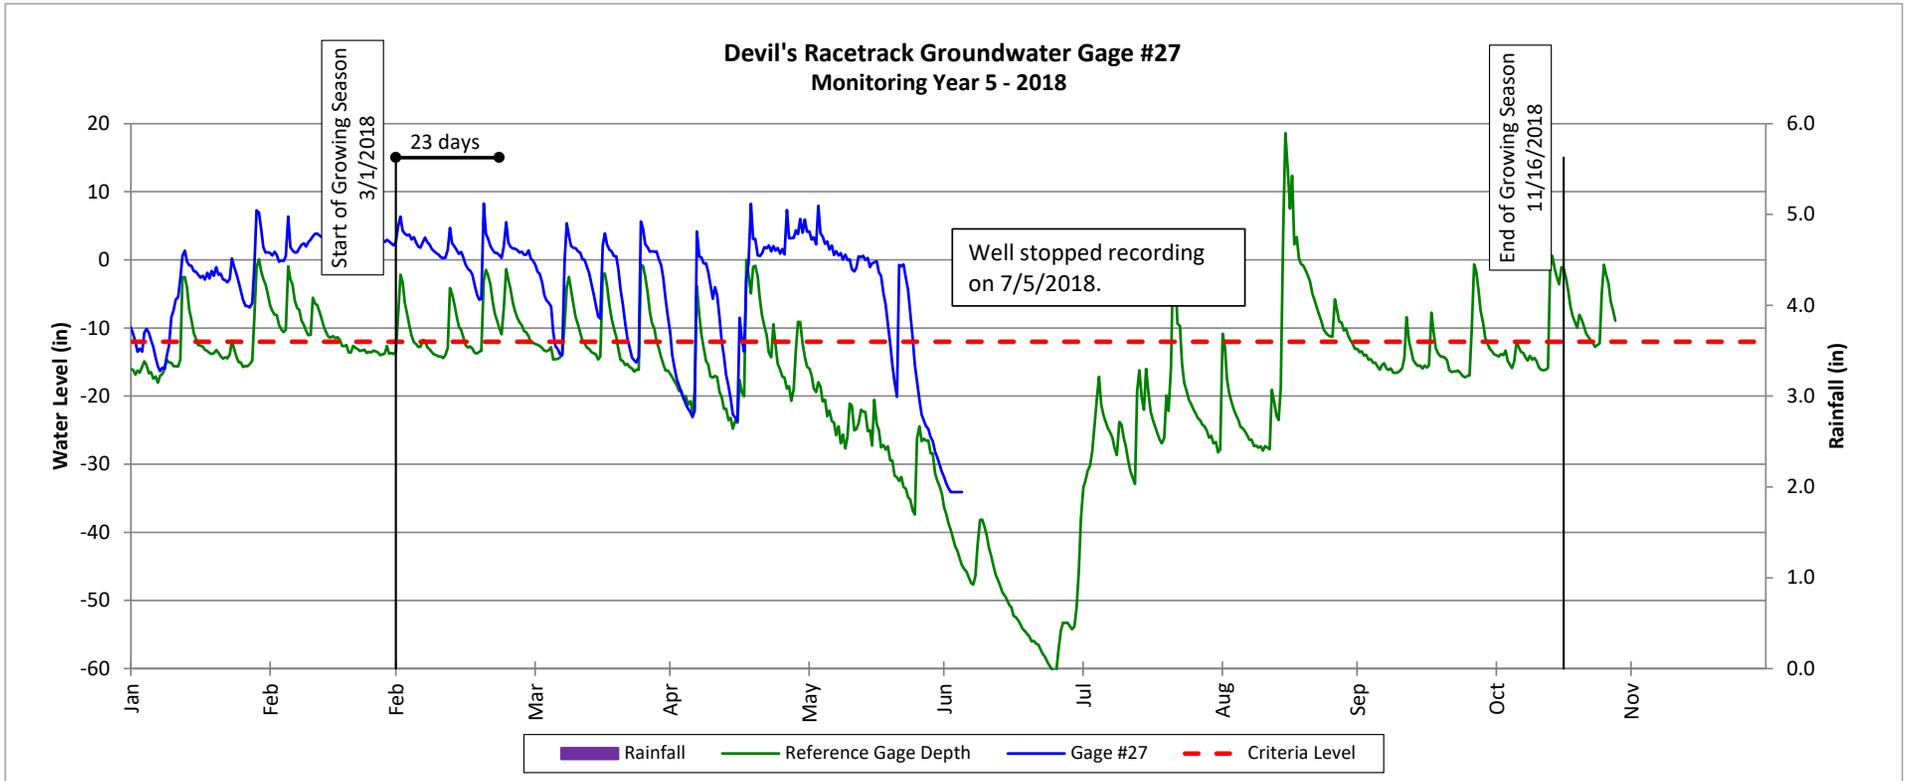

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

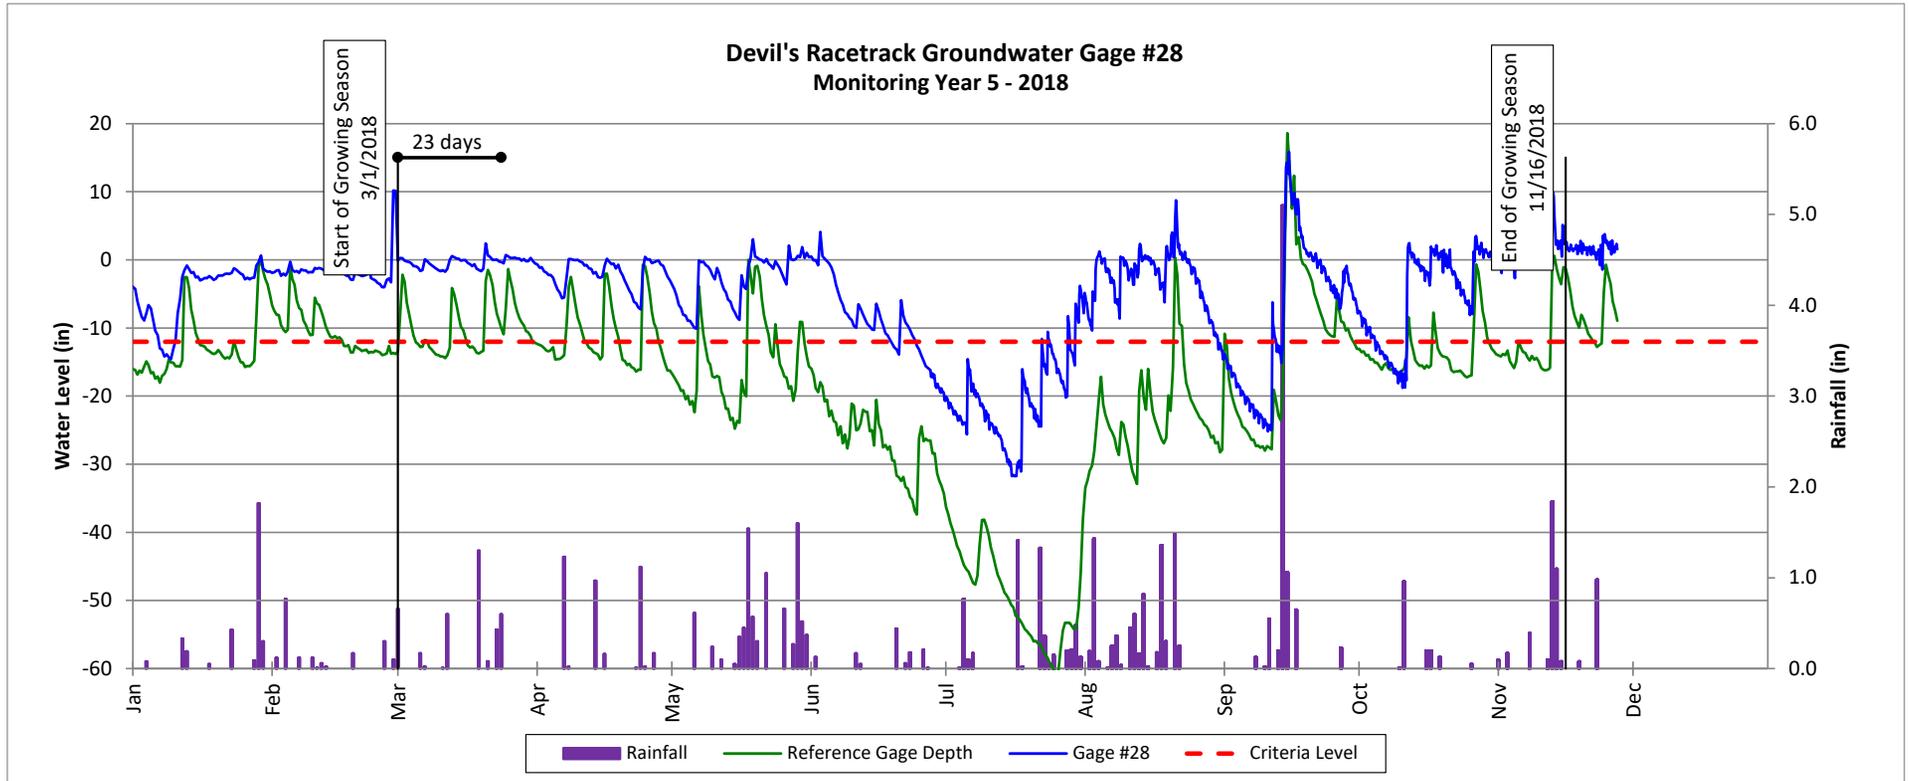

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

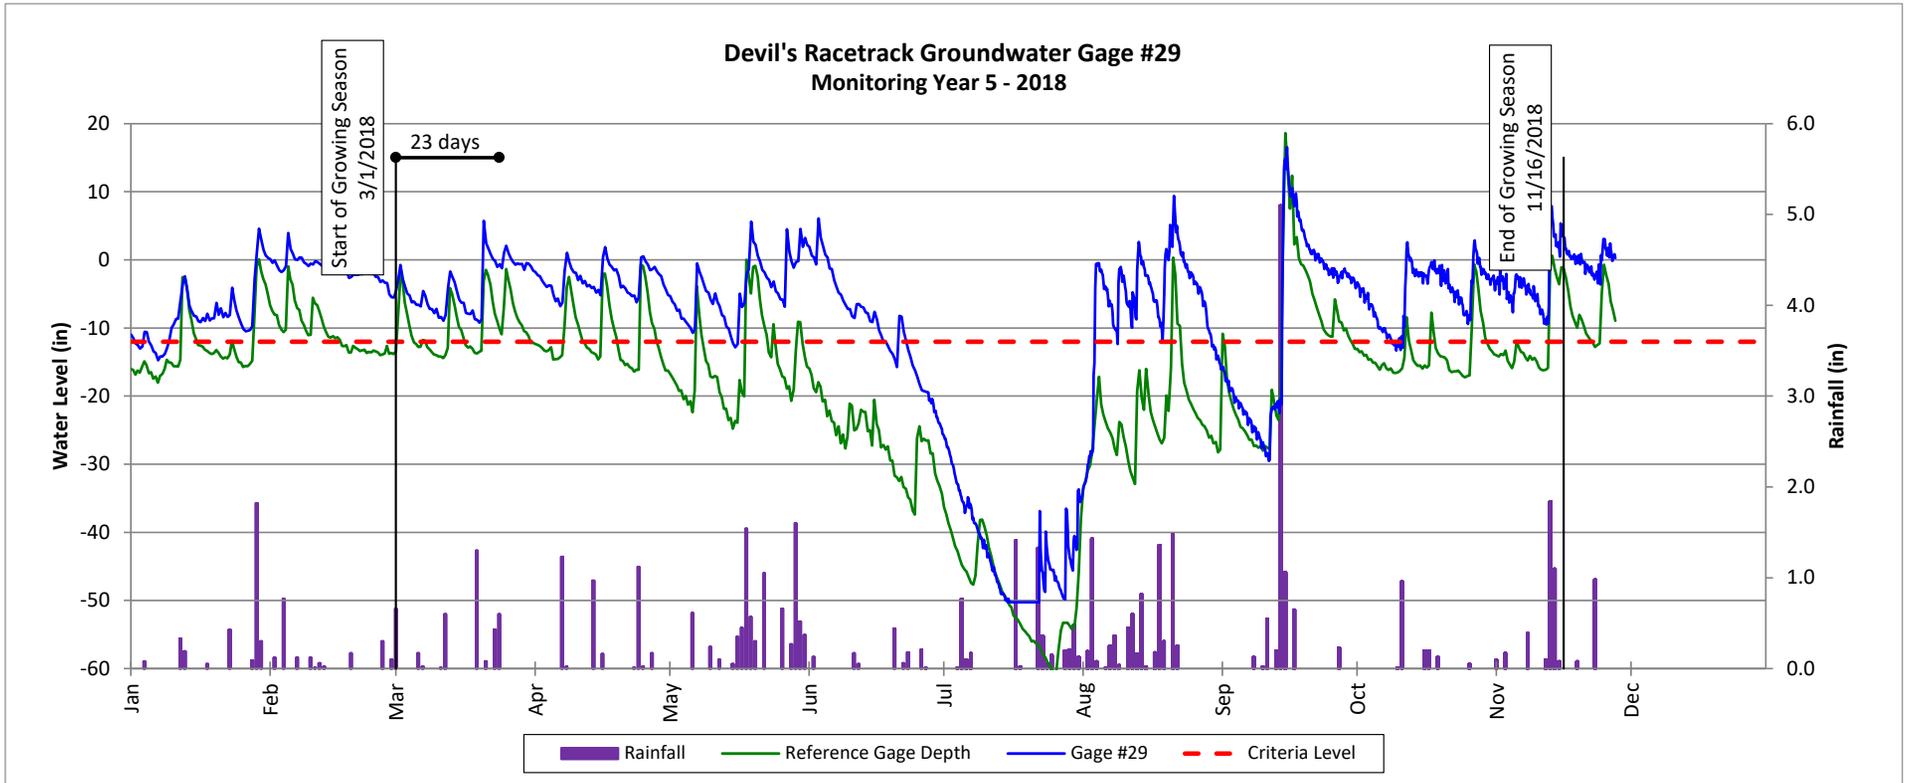

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

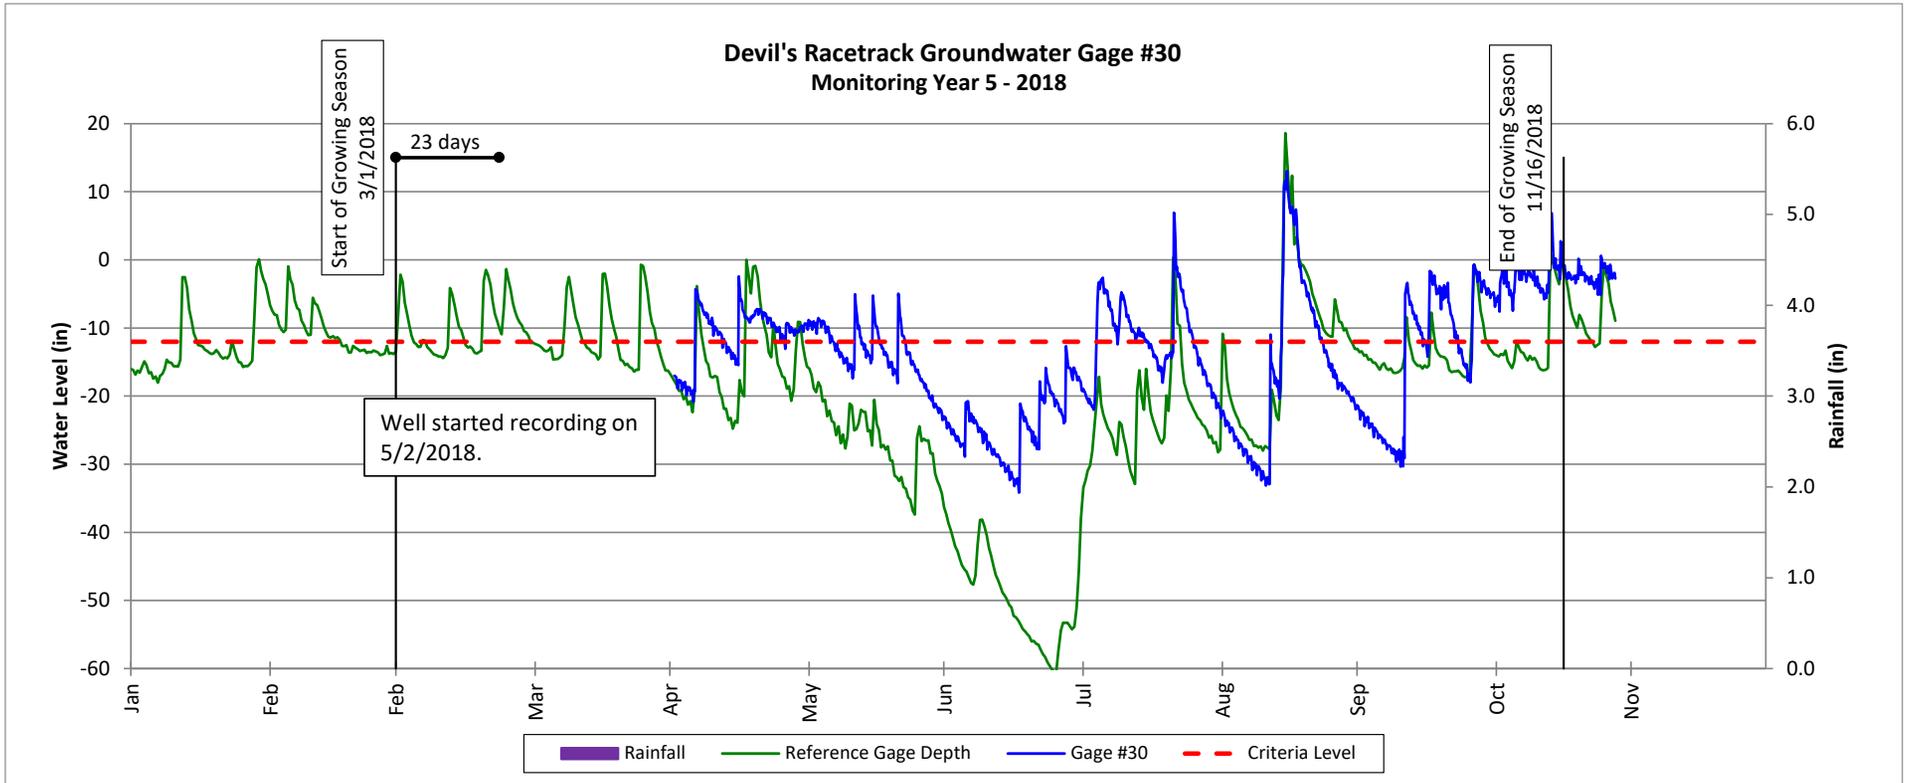

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

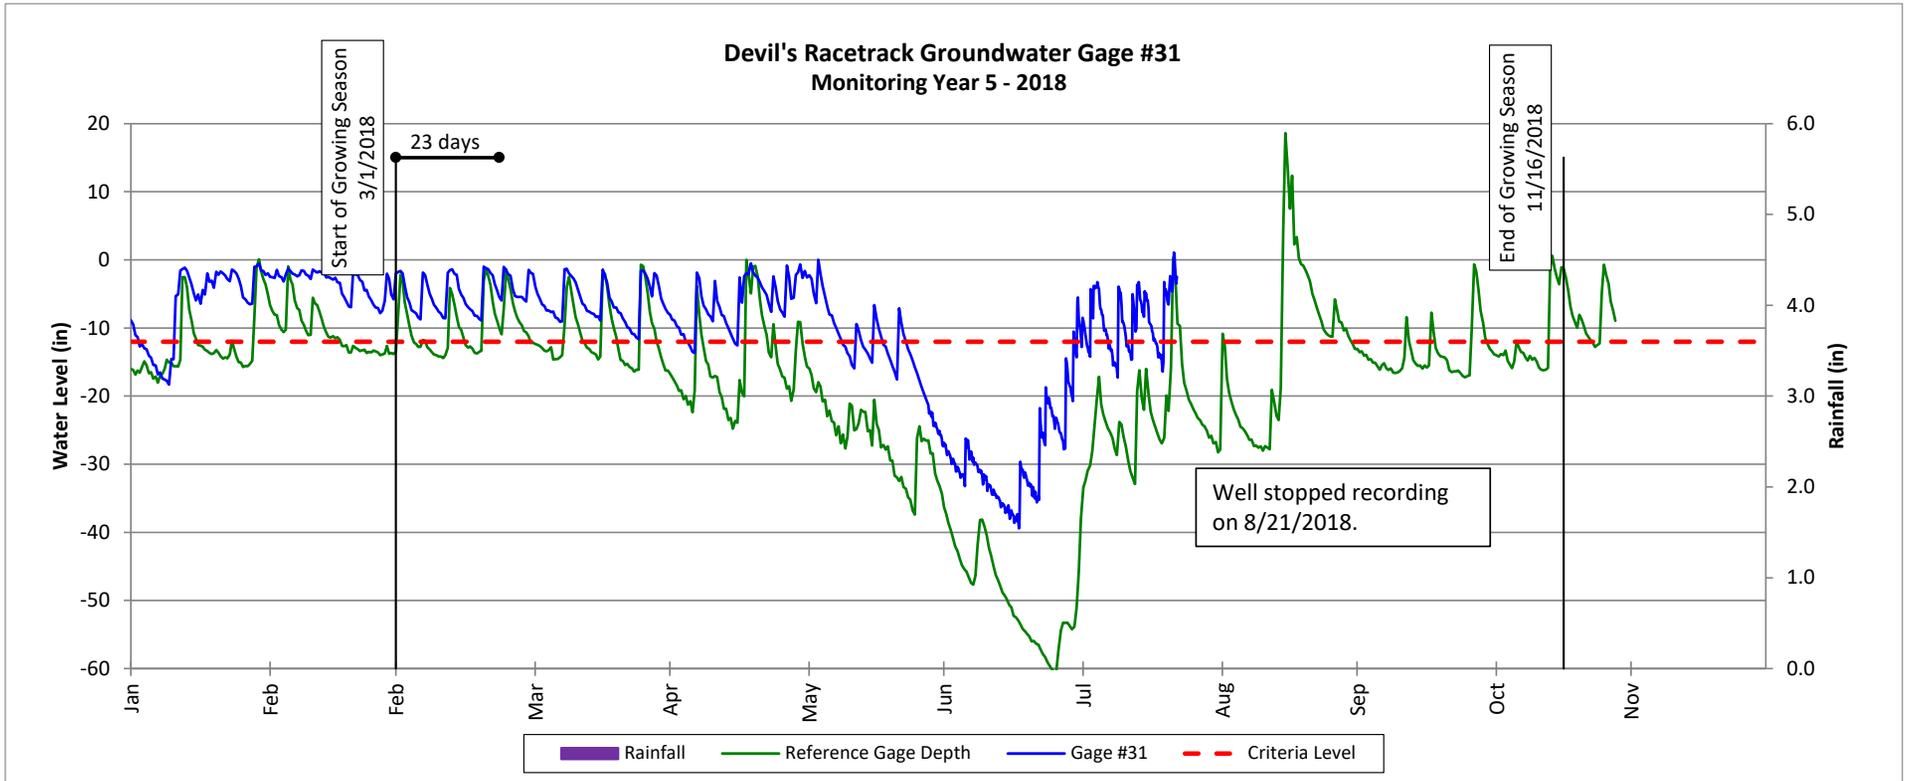

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

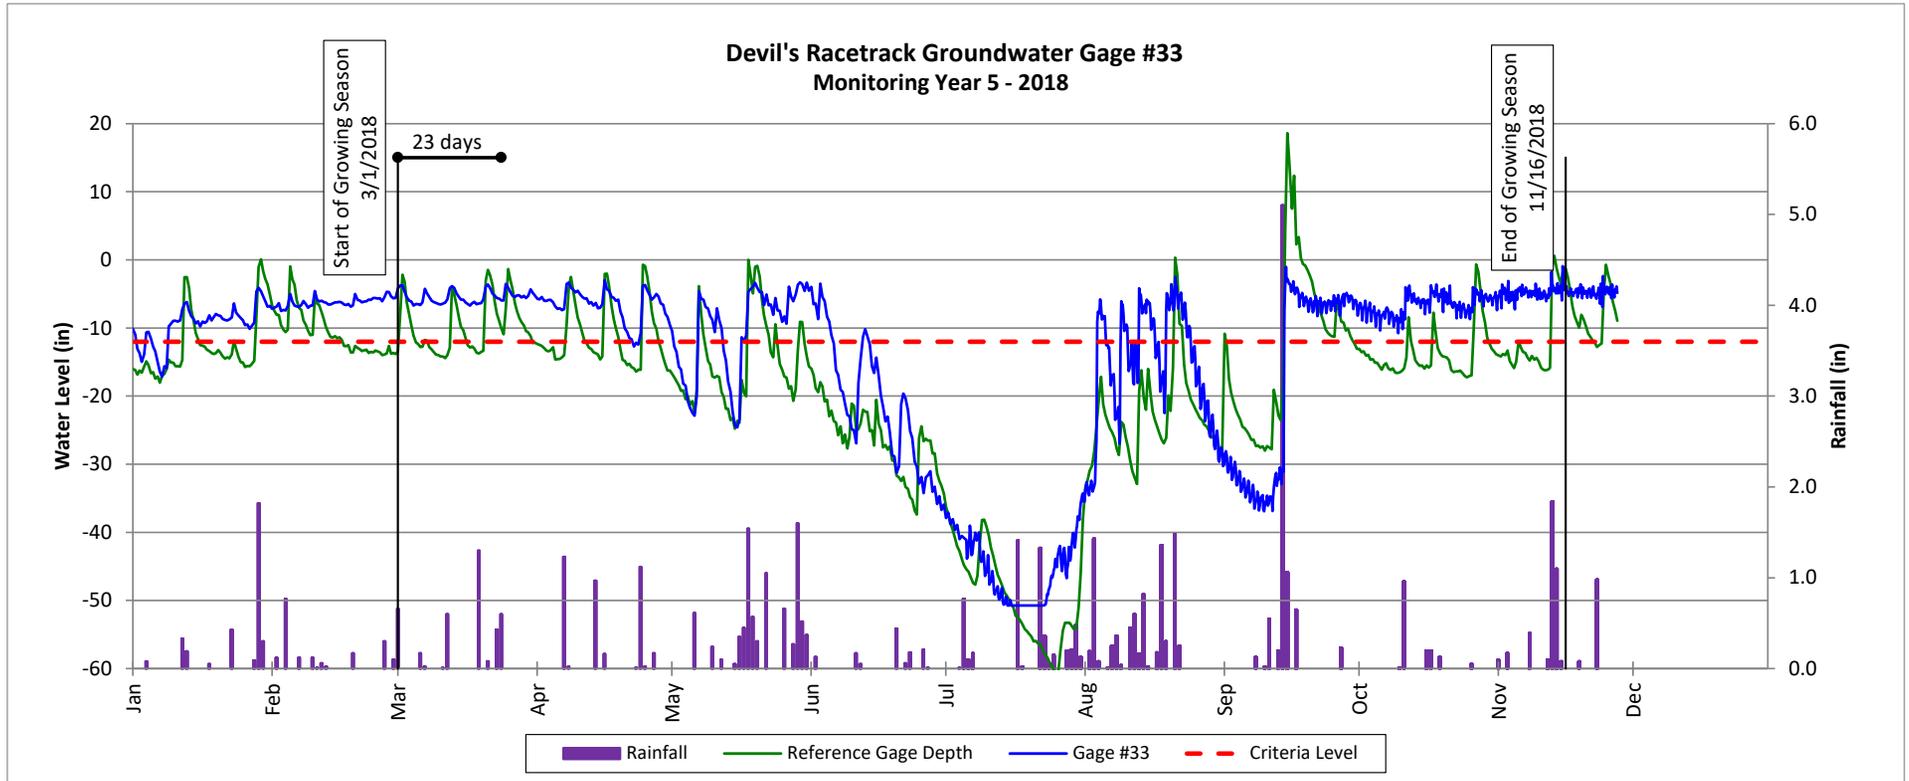

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

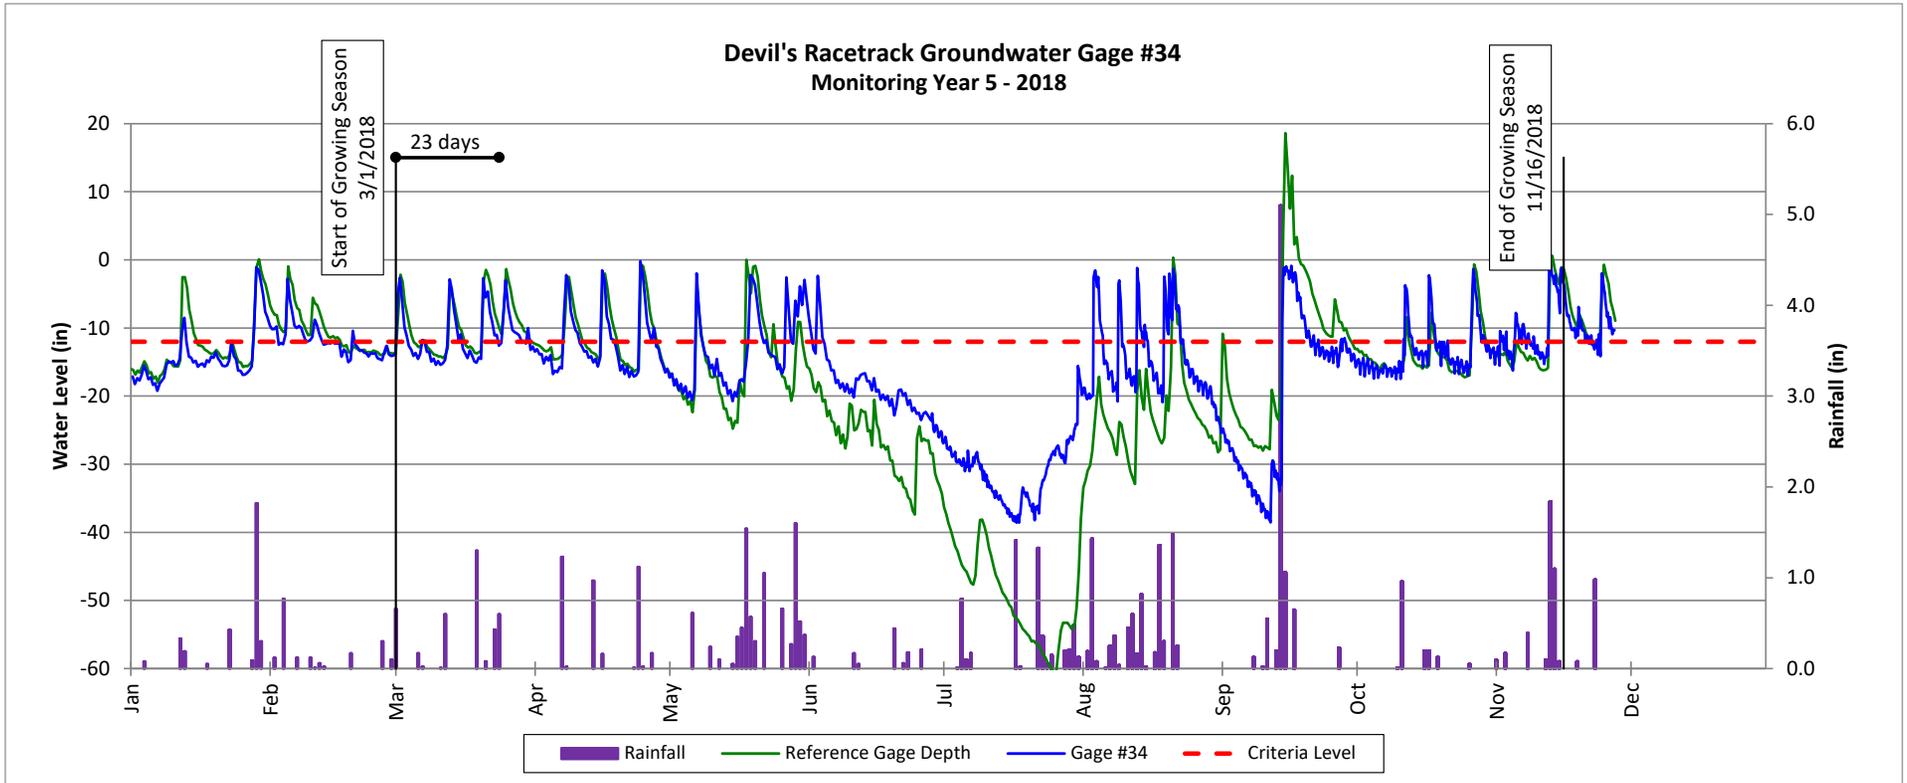

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

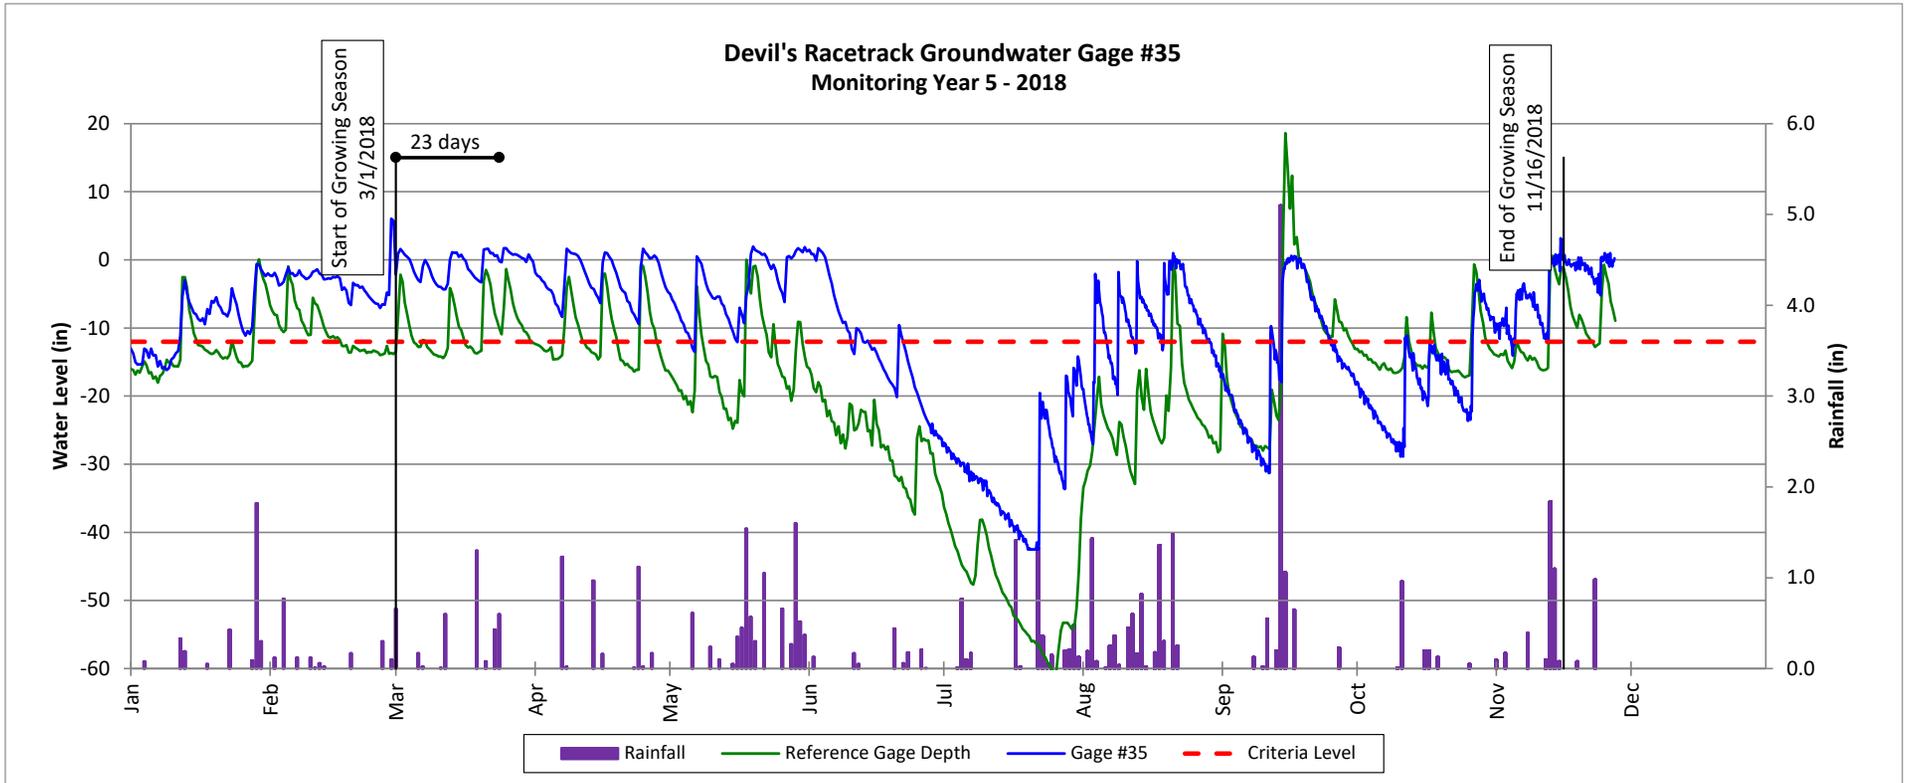

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

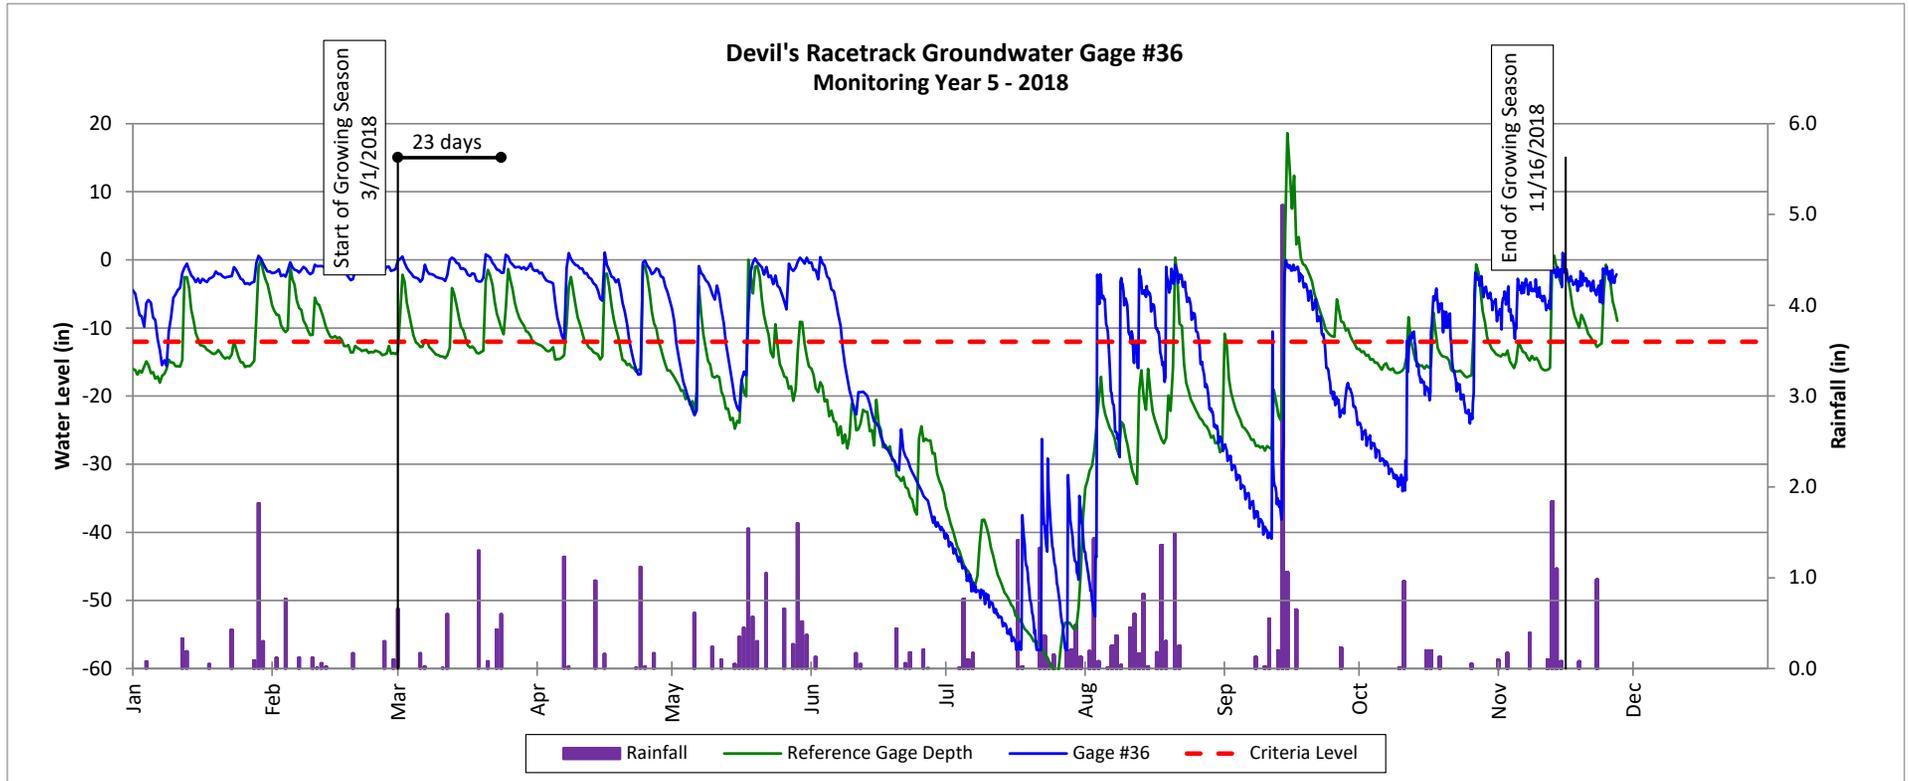

## Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

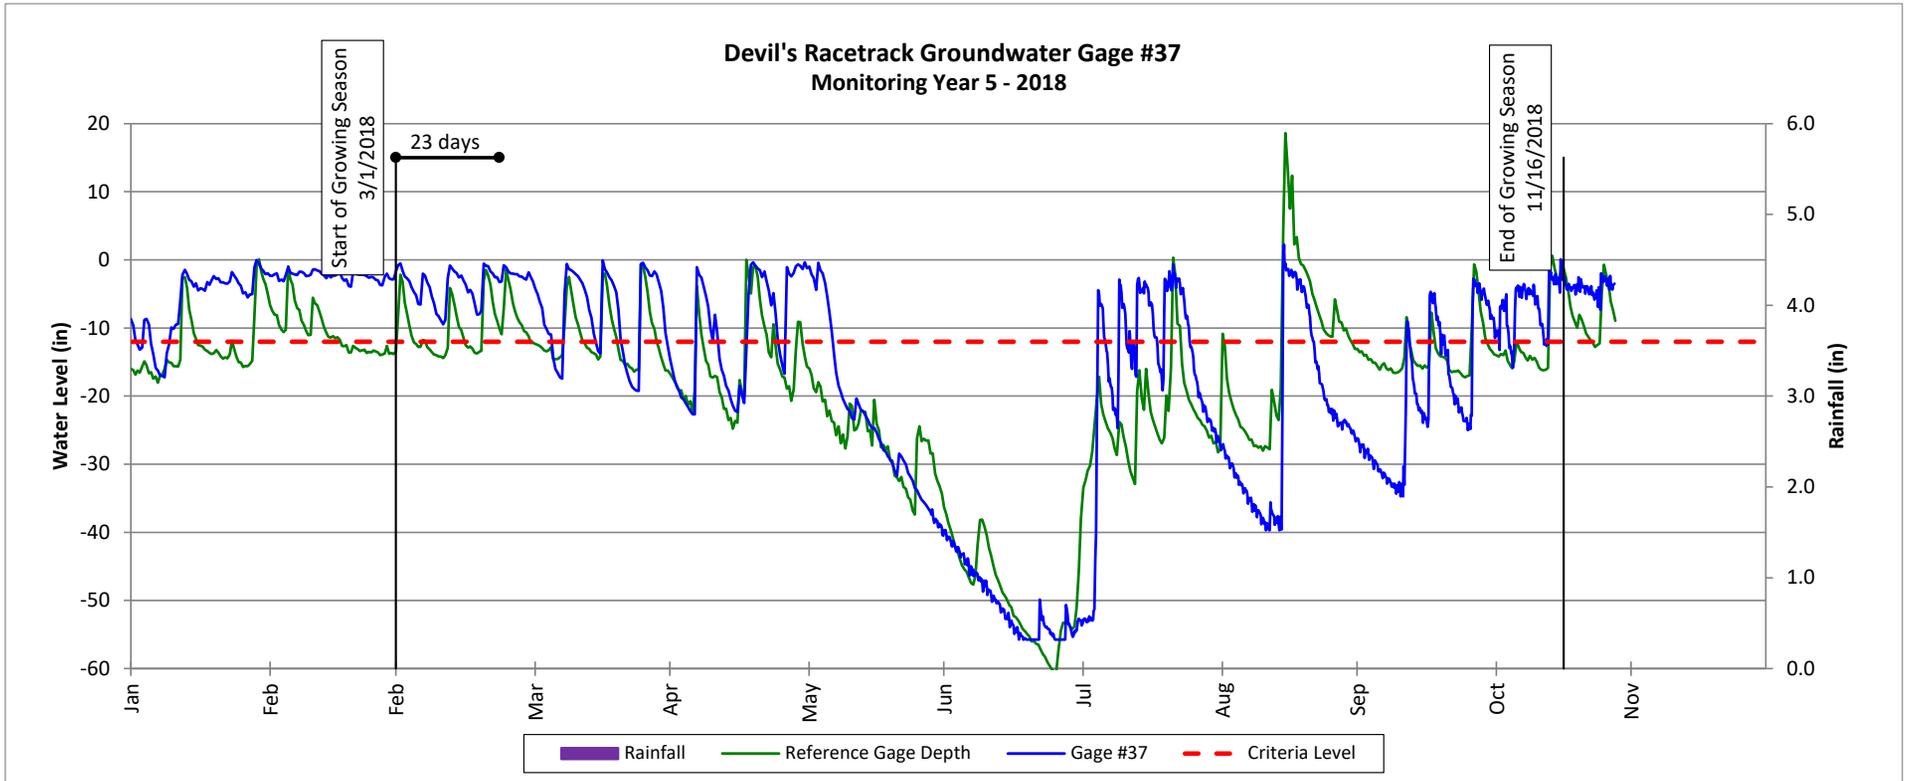

### Groundwater Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

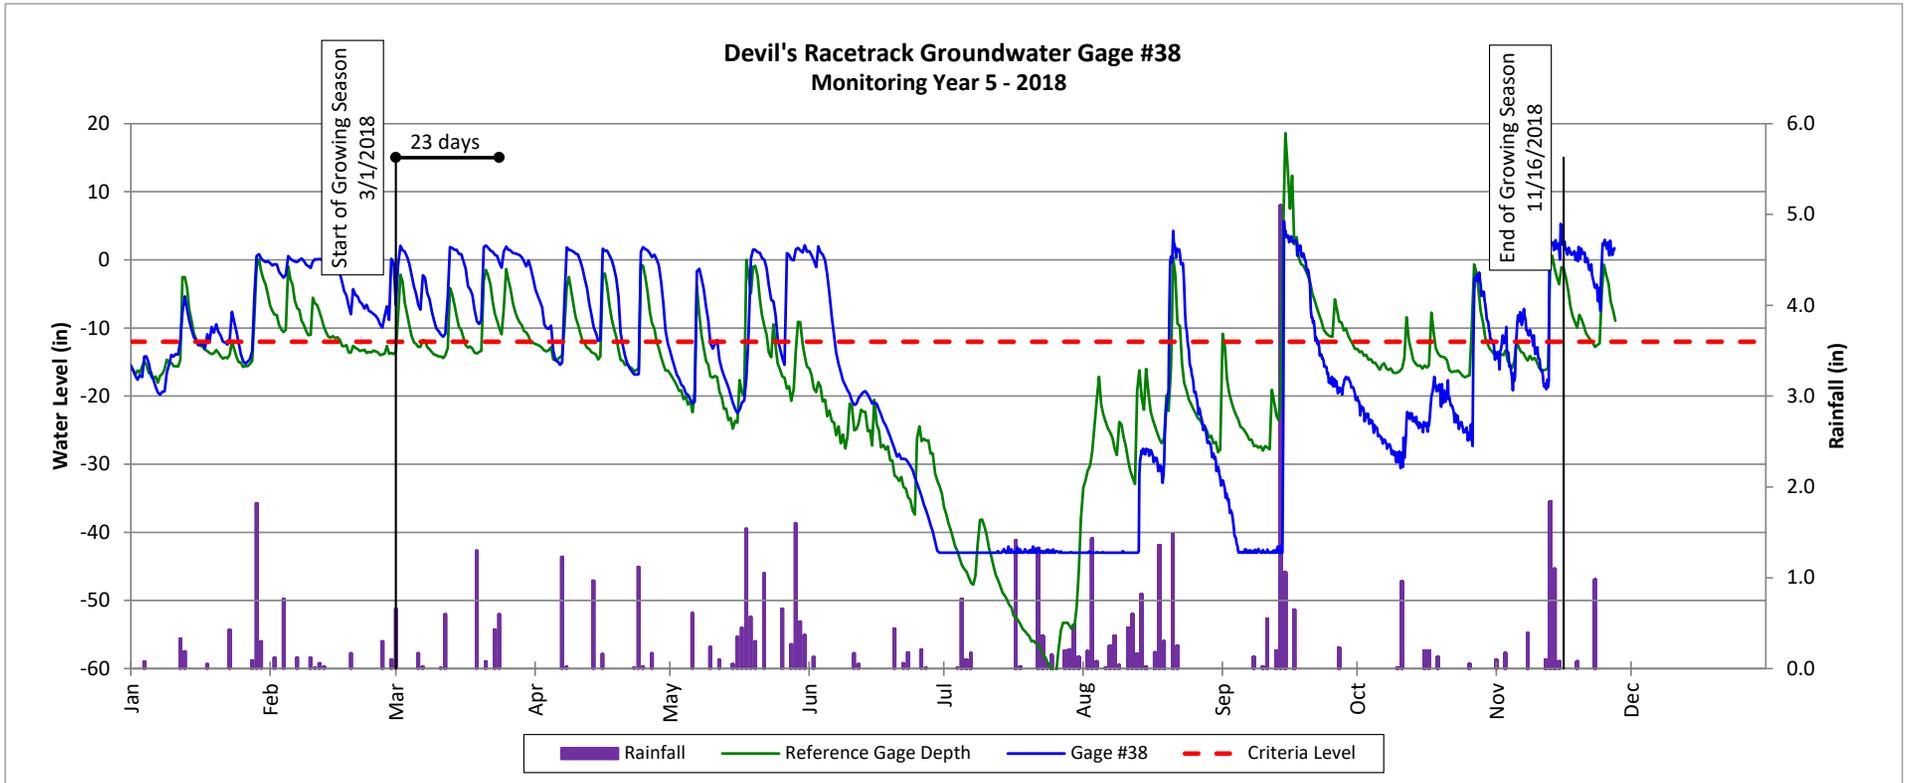

### In-Stream Flow Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

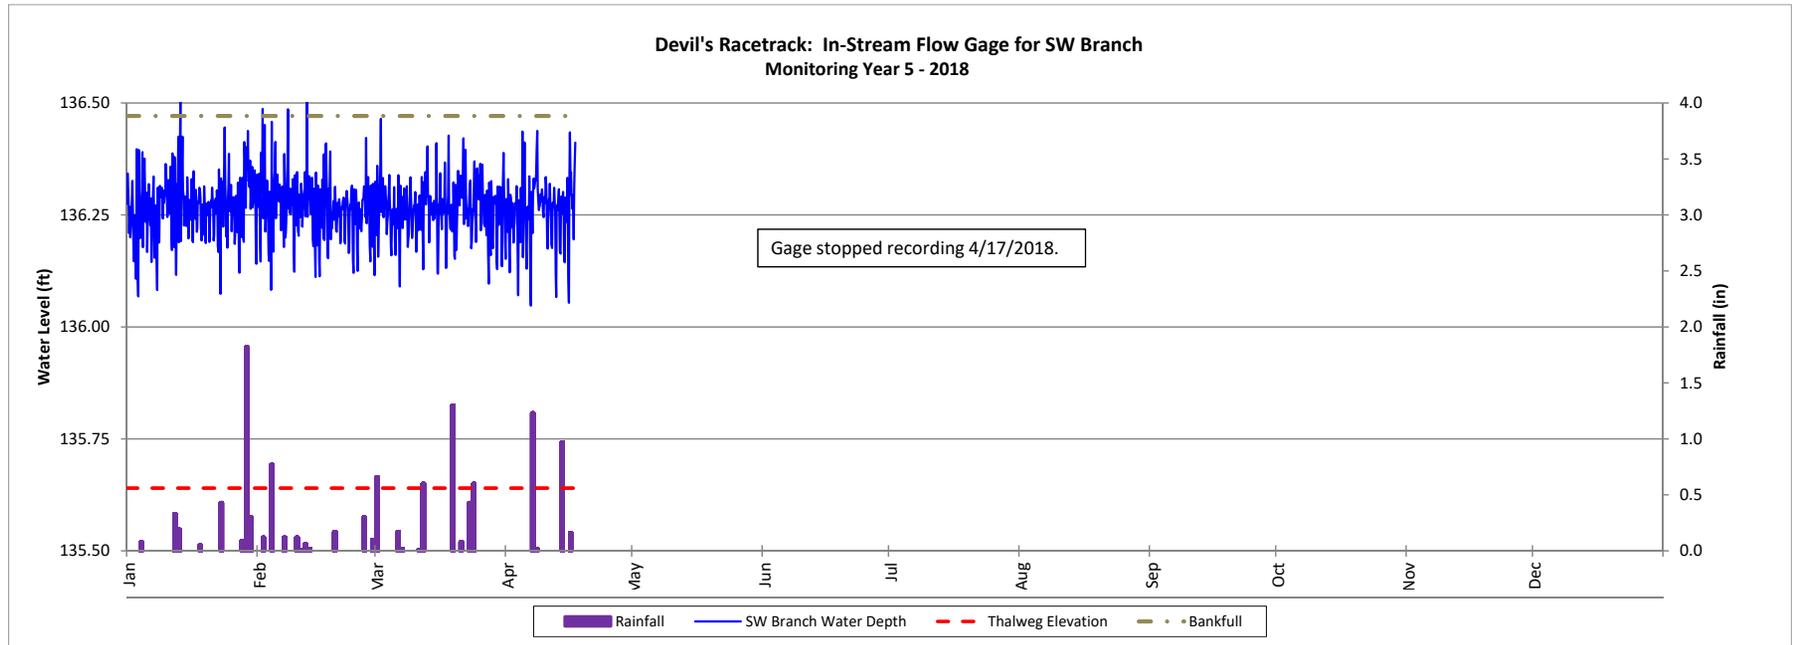

**In-Stream Flow Gage Plots**

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


**Monitoring Year 5 - 2018**

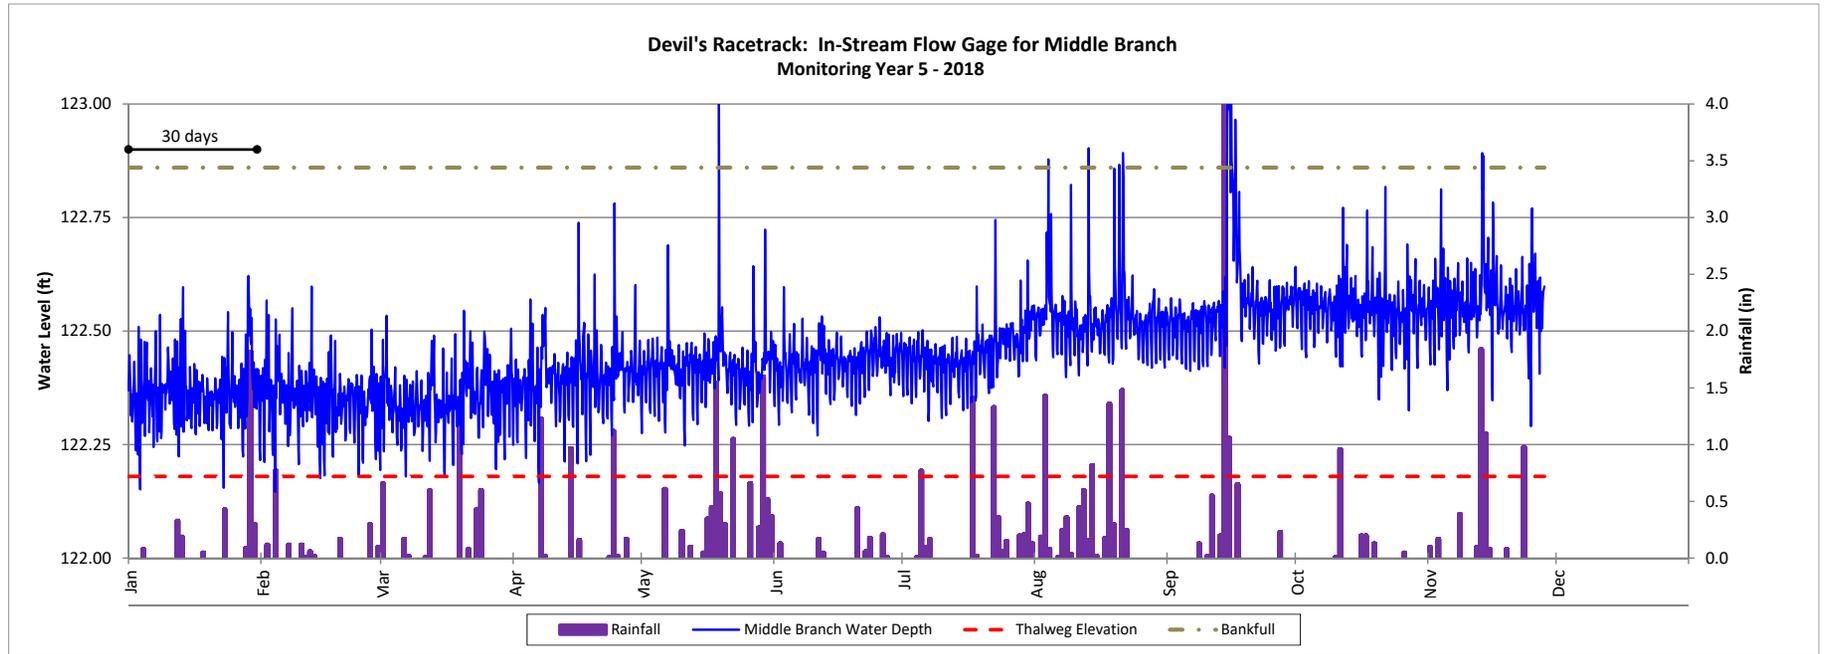

### In-Stream Flow Gage Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

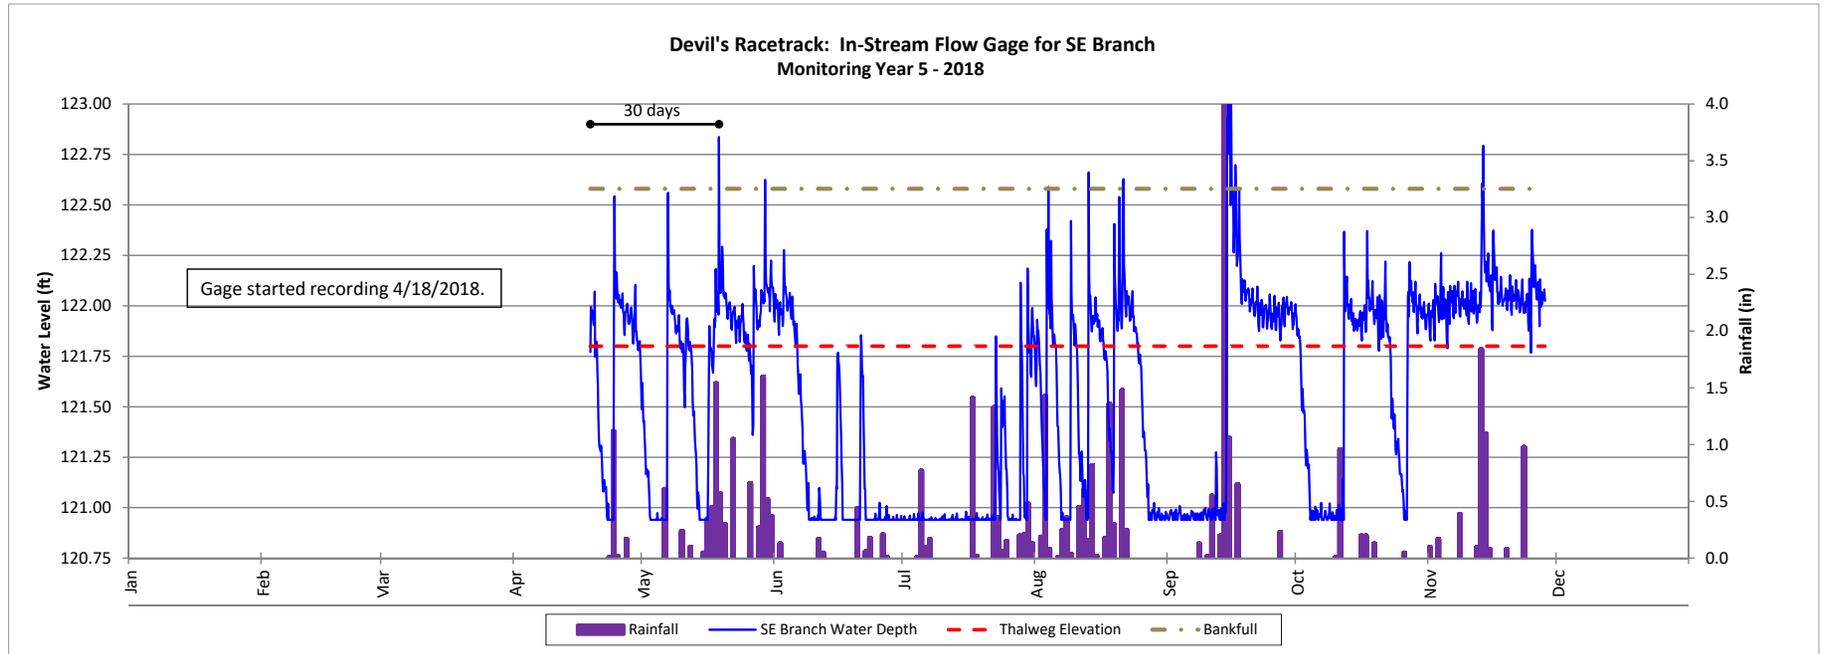

## Monthly Rainfall Data

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

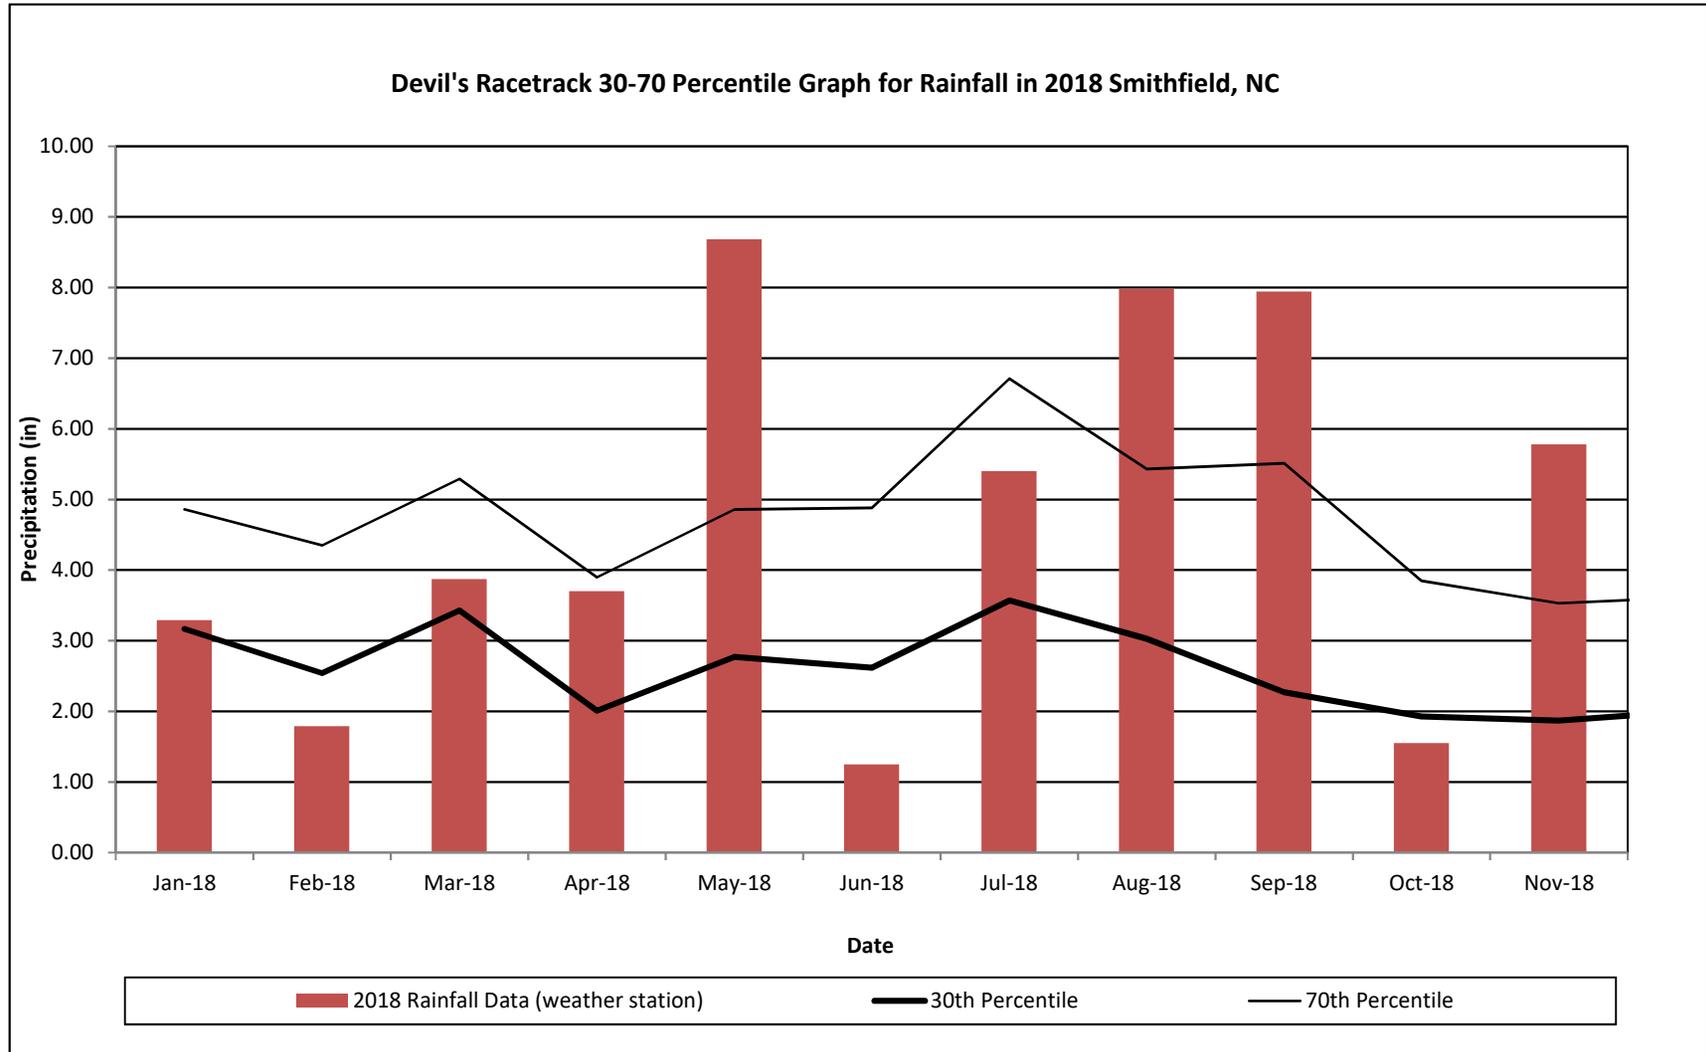


<sup>1</sup> 2018 monthly rainfall collected from USDA weather station 317994 (Smithfield, NC).

<sup>2</sup> 30th and 70th percentile rainfall data collected from weather station 317994, in Smithfield, NC (USDA, 1970 - 2000).

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

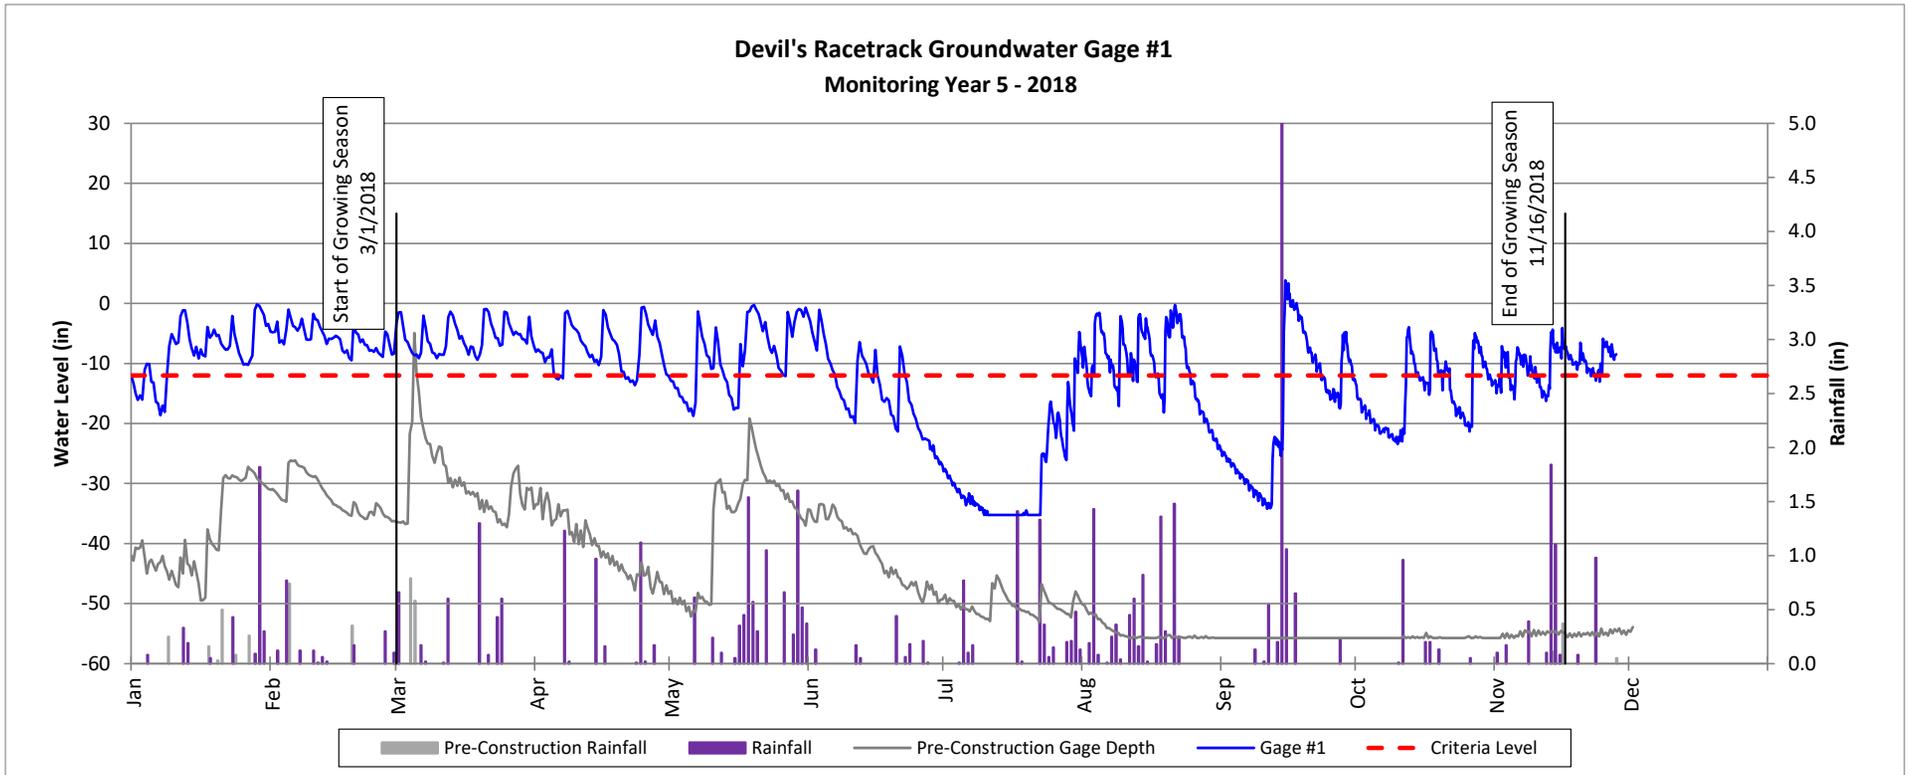

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

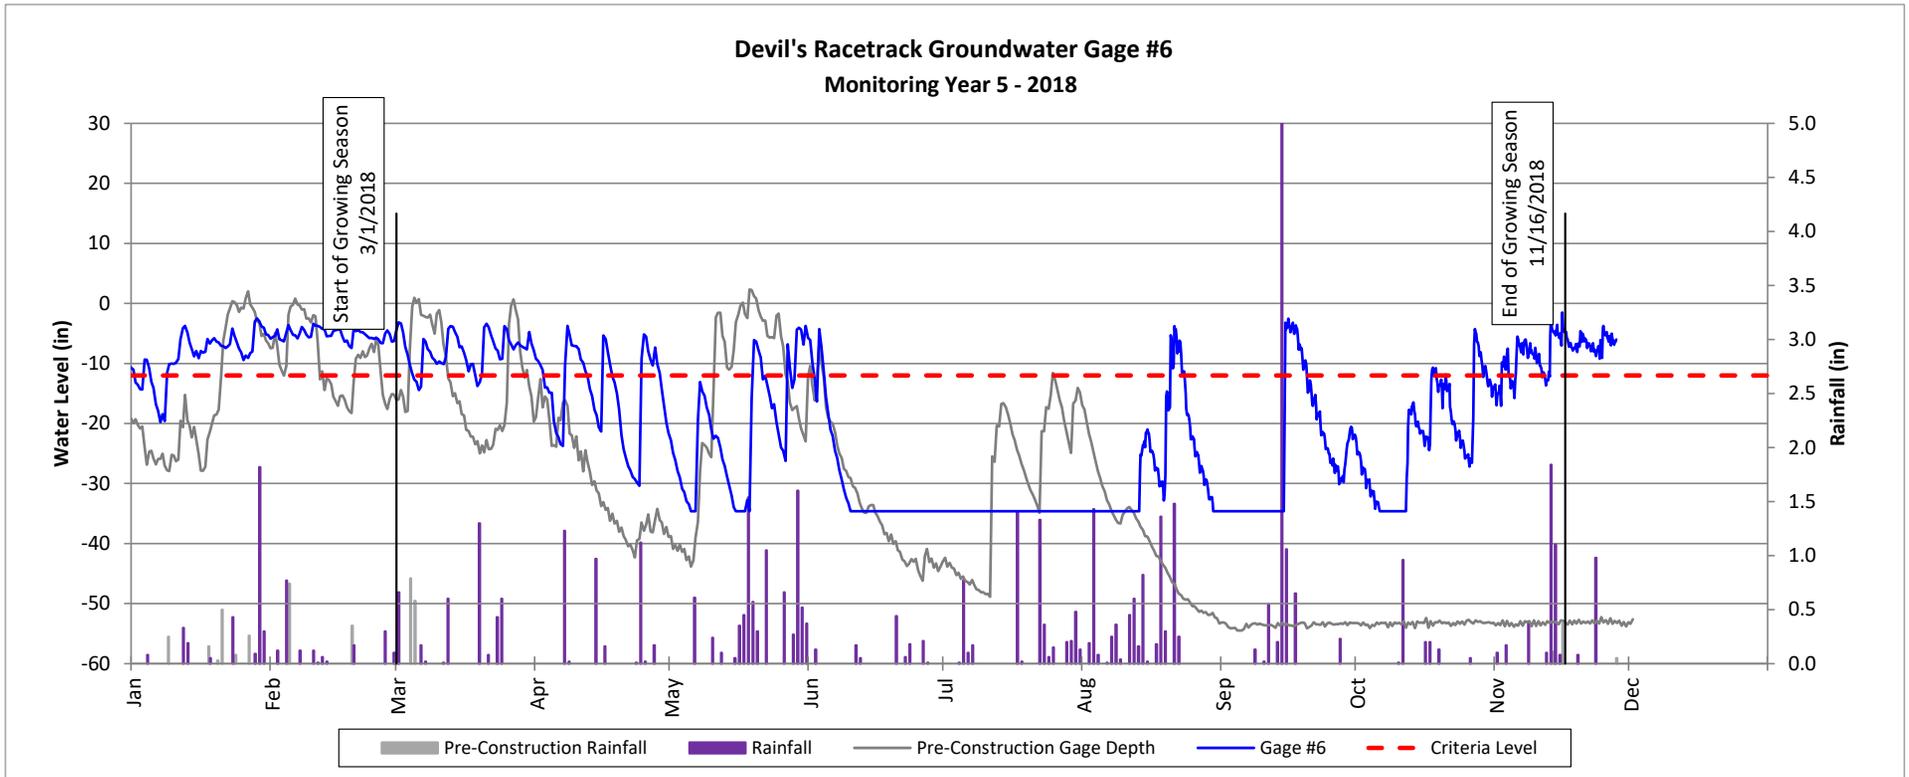

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

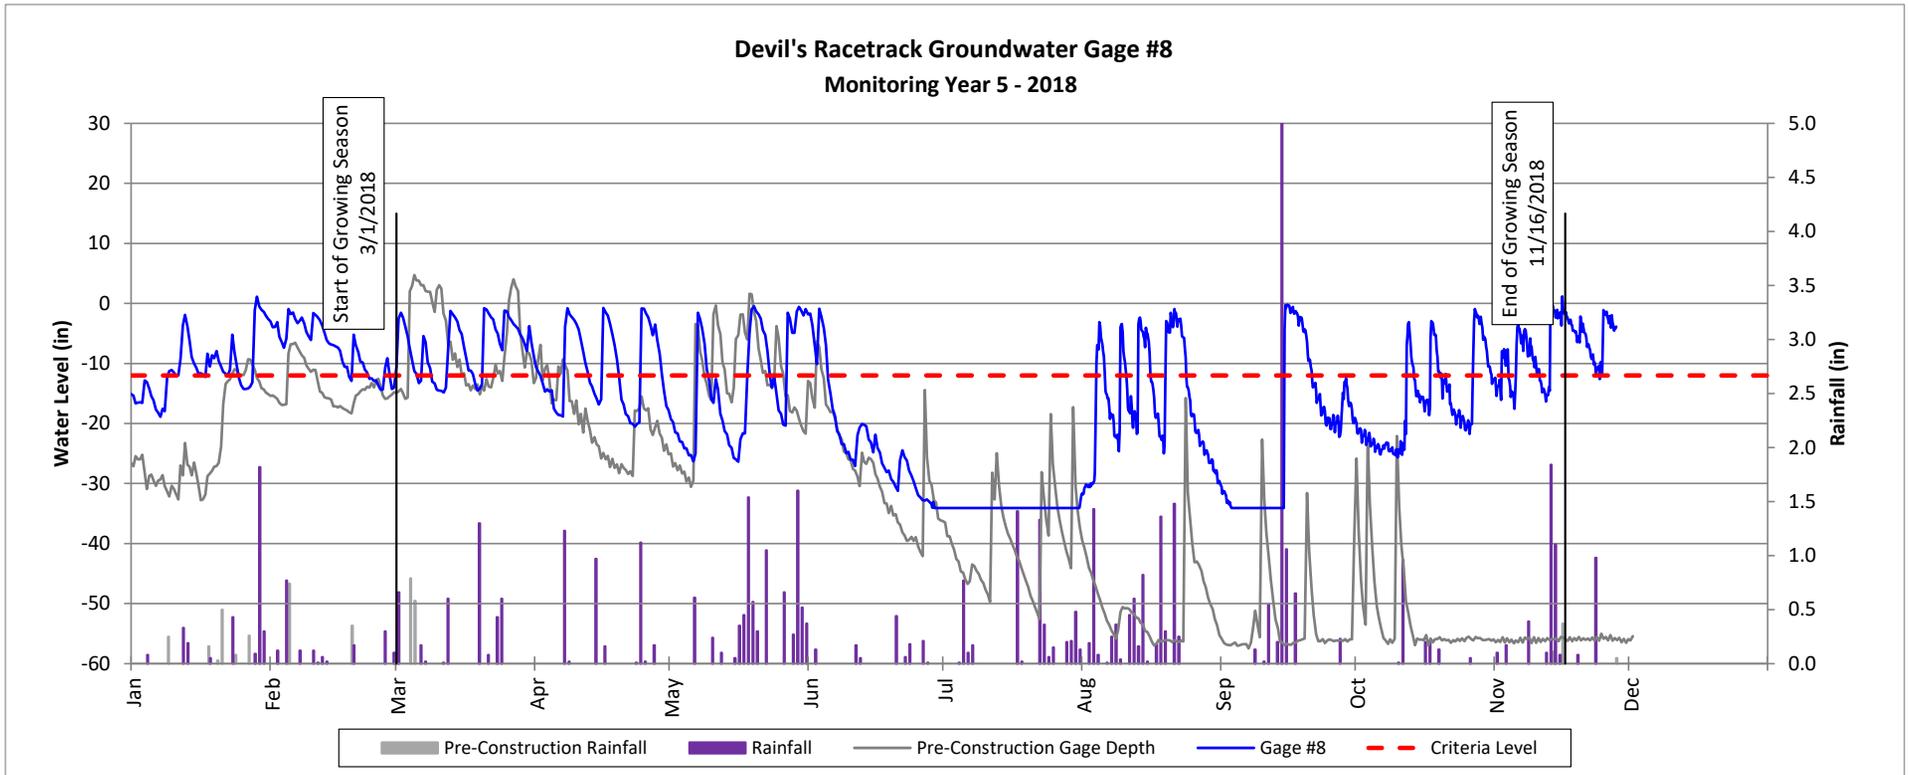

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

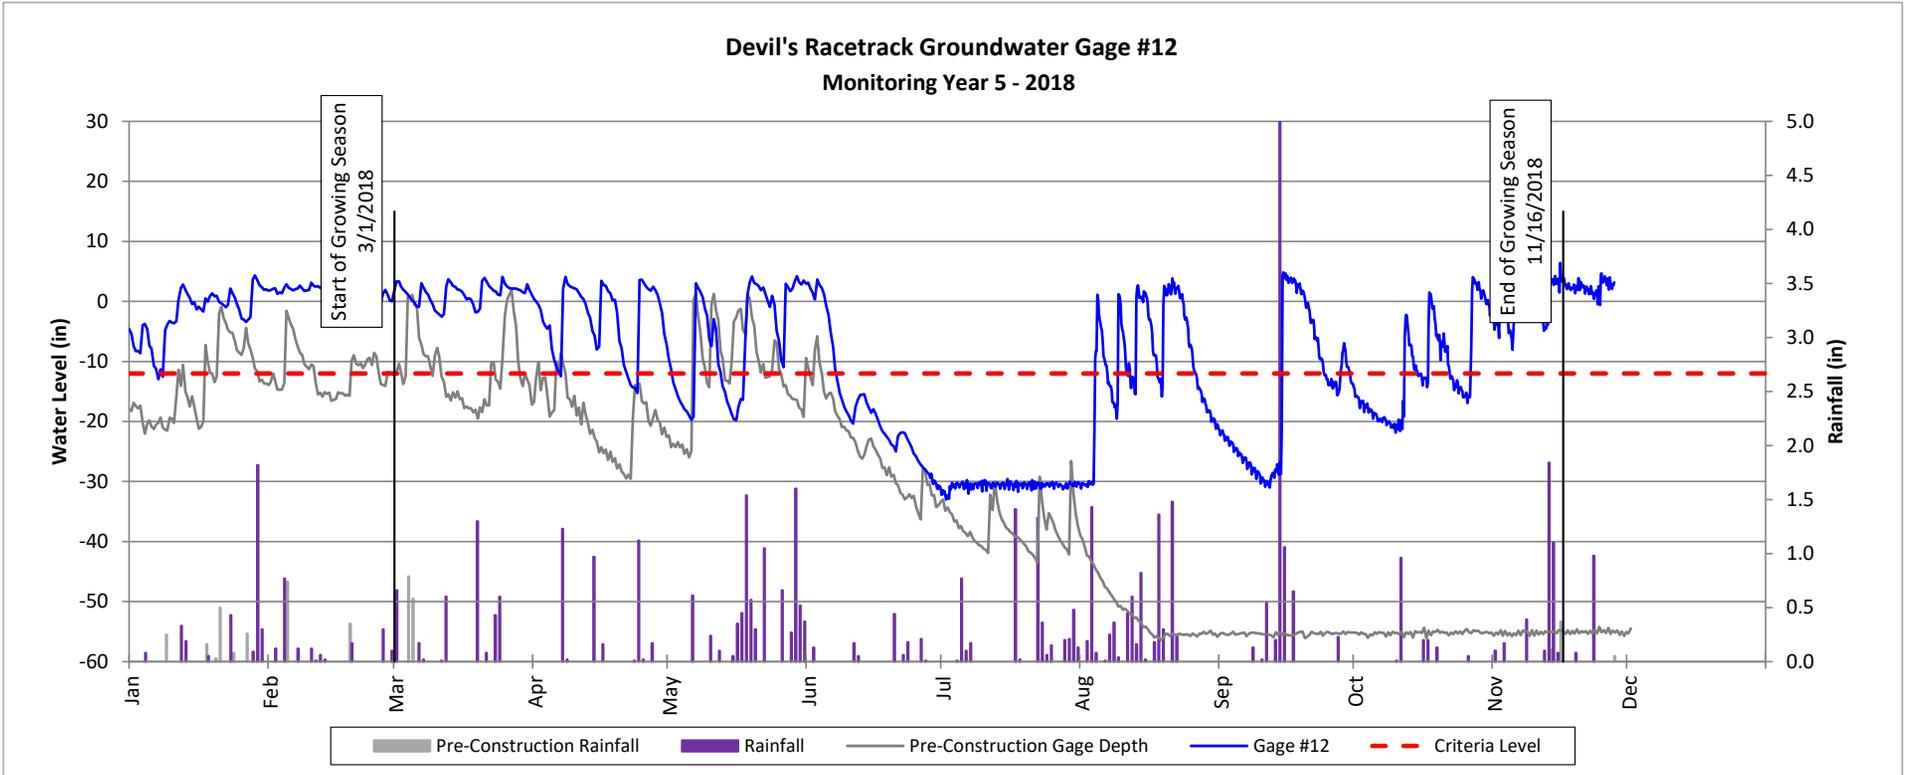

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

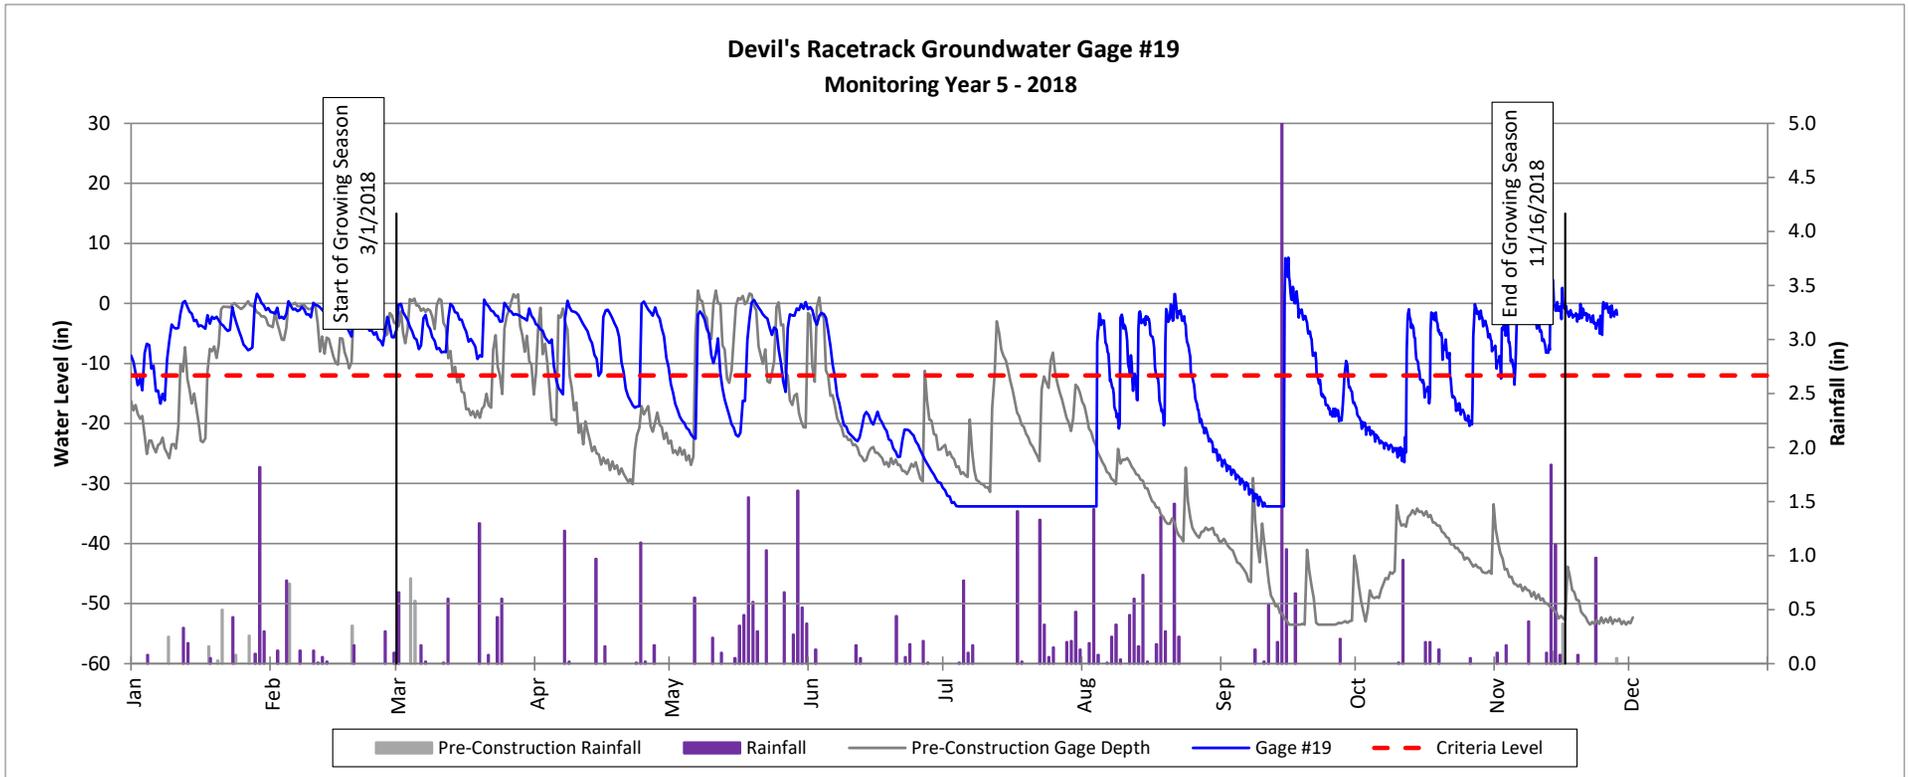

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


Monitoring Year 5 - 2018

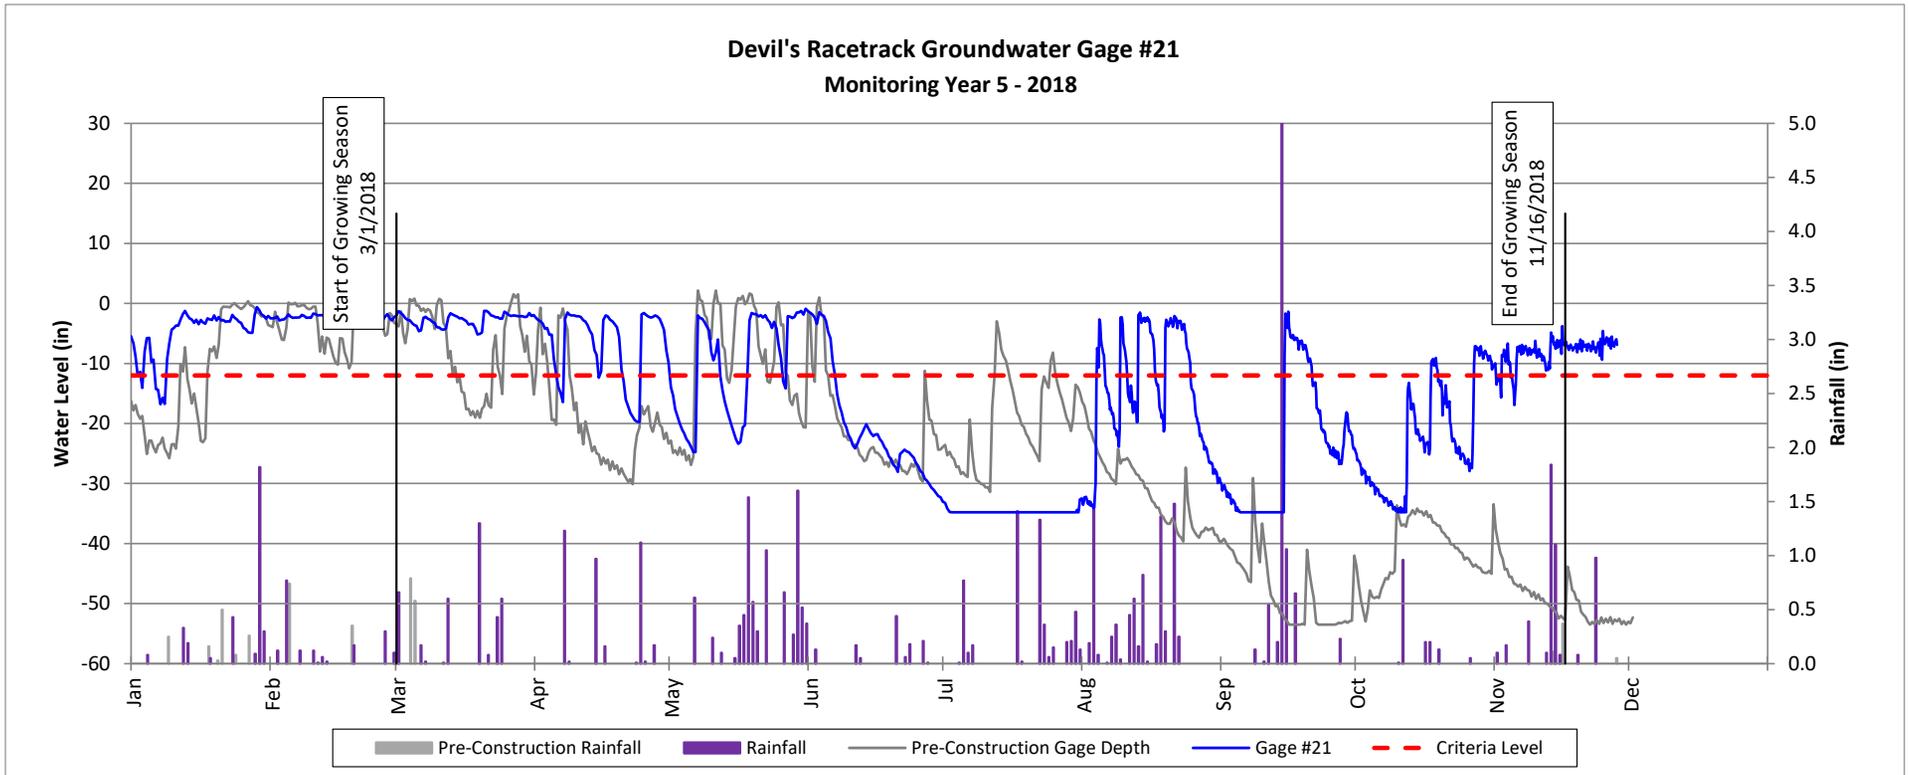

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)


#### Monitoring Year 5 - 2018

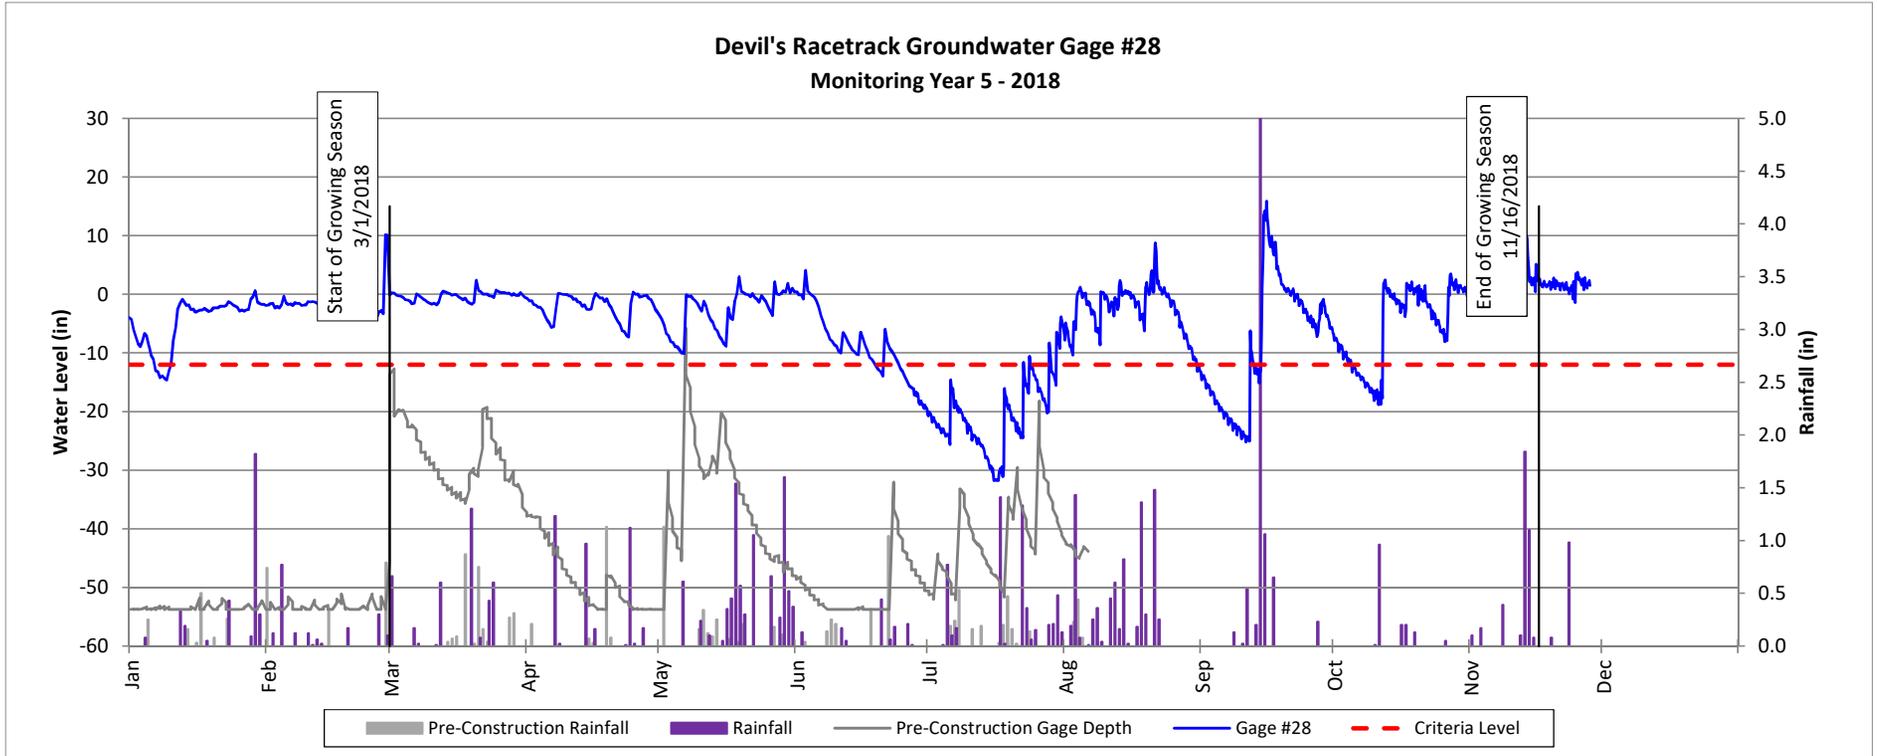

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

Monitoring Year 5 - 2018

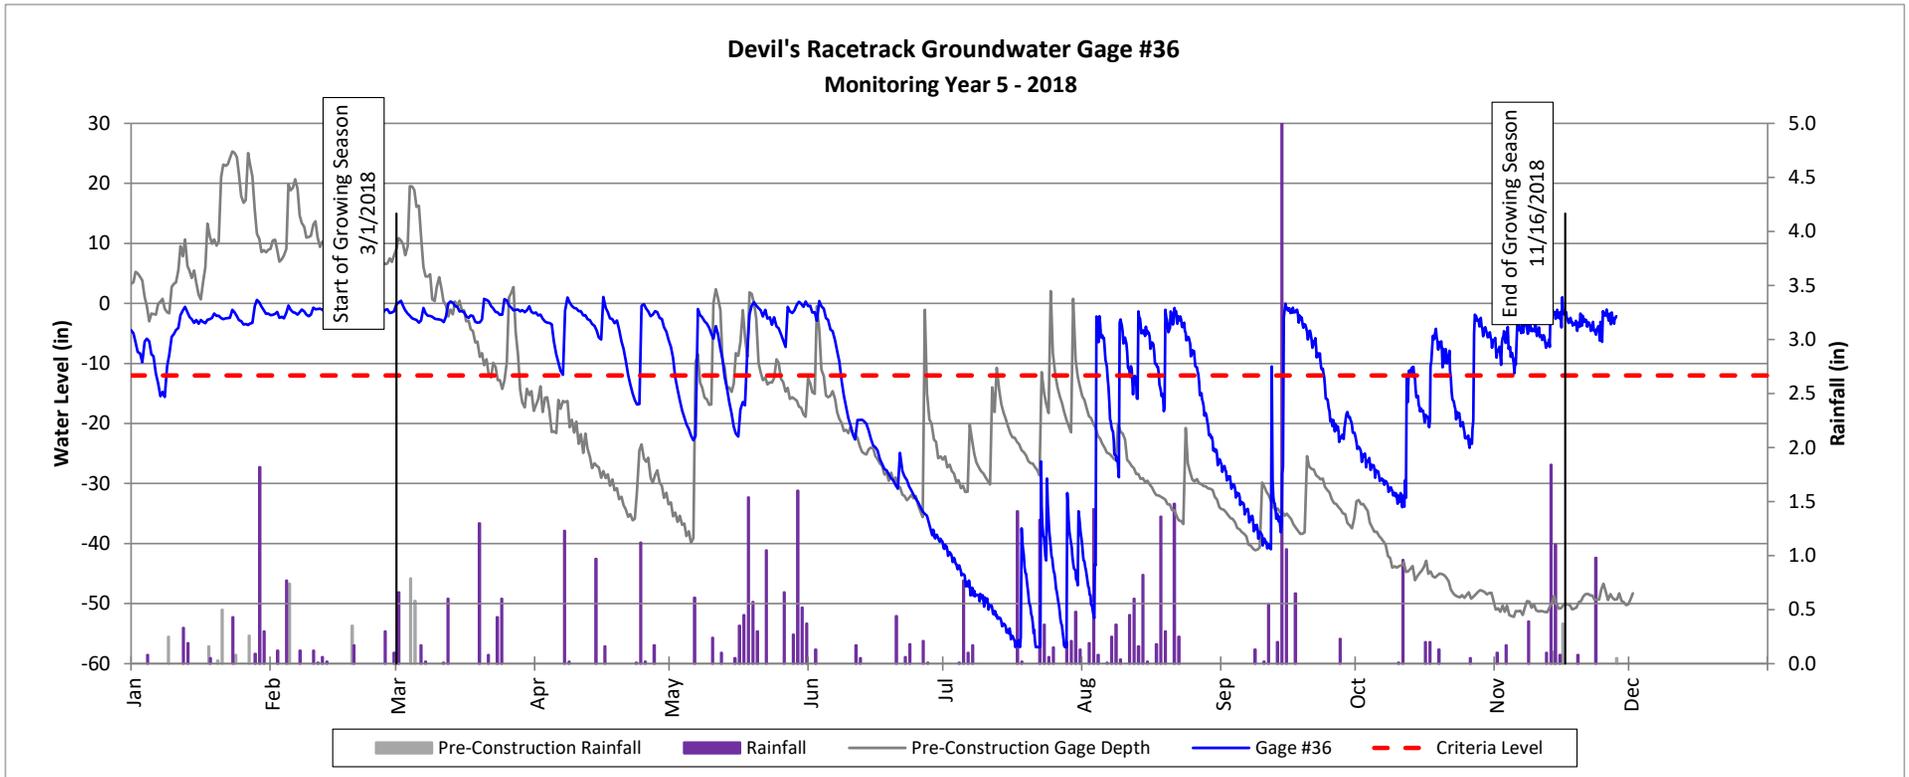

### Pre and Post Construction Groundwater Gage Comparison Plots

Devil's Racetrack Mitigation Site (DMS Project No. 95021)

#### Monitoring Year 5 - 2018

