

Harrell Stream and Wetland Restoration Site

Monitoring Report – MY02

Edgecombe County, NC



Submitted to:



NCEEP, 1652 Mail Service Center, Raleigh, NC 27699-1652

December 2009



**Landmark Center II, Suite 220
4601 Six Forks Road
Raleigh, NC 27609
Phone: (919) 783-9214
Fax: (919) 783-9266**

**Project Manager: Gary M. Mryncza, P.H., P.E.
Email: gary.mryncza@kci.com
KCI Project No: 12054239**

TABLE OF CONTENTS

1.0 PROJECT BACKGROUND	1
1.1 Project Structure, Restoration Type, and Approach	1
1.2 Location and Setting	1
1.3 Project History and Background.....	4
2.0 PROJECT CONDITIONS AND MONITORING RESULTS	14
2.1 Vegetation Assessment	14
2.2 Stream Assessment	14
2.2.1 Bankfull Events.....	15
2.2.2 Quantitative Measures Summary Tables	16
2.3 Wetland Assessment.....	23
2.3.1 Wetland Criteria Attainment Tables	23
3.0 SUCCESS CRITERIA	23

LIST OF TABLES

Table I.	Project Structure Table	3
Table II.	Project Activity and Reporting History	3
Table III.	Project Contact Table.....	4
Table IV.	Project Background Table.....	5
Table V.	Hydrological (Bankfull) Verifications.....	14
Table VI.	Baseline Morphology and Hydraulic Summary	15
Table VII.	Morphology and Hydraulic Monitoring Summary	19
Table VIII.	Wetland Criteria Attainment.....	23

LIST OF FIGURES

Figure 1.	Vicinity Map	2
Figure 2.	Project Reaches.....	6
Figure 3.	Current Condition Plan View.....	7

APPENDIX A – VEGETATION DATA

A1.	Vegetation Data Tables and Monitoring Data Sheets.....	24
-----	--	----

APPENDIX B – STREAM AND WETLAND PHOTOS

B1.	Stream and Wetland Photo Stations.....	89
B2.	Representative Stream Problem Area Photos	107

APPENDIX C – GEOMORPHOLOGIC AND HYDROLOGIC DATA

C1.	Stream Cross-Sections	110
C2.	Stream Longitudinal Profiles	124
C3.	Stream Pebble Counts	128
C4.	Stream and Wetland Hydrographs	142
C5.	Precipitation 30-70 Percentile Graph.....	150

EXECUTIVE SUMMARY

The Harrell Stream and Wetland Restoration Site is a full-delivery project that was developed for the North Carolina Ecosystem Enhancement Program (EEP). Construction was completed in September 2007 on an Unnamed Tributary to Swift Creek and 15.0 acres of Coastal Plain Small Stream Swamp wetland community. The 441-acre watershed at the downstream limits of the project stream and the 57-acre watershed draining into the project wetland are located within the USGS 14-digit HUC 03020101130090 and the NCDWQ Sub-basin 03-03-02 in the Tar-Pamlico River Basin. The project restored 6,808 linear feet of channel using a combination of Priority 2 and 3 approaches, and 15.0 acres of Coastal Plain Small Stream Swamp wetland community, generating 6,808 stream mitigation units and 15.0 wetland mitigation units. The stream design addressed vertical instability problems and a lack of bed variability by stabilizing stream banks, installing in-stream structures, adjusting stream planform, and replanting the riparian areas with native vegetation. The wetland was restored by filling ditches, creating microtopography, and planting native trees and shrubs. This report describes the results from the findings of the second year of monitoring that took place in 2009.

The riparian buffer was planted with twelve different species of bare root trees and shrubs and three different species of live stakes. The restored wetland was planted with eleven different species of bare root trees and shrubs. Vegetation monitoring plots were established during the as-built survey and included 18 monitoring plots placed throughout the stream buffer and 12 monitoring plots installed in the restored wetland. Vegetation must meet a minimum survival success rate of 320 stems/acre after five years. The second-year monitoring counted an average of 584 stems/acre in the stream plots and 533 stems/acre in the wetland plots. The second-year monitoring found the vegetation component of the project to be on track to meeting the success criteria.

The stream assessment completed during second-year monitoring found the stream to be stable and functioning properly. Channel dimensions have not changed significantly from the first-year monitoring. Small portions of localized bed erosion, aggradation, and degradation have been noted during the second-year monitoring. These areas have been documented in the Current Condition Plan View. The on-site stream gauges have recorded 4 bankfull events since the project was constructed in September 2007.

During the 2009 monitoring year, wetland hydrology was achieved at all four wells in the restoration area. Groundwater was within 12 inches of the soil surface in excess of 12 consecutive days (5% of the growing season) at each well.

The daily rainfall data depicted on the gauge data graphs were obtained from the on-site precipitation gauge. The precipitation gauge was installed on the site prior to project implementation. The daily rainfall data obtained from a local weather station shows that the area had average rainfall during the 2009 growing season and correlated to the precipitation data recorded on-site.

1.0 PROJECT BACKGROUND

Project Goals and Objectives

The goals and objectives of the restoration project are as follows:

Restoration Goals:

- Protect aquatic resources from excess nutrients, sediment, and other pollutants coming from the agricultural watershed.
- Reestablish terrestrial and aquatic habitat and connect the site to the existing floodplain corridor along Swift Creek.

Restoration Objectives:

- Restore 6,808 linear feet of stable stream channel with the appropriate pattern, profile, and dimension that can support a sand transport system.
- Connect the stream to a functioning floodplain.
- Fill and plug ditches in the drained hydric soils to restore saturated hydrologic conditions for 5% of the growing season.
- Plant tree species typical of a Coastal Plain Small Swamp Stream along the stream riparian corridor and floodplain as well as in the restored wetland.

1.1 Project Structure, Restoration Type, and Approach

Prior to restoration, UT to Swift Creek had been channelized and straightened since at least 1948. The entire site, including where the wetland was restored, was under agricultural production. There were fields adjacent to the stream and the wetland that had been drained by a network of ditches. There were no remaining vegetated buffers or instream features in the channel and the banks were nearly vertical. The channel was characterized as having poor streambed variability and habitat diversity. Restoration of 6,808 linear feet of channel was accomplished utilizing a combination of Priority Levels 2 and 3 (Table 1). Reach 1 (Station 10+00 to 22+26) was restored using a Priority Level 3 approach. The restoration of a B5c channel with a sinuosity of 1.06 was accomplished by building a bankfull channel with a higher width/depth ratio than the existing stream, creating distinct bed features by adding pools and riffles to the profile, and grading back the upper slopes to create an appropriate valley for the stream. Reaches 2, 3, and 4 (Stations 22+26 to 36+91, 36+91 to 51+82, and 51+82 to 78+80, respectively) were restored to a C5 channel with a Priority Level 2 restoration. The restoration established a bankfull channel with a new floodplain where the designed bankfull stage equals the new floodplain elevation (bank height ratio=1.0). Reaches 2, 3, and 4 have sinuosity values of 1.07, 1.23, and 1.10, respectively. The four different reaches are shown in Figure 2.

1.2 Location and Setting

The Harrell Stream and Wetland Restoration Site is located approximately six miles northeast of Rocky Mount, North Carolina in Edgecombe County (Figure 1). The latitude and longitude of the project site are 36.0201 North and 77.6807 West (WGS1984). To reach the site from Raleigh, proceed east on U.S. Route 264-East/64-East (US 264E/64E) for approximately 17 miles. Continue on US 64E for another 30 miles. Take the U.S. Route 301 Bypass and then U.S. Route 301 (US 301) north into Battleboro. Make a right onto Battleboro-Leggett Road and then turn left onto Morning Star Church Road just outside of town. Proceed through Cherry Crossroads and continue for 2.25 miles. The project site is on the left side of Morning Star Church Road and is directly opposite the junction with Benson Farm Road.

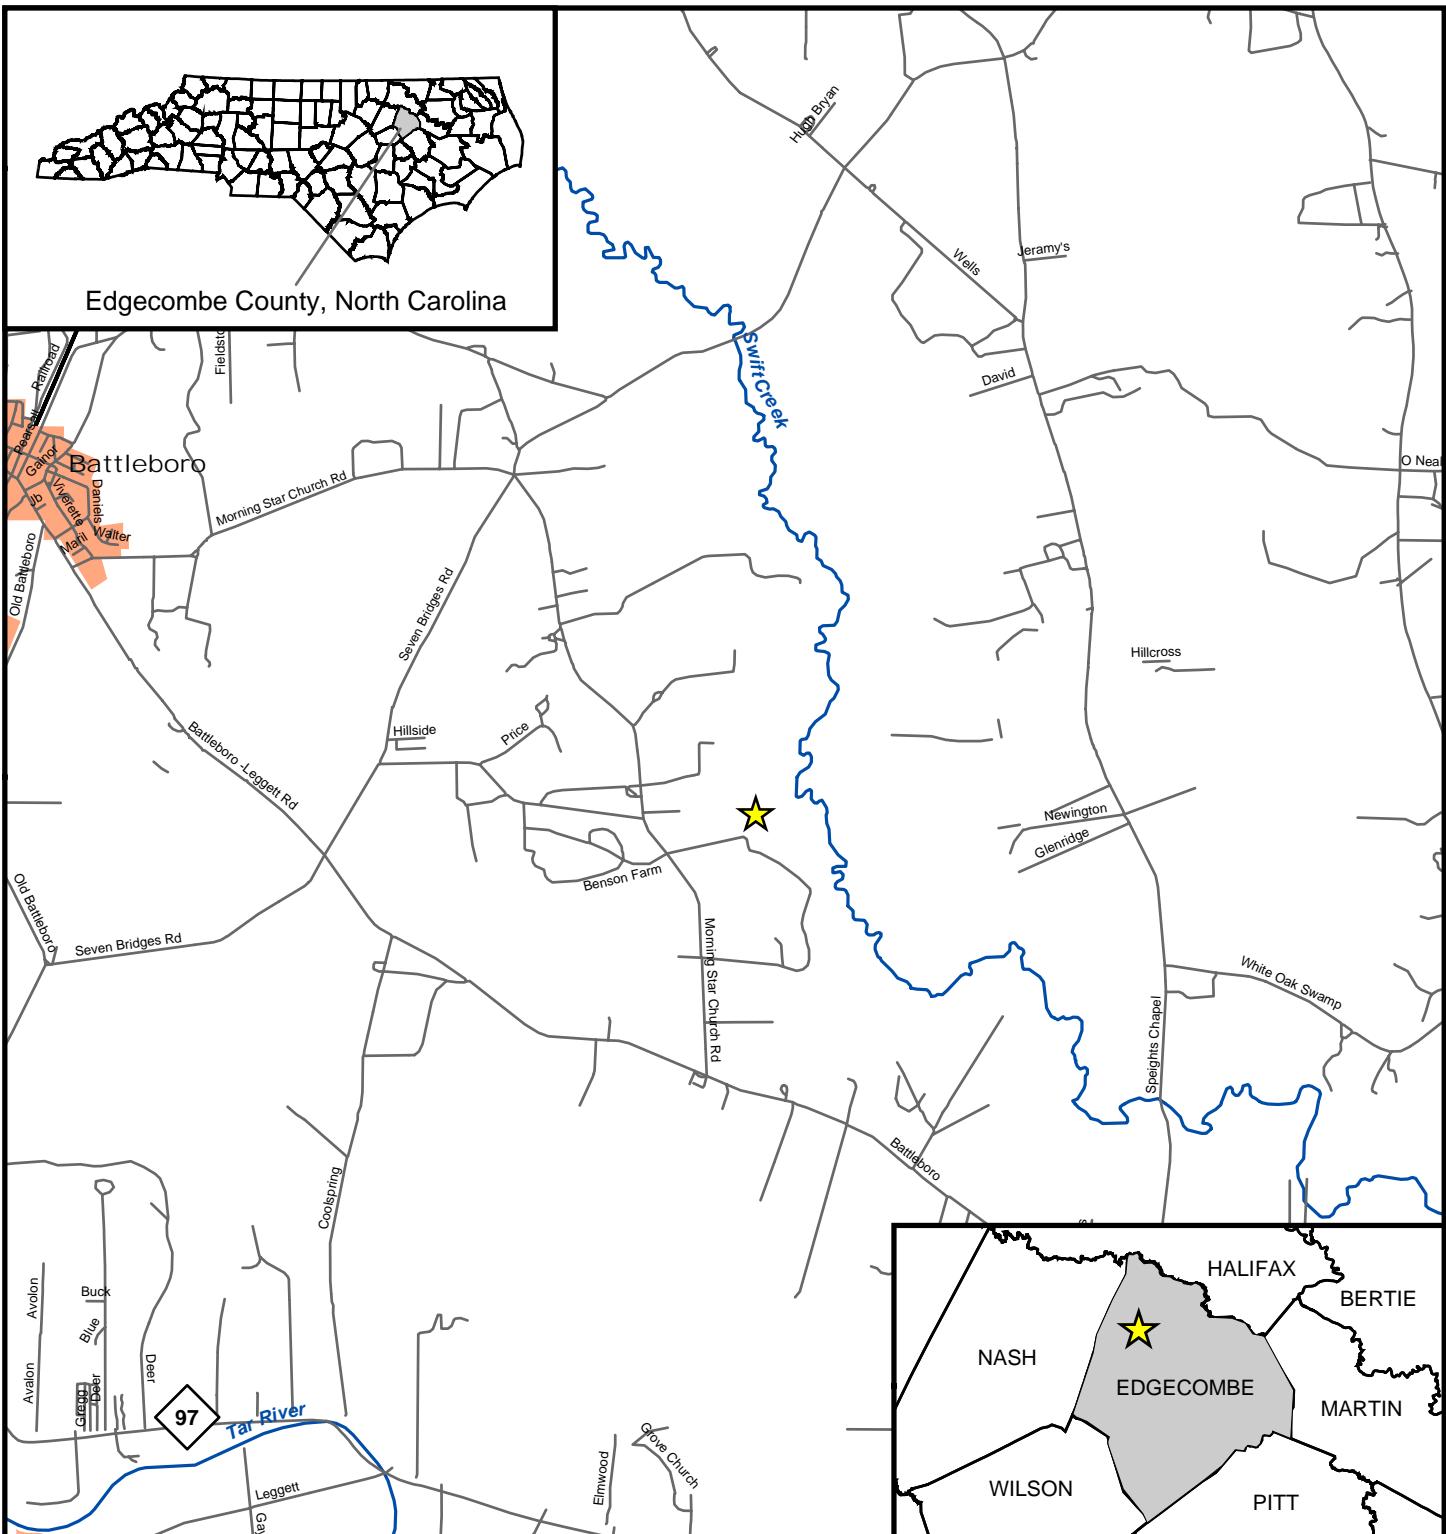


Figure 1. Vicinity Map



- ★ Project Site Location
- Major Streams and Rivers
- Municipalities
- Roads

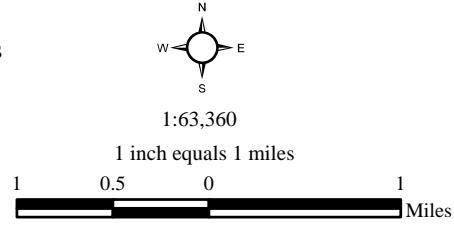




Figure 2. Project Reaches



- Reach 1 Easement Exception
- Reach 2 Project Site Boundary
- Reach 3
- Reach 4



1:8,400

700 350 0 700
Feet



Image Source: Edgecombe County Orthoimagery, 2008.

1.3 Project History and Background

Table I. Project Restoration Components Harrell Stream and Wetland Restoration						
Project Segment / Reach ID	Pre-Restoration Feet/Acres	Type	Approach	As - Built Footage or Acreage	Stationing	Stream or Wetland Mitigation Units (SMU/WMU)*
Reach 1	1,224 lf	R	P3	1,226 lf	10+00 - 22+26	1,226 SMU
Reach 2	1,389 lf	R	P2	1,465 lf	22+59 - 36+91	1,432 SMU
Reach 3	1,231 lf	R	P2	1,491 lf	36+91 - 51+82	1,491 SMU
Reach 4	2,494 lf	R	P2	2,698 lf	52+12 - 78+80	2,659 SMU
Wetland	15.0 ac	R	-	15.0 ac	-	15 WMU

R = Restoration

P2 = Priority 2

P3 = Priority 3

* Two 30' farm crossings and one 10' irrigation crossing are excluded from the mitigation unit calculations.

Table II. Project Activity and Reporting History Harrell Stream and Wetland Restoration		
Activity or Report	Data Collection Complete	Completion or Delivery
Final Design - Wetland	2005 - 2006	Aug 06
Construction - Wetland	N/A	Oct 06
Planting - Wetland	N/A	Feb 07
Restoration Plan	2005 - 2006	Apr 07
Final Design - Stream	2005 - 2006	Apr 07
Construction - Stream	N/A	Sep 07
Planting - Stream	N/A	Jan 08
Mitigation Plan / As-Built (Year 0 Monitoring - Baseline)	Oct 07 / Jan 08*	Feb 08
Year 1 Monitoring	Oct 08	Nov 08
Year 2 Monitoring	Nov 09	Dec 09


*The wetland restoration was constructed one year prior to the stream restoration and as-built data were collected accordingly.


Table III. Project Contact Table**Harrell Stream and Wetland Restoration**

Design Firm	KCI Technologies, Inc. Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Gary Mryncza Phone: (919) 783-9214 Fax: (919) 783-9266
Construction Contractor	Environmental Technologies and Construction Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Ryan McDavitt Phone: (919) 783-9214 Fax: (919) 783-9266
Planting Contractor	H & J Forest Services PO Box 458 Holly Ridge, NC 28445 Phone: (910) 512-6754
Monitoring Performers	
MY-00 - MY-05	KCI Technologies, Inc. Landmark Center II, Suite 220 4601 Six Forks Rd. Raleigh, NC 27609 Contact: Mr. Adam Spiller Phone: (919) 278-2514 Fax: (919) 783-9266

Table IV. Project Background Table
Harrell Stream and Wetland Restoration

Project County	Edgecombe County	
Physiographic Region	Coastal Plain	
Ecoregion	Southeastern Floodplains and Low Terraces	
Project River Basin	Tar-Pamlico	
USGS HUC for Project and Reference	03020101130090 (UT to Swift Creek) 03040101080010 (Mitchell River) 03030002060140 (North Prong Creek)	
NCDWQ Sub-basin for Project and Reference	03-03-02 (UT to Swift Creek) 03-07-02 (Mitchell River) 03-06-05 (North Prong Creek)	
Drainage Area	Wetland Stream	0.09 sq. mi. 0.60 sq. mi.
Stream Order	Second Order	
Watershed Type (Rural, Urban, Developing, etc.)	Rural	
Watershed LULC Distribution	Urban Ag-Row Crop Ag-Livestock Forested Water/Wetlands	<1% 95% 1% 4% <1%
Watershed impervious cover (%)	<1%	
Rosgen Classification of As-built (Stream)	B5c / C5	
Cowardin Classification (Wetland)	Palustrine - forested wetland	
NCDWQ Classification for Project	NSW, Class C	
Within EEP Watershed Plan?	No	
Any portion of the project segment upstream of a 303d listed segment?	No	
Reasons for 303d Listing or Stressor	N/A	
Total project acreage of easement	44.5 Acres	
Total planted acreage	43.0 Acres	
WRC Class (Warm, Cool, Cold)	warm	
Species of concern, endangered etc.	none	
Pre-construction Beaver activity?	Historically, according to landowner	
Dominant Soil Types	Wetland Stream	Roanoke loam series Roanoke loam and Wagram loamy sand series
% of Project Easement Fenced	0%	

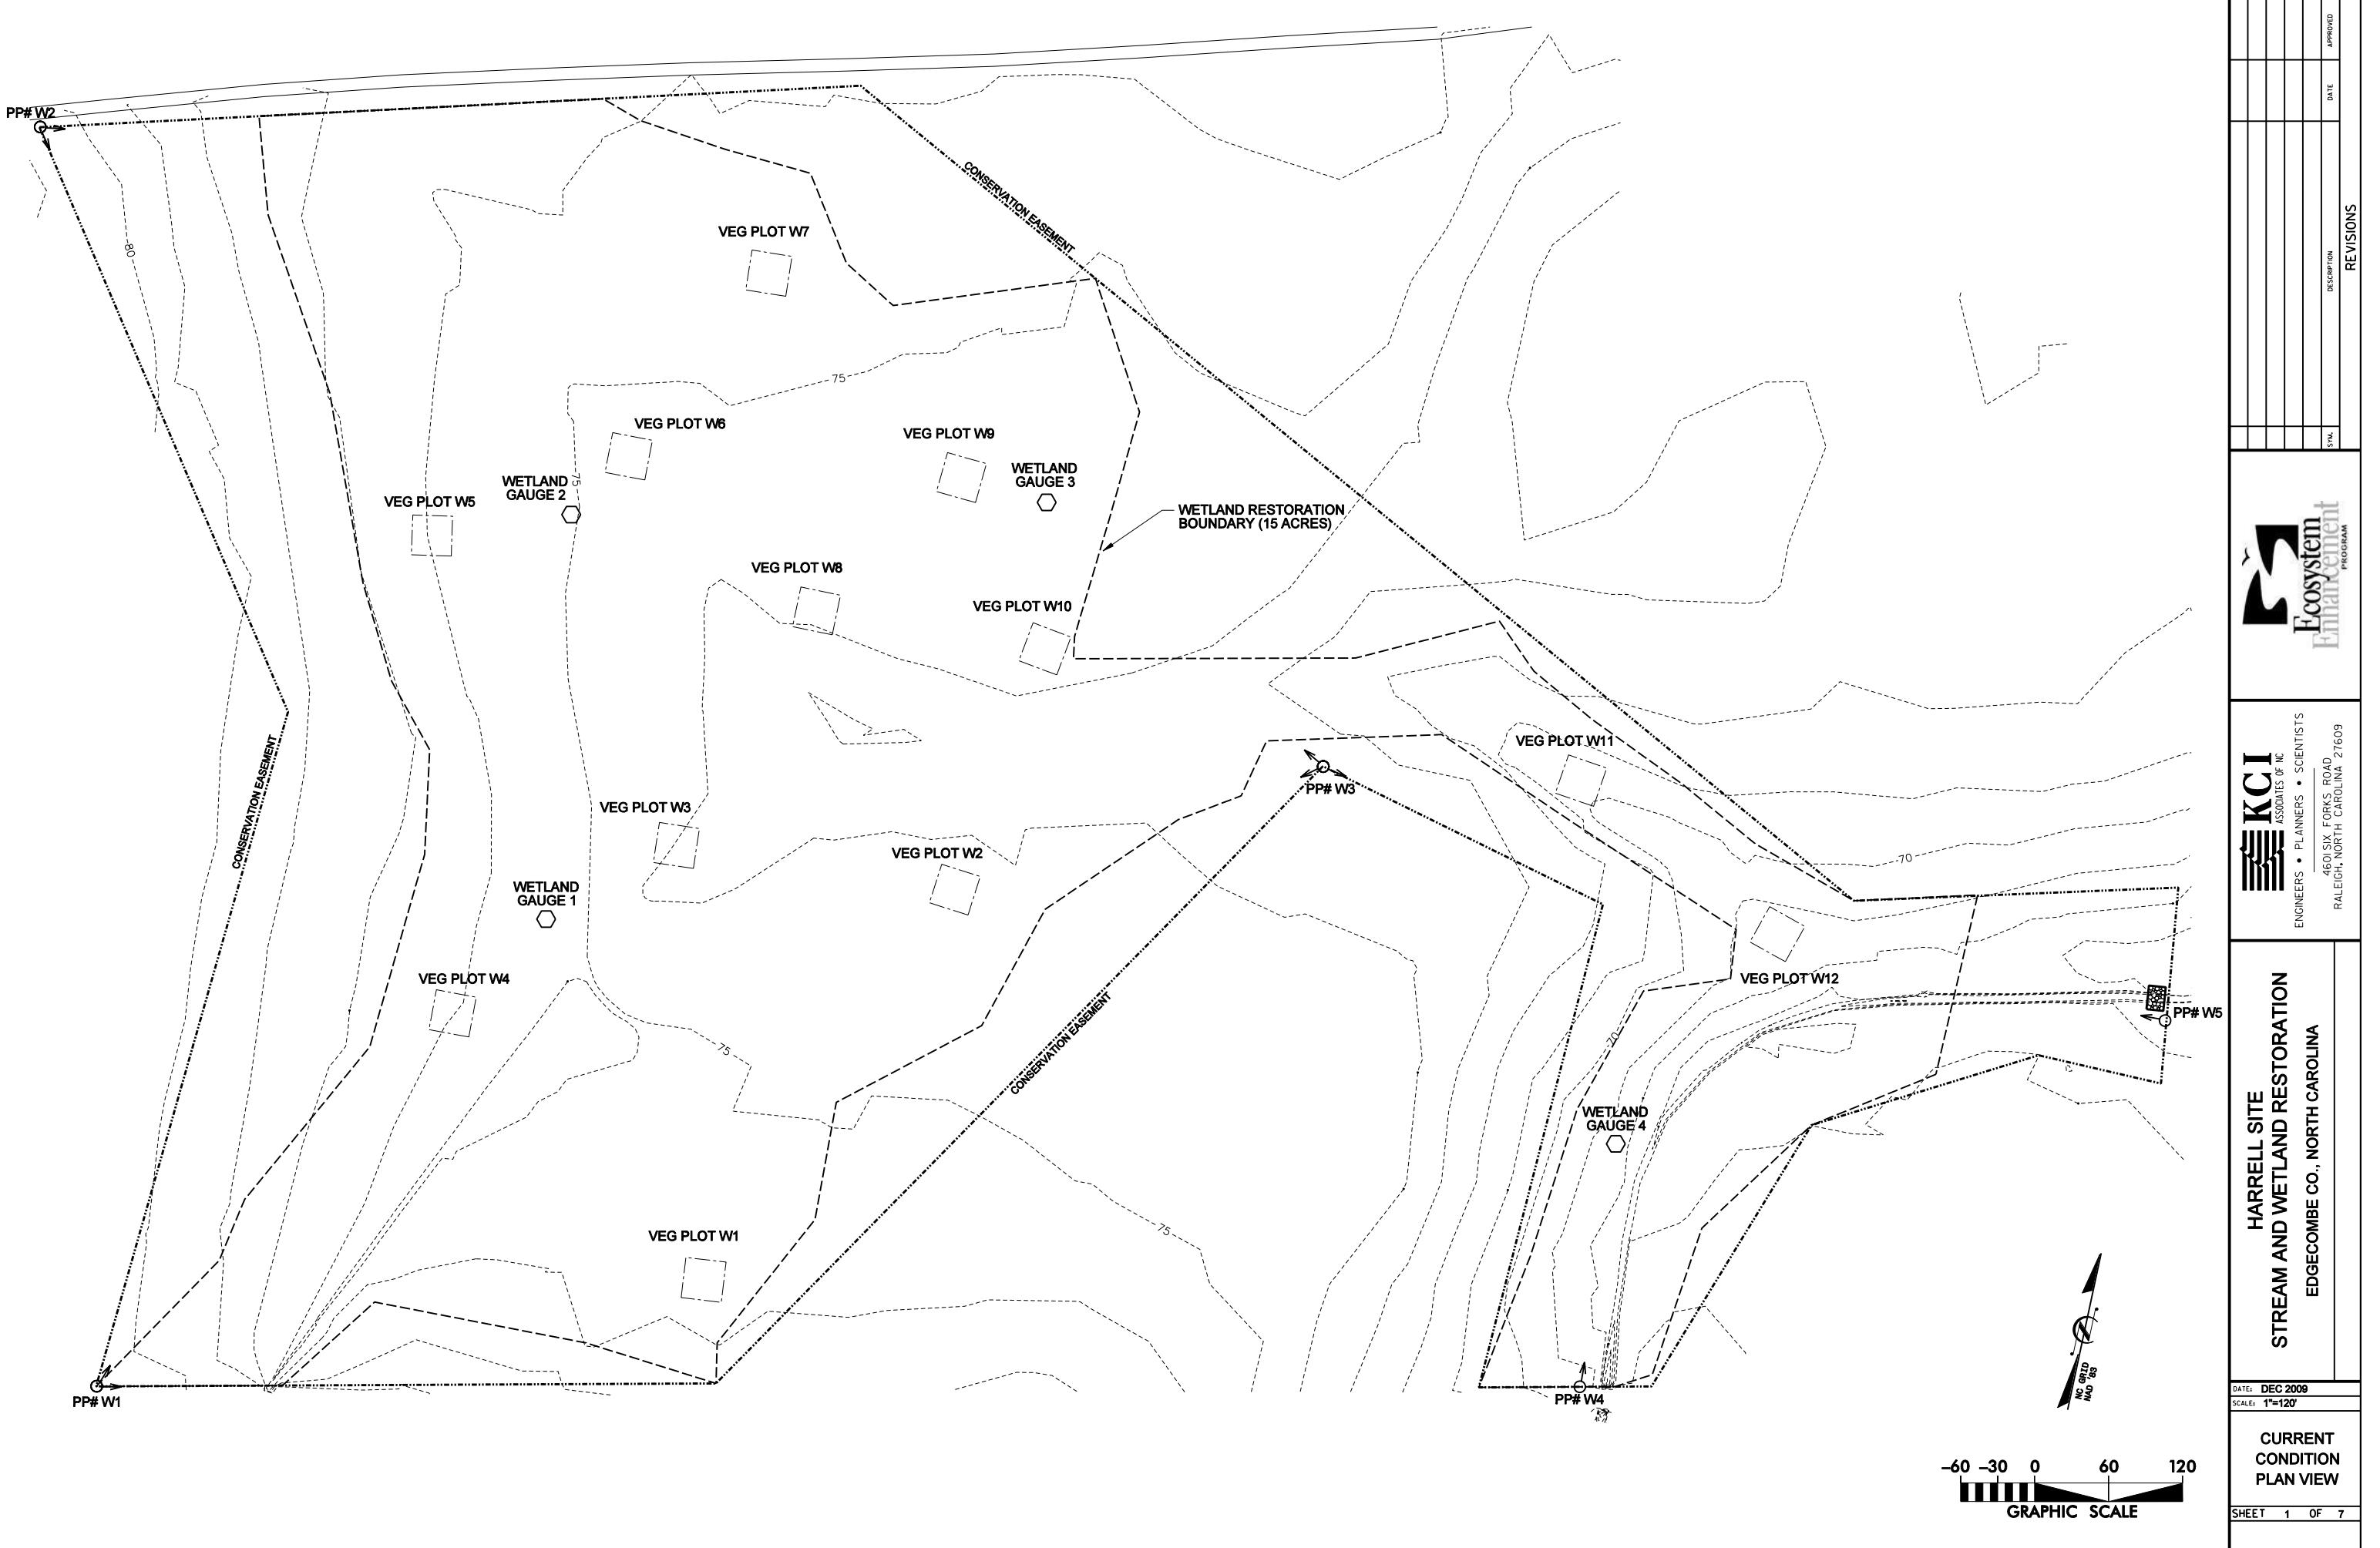

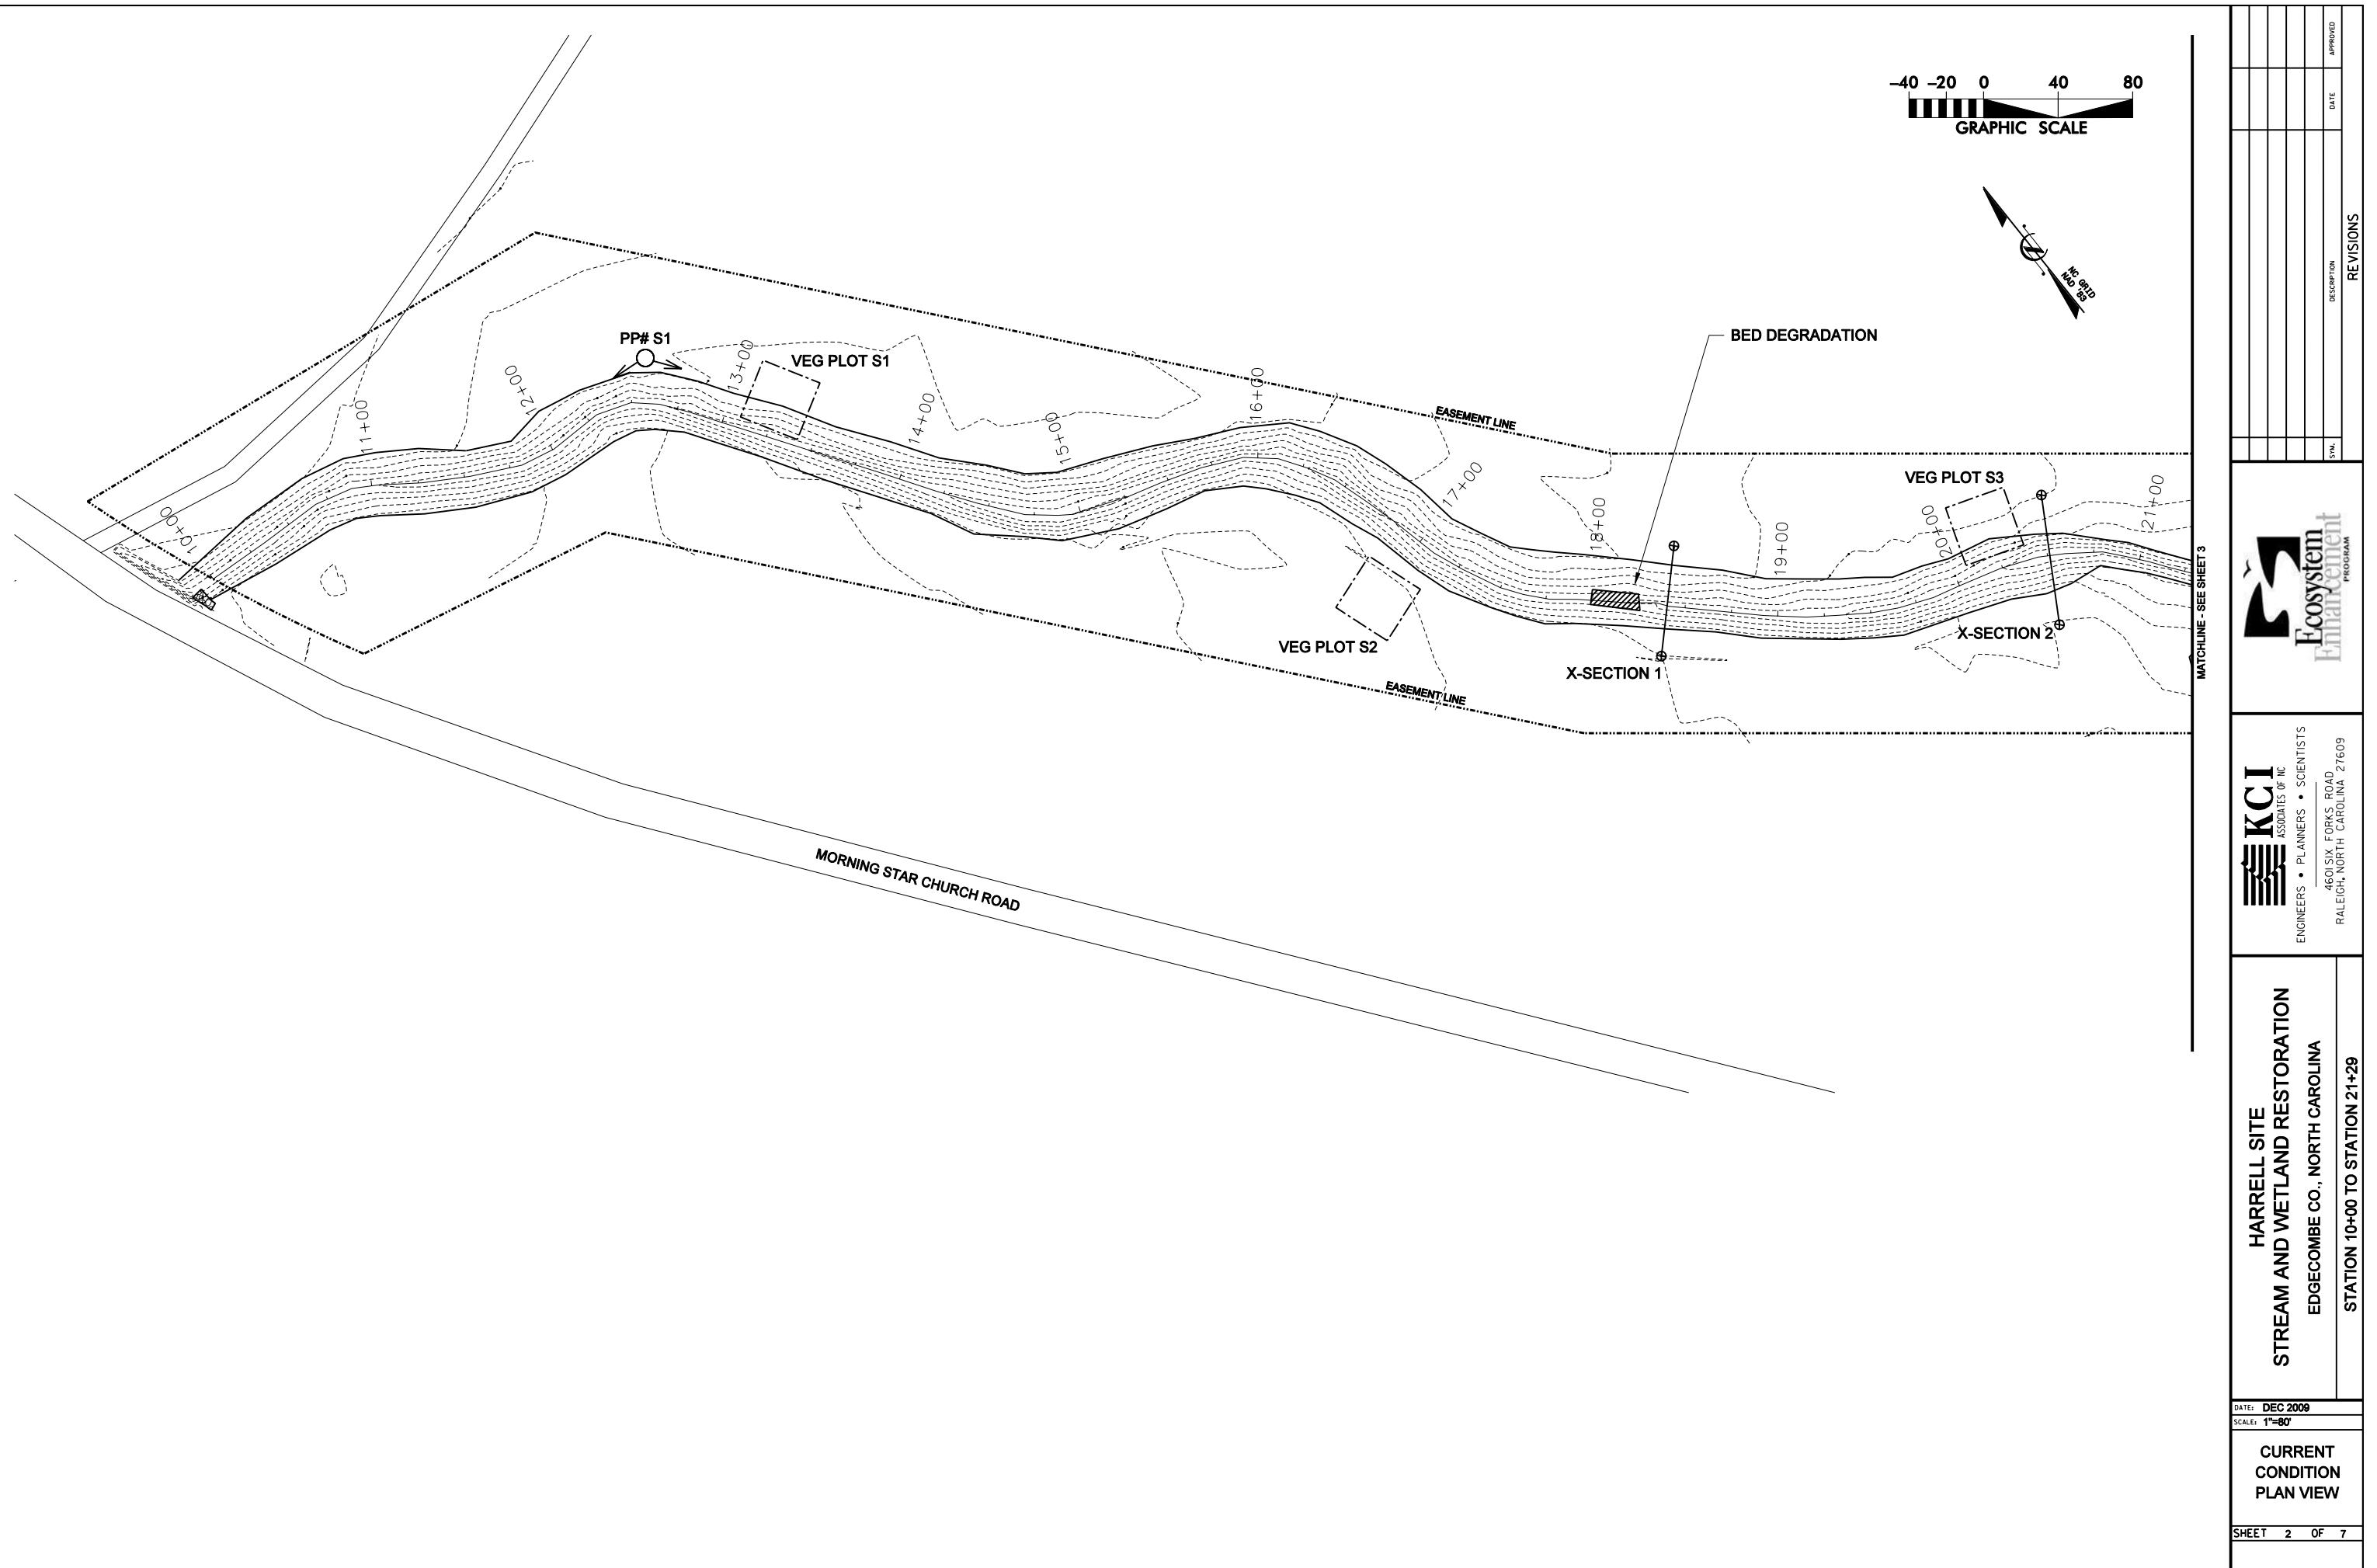

SYM.	DESCRIPTION	DATE




KCI
ASSOCIATES OF NC
ENGINEERS • PLANNERS • SCIENTISTS
460 SIX FORKS ROAD
RALEIGH, NORTH CAROLINA 27609

HARRELL SITE
STREAM AND WETLAND RESTORATION
EDGECOMBE CO., NORTH CAROLINA
STATION 21+29 TO STATION 33+64

DATE: DEC 2009
SCALE: 1"=80'


CURRENT
CONDITION
PLAN VIEW




SHEET 3 OF 7



MATCHLINE - SEE SHEET 2

MATCHLINE - SEE SHEET 4

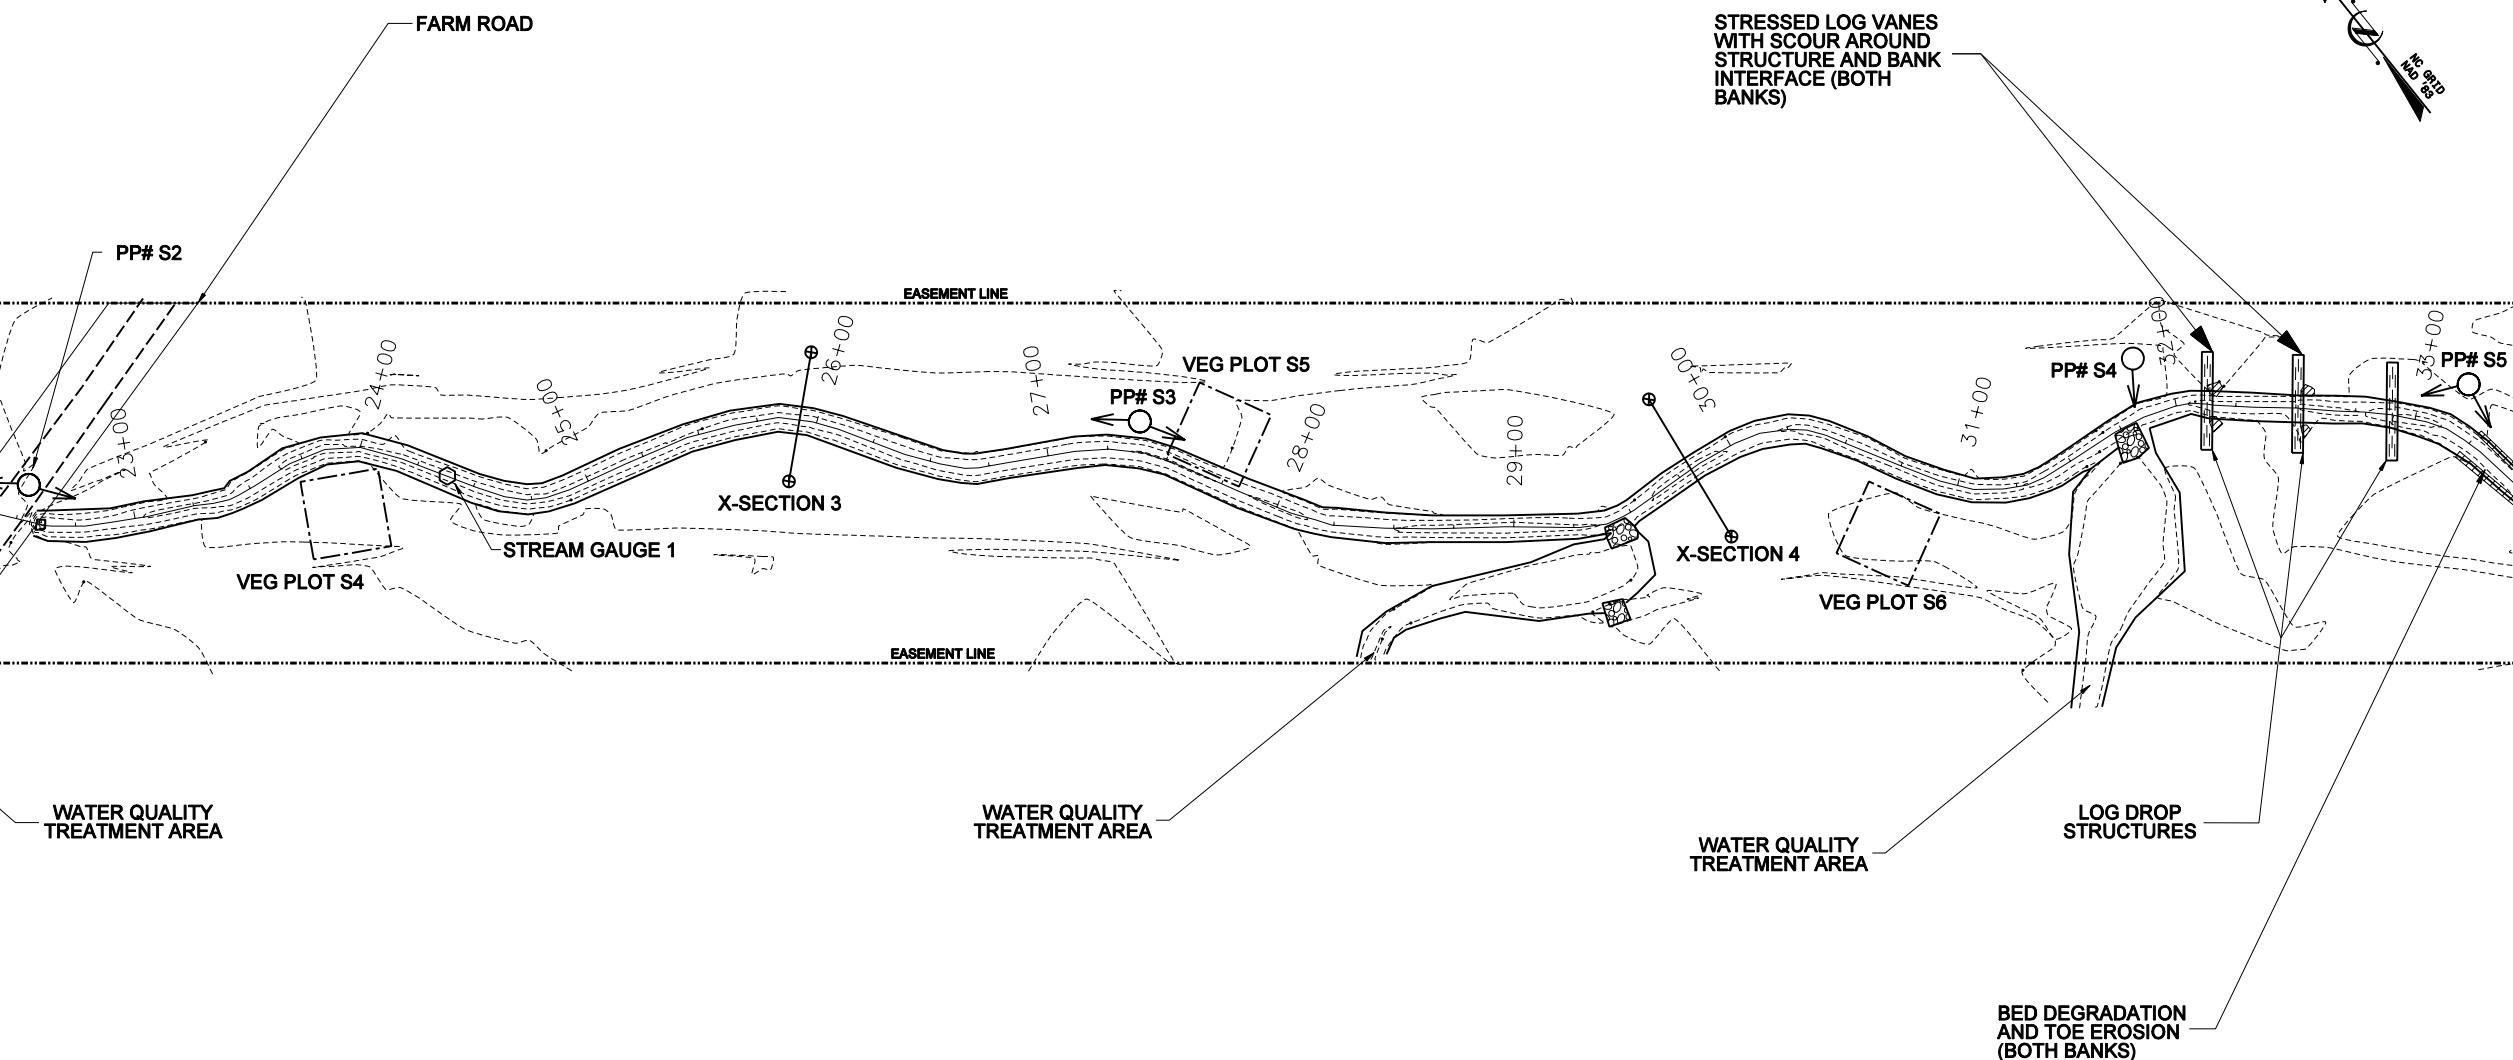

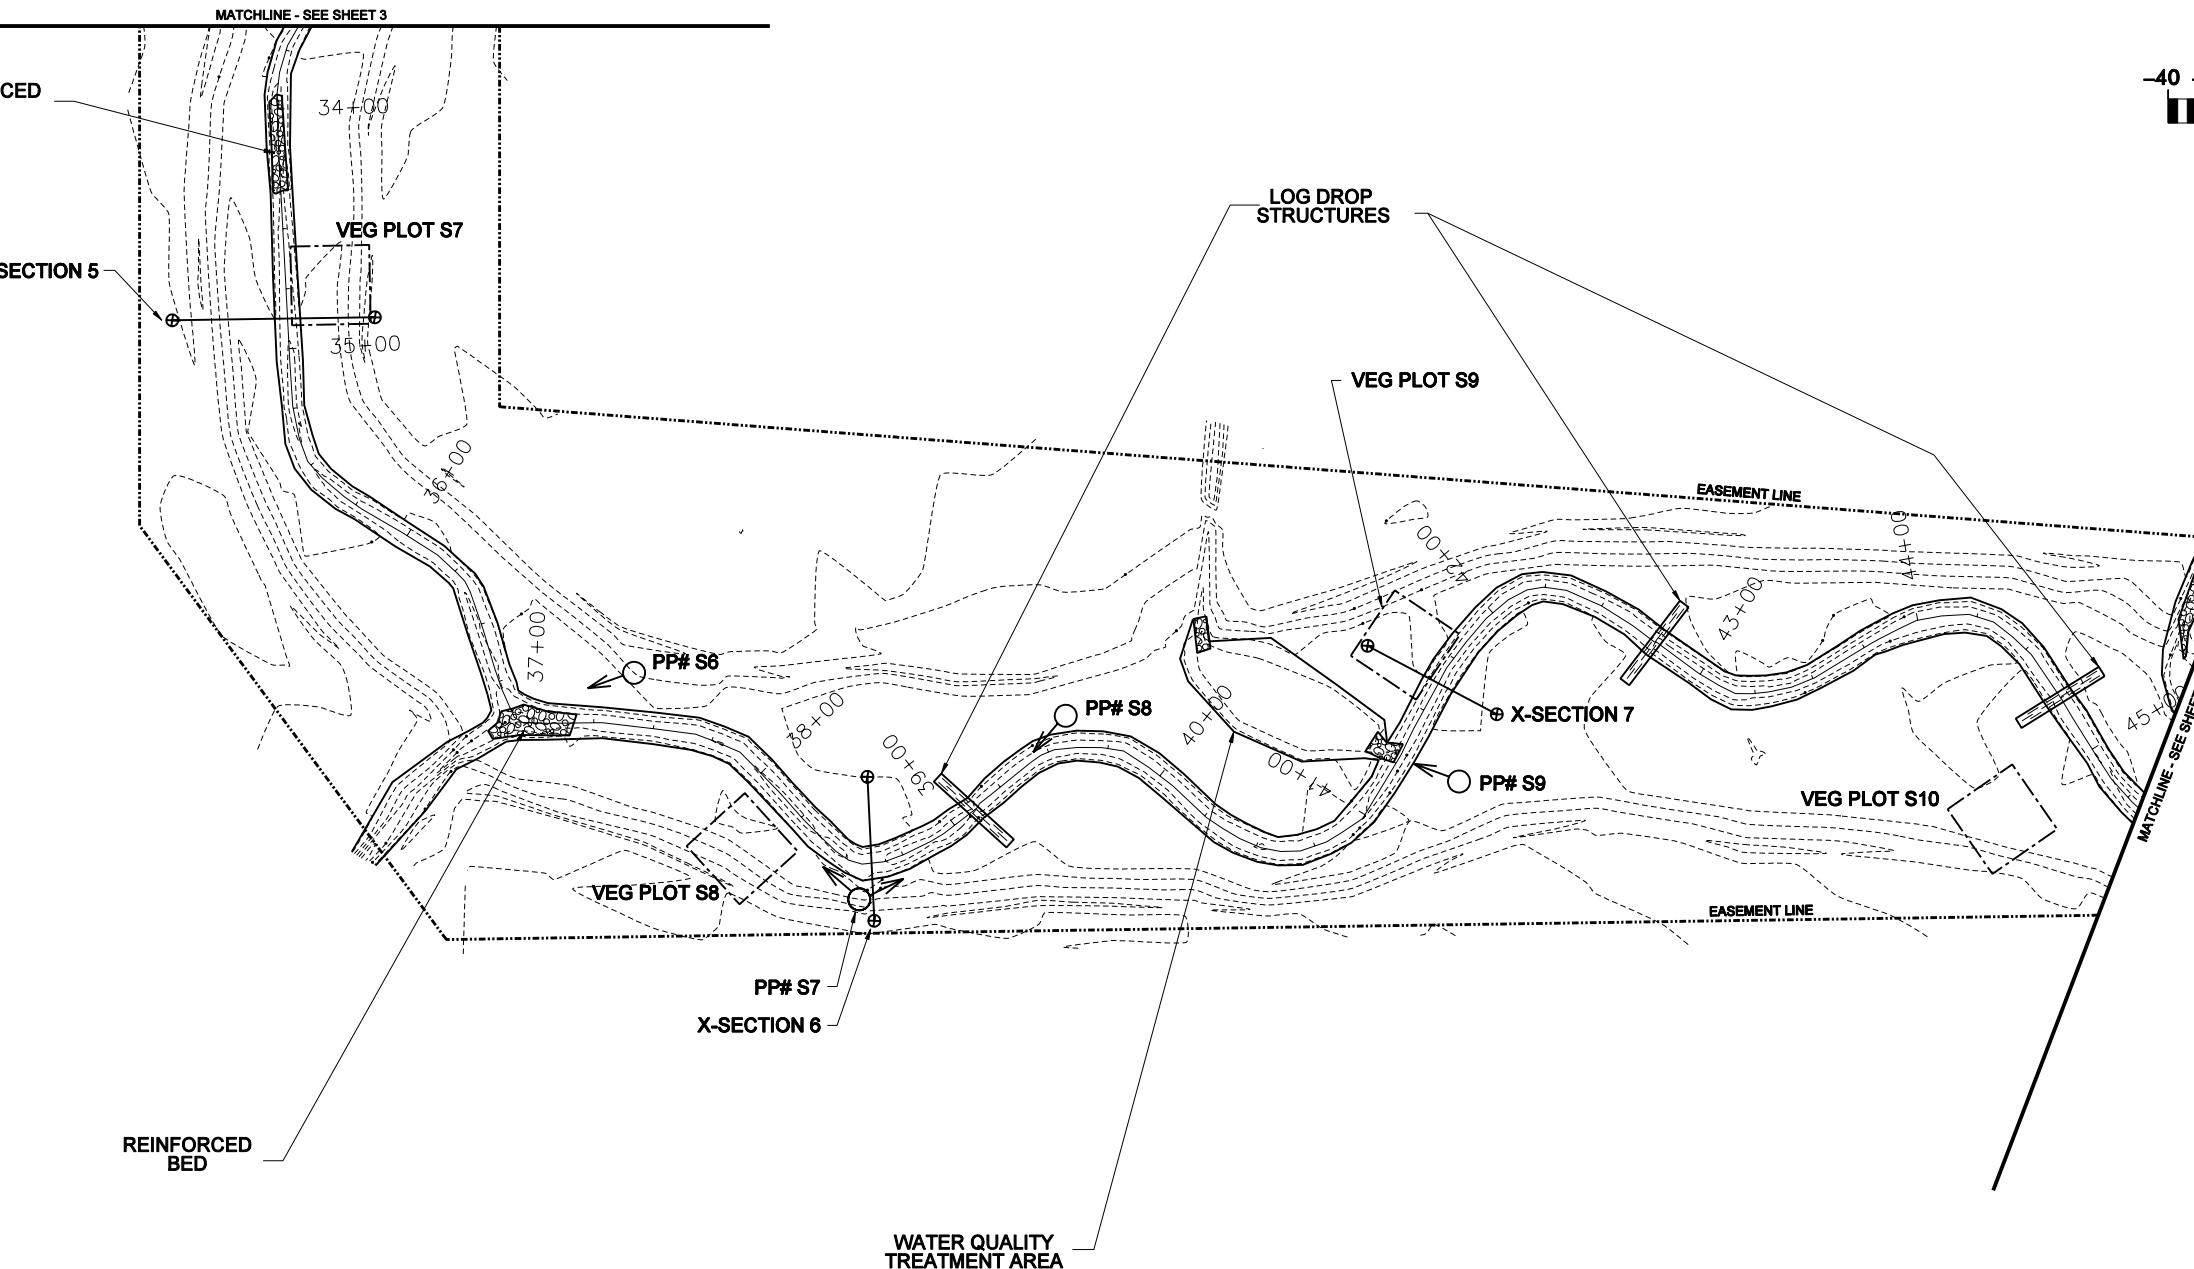

SYM. DESCRIPTION REVISIONS



KCI
ASSOCIATES OF NC
ENGINEERS • PLANNERS • SCIENTISTS
460 SIX FORKS ROAD
RALEIGH, NORTH CAROLINA 27609


HARRELL SITE
STREAM AND WETLAND RESTORATION
EDGECOMBE CO., NORTH CAROLINA
STATION 33+64 TO STATION 45+31

DATE: DEC 2009
SCALE: 1"=80'

CURRENT
CONDITION
PLAN VIEW

SHEET 4 OF 7

APPROVED

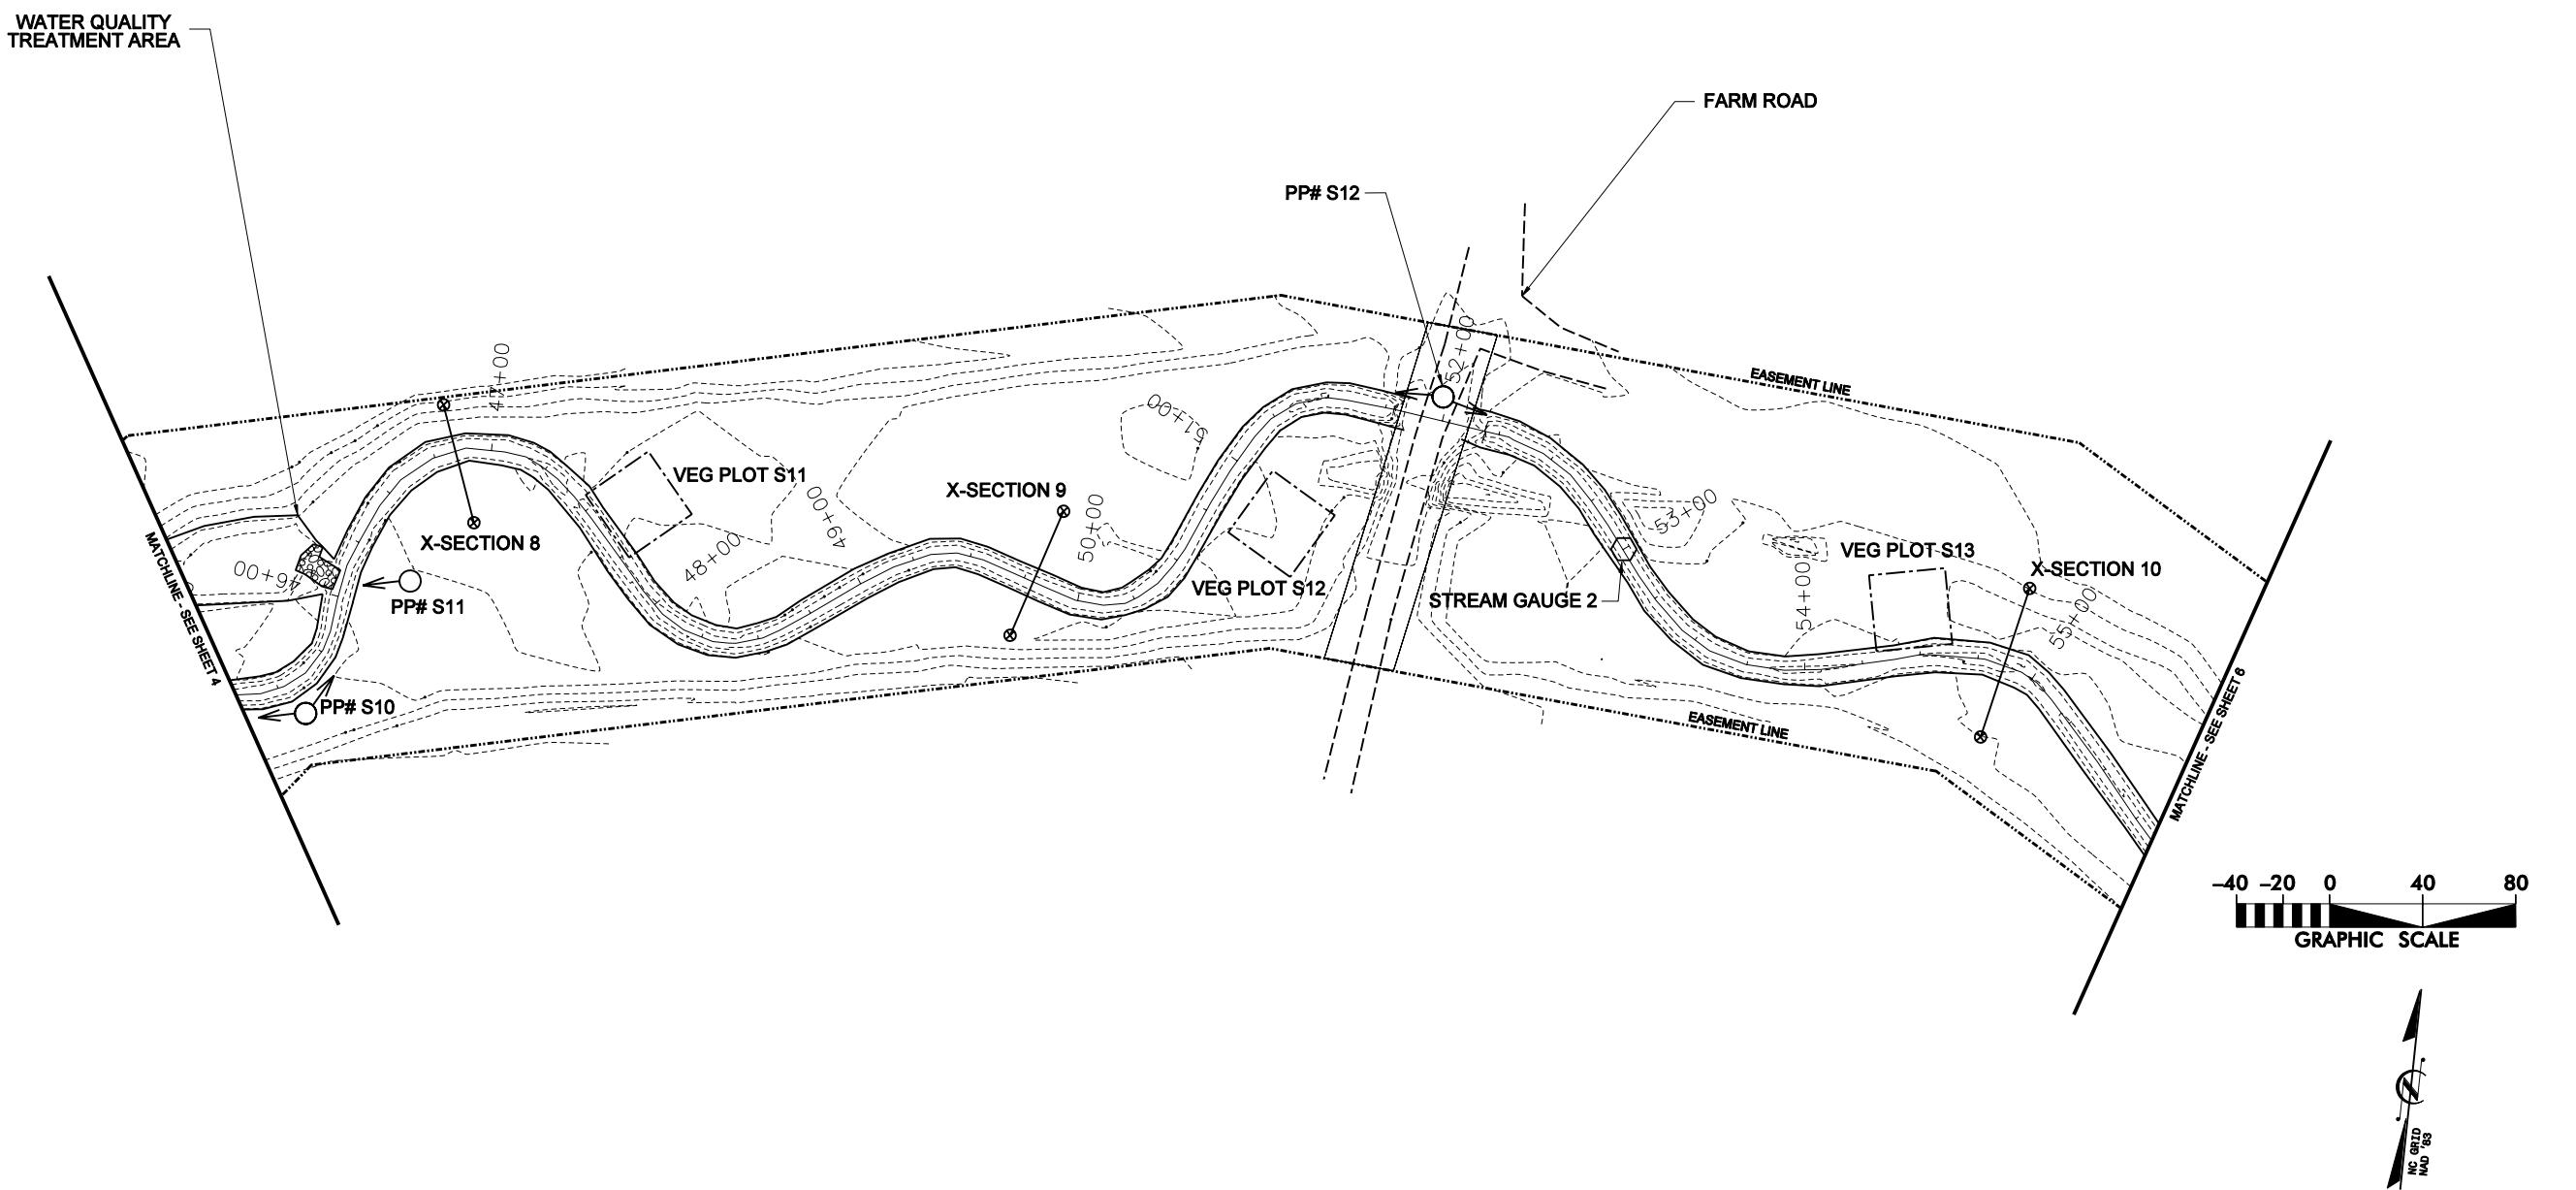

HARRELL SITE
STREAM AND WETLAND RESTORATION
EDGECOMBE CO., NORTH CAROLINA
STATION 45+31 TO STATION 55+86

DATE: DEC 2009
SCALE: 1"=80'



CURRENT
CONDITION
PLAN VIEW

SHEET 5 OF 7



KCI
ASSOCIATES OF NC
ENGINEERS • PLANNERS • SCIENTISTS
460 SIX FORKS ROAD
RALEIGH, NORTH CAROLINA 27609

SYN.	DESCRIPTION	APPROVED

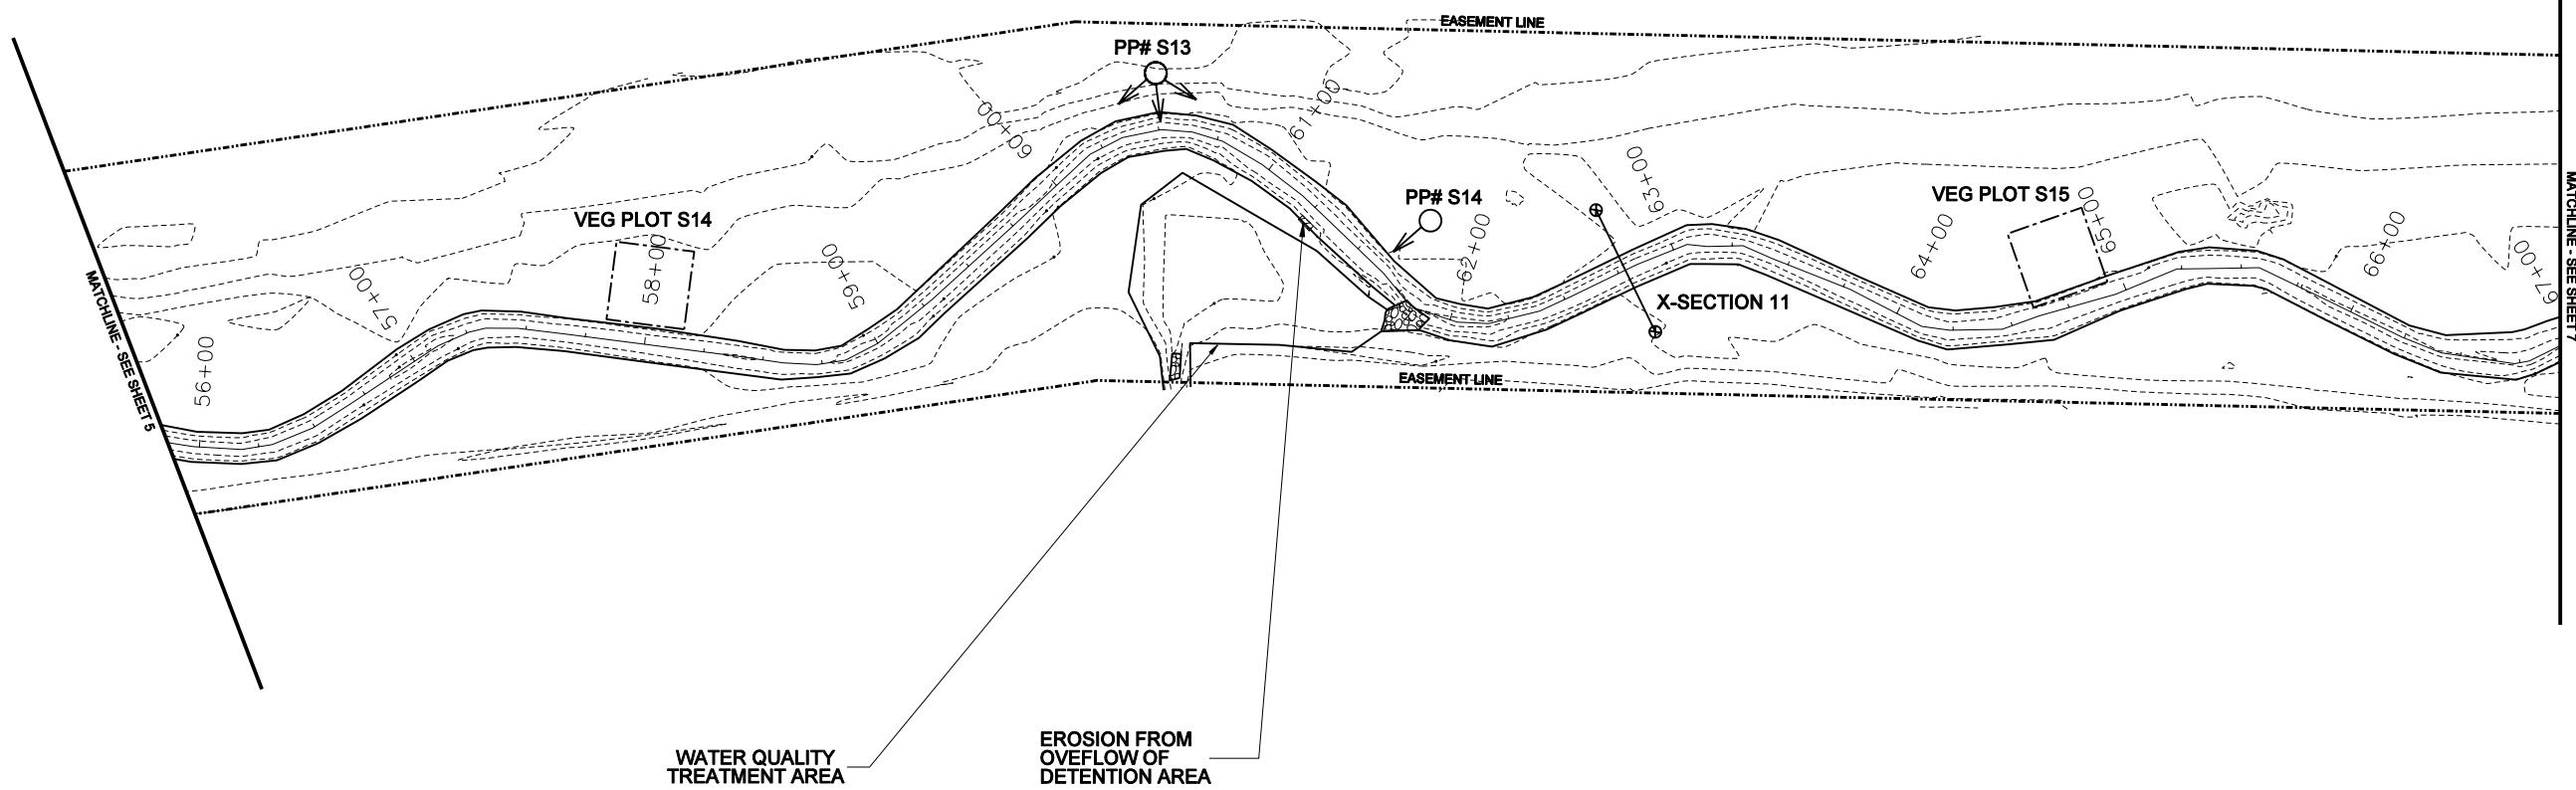

HARRELL SITE
STREAM AND WETLAND RESTORATION
EDGECOMBE CO., NORTH CAROLINA
STATION 55+86 TO STATION 66+94


DATE: DEC 2009
SCALE: 1"=80'
CURRENT
CONDITION
PLAN VIEW
SHEET 6 OF 7

KCI
ASSOCIATES OF NC
ENGINEERS • PLANNERS • SCIENTISTS
460 SIX FORKS ROAD
RALEIGH, NORTH CAROLINA 27609

**Ecosystem
Enhancement
PROGRAM**

SYM.	DESCRIPTION	REVISIONS

APPROVED

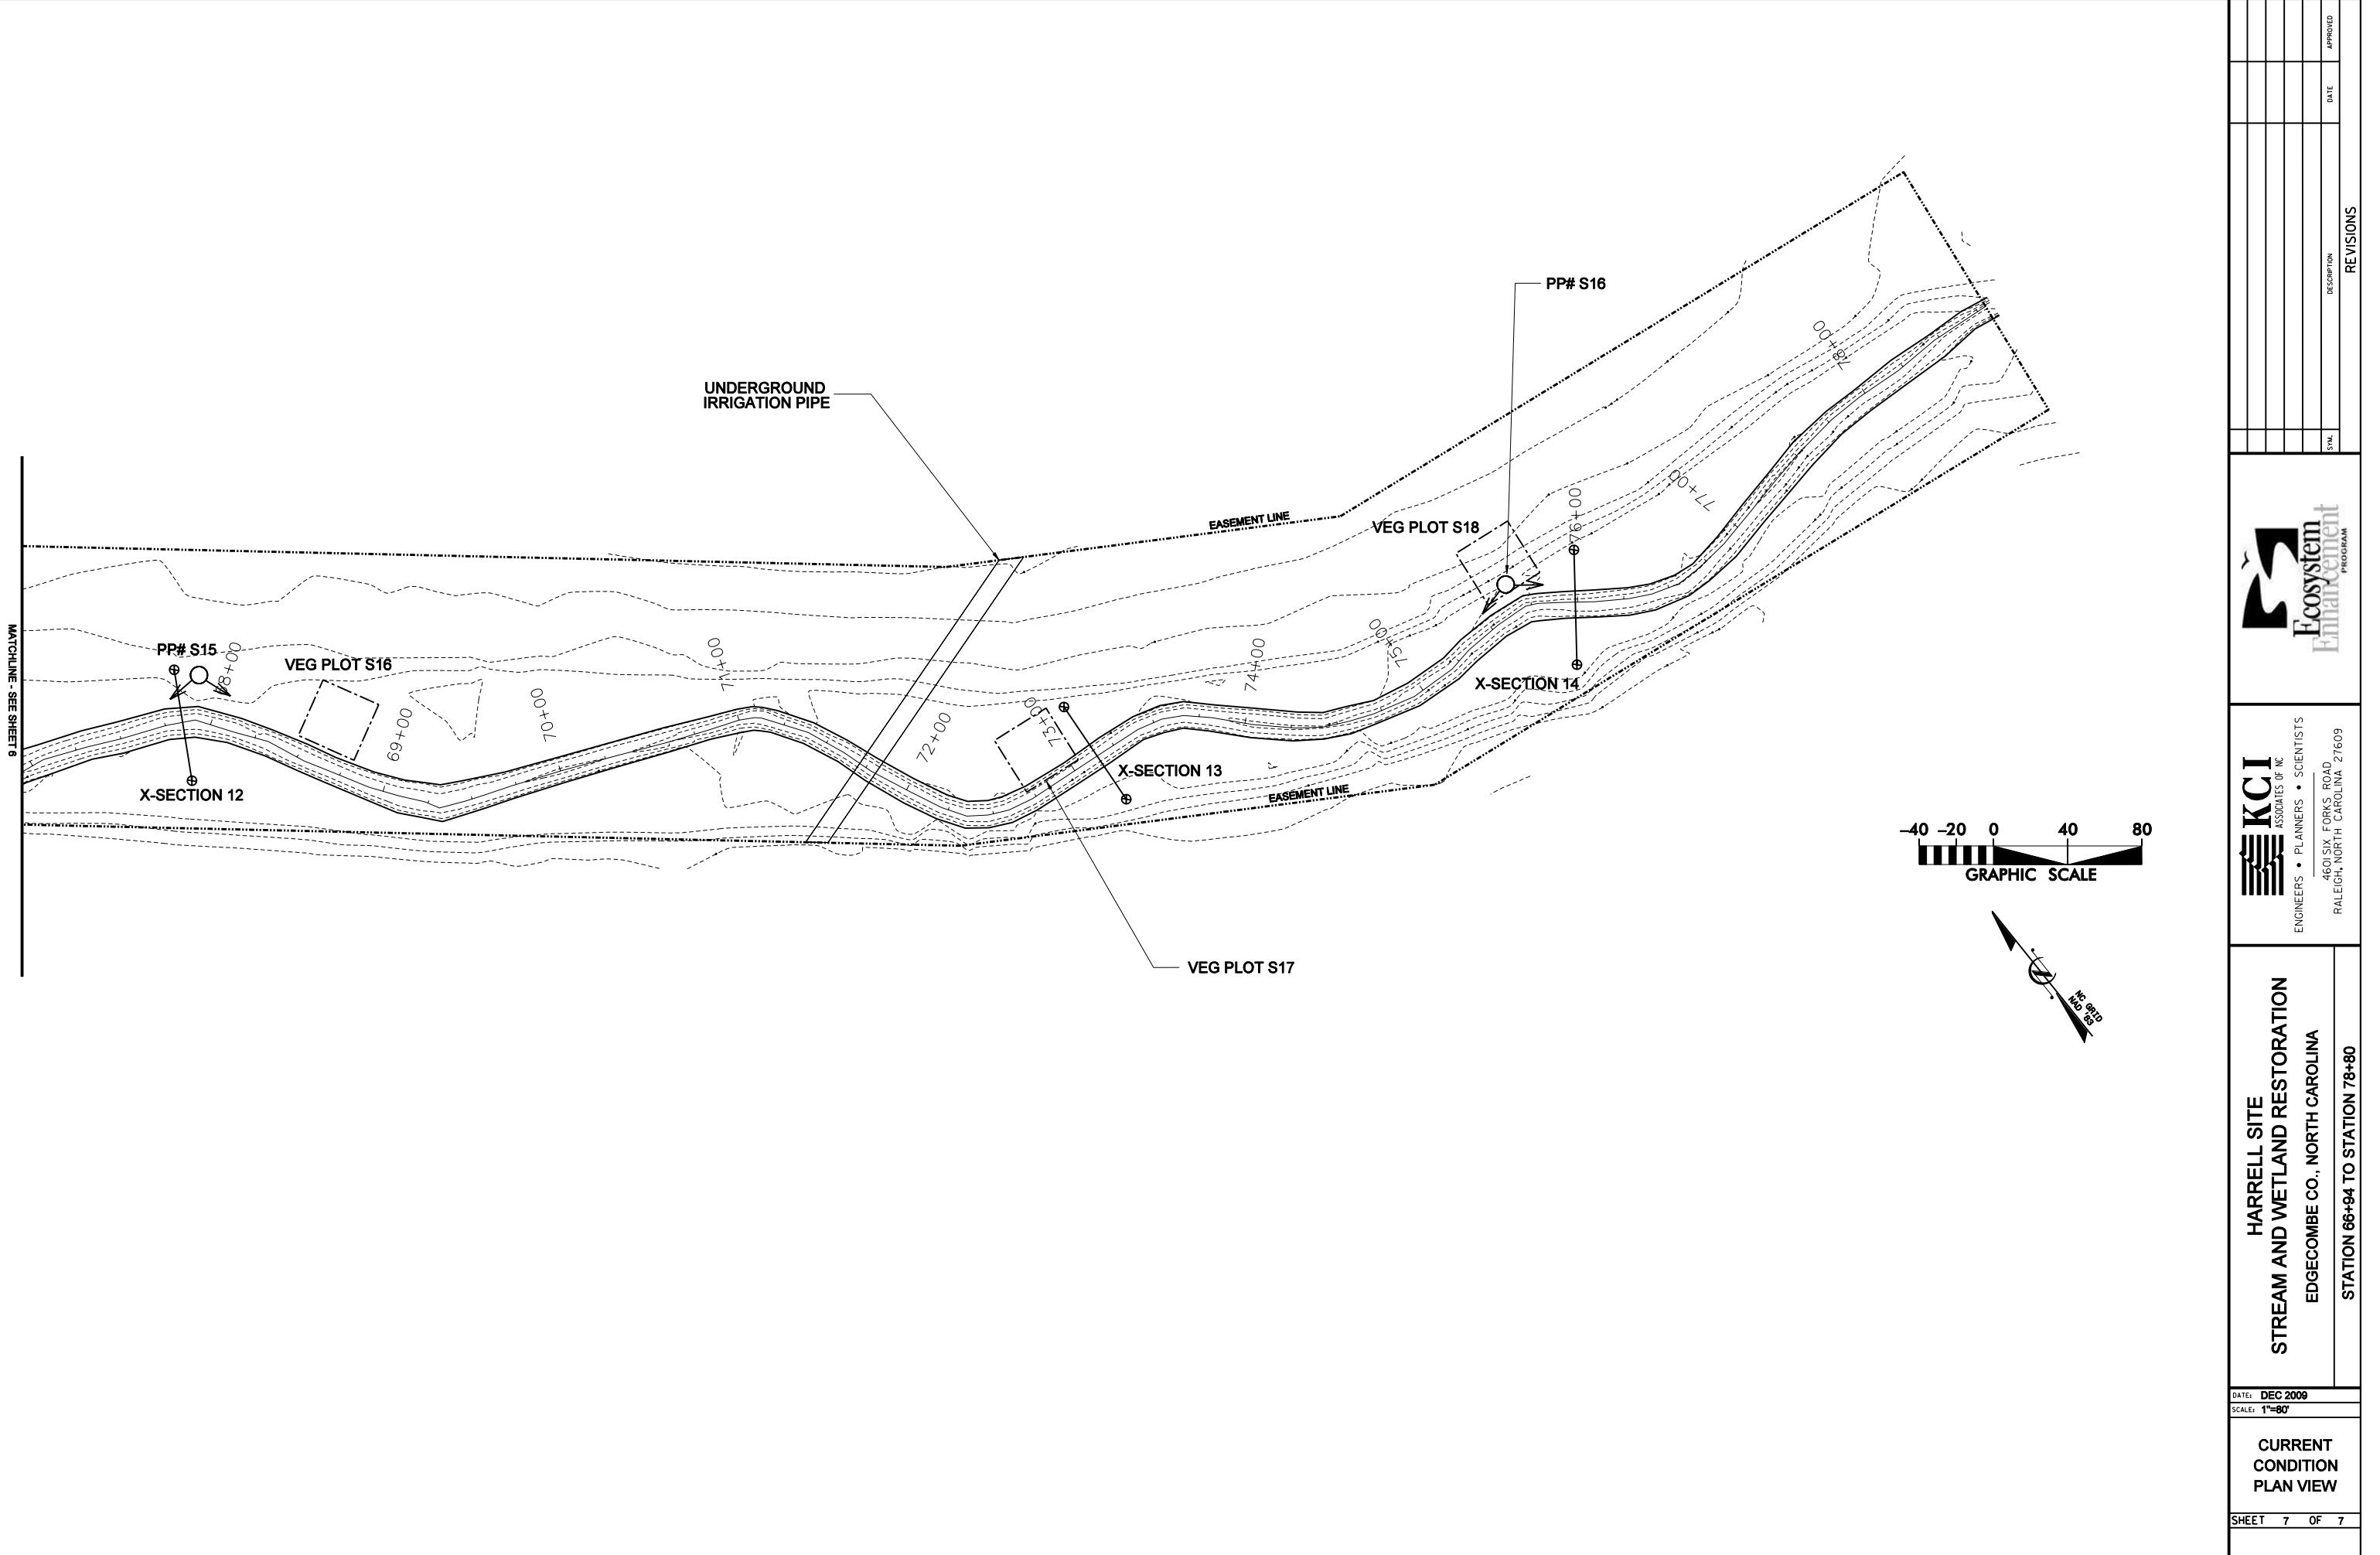

2.0 PROJECT CONDITIONS AND MONITORING RESULTS

2.1 Vegetation Assessment

The planted vegetation on the site is growing well. There are a few spots of sparse vegetation throughout the site due to poor soil being exposed in the priority 2 restoration. Also, due to backwater situations from Swift Creek, the downstream portion of the site often becomes flooded, drowning out trees planted in this area. Appropriate species will be replanted during the upcoming winter months.

The low stream flow throughout the summer months allowed vegetation to become established in the stream channel. This vegetation included grasses, rushes, cattails, and Asian dayflower (*Murdannia keisak*). While contributing to the overall stream stability, this vegetation could contribute to aggradation in the channel by trapping sediment. Further monitoring will determine if channel vegetation becomes a problem.

The floodplain, stream banks, and riparian buffer have small areas of sparse vegetation, but overall they are well vegetated. Some scattered populations of invasive species have been identified in the floodplain area, which include: Chinese lespedeza (*Lespedeza cuneata*) and tropical soda apple (*Solanum viarum*). Asian dayflower was present within the channel in isolated areas. Japanese honeysuckle (*Lonicera japonica*) was observed on the outer edges of the project. Although they are not a problem at this time, these populations will continue to be monitored to determine if invasive control is required in the future.

The monitored vegetation plots within the stream buffer and wetland revealed that the planted vegetation is growing well with 584 and 533 stems/acre, respectively. The overall vegetation assessment found the site to be on track to meeting the vegetative success criteria.

The vegetative monitoring results are displayed in Appendix A and the Current Conditions Plan View.

2.2 Stream Assessment

During the 2009 growing season, the stream experienced low flow throughout the summer. This flow allowed vegetation to become more established in some areas of the stream. The vegetation has not caused any problematic aggradation at this time, but it will continue to be monitored. The on-site stream gauge recorded a bankfull event on June 9, 2009.

The stream assessment found the stream to be generally stable. Periodic storm events caused isolated bed degradation in reaches 1 and 2. Some of these areas are visible on the longitudinal profile and cross-section plots. These patterns are typical for a stream like UT to Swift Creek. A sand bed system, like the project stream, is much more mobile than a gravel stream. Because of this, it is expected that patterns of aggradation and degradation are more dynamic within these systems. These dune/anti-dune streams will experience bed variation over time. The stream banks and floodplain experienced little to no erosion throughout the project. Piping is occurring at one instream structure, but the rest of the structures are performing as designed. Water quality treatment areas are stable and retaining water. All of these stream features will continue to be monitored to make sure that any observed changes are within the range of variability found in stable stream systems.

The stream assessment monitoring is described in Appendix B and the Current Conditions Plan View.

2.2.1 Bankfull Events

Table V. Hydrological (Bankfull) Verifications Harrell Stream and Wetland Restoration Site			
Date of Data Collection	Date of Occurrence	Method	Photo Number
10/10/2007	10/10/2007	Stream Gauge	N/A
10/27/2007	10/27/2007	Stream Gauge	N/A
7/6/2008	7/6/2008	Stream Gauge	N/A
6/9/2009	6/9/2009	Stream Gauge	N/A

2.2.2 Quantitative Measures Summary Tables

Table VI a. Reach 1 Baseline Stream Summary

Harrell Stream and Wetland Restoration

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design			As-built		
Dimension - Riffle	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)		5.4			1	29.2			35.0		10.0			10.2		1
Floodprone Width (ft)		>70			1	44			64		>18			22		1
Bankfull Mean Depth (ft)		1.3			1	2.0			2.1		0.9			1.2		1
Bankfull Max Depth (ft)		2.0			1	2.7			2.8		1.4			2.1		1
Bankfull Cross-Sectional Area (ft ²)		7.3			1	62.5			68.8		9.1			12.6		1
Width/Depth Ratio		4.1			1	13.9			17.5		11.1			8.3		1
Entrenchment Ratio		13			1	1.3			2.2		>1.8			2.7		1
Bank Height Ratio		1.8			1						1.0			1.0		1
Pattern																
Channel Beltwidth (ft)						100			400		45	65	47	66	85	5
Radius of Curvature (ft)						70			220		30	80	31	55	65	8
Rc:Bankfull width (ft/ft)						2.2			12.5		3.0	8.0	3.0	5.4	6.4	
Meander Wavelength (ft)						140			500		50	200	166	260	420	7
Meander Width Ratio						3			14		4	10	4.6	6.5	8.3	
Profile																
Riffle Length (ft)																
Riffle Slope (ft/ft)						0.007			0.027							
Pool Length (ft)																
Pool Spacing (ft)						115			400							
Substrate and Transport Parameters																
SC% / Sa% / G% / C% / B% / Be%	100% / - / - / - / - / -					- / 11% / 89% / - / - / -					7% / 85% / 8% / - / - / -					
d16 / d35 / d50 / d84 / d95 (mm)	0.062 / 0.062 / 0.1 / 0.1 / 0.1					2.6 / 5.7 / 7.1 / - / 15.0					0.15 / 0.36 / 0.54 / 1.1 / 6.0					
Additional Reach Parameters																
Channel length (ft)	1,224										1,265					
Drainage Area (SM)	0.20					6.00					0.20					
Rosgen Classification	E5					B4c					B5c					
Sinuosity	1.00					1.10					1.03					
Water Surface Slope (ft/ft)	0.0067					0.0084					0.0067					
BF slope (ft/ft)											0.0067					

Table VI b. Reach 2 Baseline Stream Summary**Harrell Stream and Wetland Restoration**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design			As-Built		
Dimension - Riffle	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n
Bankfull Width (ft)	5.7	6.1		6.5	2	13.6	15.7		17.8	2	10.0		9.2	10.2	11.5	3
Floodprone Width (ft)	>65			>70	2	325	463		600	2	>30		56	>59	>67	3
Bankfull Mean Depth (ft)	1.2	1.25		1.3	2	1.5	1.6		1.7	2	1.1		1.0	1.1	1.1	3
Bankfull Max Depth (ft)	1.9	1.9		1.9	2	2.6	2.8		3.0	2	1.4		1.6	1.7	1.9	3
Bankfull Cross-Sectional Area (ft ²)	7.5	7.75		8	2	22.6	24.4		26.2	2	11.2		8.8	10.5	12.5	3
Width/Depth Ratio	4.3	4.8		5.3	2	8.2	10.1		11.9	2	9.1		9.3	9.8	10.6	3
Entrenchment Ratio	10.8	11.1		11.4	2	23.8	28.8		33.7	2	>3.0		4.8	5.9	6.8	3
Bank Height Ratio	1.4	1.6		1.8	2	1.0	1.0		1.0	2	1.0		1.0	1.0	1.0	3
Pattern																
Channel Beltwidth (ft)						158				45	60	24	32	41	8	
Radius of Curvature (ft)						37	158		40		30	50	30	36	43	14
Rc:Bankfull width (ft/ft)						2.1			2.3		3.0	5.0	2.9	3.5	4.2	
Meander Wavelength (ft)						94			143		100	200	125	157	186	8
Meander Width Ratio						8.9				4.0	10.0	2.4	3.1	4.0		
Profile																
Riffle Length (ft)																
Riffle Slope (ft/ft)																
Pool Length (ft)																
Pool Spacing (ft)																
Substrate and Transport Parameters																
SC% / Sa% / G% / C% / B% / Be%	88% / 12% / - / - / - / -					11% / 89% / - / - / - / -					3% / 81% / 16% / - / - / -					
d16 / d35 / d50 / d84 / d95 (mm)	0.062 / 0.062 / 0.1 / - / -					0.075 / 0.14 / 0.2 / 0.4 / 0.6					0.3 / 0.7 / 0.9 / 3.5 / 9.8					
Additional Reach Parameters																
Channel length (ft)	1,400								1,465				1,465			
Drainage Area (SM)	0.23				3.04				0.23				0.23			
Rosgen Classification	E5				C5				C5				C5			
Sinuosity	1.00				1.28				1.05				1.07			
Water Surface Slope (ft/ft)	0.0023				0.0024				0.0023				0.0021			
BF slope (ft/ft)									0.0023				0.0022			

Table VI c. Reach 3 Baseline Stream Summary**Harrell Stream and Wetland Restoration**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design			As-built		
Dimension - Riffle																
Bankfull Width (ft)	6.4	7.6	7.7	8.6	4	13.6	15.7		17.8	2	12.0		11.8	12.8	14.1	4
Floodprone Width (ft)	>65			>80	4	325	463		600	2	>30		>50	>57	>61	4
Bankfull Mean Depth (ft)	1.4	1.6	1.5	1.9	4	1.5	1.6		1.7	2	1.4		1.2	1.3	1.4	4
Bankfull Max Depth (ft)	2.4	2.7	2.7	2.8	4	2.6	2.8		3.0	2	2.0		1.9	2.1	2.5	4
Bankfull Cross-Sectional Area (ft ²)	10.4	11.6	12.0	12.1	4	22.6	24.4		26.2	2	16.8		14.4	16.2	19.1	4
Width/Depth Ratio	3.3	5.0	5.3	6.2	4	8.2	10.1		11.9	2	8.6		8.9	10.1	10.8	4
Entrenchment Ratio	7.6	9.5	9.8	10.9	4	23.8	28.8		33.7	2	>2.5		3.8	4.5	5.0	4
Bank Height Ratio	1.5	1.6	1.6	1.7	4	1.0	1.0		1.0	2	1.0		1.0	1.0	1.0	4
Pattern																
Channel Beltwidth (ft)						158			60	100	41	70	107	11		
Radius of Curvature (ft)						37	158		40	40	60	21	35	46	13	
Rc:Bankfull width (ft/ft)						2.1			2.3	3.0	5.0	1.6	2.7	3.6		
Meander Wavelength (ft)						94			143	120	240	158	183	225	11	
Meander Width Ratio						8.9			4.0	10.0	3.2	5.5	8.4			
Profile																
Riffle Length (ft)																
Riffle Slope (ft/ft)																
Pool Length (ft)																
Pool Spacing (ft)																
Substrate and Transport Parameters																
SC% / Sa% / G% / C% / B% / Be%	65% / 35% / - / - / - / -					11% / 89% / - / - / - / -					7% / 81% / 12% / - / - / -					
d16 / d35 / d50 / d84 / d95	0.062 / 0.062 / 0.1 / - / -					0.075 / 0.14 / 0.2 / 0.4 / 0.6					0.2 / 0.5 / 0.8 / 1.9 / 5.9					
Additional Reach Parameters																
Channel length (ft)	1,225										1,560					
Drainage Area (SM)	0.42					3.04					0.42					
Rosgen Classification	E5					C5					C5					
Sinuosity	1.00					1.28					1.27					
Water Surface Slope (ft/ft)	0.0023					0.0024					0.0023					
BF slope (ft/ft)											0.0023					

Table VI d. Reach 4 Baseline Stream Summary**Harrell Stream and Wetland Restoration**

Parameter	Pre-Existing Condition					Reference Reach(es) Data					Design			As-built				
Dimension - Riffle	Min	Mean	Med	Max	n	Min	Mean	Med	Max	n	Min	Max	Min	Mean	Max	n		
Bankfull Width (ft)	8.4	9.5	9.6	10.4	3	13.6	15.7		17.8	2	13.4		13.1	14.2	16.5	5		
Floodprone Width (ft)	>65			>70	3	325	463		600	2	>30		>57	>61	>67	5		
Bankfull Mean Depth (ft)	1.1	1.5	1.2	2.2	3	1.5	1.6		1.7	2	1.6		1.3	1.4	1.7	5		
Bankfull Max Depth (ft)	1.7	2.5	2.7	3.0	3	2.6	2.8		3.0	2	2.3		2.0	2.2	2.5	5		
Bankfull Cross-Sectional Area (ft ²)	10.4	13.8	12.7	18.4	3	22.6	24.4		26.2	2	21.6		17.9	20.5	28.2	5		
Width/Depth Ratio	3.8	7.0	8.5	8.8	3	8.2	10.1		11.9	2	8.4		8.8	9.9	10.8	5		
Entrenchment Ratio	7.1	7.2	7.2	7.3	3	23.8	28.8		33.7	2	>2.2		3.6	4.4	5.0	5		
Bank Height Ratio	0.9	1.0	1.0	1.2	3	1.0	1.0		1.0	2	1.0		1.0	1.0	1.0	5		
Pattern																		
Channel Beltwidth (ft)						158				50	90	32	59	101	18			
Radius of Curvature (ft)						37	158		40		40	70	30	50	63	17		
Rc:Bankfull width (ft/ft)						2.1			2.3		3.0	5.0	2.1	3.5	4.0			
Meander Wavelength (ft)						94			143		130	260	196	233	300	18		
Meander Width Ratio						8.9				4.0	10.0	2.3	4.2	7.1				
Profile																		
Riffle Length (ft)																		
Riffle Slope (ft/ft)																		
Pool Length (ft)																		
Pool Spacing (ft)																		
Substrate and Transport Parameters																		
SC% / Sa% / G% / C% / B% / Be%	50% / 16% / 34% / - / - / -				11% / 89% / - / - / - / -				7.8% / 77.2% / 15% / - / -									
d16 / d35 / d50 / d84 / d95	0.062 / 0.062 / 0.062 / 3.1 / 4.3				0.075 / 0.14 / 0.2 / 0.4 / 0.6				0.6 / 1.1 / 1.3 / 2.4 / 5.0									
Additional Reach Parameters																		
Channel length (ft)	2,500										2,697							
Drainage Area (SM)	0.61					3.04					0.605							
Rosgen Classification	E5					C5					C5							
Sinuosity	1.00					1.28					1.08							
Water Surface Slope (ft/ft)	0.0023					0.0024					0.0023							
BF slope (ft/ft)											0.0023							

Table VII. Morphology and Hydraulic Monitoring Summary**Harrell Stream and Wetland Restoration**

Parameter	Cross-Section 1 Reach 1						Cross-Section 2 Reach 1						Cross-Section 3 Reach 2					
	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5
Dimension																		
Bankfull Width (ft)	10.2	10.4	10.5				12.4	12.7	13.4				11.5	13.1	12.4			
Floodprone Width (ft)	22	27	30				25	25	24				>55	>55	>55			
Bankfull Cross-Sectional Area (ft ²)	12.6	13.4	14.3				17.1	12.9	14.3				12.5	12.6	11.9			
Bankfull Mean Depth (ft)	1.2	1.3	1.4				1.4	1.0	1.1				1.1	1.0	1.0			
Bankfull Maximum Depth (ft)	2.1	2.1	2.1				2.2	1.7	1.8				1.9	1.9	1.9			
Width/Depth Ratio	8.3	8.1	7.7				9.0	12.5	12.6				10.6	13.7	12.9			
Entrenchment Ratio	2.7	2.6	2.9				2.8	2.0	1.9				>5.0	>5.0	>5.0			
Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Wetted Perimeter (ft)	11.2	11.5	11.6				13.3	13.6	14.2				12.2	13.9	13.0			
Hydraulic Radius (ft)	1.1	1.2	1.2				1.3	0.9	1.0				1.0	0.9	0.9			
Substrate																		
d50 (mm)	0.5	1.8	0.1				1.1	1.8	0.1				0.6	2.3	0.4			
d84 (mm)	1.1	14.0	1.8				1.8	5.3	0.9				1.4	4.3	1.3			

Table VII. cont. Morphology and Hydraulic Monitoring Summary**Harrell Stream and Wetland Restoration**

Parameter	Cross-Section 4 Reach 2						Cross-Section 5 Reach 2						Cross-Section 6 Reach 3					
	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5
Dimension																		
Bankfull Width (ft)	9.8	11.5	8.8				9.2	9.9	8.2				14.1	15.0	13.4			
Floodprone Width (ft)	>67	>67	>67				56	56	57				>60	>60	56.3			
Bankfull Cross-Sectional Area (ft ²)	10.3	10.8	8.1				8.8	10.2	8.8				19.1	20.8	18.6			
Bankfull Mean Depth (ft)	1.1	0.9	0.9				1.0	1.0	1.1				1.4	1.4	1.4			
Bankfull Maximum Depth (ft)	1.7	1.7	1.5				1.6	2.0	1.8				2.5	2.7	2.6			
Width/Depth Ratio	9.3	12.2	9.6				9.6	9.7	7.6				10.4	10.8	9.7			
Entrenchment Ratio	>7.0	>7.0	>7.0				6.1	5.7	7.0				4.3	>5.0	4.2			
Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Wetted Perimeter (ft)	10.7	12.2	9.4				10.0	10.9	9.3				15.2	16.3	14.7			
Hydraulic Radius (ft)	1.0	0.9	0.9				0.9	0.9	0.9				1.3	1.3	1.3			
Substrate																		
d50 (mm)	1.3	3.4	0.1				0.9	0.8	0.1				0.6	0.2	0.1			
d84 (mm)	4.4	6.2	1.2				4.6	3.8	0.3				2.0	7.7	1.0			

Table VII. cont. Morphology and Hydraulic Monitoring Summary**Harrell Stream and Wetland Restoration**

Parameter	Cross-Section 7						Cross-Section 8						Cross-Section 9					
	Reach 3						Reach 3						Reach 3					
Dimension	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5
Bankfull Width (ft)	12.1	12.0	13.0				13.0	11.9	11.0				11.8	12.4	11.9			
Floodprone Width (ft)	>61	>61	>61				>50	>50	>50				>58	>58	>58			
Bankfull Cross-Sectional Area (ft ²)	14.4	16.2	18.5				15.6	15.8	13.2				15.6	15.2	14.3			
Bankfull Mean Depth (ft)	1.2	1.4	1.4				1.2	1.3	1.2				1.3	1.2	1.2			
Bankfull Maximum Depth (ft)	1.9	2.6	2.8				1.9	2.0	1.8				2.0	2.0	1.9			
Width/Depth Ratio	10.2	8.8	9.1				10.8	8.9	9.2				8.9	10.1	9.9			
Entrenchment Ratio	>5.0	>5.0	>5.0				>4.0	>5.0	>5.0				>5.0	>5.0	>5.0			
Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Wetted Perimeter (ft)	12.8	13.2	14.3				14.0	12.8	11.9				12.8	13.2	12.7			
Hydraulic Radius (ft)	1.1	1.2	1.3				1.1	1.2	1.1				1.2	1.2	1.1			
Substrate																		
d50 (mm)	0.8	0.7	0.1				1.0	1.0	1.1				0.9	0.8	0.6			
d84 (mm)	2.0	7.3	0.7				1.9	5.5	3.2				1.7	1.7	1.0			

Table VII. cont. Morphology and Hydraulic Monitoring Summary**Harrell Stream and Wetland Restoration**

Parameter	Cross-Section 10						Cross-Section 11						Cross-Section 12					
	Reach 4						Reach 4						Reach 4					
Dimension	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5
Bankfull Width (ft)	13.5	13.9	12.7				14.0	13.3	12.8				16.8	17.6	16.1			
Floodprone Width (ft)	>67	>67	>67				>57	>57	>57				>61	>61	>61			
Bankfull Cross-Sectional Area (ft ²)	17.9	16.9	14.2				18.2	18.7	18.0				28.2	27.2	23.4			
Bankfull Mean Depth (ft)	1.3	1.2	0.1				1.3	1.4	1.4				1.7	1.5	1.5			
Bankfull Maximum Depth (ft)	2.0	2.0	1.8				2.1	2.3	2.2				2.5	2.5	2.2			
Width/Depth Ratio	10.2	11.5	11.4				10.8	9.5	9.1				10.0	11.4	11.1			
Entrenchment Ratio	>5.0	>5.0	>5.0				>4.0	>4.0	>4.0				>4.0	>4.0	>4.0			
Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0				1.0	1.0	1.0			
Wetted Perimeter (ft)	14.3	14.7	13.3				15.0	14.4	13.9				17.8	18.7	17.1			
Hydraulic Radius (ft)	1.2	1.2	1.1				1.2	1.3	1.3				1.6	1.5	1.4			
Substrate																		
d50 (mm)	1.0	2.0	0.1				1.4	1.6	0.1				1.4	0.9	1.3			
d84 (mm)	2.6	4.2	3.0				2.0	5.9	1.6				3.0	2.7	2.8			

Table VII. cont. Morphology and Hydraulic Monitoring Summary**Harrell Stream and Wetland Restoration**

Parameter	Cross-Section 13 Reach 4						Cross-Section 14 Reach 4					
	MY0	MY1	MY2	MY3	MY4	MY5	MY0	MY1	MY2	MY3	MY4	MY5
Dimension												
Bankfull Width (ft)	13.1	13.4	13.3				13.6	14.0	13.8			
Floodprone Width (ft)	>60	>60	>60				>62	>62	>62			
Bankfull Cross-Sectional Area (ft ²)	19.4	20.0	18.4				19.0	20.5	19.1			
Bankfull Mean Depth (ft)	1.5	1.5	1.4				1.4	1.5	1.4			
Bankfull Maximum Depth (ft)	2.4	2.3	2.3				2.1	2.3	2.2			
Width/Depth Ratio	8.8	8.9	9.6				9.7	9.6	10.0			
Entrenchment Ratio	>4.0	>4.0	>4.0				>4.0	>4.0	>4.0			
Bank Height Ratio	1.0	1.0	1.0				1.0	1.0	1.0			
Wetted Perimeter (ft)	14.1	14.3	14.4				14.5	15.1	15.6			
Hydraulic Radius (ft)	1.4	1.4	1.3				1.3	1.4	1.2			
Substrate												
d50 (mm)	1.5	1.6	1.1				1.3	0.1	0.1			
d84 (mm)	2.6	4.7	1.8				1.8	0.4	0.1			

2.3 Wetland Assessment

The maximum number of consecutive days that the groundwater was within 12 inches of the surface was determined for each groundwater gauge. This number was converted into a percentage of the 223-day growing season. Table 5 presents the hydrological monitoring results for 2009. The wetland wells used to monitor site hydrology were installed in the spring of 2007. During the second year of monitoring wetland hydrology was achieved at all of the wells on the site (Table 5). Based on these data, the site has exceeded the minimum duration of 12 consecutive days with the water table within 12 inches of the soil surface for the 2009 growing season (Appendix B). Climatic data for the 2009 growing season were analyzed in comparison to historical data to determine whether 2009 was a normal year in terms of climatic conditions. The historical data were collected from the NRCS, Water and Climate Center, "Climate Analysis for Wetlands by County" website. This evaluation concluded that 2009 was a normal year for rainfall during the growing season. Rainfall was within the 30th to 70th percentiles for the months of July, August, and October. Rainfall was less than the 30th percentile threshold in January, February, May, and September and was greater than the 70th percentile threshold in March, June, and November (Appendix B).

2.3.1 Wetland Criteria Attainment Tables

Table VIIIa. Hydrologic Monitoring Results

Project Name: Harrell Stream and Wetland Restoration

Well #	Hydroperiod					Max. No. of Consecutive Days	Dates Meeting Success
	<5%	5% - 8%	8% - 12.5%	>12.5%	Actual %		
1			X		9.8%	23	3/20/09-4/11/09
2			X		12.4%	29	3/20/09-4/17/09
3			X		9.8%	23	3/20/09-4/11/09
4			X		12.0%	28	3/20/09-4/16/09

Table VIIIb. Hydroperiod History

Harrell Stream and Wetland Restoration

Well #	Pre-Restoration	Year 1	Year 2	Year 3	Year 4	Year 5
1	<5%	6.8%	9.8%			
2	<5%	16.5%	12.4%			
3	<5%	6.8%	9.8%			
4	<5%	13.7%	12.0%			

3.0 SUCCESS CRITERIA

The stream is functioning as designed and has not developed any significant problems. The changes that are visible in the monitored cross-sections and profiles indicate adjustment of the stream due to its sand bed. Any feature changes will be tracked to see if the stream is moving beyond its expected variability. With four bankfull events since construction, the stream is on track to meeting the success criteria.

The hydrology data in Section 2.3 indicates that the wetland is on track to meeting the success criteria.

The planted vegetation has been doing well, with some plots experiencing more mortality than others. This mortality can be attributed to normal losses after the initial planting as well as to the effects of last year's exceptional drought. Some invasive species have been identified on the site, which include Chinese lespedeza (*Lespedeza cuneata*), Japanese honeysuckle (*Lonicera japonica*), tropical soda apple (*Solanum viarum*) and Asian dayflower (*Murdannia keisak*). The exotic vegetation is not widespread across the project, but these populations will continue to be monitored to determine if control measures

Appendix A

Vegetation Data

Table A1. Riparian Buffer Stem Density and Species Count by Plot
Harrell Stream and Wetland Restoration

Plot Number	River Birch <i>Betula nigra</i>	American Beautyberry <i>Callicarpa americana</i>	Shagbark Hickory <i>Carya ovata</i>	Sugarberry <i>Celtis laevigata</i>	Silky Dogwood <i>Cornus amomum</i>	Persimmon <i>Diospyros virginiana</i>	Green Ash <i>Fraxinus pennsylvanica</i>	Sycamore <i>Platanus occidentalis</i>	Southern Red Oak <i>Quercus falcata</i>	Swamp Chestnut Oak <i>Quercus michauxii</i>	Willow Oak <i>Quercus phellos</i>	Black Willow <i>Salix nigra</i>	Elderberry <i>Sambucus canadensis</i>	Possomhaw <i>Viburnum nudum</i>	Cherrybark Oak <i>Quercus pagoda</i>	Total (Year 2)	Density Year 2 (Stems/Acre)
S1																14	560
S2	5	3							1							10	400
S3	2	2			5	6							1			22	880
S4	2	2		4						3	3					14	560
S5	4			1	8					4	2		1			20	800
S6	1	2								4						7	280
S7		7		3	7				1	3	4		3			28	1,120
S8		5									1					6	240
S9	4			1	4	5				2	4	3				23	920
S10		1		1		1		4			2					9	360
S11	4			2	6	2			1	2	1	1	1			20	800
S12	5	1		1				2								9	360
S13	4			7	2			1		4			2			20	800
S14	2	2				7				2						13	520
S15	4	4		3	9			3		1						24	960
S16	1	4				1		1		5						12	480
S17						1				3			1			5	200
S18	4						1				2					7	280
															Average Density	584	

Table A2. Wetland Stem Density and Species Count by Plot
Harrell Stream and Wetland Restoration

Plot Number	Green Ash <i>Fraxinus pennsylvanica</i>	American Beautyberry <i>Callicarpa americana</i>	Water Hickory <i>Carya aquatica</i>	Buttonbush <i>Cephaelanthus occidentalis</i>	Cherrybark Oak <i>Quercus pagoda</i>	Swamp Chestnut Oak <i>Quercus michauxii</i>	Willow Oak <i>Quercus phellos</i>	Laurel Oak <i>Quercus laurifolia</i>	Bald Cypress <i>Taxodium distichum</i>	Total (Year 1)	Density- Year 1 (Stems/Acre)
W1	4	1		1	2	1				10	400
W2				1	5		2	1		9	360
W3				2	1	1			6	10	400
W4	2	1		4	4	1	2	2		16	640
W5	4	1			1	4			4	14	560
W6				5			5	2	3	15	600
W7					1	2	3			6	240
W8		1	8	4	1				3	17	680
W9	2	2		1	4	1	1	3		14	560
W10	3	1		3	2			5	1	15	600
W11		1	3	4					6	14	560
W12			5	6					9	20	800
										Average Density	533

Table A3. Riparian Buffer Vegetation History (stems/acre)**Harrell Stream and Wetland Restoration**

Plot Number	MY-00	MY-01	MY-02	MY-03	MY-04	MY-05
S1	1,120	640	560			
S2	720	360	400*			
S3	1,120	880	880			
S4	480	560*	560			
S5	1,200	840	800			
S6	480	280	280			
S7	1,120	1,120	1,120			
S8	480	320	240			
S9	1,240	920	920			
S10	600	360	360			
S11	880	760	800*			
S12	600	440	360			
S13	1,160	840	800			
S14	640	520	520			
S15	1,120	1,000	960			
S16	600	480	480			
S17	880	200	200			
S18	680	320	280			

*Uncounted plants during baseline and MY01 were added to total

Table A4. Wetland Vegetation History (stems/acre)**Harrell Stream and Wetland Restoration**


Plot Number	MY-00	MY-01	MY-02	MY-03	MY-04	MY-05
W1	520	400	400			
W2	640	360	360			
W3	600	400	400			
W4	800	640	640			
W5	600	560	560			
W6	720	600	600			
W7	680	240	240			
W8	760	680	680			
W9	640	560	560			
W10	600	600	600			
W11	680	560	560			
W12	1,080	800	800			

Vegetation Monitoring Data Sheets

Vegetation Monitoring Worksheet

Site: Harrell Plot: S1 Date: 6/30/2009

Plot Map

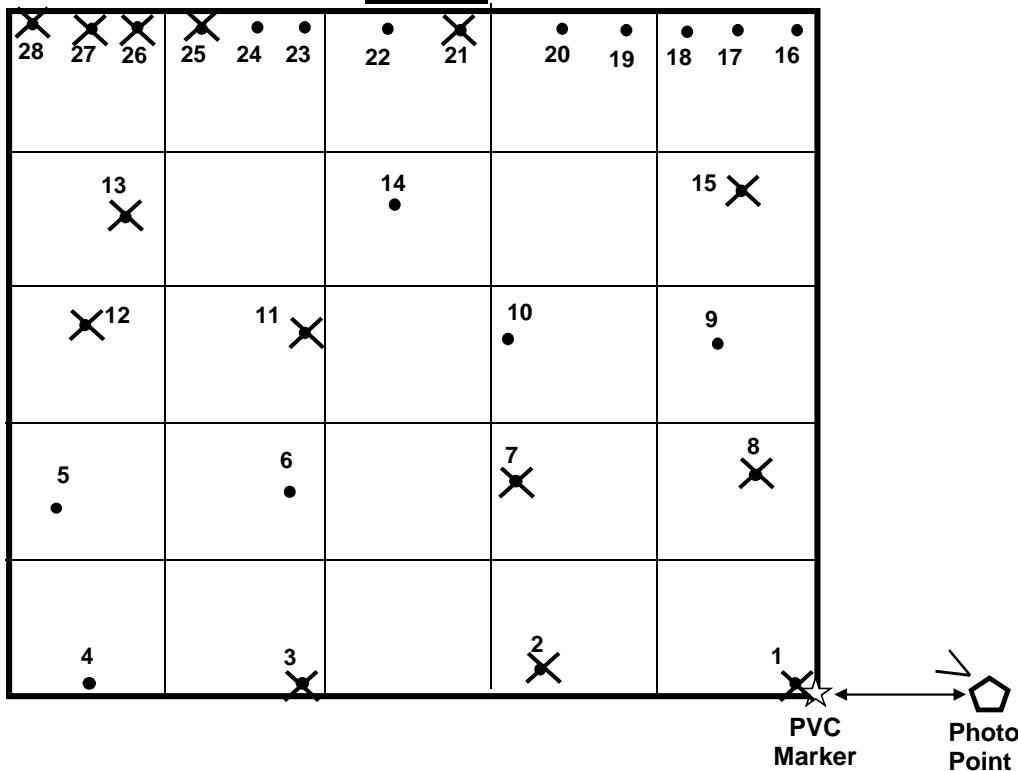

ID	Species	Height (m)	Vigor	Comment
1	<i>Quercus</i> sp.			Dead
2	Unknown			Dead
3	Southern Red Oak (<i>Quercus falcata</i>)			Dead
4	Southern Red Oak (<i>Quercus falcata</i>)	0.29	3	Resprout
5	Southern Red Oak (<i>Quercus falcata</i>)	0.19	2	Resprout, flag not on tree
6	Persimmon (<i>Diospyros virginiana</i>)	0.09	2	Resprout
7	Unknown			Dead
8	Unknown			Dead
9	Willow Oak (<i>Quercus phellos</i>)	0.91	3	
10	Willow Oak (<i>Quercus phellos</i>)	0.53	3	Rodent damage
11	Willow Oak (<i>Quercus phellos</i>)			Dead
12	Unknown			Dead
13	Southern Red Oak (<i>Quercus falcata</i>)			Dead
14	Southern Red Oak (<i>Quercus falcata</i>)	0.42	3	
15	Southern Red Oak (<i>Quercus falcata</i>)			Dead
16	Silky Dogwood (<i>Cornus amomum</i>)	0.19	3	Live Stake
17	Silky Dogwood (<i>Cornus amomum</i>)	0.71	3	Live stake, deer browse
18	Silky Dogwood (<i>Cornus amomum</i>)	0.50	3	Live stake, deer browse
19	Silky Dogwood (<i>Cornus amomum</i>)	0.26	3	Live stake, deer browse
20	Silky Dogwood (<i>Cornus amomum</i>)	0.21	3	Live stake, deer browse
21	Elderberry (<i>Sambucus canadensis</i>)			Dead
22	Silky Dogwood (<i>Cornus amomum</i>)	0.33	3	Live stake, deer browse
23	Silky Dogwood (<i>Cornus amomum</i>)	0.29	3	Live stake, deer browse
24	Silky Dogwood (<i>Cornus amomum</i>)	0.24	2	Live stake, deer browse
25	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
26	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
27	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
28	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	57.1%
Southern Red Oak (<i>Quercus falcata</i>)	21.4%
Willow Oak (<i>Quercus phellos</i>)	14.3%
Persimmon (<i>Diospyros virginiana</i>)	7.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{14}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{560}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{14}} \quad / \quad 28 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{50}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell

Plot: S2

Date: 6/30/2009

Plot Map

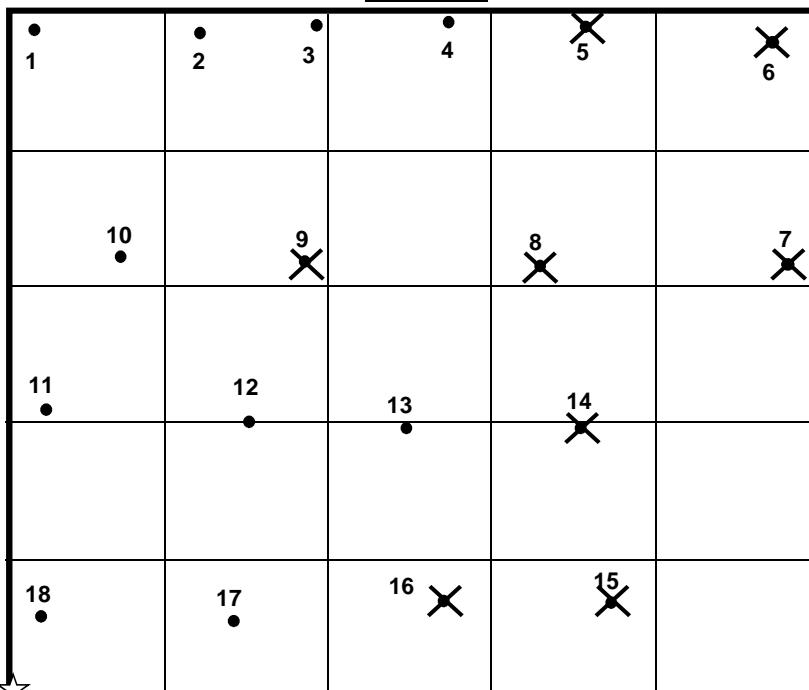


 Photo Point  PVC Marker

ID	Species	Height (m)	Vigor	Comment
1	American Beautyberry (<i>Callicarpa americana</i>)	0.20	2	Resprout
2	American Beautyberry (<i>Callicarpa americana</i>)	0.16	2	
3	Cherrybark Oak (<i>Quercus pagoda</i>)	0.18	2	Resprout
4	Southern Red Oak (<i>Quercus falcata</i>)	0.21	2	Resprout
5	American Beautyberry (<i>Callicarpa americana</i>)			Dead
6	American Beautyberry (<i>Callicarpa americana</i>)			Dead
7	Willow Oak (<i>Quercus phellos</i>)			Dead
8	American Beautyberry (<i>Callicarpa americana</i>)			Dead
9	<i>Quercus</i> sp.			Dead
10	American Beautyberry (<i>Callicarpa americana</i>)	0.88	4	
11	Shagbark Hickory (<i>Carya ovata</i>)	0.19	2	Resprout
12	Shagbark Hickory (<i>Carya ovata</i>)	0.25	2	Rodent damage
13	Shagbark Hickory (<i>Carya ovata</i>)	0.05	2	Top died back
14	Southern Red Oak (<i>Quercus falcata</i>)			Dead
15	<i>Quercus</i> sp.			Dead
16	Willow Oak (<i>Quercus phellos</i>)			Dead
17	American Beautyberry (<i>Callicarpa americana</i>)	0.94	4	
18	American Beautyberry (<i>Callicarpa americana</i>)	1.04	4	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Southern Red Oak (<i>Quercus falcata</i>)	10.0%
Shagbark Hickory (<i>Carya ovata</i>)	30.0%
American Beautyberry (<i>Callicarpa americana</i>)	50.0%
Cherrybark Oak (<i>Quercus pagoda</i>)	10.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{10}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{400}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{10}} \quad / \quad 18 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{56}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell

Plot: S3

Date: 6/30/2009

Plot Map

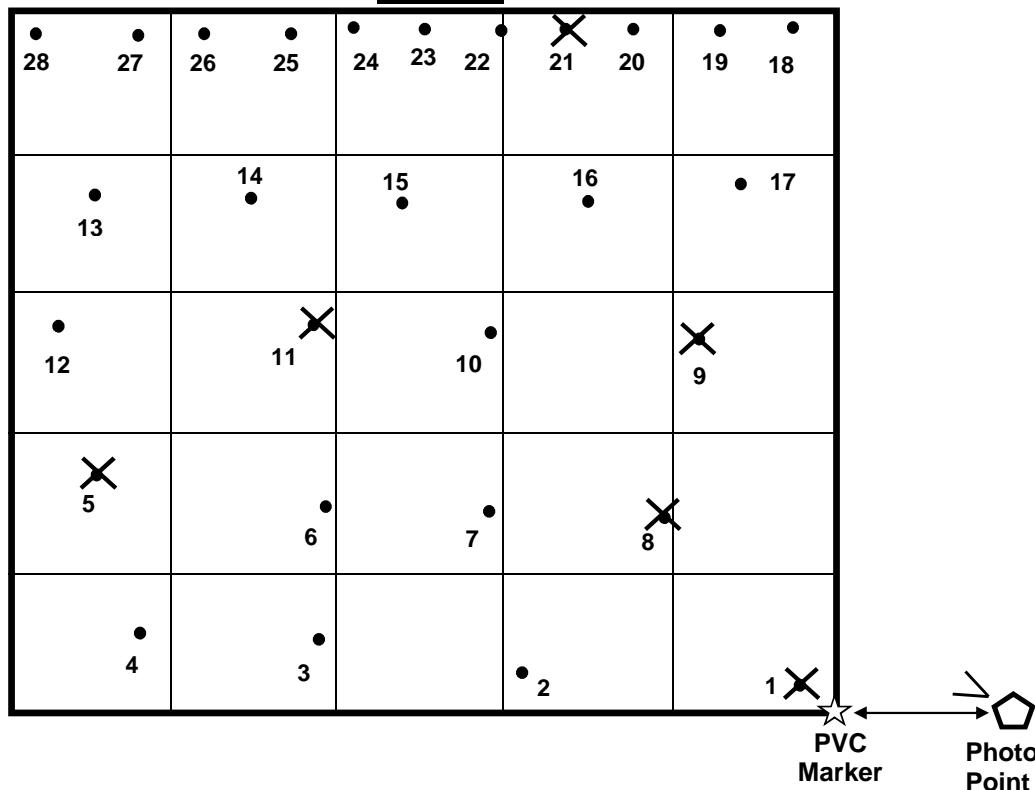

ID	Species	Height (m)	Vigor	Comment
1	Willow Oak (<i>Quercus phellos</i>)			Dead
2	American Beautyberry (<i>Callicarpa americana</i>)	1.30	4	
3	Persimmon (<i>Diospyros virginiana</i>)	0.38	3	Top died back
4	American Beautyberry (<i>Callicarpa americana</i>)	0.83	4	
5	Persimmon (<i>Diospyros virginiana</i>)			Dead
6	Shagbark Hickory (<i>Carya ovata</i>)	0.08	2	Resprout
7	Shagbark Hickory (<i>Carya ovata</i>)	0.23	3	Resprout
8	Shagbark Hickory (<i>Carya ovata</i>)			Dead
9	Unknown			Dead
10	Willow Oak (<i>Quercus phellos</i>)	1.04	3	
11	Unknown			Dead
12	Persimmon (<i>Diospyros virginiana</i>)	1.13	4	
13	Persimmon (<i>Diospyros virginiana</i>)	0.47	3	
14	Persimmon (<i>Diospyros virginiana</i>)	0.18	2	Resprout
15	Persimmon (<i>Diospyros virginiana</i>)	0.77	3	
16	Persimmon (<i>Diospyros virginiana</i>)	0.93	4	
17	Cherrybark Oak (<i>Quercus pagoda</i>)	0.53	4	
18	Elderberry (<i>Sambucus canadensis</i>)	0.78	3	Live stake
19	Elderberry (<i>Sambucus canadensis</i>)	1.34	4	Live stake
20	Silky Dogwood (<i>Cornus amomum</i>)	0.44	3	Live stake, deer browse
21	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
22	Elderberry (<i>Sambucus canadensis</i>)	0.65	2	Live stake
23	Silky Dogwood (<i>Cornus amomum</i>)	0.65	3	Live stake
24	Elderberry (<i>Sambucus canadensis</i>)	0.87	3	Live stake
25	Elderberry (<i>Sambucus canadensis</i>)	1.08	4	Live stake
26	Silky Dogwood (<i>Cornus amomum</i>)	0.79	3	Live stake
27	Silky Dogwood (<i>Cornus amomum</i>)	0.41	3	Live stake
28	Silky Dogwood (<i>Cornus amomum</i>)	0.55	3	Live stake, deer browse

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Elderberry (<i>Sambucus canadensis</i>)	22.7%
Silky Dogwood (<i>Cornus amomum</i>)	22.7%
American Beautyberry (<i>Callicarpa americana</i>)	9.1%
Willow Oak (<i>Quercus phellos</i>)	4.5%
Persimmon (<i>Diospyros virginiana</i>)	27.3%
Cherrybark Oak (<i>Quercus pagoda</i>)	4.5%
Shagbark Hickory (<i>Carya ovata</i>)	9.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{22}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{880}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{22}} \quad / \quad 28 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{79}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**



Vegetation Monitoring Worksheet

Site: Harrell

Plot: S4

Date: 6/25/2009

Plot Map

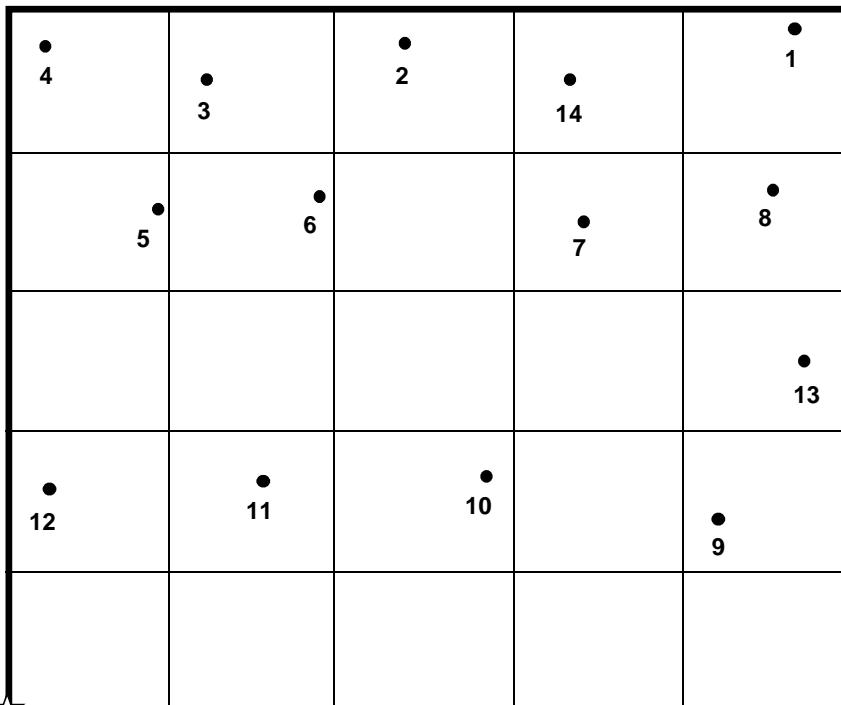

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
River Birch (<i>Betula nigra</i>)	14.3%
American Beautyberry (<i>Callicarpa americana</i>)	14.3%
Willow Oak (<i>Quercus phellos</i>)	21.4%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	21.4%
Sugarberry (<i>Celtis laevigata</i>)	28.6%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{14}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{560}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{14}} \quad / \quad 14 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{100}} \quad \% \text{ survivability*}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell

Plot: S5

Date: 6/25/2009

Plot Map

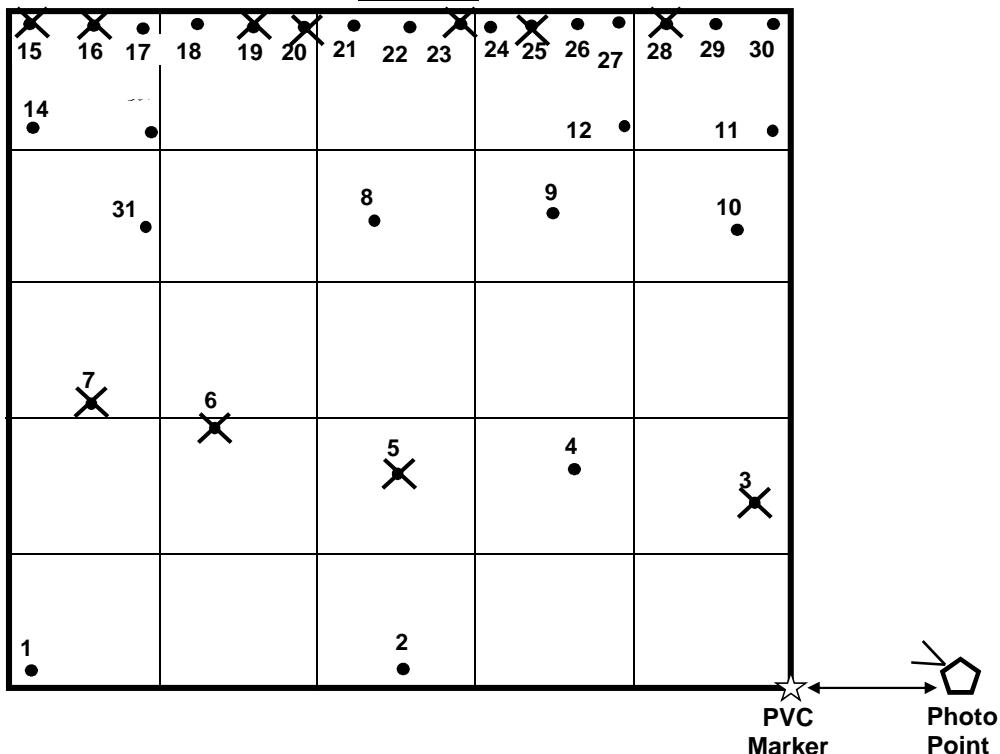

ID	Species	Height (m)	Vigor	Comment
1	River Birch (<i>Betula nigra</i>)	0.53	2	
2	River Birch (<i>Betula nigra</i>)	0.59	2	
3	<i>Quercus</i> sp.			Dead
4	Willow Oak (<i>Quercus phellos</i>)	0.40	2	
5	<i>Quercus</i> sp.			Dead
6	Sugarberry (<i>Celtis laevigata</i>)			Dead
7	<i>Quercus</i> sp.			Dead
8	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.55	3	Top died back
9	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.59	3	Top died back
10	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.34	2	
11	Willow Oak (<i>Quercus phellos</i>)	0.85	3	
12	River Birch (<i>Betula nigra</i>)	0.81	3	
13	River Birch (<i>Betula nigra</i>)	0.78	3	
14	Sugarberry (<i>Celtis laevigata</i>)	0.74	3	
15	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
16	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
17	Silky Dogwood (<i>Cornus amomum</i>)	0.10	2	Live stake
18	Silky Dogwood (<i>Cornus amomum</i>)	0.26	3	Live stake
19	Black Willow (<i>Salix nigra</i>)			Live stake, dead
20	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
21	Silky Dogwood (<i>Cornus amomum</i>)	0.20	2	Live stake
22	Silky Dogwood (<i>Cornus amomum</i>)	0.15	2	Live stake
23	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
24	Silky Dogwood (<i>Cornus amomum</i>)	0.13	3	Live stake
25	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
26	Silky Dogwood (<i>Cornus amomum</i>)	0.29	3	Live stake
27	Silky Dogwood (<i>Cornus amomum</i>)	0.45	3	Live stake
28	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
29	Silky Dogwood (<i>Cornus amomum</i>)	0.41	3	Live stake
30	Elderberry (<i>Sambucus canadensis</i>)	0.24	3	Live stake
31	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.22	2	Resprout

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	40.0%
Elderberry (<i>Sambucus canadensis</i>)	5.0%
River Birch (<i>Betula nigra</i>)	20.0%
Willow Oak (<i>Quercus phellos</i>)	10.0%
Sugarberry (<i>Celtis laevigata</i>)	5.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	20.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{800}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 31 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{65}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell

Plot: S6

Date: 6/25/2009

Plot Map

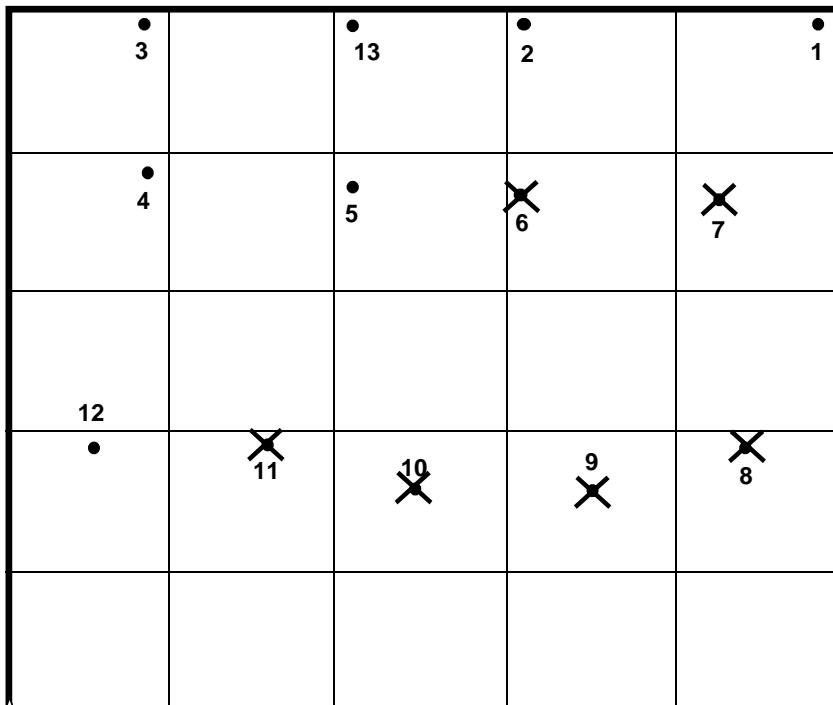


Photo
Point



PVC
Marker

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
River Birch (<i>Betula nigra</i>)	14.3%
American Beautyberry (<i>Callicarpa americana</i>)	28.6%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	57.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{7}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{280}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{7}} \quad / \quad 12 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{58}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: S7 Date: 6/25/2009

Plot Map

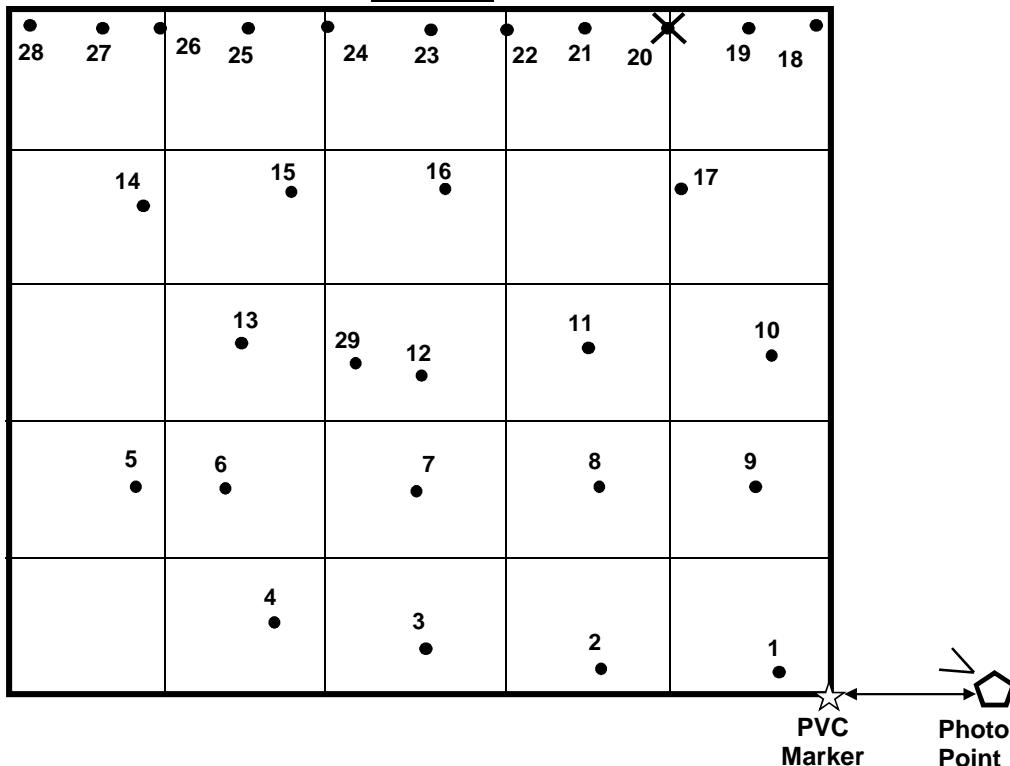

ID	Species	Height (m)	Vigor	Comment
1	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.11	2	Resprout
2	Sugarberry (<i>Celtis laevigata</i>)	0.75	4	
3	Sugarberry (<i>Celtis laevigata</i>)	0.83	4	
4	Sugarberry (<i>Celtis laevigata</i>)	0.90	4	
5	Southern Red Oak (<i>Quercus falcata</i>)	0.57	3	
6	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.47	3	
7	American Beautyberry (<i>Callicarpa americana</i>)	0.60	3	
8	American Beautyberry (<i>Callicarpa americana</i>)	0.59	3	
9	American Beautyberry (<i>Callicarpa americana</i>)	0.58	3	
10	Willow Oak (<i>Quercus phellos</i>)	0.58	3	
11	Willow Oak (<i>Quercus phellos</i>)	0.28	3	Resprout
12	Willow Oak (<i>Quercus phellos</i>)	0.40	2	
13	Willow Oak (<i>Quercus phellos</i>)	0.37	3	Top died back
14	American Beautyberry (<i>Callicarpa americana</i>)	1.08	4	
15	American Beautyberry (<i>Callicarpa americana</i>)	0.63	3	
16	American Beautyberry (<i>Callicarpa americana</i>)	0.84	4	
17	American Beautyberry (<i>Callicarpa americana</i>)	0.60	3	Top died back
18	Silky Dogwood (<i>Cornus amomum</i>)	0.45	3	Live stake
19	Silky Dogwood (<i>Cornus amomum</i>)	0.49	3	Live stake
20	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
21	Silky Dogwood (<i>Cornus amomum</i>)	0.37	3	Live stake, deer browse
22	Silky Dogwood (<i>Cornus amomum</i>)	0.35	3	Live stake, deer browse
23	Silky Dogwood (<i>Cornus amomum</i>)	0.18	3	Live stake, deer browse
24	Silky Dogwood (<i>Cornus amomum</i>)	0.35	3	Live stake
25	Silky Dogwood (<i>Cornus amomum</i>)	0.30	3	Live stake, deer browse
26	Elderberry (<i>Sambucus canadensis</i>)	0.54	3	Live stake, deer browse
27	Elderberry (<i>Sambucus canadensis</i>)	0.42	3	Live stake
28	Elderberry (<i>Sambucus canadensis</i>)	0.28	2	Live stake
29	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.15	2	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	25.0%
Elderberry (<i>Sambucus canadensis</i>)	10.7%
American Beautyberry (<i>Callicarpa americana</i>)	25.0%
Sugarberry (<i>Celtis laevigata</i>)	10.7%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	10.7%
Southern Red Oak (<i>Quercus falcata</i>)	3.6%
Willow Oak (<i>Quercus phellos</i>)	14.3%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{28}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{1120}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{28}} \quad / \quad 29 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{97}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell

Plot:

S8

Date:

6/25/2009

Plot Map

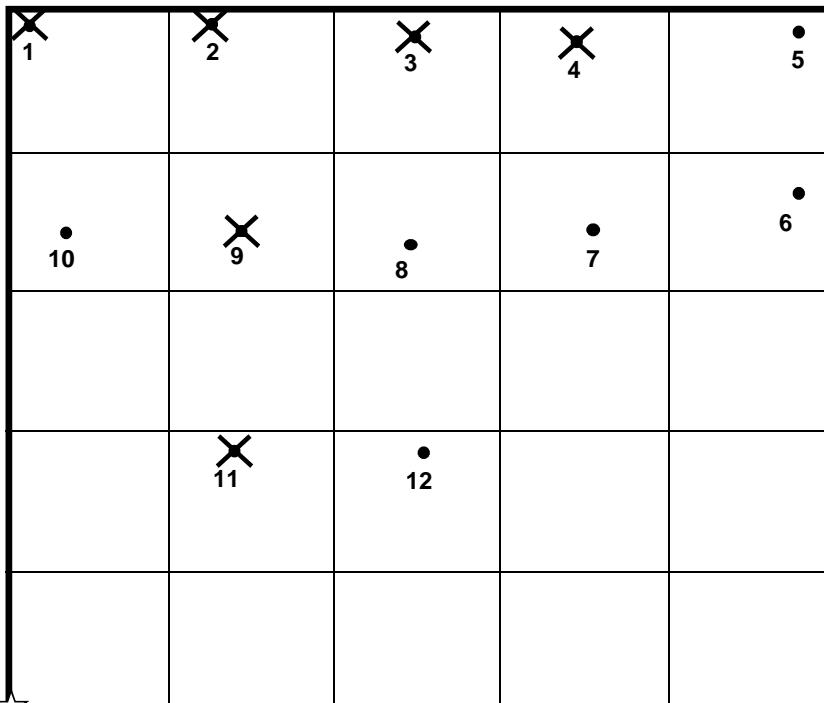


Photo
Point



PVC
Marker

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
American Beautyberry (<i>Callicarpa americana</i>)	83.3%
Willow Oak (<i>Quercus phellos</i>)	16.7%

Density:

$$\text{Total Number of Trees } \underline{\underline{6}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{240}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{6}} \quad / \quad 12 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{50}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: S9 Date: 6/25/2009

Plot Map

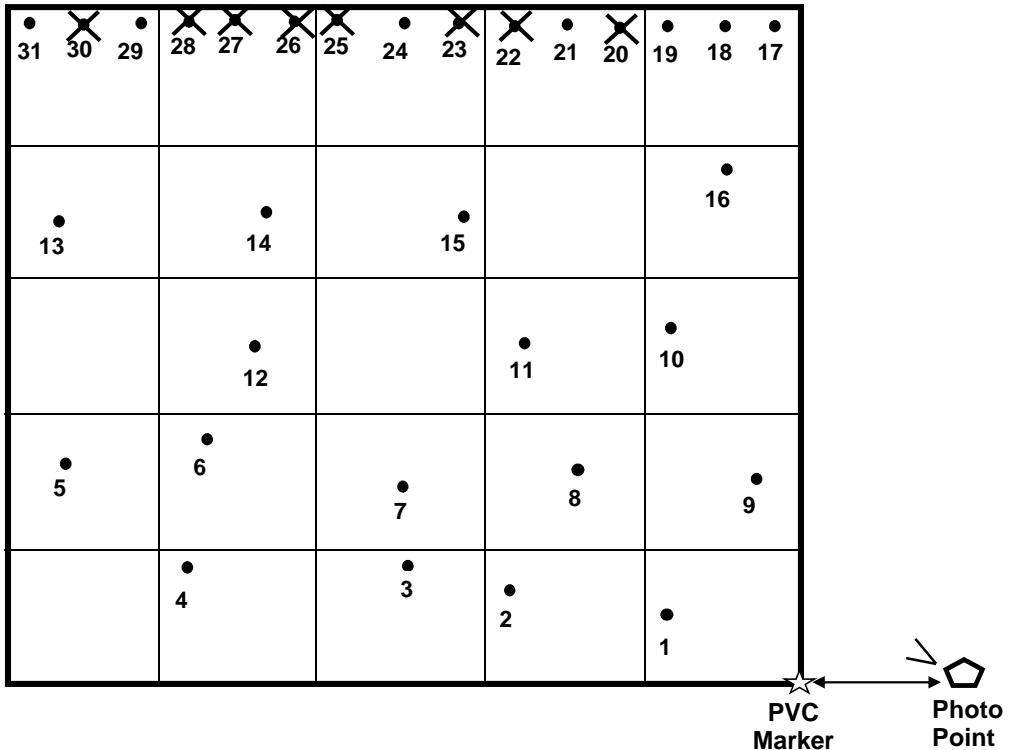

ID	Species	Height (m)	Vigor	Comment
1	Sugarberry (<i>Celtis laevigata</i>)	0.32	2	
2	Persimmon (<i>Diospyros virginiana</i>)	0.71	3	Main stem broke off
3	Persimmon (<i>Diospyros virginiana</i>)	0.48	2	
4	Persimmon (<i>Diospyros virginiana</i>)	0.83	4	
5	Willow Oak (<i>Quercus phellos</i>)	0.48	2	
6	Willow Oak (<i>Quercus phellos</i>)	0.41	2	
7	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.44	2	
8	River Birch (<i>Betula nigra</i>)	0.52	3	
9	River Birch (<i>Betula nigra</i>)	0.61	3	Deer browse
10	Persimmon (<i>Diospyros virginiana</i>)	0.60	2	
11	Willow Oak (<i>Quercus phellos</i>)	0.16	2	Resprout
12	Persimmon (<i>Diospyros virginiana</i>)	0.49	3	
13	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.26	2	Top died back
14	Willow Oak (<i>Quercus phellos</i>)	0.38	2	
15	River Birch (<i>Betula nigra</i>)	0.46	3	
16	River Birch (<i>Betula nigra</i>)	0.87	4	
17	Silky Dogwood (<i>Cornus amomum</i>)	0.19	2	Deer browse
18	Silky Dogwood (<i>Cornus amomum</i>)	0.12	2	Deer browse
19	Silky Dogwood (<i>Cornus amomum</i>)	0.12	2	Deer browse
20	Elderberry (<i>Sambucus canadensis</i>)			Dead, live stake
21	Black Willow (<i>Salix nigra</i>)	0.45	2	Live stake
22	Silky Dogwood (<i>Cornus amomum</i>)			Dead, live stake
23	Silky Dogwood (<i>Cornus amomum</i>)			Dead, live stake
24	Silky Dogwood (<i>Cornus amomum</i>)	0.10	2	Live stake
25	Silky Dogwood (<i>Cornus amomum</i>)			Dead, live stake
26	Silky Dogwood (<i>Cornus amomum</i>)			Dead, live stake
27	Silky Dogwood (<i>Cornus amomum</i>)			Dead, live stake
28	Black Willow (<i>Salix nigra</i>)			Dead, live stake
29	Black Willow (<i>Salix nigra</i>)	1.57	4	Live stake
30	Black Willow (<i>Salix nigra</i>)			Dead, live stake
31	Black Willow (<i>Salix nigra</i>)	0.62	3	Live stake

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	17.4%
Black Willow (<i>Salix nigra</i>)	13.0%
River Birch (<i>Betula nigra</i>)	17.4%
Willow Oak (<i>Quercus phellos</i>)	17.4%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	8.7%
Persimmon (<i>Diospyros virginiana</i>)	21.7%
Sugarberry (<i>Celtis laevigata</i>)	4.3%

Density:

$$\text{Total Number of Trees } \underline{\underline{23}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{920}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{23}} \quad / \quad 31 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{74}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**



Vegetation Monitoring Worksheet

Site: Harrell

Plot: S10

Date: 6/25/2009

Plot Map

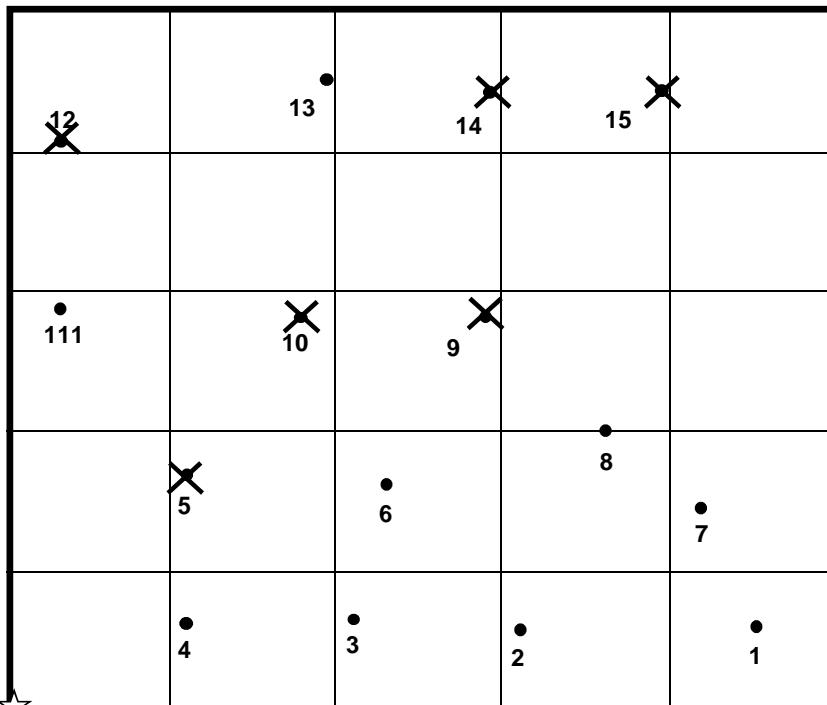

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Sycamore (<i>Platanus occidentalis</i>)	44.4%
Willow Oak (<i>Quercus phellos</i>)	22.2%
Sugarberry (<i>Celtis laevigata</i>)	11.1%
Persimmon (<i>Diospyros virginiana</i>)	11.1%
American Beautyberry (<i>Callicarpa americana</i>)	11.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{360}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 15 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{60}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell

Plot: S11

Date: 6/25/2009

Plot Map

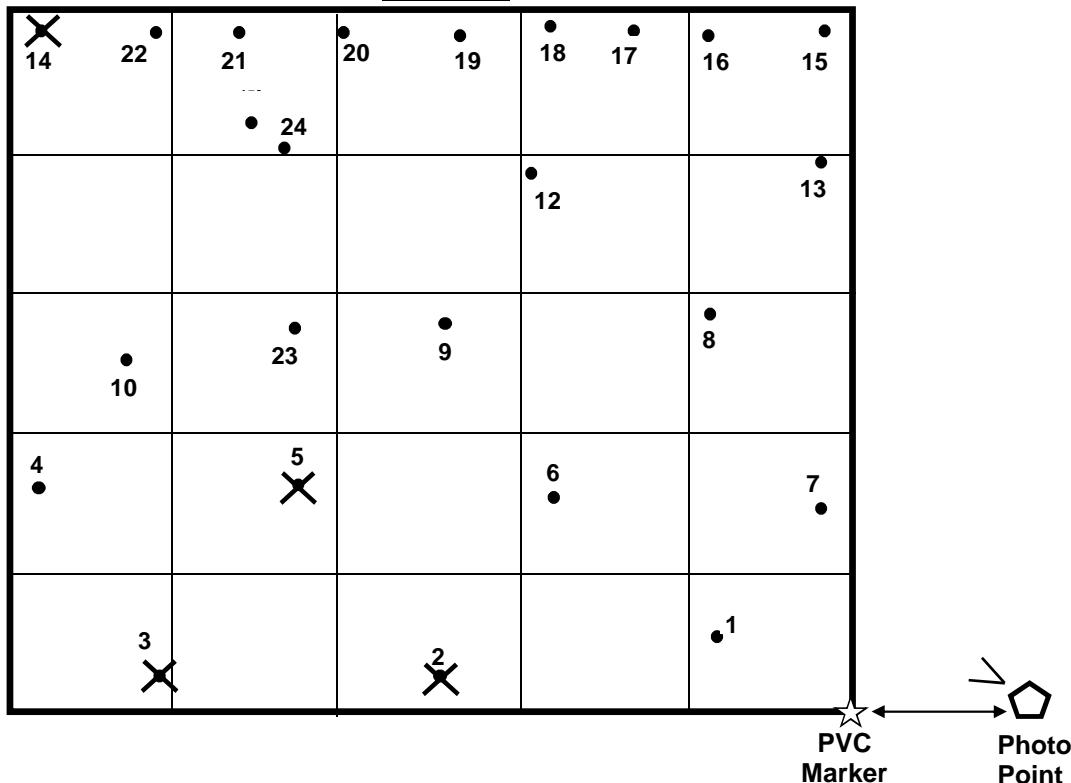

ID	Species	Height (m)	Vigor	Comment
1	American Beautyberry (<i>Callicarpa americana</i>)	0.15	2	Top died back
2	Swamp Chestnut Oak (<i>Quercus michauxii</i>)			Dead
3	American Beautyberry (<i>Callicarpa americana</i>)			Dead
4	Willow Oak (<i>Quercus phellos</i>)	0.54	3	
5	American Beautyberry (<i>Callicarpa americana</i>)			Dead
6	Southern Red Oak (<i>Quercus falcata</i>)	0.23	2	
7	American Beautyberry (<i>Callicarpa americana</i>)	0.09	2	
8	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.38	3	
9	American Beautyberry (<i>Callicarpa americana</i>)	0.10	2	
10	Persimmon (<i>Diospyros virginiana</i>)	0.81	4	
11	Persimmon (<i>Diospyros virginiana</i>)	0.86	4	
12	American Beautyberry (<i>Callicarpa americana</i>)	0.40	3	
13	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.35	2	
14	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
15	Silky Dogwood (<i>Cornus amomum</i>)	0.25	2	Live stake, deer browse
16	Silky Dogwood (<i>Cornus amomum</i>)	0.19	2	Live stake, deer browse
17	Silky Dogwood (<i>Cornus amomum</i>)	0.35	3	Live stake
18	Silky Dogwood (<i>Cornus amomum</i>)	0.44	3	Live stake
19	Silky Dogwood (<i>Cornus amomum</i>)	0.62	4	Live stake
20	Silky Dogwood (<i>Cornus amomum</i>)	0.34	3	Live stake
21	Elderberry (<i>Sambucus canadensis</i>)	0.11	2	Live stake
22	Black Willow (<i>Salix nigra</i>)	0.60	3	Live stake
23	Sugarberry (<i>Celtis laevigata</i>)	0.40	2	
24	Sugarberry (<i>Celtis laevigata</i>)	0.25	2	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	30.0%
Elderberry (<i>Sambucus canadensis</i>)	5.0%
Black Willow (<i>Salix nigra</i>)	5.0%
American Beautyberry (<i>Callicarpa americana</i>)	20.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	10.0%
Willow Oak (<i>Quercus phellos</i>)	5.0%
Persimmon (<i>Diospyros virginiana</i>)	10.0%
Sugarberry (<i>Celtis laevigata</i>)	10.0%
Southern Red Oak (<i>Quercus falcata</i>)	5.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{800}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 23 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{87}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**



Vegetation Monitoring Worksheet

Site: Harrell

Plot: S12

Date: 6/25/2009

Plot Map

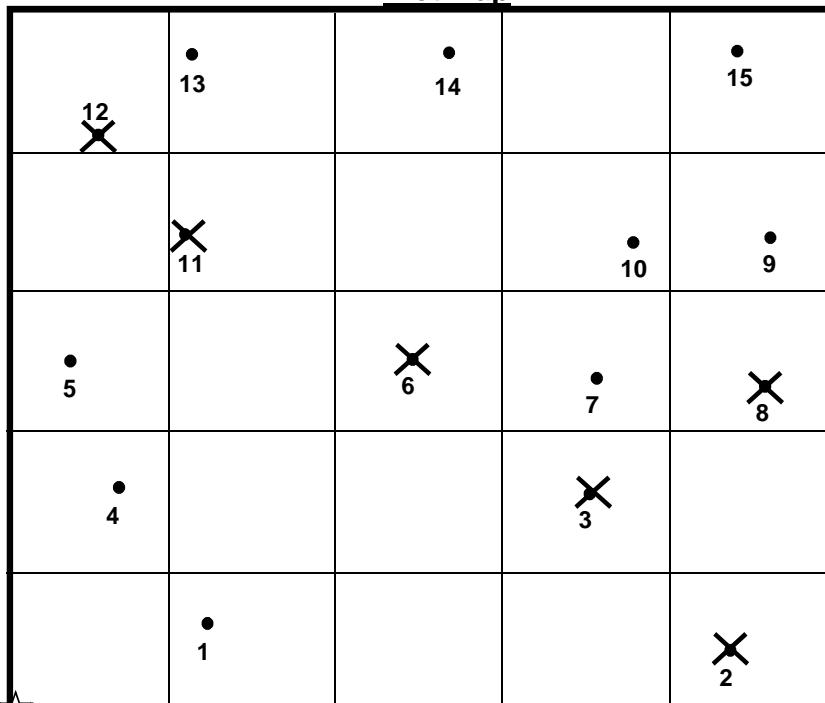

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
River Birch (<i>Betula nigra</i>)	55.6%
Sycamore (<i>Platanus occidentalis</i>)	22.2%
American Beautyberry (<i>Callicarpa americana</i>)	11.1%
Sugarberry (<i>Celtis laevigata</i>)	11.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{360}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 15 \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{60}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: S13 Date: 6/25/2009

Plot Map

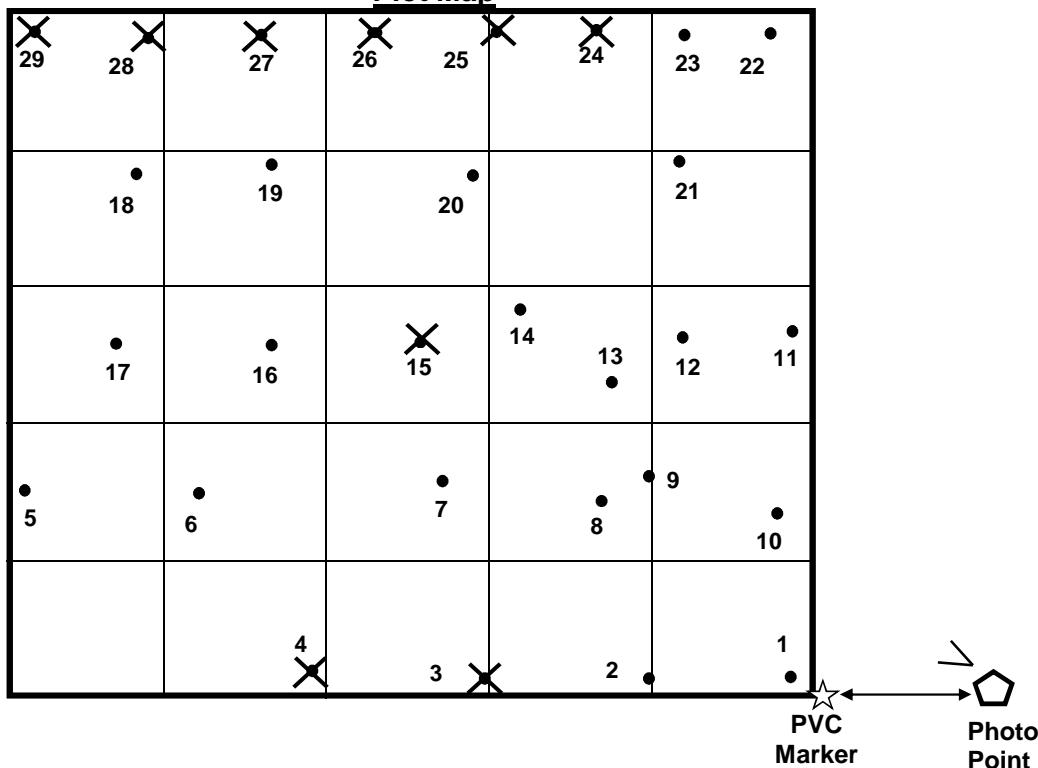

ID	Species	Height (m)	Vigor	Comment
1	Sugarberry (<i>Celtis laevigata</i>)	0.38	1	Heavily browsed
2	Sugarberry (<i>Celtis laevigata</i>)	0.43	2	
3	Unknown			Missing
4	American Beautyberry (<i>Callicarpa americana</i>)			Dead
5	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.53	3	
6	Sycamore (<i>Platanus occidentalis</i>)	1.05	3	
7	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.27	2	
8	Possumhaw (<i>Viburnum nudum</i>)	0.36	3	
9	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.62	3	Browsed
10	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.60	3	
11	Sugarberry (<i>Celtis laevigata</i>)	0.25	2	Heavily browsed
12	Possumhaw (<i>Viburnum nudum</i>)	0.45	2	
13	Sugarberry (<i>Celtis laevigata</i>)	0.24	2	
14	Sugarberry (<i>Celtis laevigata</i>)	0.15	2	Heavily browsed
15	Possumhaw (<i>Viburnum nudum</i>)			Dead
16	Sugarberry (<i>Celtis laevigata</i>)	0.32	2	
17	Sugarberry (<i>Celtis laevigata</i>)	0.35	2	Heavily browsed
18	American Beautyberry (<i>Callicarpa americana</i>)	0.46	3	
19	American Beautyberry (<i>Callicarpa americana</i>)	0.29	3	
20	American Beautyberry (<i>Callicarpa americana</i>)	0.40	3	
21	American Beautyberry (<i>Callicarpa americana</i>)	0.30	2	
22	Silky Dogwood (<i>Cornus amomum</i>)	0.21	2	Live stake
23	Silky Dogwood (<i>Cornus amomum</i>)	0.21	2	Live stake
24	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
25	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
26	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
27	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
28	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
29	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	10.0%
Sycamore (<i>Platanus occidentalis</i>)	5.0%
American Beautyberry (<i>Callicarpa americana</i>)	20.0%
Sugarberry (<i>Celtis laevigata</i>)	35.0%
Possomhaw (<i>Viburnum nudum</i>)	10.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	20.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{800}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{20}} \quad / \quad 29 \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{69}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet


Site: Harrell **Plot:** S14 **Date:** 6/25/2009

Plot: S14

Date:

6/25/2009

Plot Map

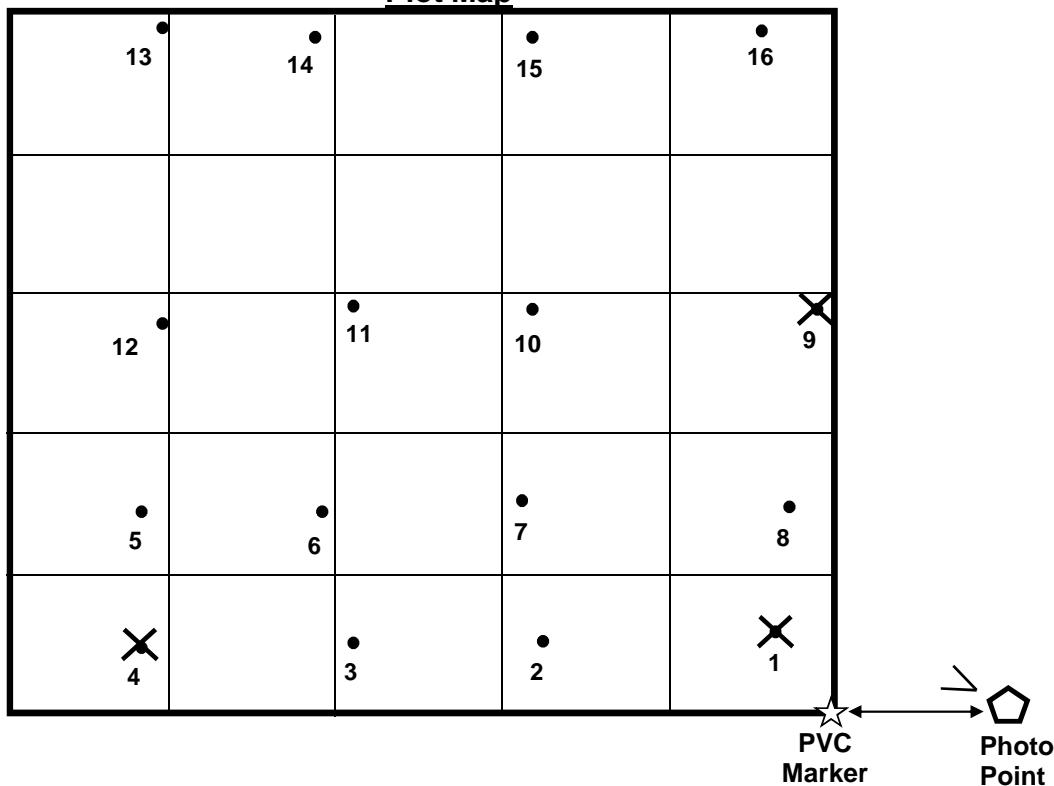

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
River Birch (<i>Betula nigra</i>)	15.4%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	15.4%
Persimmon (<i>Diospyros virginiana</i>)	53.8%
American Beautyberry (<i>Callicarpa americana</i>)	15.4%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{13}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{520}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{13}} \quad / \quad 16 \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{81}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site:

Harrell


Plot:

S15

Date:

6/25/2009

Plot Map

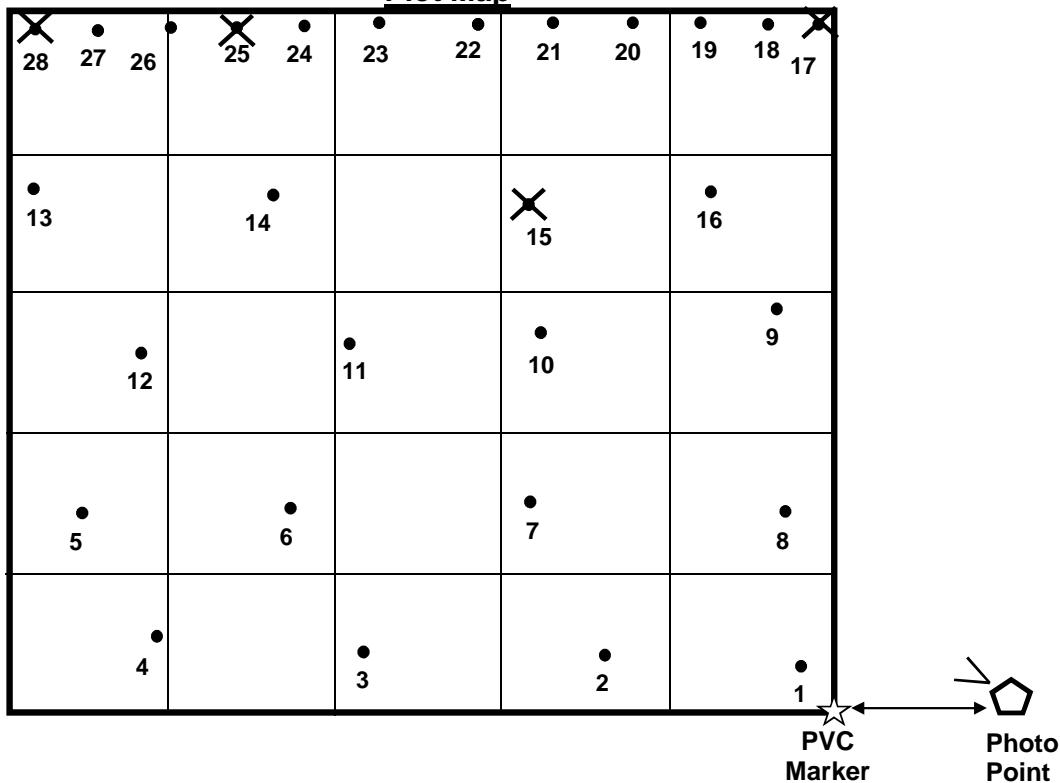

ID	Species	Height (m)	Vigor	Comment
1	River Birch (<i>Betula nigra</i>)	0.80	3	
2	River Birch (<i>Betula nigra</i>)	1.29	4	
3	River Birch (<i>Betula nigra</i>)	1.06	4	
4	River Birch (<i>Betula nigra</i>)	0.98	4	
5	Sugarberry (<i>Celtis laevigata</i>)	0.31	2	Browsed
6	Sugarberry (<i>Celtis laevigata</i>)	0.41	3	
7	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.14	2	Resprout
8	Sugarberry (<i>Celtis laevigata</i>)	0.29	1	Heavily browsed
9	American Beautyberry (<i>Callicarpa americana</i>)	0.19	2	Resprout
10	Sycamore (<i>Platanus occidentalis</i>)	0.78	3	
11	Sycamore (<i>Platanus occidentalis</i>)	0.88	3	
12	Sycamore (<i>Platanus occidentalis</i>)	0.56	3	Browsed
13	American Beautyberry (<i>Callicarpa americana</i>)	0.15	2	Resprout
14	American Beautyberry (<i>Callicarpa americana</i>)	0.18	2	Resprout
15	American Beautyberry (<i>Callicarpa americana</i>)			Dead
16	American Beautyberry (<i>Callicarpa americana</i>)	0.10	2	Resprout
17	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
18	Silky Dogwood (<i>Cornus amomum</i>)	0.18	2	Live stake, heavily browsed
19	Silky Dogwood (<i>Cornus amomum</i>)	0.20	2	Live stake
20	Silky Dogwood (<i>Cornus amomum</i>)	0.12	2	Live stake
21	Silky Dogwood (<i>Cornus amomum</i>)	0.47	3	Live stake
22	Silky Dogwood (<i>Cornus amomum</i>)	0.25	2	Live stake, heavily browsed
23	Silky Dogwood (<i>Cornus amomum</i>)	0.18	2	Live stake, heavily browsed
24	Silky Dogwood (<i>Cornus amomum</i>)	0.17	2	Live stake, heavily browsed
25	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
26	Silky Dogwood (<i>Cornus amomum</i>)	0.11	2	Live stake, heavily browsed
27	Silky Dogwood (<i>Cornus amomum</i>)	0.18	2	Live stake, heavily browsed
28	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Silky Dogwood (<i>Cornus amomum</i>)	37.5%
River Birch (<i>Betula nigra</i>)	16.7%
Sycamore (<i>Platanus occidentalis</i>)	12.5%
Sugarberry (<i>Celtis laevigata</i>)	12.5%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	4.2%
American Beautyberry (<i>Callicarpa americana</i>)	16.7%

Density:

$$\text{Total Number of Trees} \quad \underline{\underline{24}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{960}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\underline{24}} \quad / \quad 28 \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{86}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell **Plot:** S16 **Date:** 6/25/2009

Plot: S16

Date: 6/25/2009

Plot Map

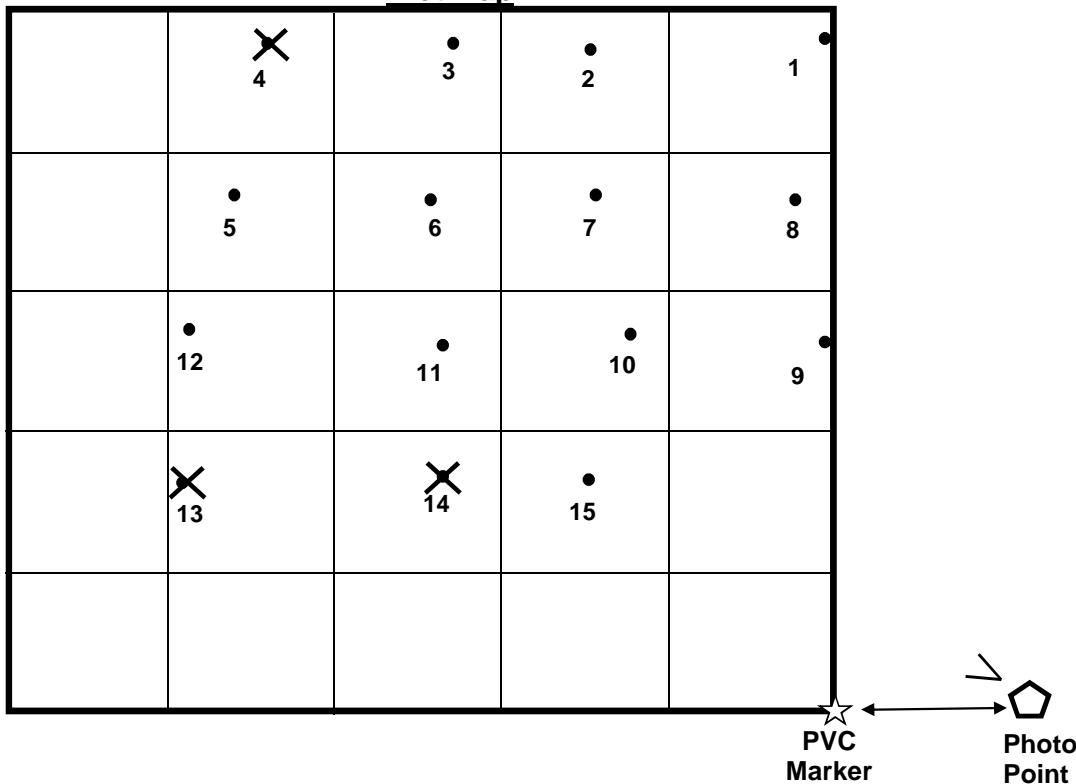

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
American Beautyberry (<i>Callicarpa americana</i>)	33.3%
Sycamore (<i>Platanus occidentalis</i>)	8.3%
River Birch (<i>Betula nigra</i>)	8.3%
Persimmon (<i>Diospyros virginiana</i>)	8.3%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	41.7%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{12}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{480}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{12}} \quad / \quad 15 \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{80}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: S17 Date: 6/25/2009

Plot Map

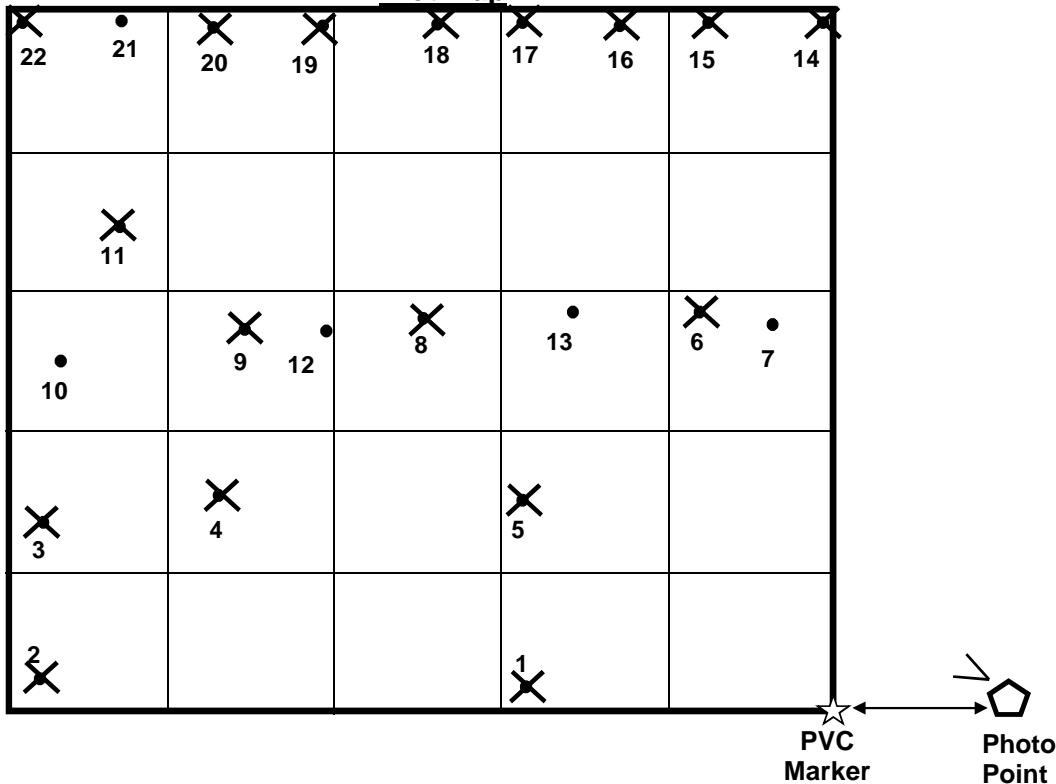

ID	Species	Height (m)	Vigor	Comment
1	Swamp Chestnut Oak (<i>Quercus michauxii</i>)			Dead
2	Sugarberry (<i>Celtis laevigata</i>)			Dead
3	Unknown			Dead
4	Willow Oak (<i>Quercus phellos</i>)			Dead
5	Sugarberry (<i>Celtis laevigata</i>)			Dead
6	Persimmon (<i>Diospyros virginiana</i>)			Dead
7	Persimmon (<i>Diospyros virginiana</i>)	1.03	4	
8	Persimmon (<i>Diospyros virginiana</i>)			Dead
9	Swamp Chestnut Oak (<i>Quercus michauxii</i>)			Dead
10	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.70	4	
11	Willow Oak (<i>Quercus phellos</i>)			Dead
12	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.16	2	Resprout, flag not on tree
13	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.42	3	Top died back
14	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead
15	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
16	Black Willow (<i>Salix nigra</i>)			Live stake, dead
17	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
18	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
19	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
20	Elderberry (<i>Sambucus canadensis</i>)			Live stake, dead
21	Elderberry (<i>Sambucus canadensis</i>)	0.14	2	Live stake, deer browse
22	Silky Dogwood (<i>Cornus amomum</i>)			Live stake, dead

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Elderberry (<i>Sambucus canadensis</i>)	20.0%
Persimmon (<i>Diospyros virginiana</i>)	20.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	60.0%

Density:

$$\text{Total Number of Trees } \underline{\underline{5}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{200}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{5}} \quad / \quad 22 \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{23}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell


Plot:

S18

Date:

6/25/2009

Plot Map

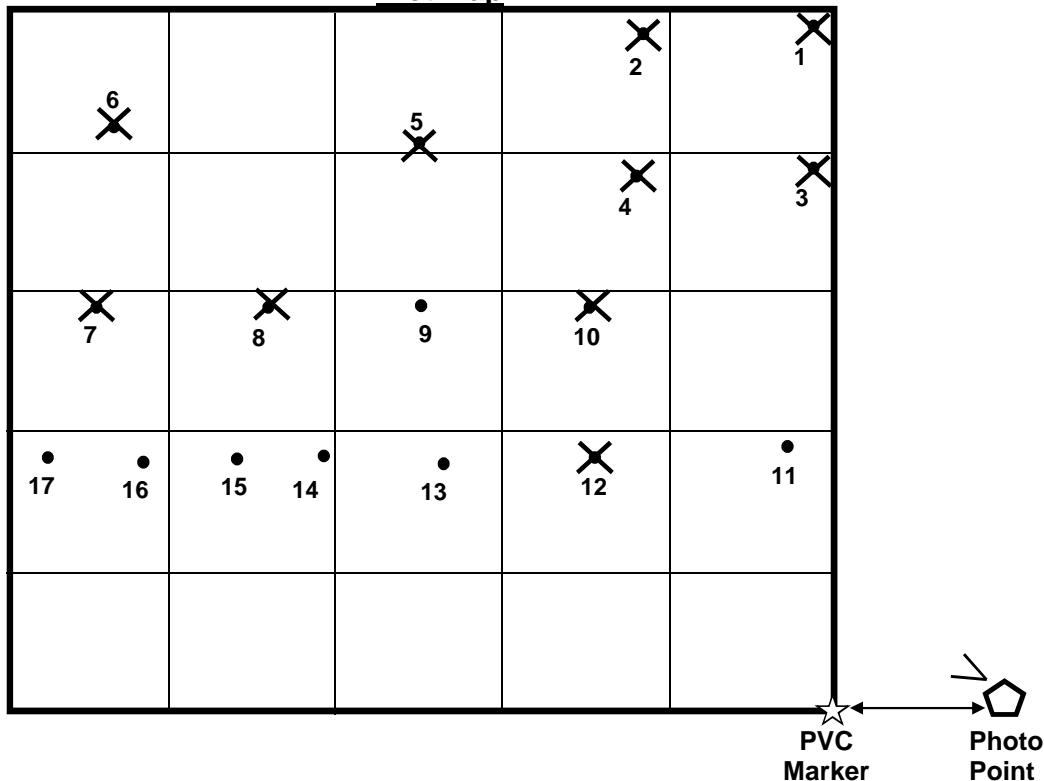

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
River Birch (<i>Betula nigra</i>)	57.1%
Willow Oak (<i>Quercus phellos</i>)	28.6%
Green Ash (<i>Fraxinus pennsylvanica</i>)	14.3%

Density:

$$\text{Total Number of Trees } \underline{\underline{7}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{280}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{7}} \quad / \quad 17 \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{41}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet


Site: Harrell **Plot:** W1 **Date:** 6/30/2009

Plot: W1

Date:

6/30/2009

Plot Map

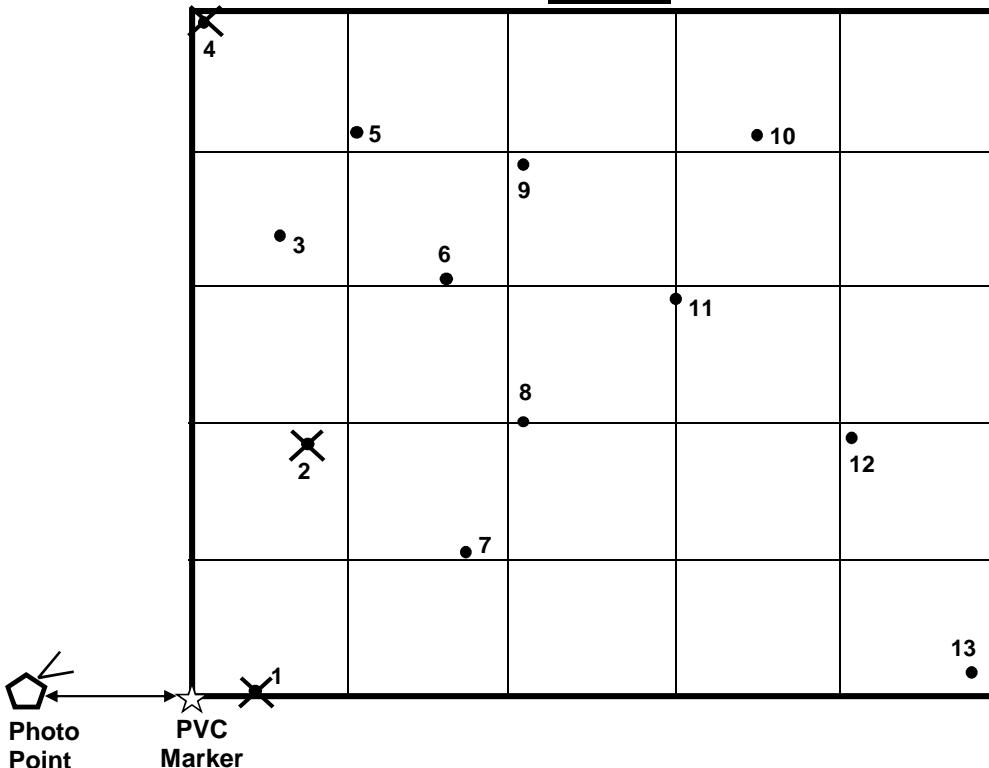

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	10.0%
Green Ash (<i>Fraxinus pennsylvanica</i>)	40.0%
Buttonbush (<i>Cephalanthus occidentalis</i>)	10.0%
Laurel Oak (<i>Quercus laurifolia</i>)	10.0%
Cherrybark Oak (<i>Quercus pagoda</i>)	20.0%
American Beautyberry (<i>Callicarpa americana</i>)	10.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\mathbf{10}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{400}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{10}} \quad / \quad 13 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{77}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell

Plot: W2

Date: 6/30/2009

Plot Map

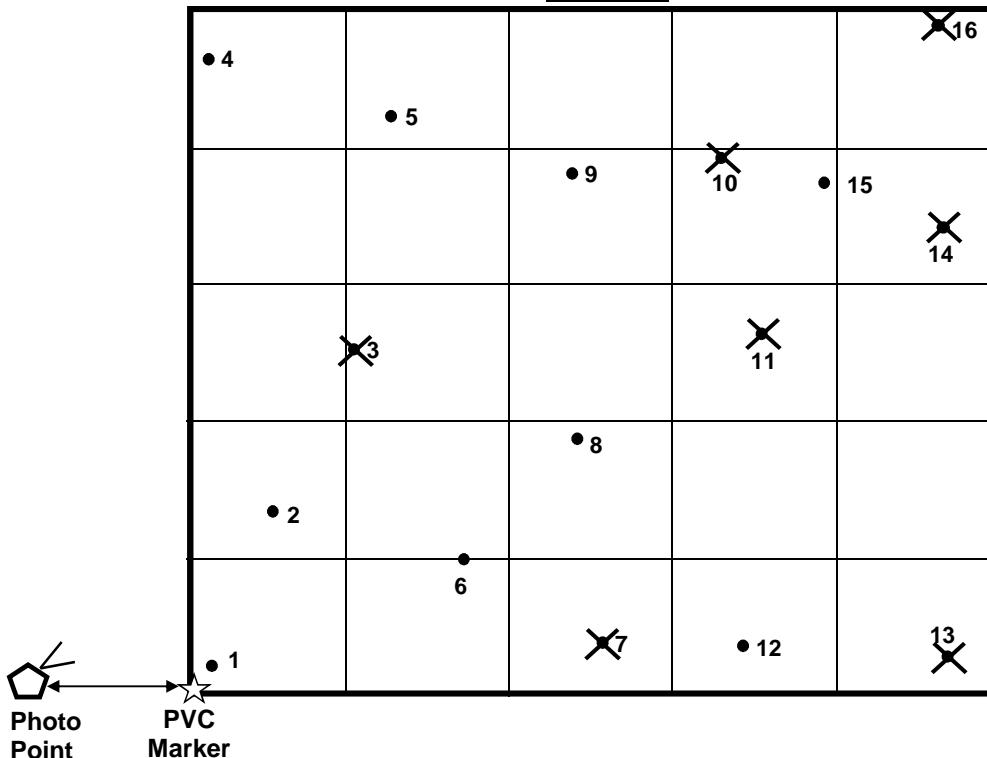

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Willow Oak (<i>Quercus phellos</i>)	22.2%
Cherrybark Oak (<i>Quercus pagoda</i>)	55.6%
Buttonbush (<i>Cephalanthus occidentalis</i>)	11.1%
Laurel Oak (<i>Quercus laurifolia</i>)	11.1%

Density:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{360}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{9}} \quad / \quad 16 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{56}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell **Plot:** W3 **Date:** 6/30/2009

Plot: W3

Date:

6/30/2009

Plot Map

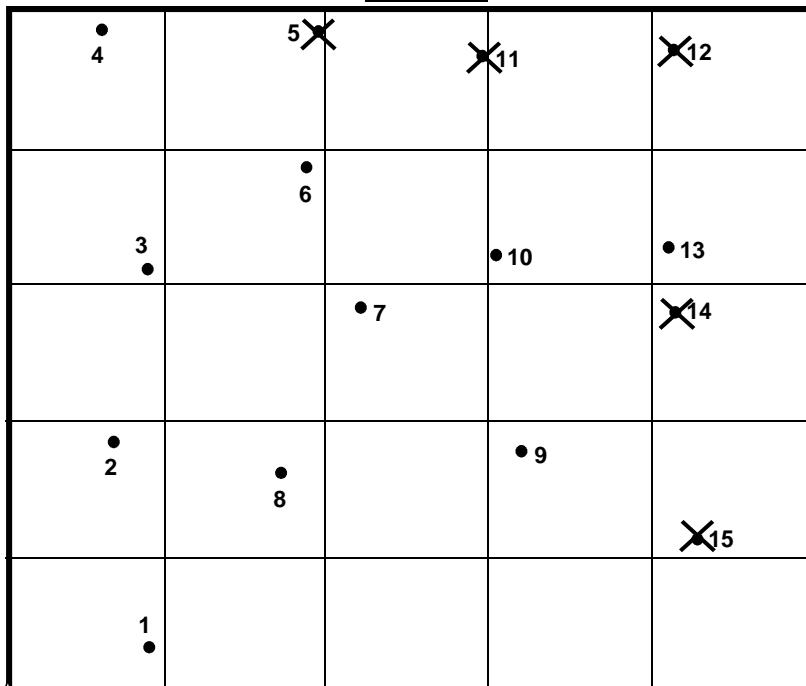


Photo Point



Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Bald Cypress (<i>Taxodium distichum</i>)	60.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	10.0%
Buttonbush (<i>Cephalanthus occidentalis</i>)	20.0%
Cherrybark Oak (<i>Quercus pagoda</i>)	10.0%

Density:

$$\text{Total Number of Trees } \underline{\quad 10 \quad} / \quad 0.025 \text{ acres} = \underline{\quad 400 \quad} \text{ trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\quad 10 \quad} / \quad 15 \text{ trees} \times \underline{\quad 100 \quad} = \underline{\quad 67 \quad} \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: W4 Date: 6/30/2009

Plot Map

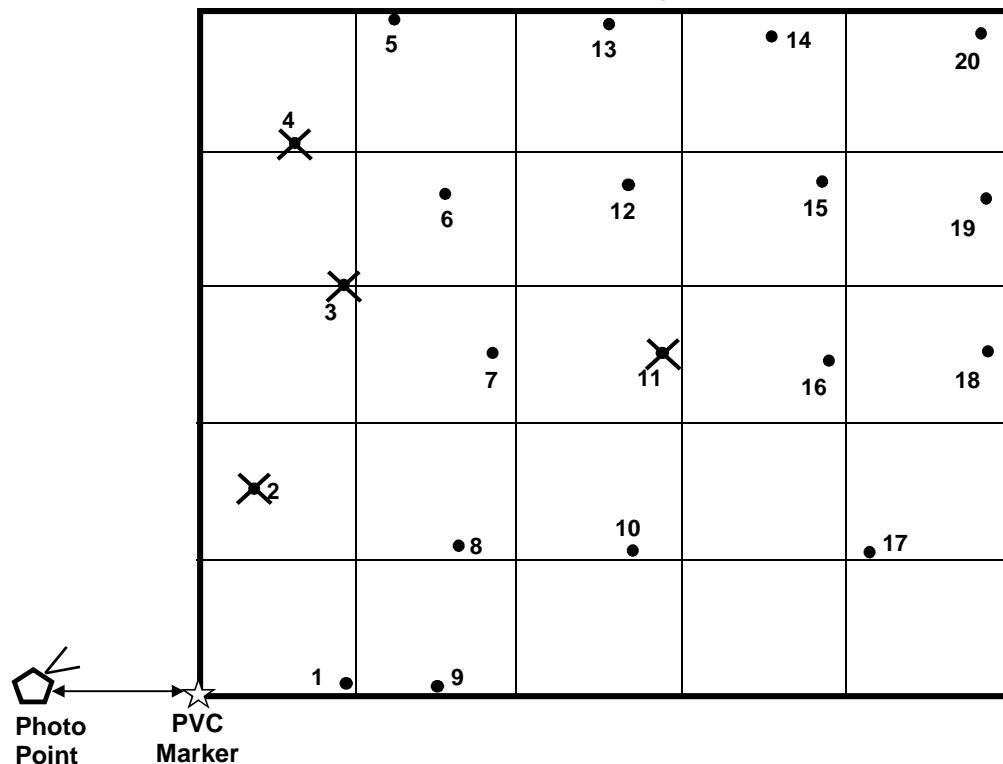

ID	Species	Height (m)	Vigor	Comment
1	Green Ash (<i>Fraxinus pennsylvanica</i>)	1.03	4	
2	Cherrybark Oak (<i>Quercus pagoda</i>)			Dead
3	Unknown			Dead
4	Unknown			Dead
5	Buttonbush (<i>Cephalanthus occidentalis</i>)	1.24	4	
6	Cherrybark Oak (<i>Quercus pagoda</i>)	0.75	3	Resprout
7	Buttonbush (<i>Cephalanthus occidentalis</i>)	1.20	4	
8	Cherrybark Oak (<i>Quercus pagoda</i>)	1.08	4	
9	Buttonbush (<i>Cephalanthus occidentalis</i>)	1.15	4	
10	Laurel Oak (<i>Quercus laurifolia</i>)	0.83	3	
11	Unknown			Dead
12	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	1.72	4	
13	Laurel Oak (<i>Quercus laurifolia</i>)	1.48	4	
14	Willow Oak (<i>Quercus phellos</i>)	0.94	4	
15	Cherrybark Oak (<i>Quercus pagoda</i>)	0.53	3	Resprout
16	Buttonbush (<i>Cephalanthus occidentalis</i>)	1.26	4	
17	Cherrybark Oak (<i>Quercus pagoda</i>)	1.44	4	
18	Green Ash (<i>Fraxinus pennsylvanica</i>)	1.10	3	Deer browse
19	American Beautyberry (<i>Callicarpa americana</i>)	0.54	3	
20	Willow Oak (<i>Quercus phellos</i>)	0.93	3	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Green Ash (<i>Fraxinus pennsylvanica</i>)	12.5%
Cherrybark Oak (<i>Quercus pagoda</i>)	25.0%
Buttonbush (<i>Cephalanthus occidentalis</i>)	25.0%
Laurel Oak (<i>Quercus laurifolia</i>)	12.5%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	6.3%
Willow Oak (<i>Quercus phellos</i>)	12.5%
American Beautyberry (<i>Callicarpa americana</i>)	6.3%

Density:

$$\text{Total Number of Trees } \underline{\underline{16}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{640}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{16}} \quad / \quad 20 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{80}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell

Plot: W5

Date: 6/30/2009

Plot Map

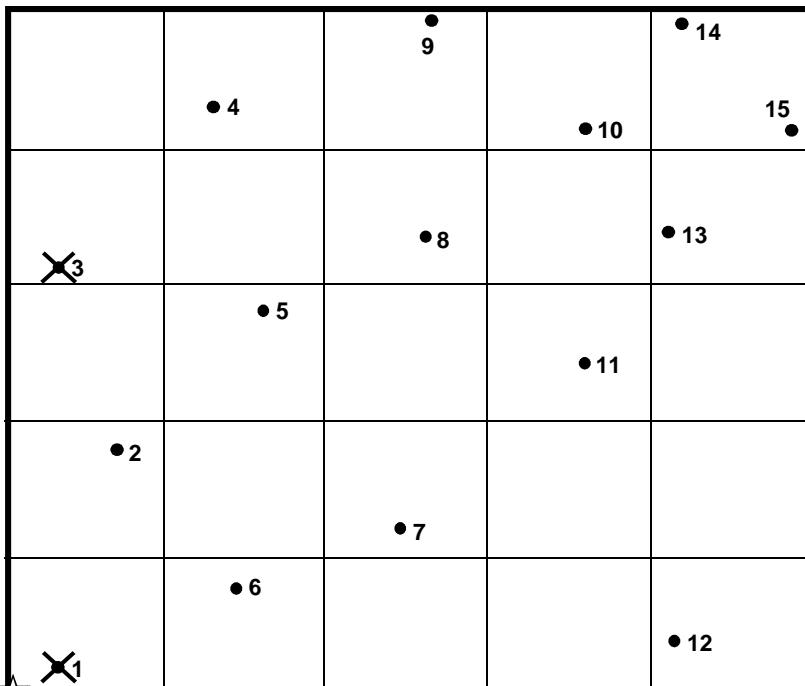


Photo
Point



PVC
Marker

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Bald Cypress (<i>Taxodium distichum</i>)	30.8%
Green Ash (<i>Fraxinus pennsylvanica</i>)	30.8%
Cherrybark Oak (<i>Quercus pagoda</i>)	7.7%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	30.8%
Beautyberry (<i>Callicarpa americana</i>)	0.0%

Density:

$$\text{Total Number of Trees} \quad \underline{\underline{13}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{520}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\underline{13}} \quad / \quad 15 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{87}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**




**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: W6 Date: 6/30/2009

Plot Map

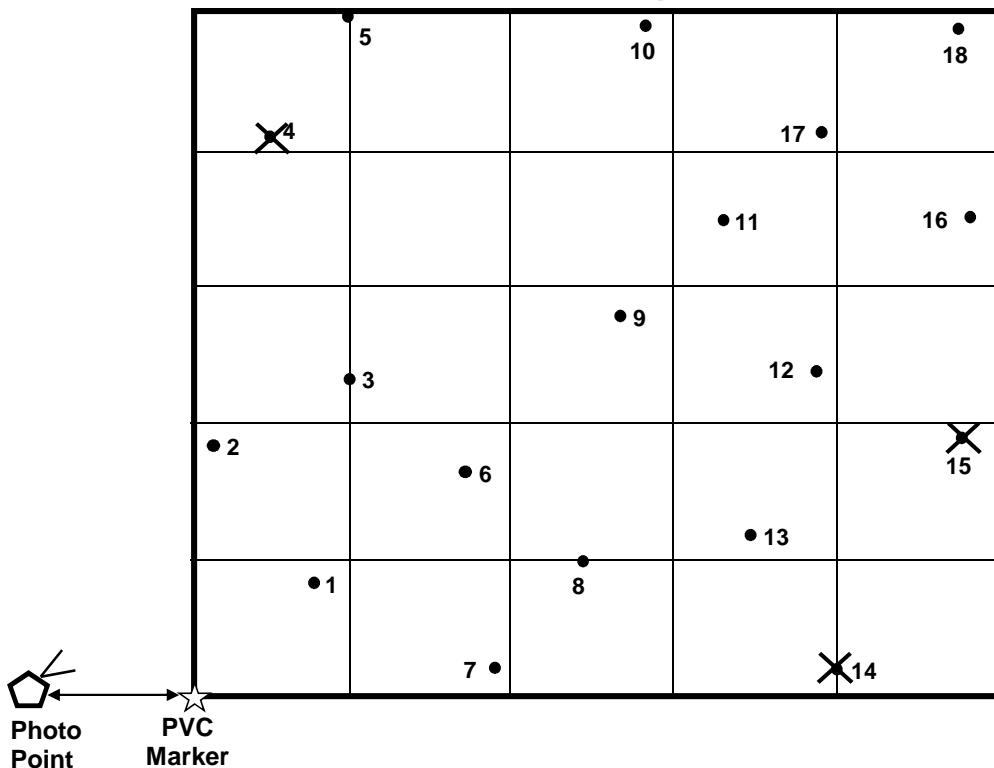

ID	Species	Height (m)	Vigor	Comment
1	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.96	3	
2	Willow Oak (<i>Quercus phellos</i>)	0.95	3	
3	Bald Cypress (<i>Taxodium distichum</i>)	1.36	4	
4	Possomhaw (<i>Viburnum nudum</i>)			Dead
5	Bald Cypress (<i>Taxodium distichum</i>)	0.96	3	
6	Willow Oak (<i>Quercus phellos</i>)	0.71	3	
7	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.74	3	
8	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.55	3	Deer browse
9	Willow Oak (<i>Quercus phellos</i>)	0.91	3	
10	Bald Cypress (<i>Taxodium distichum</i>)	0.89	3	
11	Buttonbush (<i>Cephalanthus occidentalis</i>)	1.04	4	
12	Laurel Oak (<i>Quercus laurifolia</i>)	0.56	3	Resprout
13	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.52	3	
14	Laurel Oak (<i>Quercus laurifolia</i>)			Dead
15	Swamp Chestnut Oak (<i>Quercus michauxii</i>)			Dead
16	Laurel Oak (<i>Quercus laurifolia</i>)	0.78	4	
17	Willow Oak (<i>Quercus phellos</i>)	1.36	4	
18	Willow Oak (<i>Quercus phellos</i>)	0.51	3	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Bald Cypress (<i>Taxodium distichum</i>)	20.0%
Willow Oak (<i>Quercus phellos</i>)	33.3%
Laurel Oak (<i>Quercus laurifolia</i>)	13.3%
Buttonbush (<i>Cephalanthus occidentalis</i>)	33.3%

Density:


$$\text{Total Number of Trees} \quad \underline{\mathbf{15}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\mathbf{600}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees} \quad \underline{\mathbf{15}} \quad / \quad 18 \text{ trees} \quad \times \quad \underline{\mathbf{100}} \quad = \quad \underline{\mathbf{83}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**

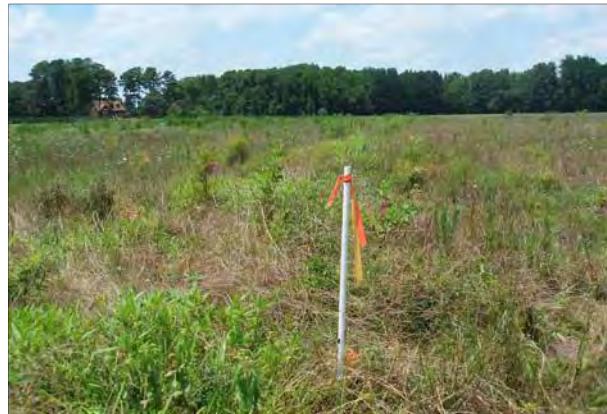

**2nd Year
Monitoring**



Vegetation Monitoring Worksheet

Site: Harrell **Plot:** W7 **Date:** 6/30/2009

Plot: W7

Date: 6/30/2009

Plot Map

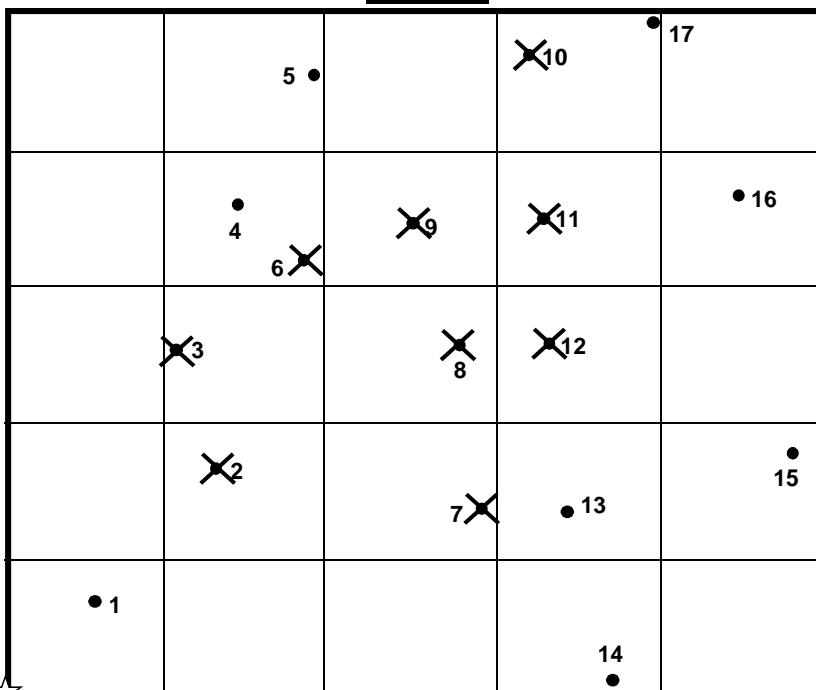

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Willow Oak (<i>Quercus phellos</i>)	50.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	37.5%
Cherrybark Oak (<i>Quercus pagoda</i>)	12.5%

Density:

$$\text{Total Number of Trees } \underline{\underline{8}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{320}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{8}} \quad / \quad 17 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{47}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell **Plot:** W8 **Date:** 6/30/2009

Plot: W8

Date: 6/30/2009

Plot Map

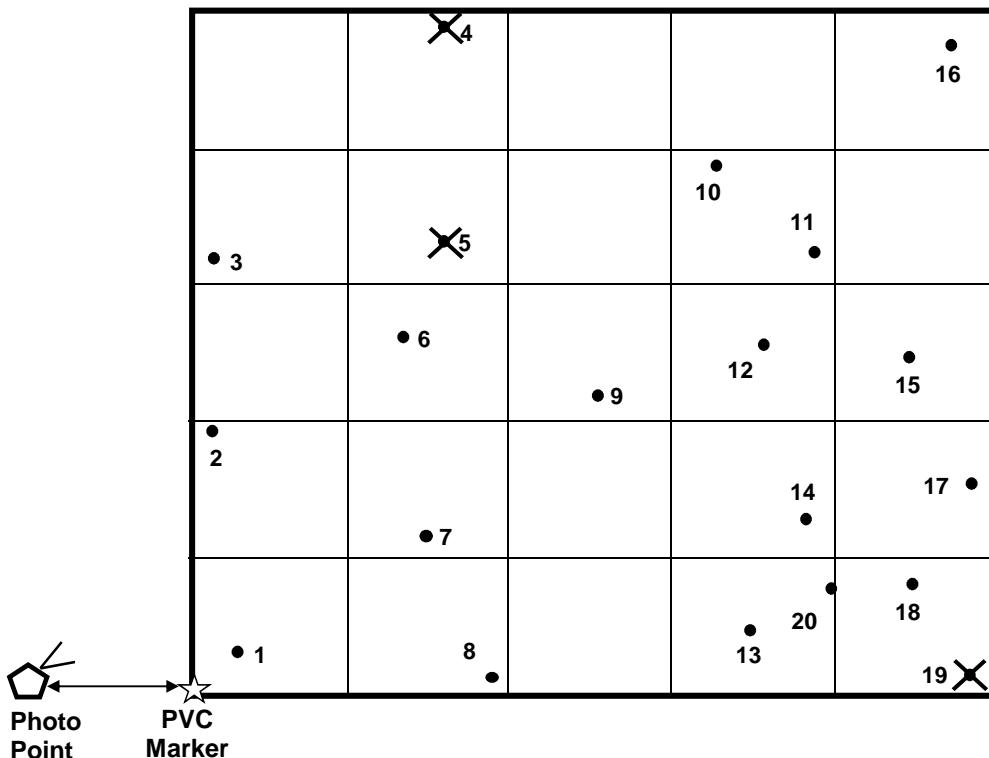

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Water Hickory (<i>Carya aquatica</i>)	47.1%
Bald Cypress (<i>Taxodium distichum</i>)	17.6%
Buttonbush (<i>Cephalanthus occidentalis</i>)	23.5%
American Beautyberry (<i>Callicarpa americana</i>)	5.9%
Cherrybark Oak (<i>Quercus pagoda</i>)	5.9%

Density:

$$\text{Total Number of Trees } \underline{\underline{17}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{680}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{17}} \quad / \quad 20 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{85}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**


Vegetation Monitoring Worksheet

Site: Harrell **Plot:** w9 **Date:** 6/30/2009

Plot: W9

Date: 6/30/2009

Plot Map

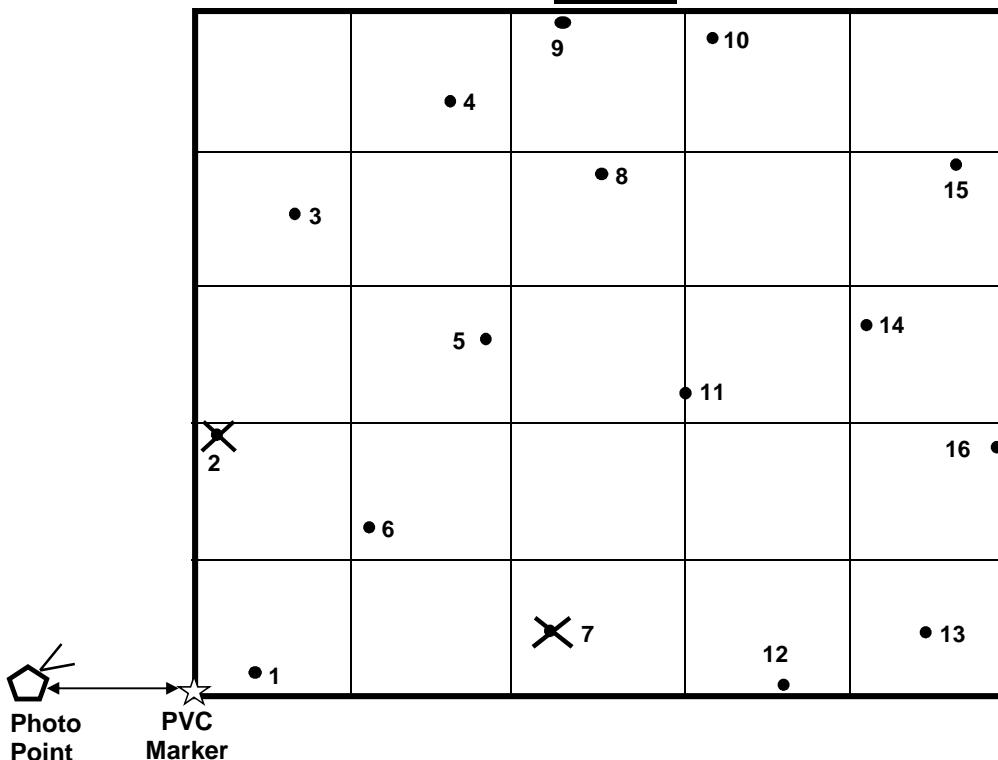

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Green Ash (<i>Fraxinus pennsylvanica</i>)	14.3%
Laurel Oak (<i>Quercus laurifolia</i>)	21.4%
Willow Oak (<i>Quercus phellos</i>)	7.1%
Cherrybark Oak (<i>Quercus pagoda</i>)	28.6%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	7.1%
Buttonbush (<i>Cephalanthus occidentalis</i>)	7.1%
American Beautyberry (<i>Callicarpa americana</i>)	14.3%

Density:

$$\text{Total Number of Trees } \underline{\underline{14}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{560}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{14}} \quad / \quad 16 \text{ trees} \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{88}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell **Plot:** W10 **Date:** 6/30/2009

Plot: W10

Date:

6/30/2009

Plot Map


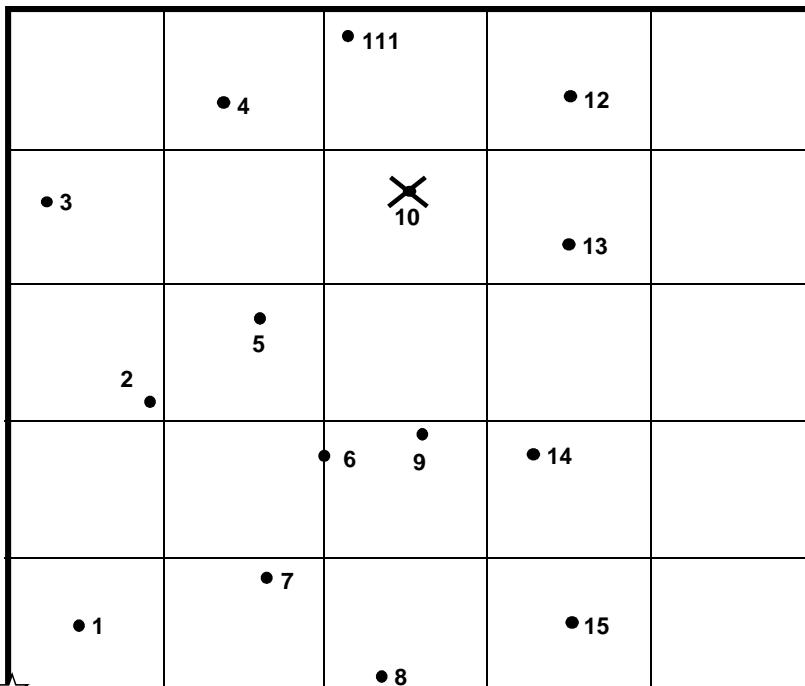


Photo Point

PVC
Marker

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Laurel Oak (<i>Quercus laurifolia</i>)	28.6%
Bald Cypress (<i>Taxodium distichum</i>)	7.1%
Green Ash (<i>Fraxinus pennsylvanica</i>)	21.4%
Cherrybark Oak (<i>Quercus pagoda</i>)	14.3%
Buttonbush (<i>Cephalanthus occidentalis</i>)	21.4%
American Beautyberry (<i>Callicarpa americana</i>)	7.1%

Density:

$$\text{Total Number of Trees } \underline{\quad 14 \quad} / \quad 0.025 \text{ acres} = \underline{\quad 560 \quad} \text{ trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\quad 14 \quad} / \quad 15 \text{ trees} \times \underline{\quad 100 \quad} = \underline{\quad 93 \quad} \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Vegetation Monitoring Worksheet


Site: Harrell **Plot:** W11 **Date:** 6/30/2009

Plot: W11

Date:

6/30/2009

Plot Map

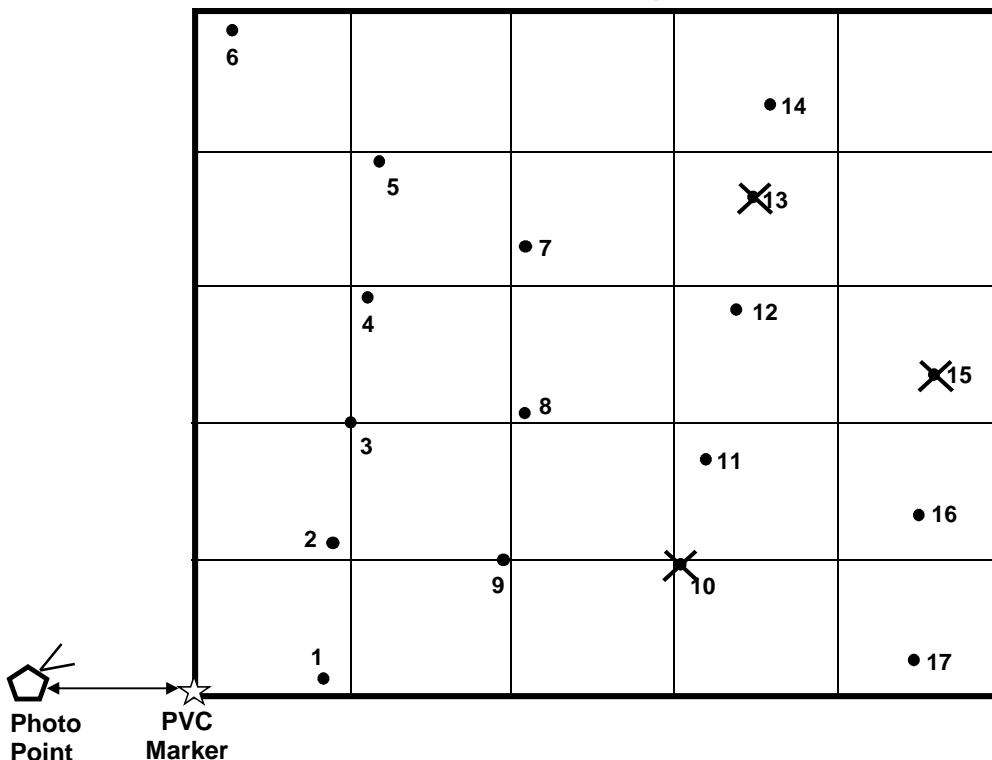

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Bald Cypress (<i>Taxodium distichum</i>)	42.9%
Water Hickory (<i>Carya aquatica</i>)	21.4%
Buttonbush (<i>Cephalanthus occidentalis</i>)	28.6%
American Beautyberry (<i>Callicarpa americana</i>)	7.1%

Density:

$$\text{Total Number of Trees } \underline{\quad 14 \quad} / \quad 0.025 \text{ acres} = \underline{\quad 560 \quad} \text{ trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\quad 14 \quad} / \quad 17 \text{ trees} \times \underline{\quad 100 \quad} = \underline{\quad 82 \quad} \% \text{ survivability}$$



**1st Year
Monitoring**





**2nd Year
Monitoring**

Vegetation Monitoring Worksheet

Site: Harrell Plot: W12 Date: 6/30/2009

Plot Map

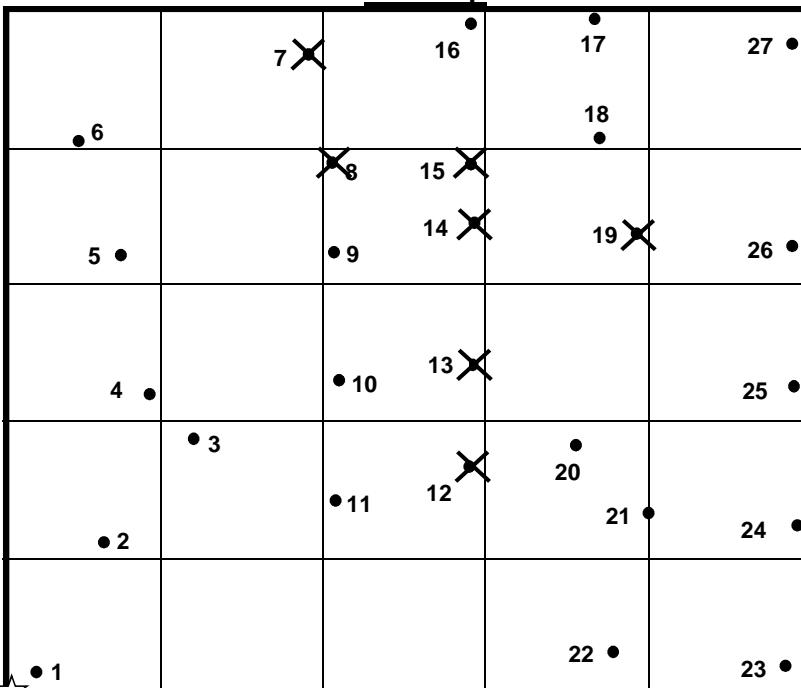

ID	Species	Height (m)	Vigor	Comment
1	Water Hickory (<i>Carya aquatica</i>)	1.44	4	
2	Bald Cypress (<i>Taxodium distichum</i>)	1.36	4	
3	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.61	3	Resprout
4	Bald Cypress (<i>Taxodium distichum</i>)	0.78	3	
5	Bald Cypress (<i>Taxodium distichum</i>)	1.03	4	
6	Bald Cypress (<i>Taxodium distichum</i>)	1.38	4	
7	American Beautyberry (<i>Callicarpa americana</i>)			Dead
8	Buttonbush (<i>Cephalanthus occidentalis</i>)			Dead
9	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.62	3	
10	Swamp Chestnut Oak (<i>Quercus michauxii</i>)	0.53	3	
11	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.34	2	Top died back
12	Buttonbush (<i>Cephalanthus occidentalis</i>)			Dead
13	Unknown			Dead
14	Buttonbush (<i>Cephalanthus occidentalis</i>)			Dead
15	Buttonbush (<i>Cephalanthus occidentalis</i>)			Dead
16	Water Hickory (<i>Carya aquatica</i>)	0.76	4	
17	Water Hickory (<i>Carya aquatica</i>)	0.81	3	
18	Water Hickory (<i>Carya aquatica</i>)	0.78	4	
19	Buttonbush (<i>Cephalanthus occidentalis</i>)			Dead
20	Water Hickory (<i>Carya aquatica</i>)	0.79	3	
21	Bald Cypress (<i>Taxodium distichum</i>)	1.57	4	
22	Bald Cypress (<i>Taxodium distichum</i>)	1.31	4	
23	Bald Cypress (<i>Taxodium distichum</i>)	1.16	4	
24	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.36	3	
25	Buttonbush (<i>Cephalanthus occidentalis</i>)	0.90	3	Deer browse
26	Bald Cypress (<i>Taxodium distichum</i>)	1.65	4	
27	Bald Cypress (<i>Taxodium distichum</i>)	1.08	4	

Vigor: 4=excellent, 3=good, 2=weak, 1=unlikely to survive year

Species	Percent of Total
Water Hickory (<i>Carya aquatica</i>)	25.0%
Bald Cypress (<i>Taxodium distichum</i>)	45.0%
Buttonbush (<i>Cephalanthus occidentalis</i>)	25.0%
Swamp Chestnut Oak (<i>Quercus michauxii</i>)	5.0%

Density:

$$\text{Total Number of Trees } \underline{\underline{20}} \quad / \quad 0.025 \text{ acres} \quad = \quad \underline{\underline{800}} \quad \text{trees / acre}$$

Survivability:

$$\text{Total Number of Trees } \underline{\underline{20}} \quad / \quad 27 \quad \times \quad \underline{\underline{100}} \quad = \quad \underline{\underline{74}} \quad \% \text{ survivability}$$



**1st Year
Monitoring**



**2nd Year
Monitoring**

Appendix B

Stream and Wetland Photos

Appendix B1 – Stream and Wetland Photo Stations



Photo Point S1: View looking upstream near Station 12+75. 11/24/09 – MY-02



Photo Point S1: View looking downstream near Station 12+75. 11/24/09 – MY-02



Photo Point S2: View looking upstream from farm road near Station 21+30. 11/24/09 – MY-02



Photo Point S2: View looking downstream from farm road near Station 21+30. 11/24/09 – MY-02



Photo Point S3: View looking upstream near Station 27+60. 11/24/09 – MY-02



Point S3: View looking downstream near Station 27+60. 11/24/09 – MY-02



Photo Point S4: View of water quality treatment structure near Station 32+25. 11/24/09 – MY-02



Photo Point S5: View looking at log drop structures, near Station 33+35. 11/24/09 – MY-02



Photo Point S5: View looking downstream near Station 33+35. 11/24/09 – MY-02



Photo Point S6: View of incoming drainage ditch near Station 37+25. 11/24/09 – MY-02



Photo Point S7: View looking upstream near Station 39+00. 11/24/09 – MY-02



Photo Point S7: View looking downstream near Station 39+00. 11/24/09 – MY-02



Photo Point S8: View of log drop structure near Station 39+50. 11/24/09 – MY-02



Photo Point S9: View of water quality treatment structure near Station 41+75. 11/24/09 – MY-02



Photo Point S10: View looking upstream near Station 46+15. 11/24/09 – MY-02



Photo Point S10: View looking downstream near Station 46+15. 11/24/09 – MY-02



Photo Point S11: View of water quality treatment structure near Station 47+00. 11/24/09 – MY-02



Photo Point S12: View looking upstream near Station 52+00. 11/24/09 – MY-02



Photo Point S12: View looking downstream near Station 52+00. 11/24/09 – MY-02



Photo Point S13: View looking upstream near Station 61+50. 11/24/09 – MY-02



Photo Point S13: View of water quality treatment structure near Station 61+50. 11/24/09 – MY-02



Photo Point S13: View looking downstream near Station 61+50. 11/24/09 – MY-02



Photo Point S14: View of stream with water quality treatment structure in the background near Station 62+60.
11/24/09 – MY-02



Photo Point S15: View looking upstream near Station 69+00. 11/24/09 – MY-02



Photo Point S15: View looking downstream near Station 69+00. 11/24/09 – MY-02



Photo Point S16: View looking upstream near Station 76+75. (Photo taken farther away from stream due to water depth) 11/24/09 – MY-02



Photo Point S16: View looking downstream toward project end before the project stream joins Swift Creek near Station 76+75. (Photo taken farther away from stream due to water depth) 11/24/09 – MY-02



Photo Point W1: View looking north from southwest corner of wetland. 8/6/09 – MY-02



Photo Point W1: View looking east from southwest corner of wetland. 6/30/09 – MY-02



Photo Point W2: View looking east from northwest corner of wetland. 6/30/09 – MY-02



Photo Point W2: View looking southeast from northwest corner of wetland. 6/30/09 – MY-02



Photo Point W3: View looking east from middle corner of wetland. 6/30/09 – MY-02



Photo Point W3: View looking west from middle corner of wetland. 6/30/09 – MY-02



Photo Point W3: View looking southwest from middle corner of wetland. 6/30/09 – MY-02



Photo Point W4: View looking north toward Wetland Gauge 1. 6/30/09 – MY-02



Photo Point W5: View looking west toward the downstream end of site. 6/30/09 – MY-02

Appendix B2: Representative Stream Problem Area Photos



SP1 – Bed degradation near Station 33+40. 11/19/09 – MY-02

Appendix C

Geomorphologic and Hydrologic Data

C1 - Stream Cross-Sections

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 1
Drainage Area (sq mi):	0.20
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	87.96
0.7	87.82
7.8	87.90
13.8	87.42
15.9	87.15
19.2	86.58
23.6	85.81
27.2	84.98
28.4	84.34
29.1	83.88
30.5	83.07
30.9	82.85
31.3	82.77
32.1	82.77
32.9	82.77
34.1	82.77
34.7	83.23
35.8	83.76
38.2	85.15
39.4	85.36
41.4	86.08
44.5	86.89
49.0	87.17
54.8	87.35
58.7	87.52
59.6	87.59


SUMMARY DATA

Bankfull Elevation:	84.9
Bankfull Cross-Sectional Area:	14.3
Bankfull Width:	10.5
Flood Prone Area Elevation:	87.0
Flood Prone Width:	30
Max Depth at Bankfull:	2.1
Mean Depth at Bankfull:	1.4
W / D Ratio:	7.7
Entrenchment Ratio:	2.9
Bank Height Ratio:	1.0



Stream Type B5c

Tar-Pamlico River Basin, Harrell, MY-02, XS - 1

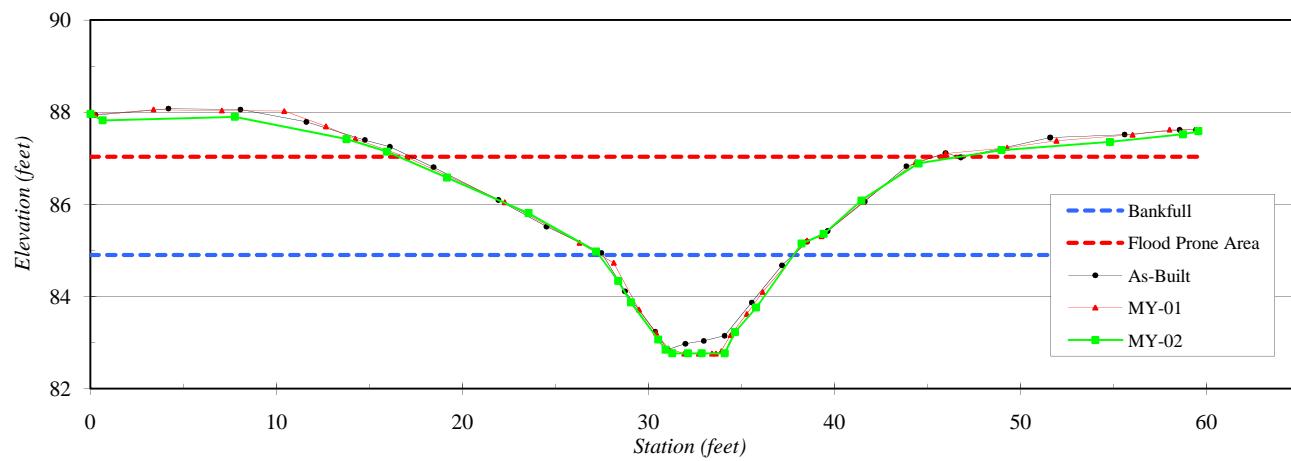

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 2
Drainage Area (sq mi):	0.20
Date:	6/8/2009
Field Crew:	A. French, A. Davis


Station	Elevation
0.0	86.37
0.4	86.21
5.1	86.00
10.0	86.20
12.7	85.84
16.4	85.31
20.1	84.55
22.4	84.09
24.1	83.69
25.9	82.95
27.0	82.31
28.5	81.60
29.6	81.12
30.8	81.33
31.9	81.40
32.9	81.35
33.5	80.86
34.5	80.58
35.8	80.75
37.3	81.04
38.2	81.49
40.7	82.61
42.8	83.41
46.1	84.32
49.5	85.57
53.5	86.04
59.1	85.75
64.3	85.91
66.7	85.97

SUMMARY DATA

Bankfull Elevation:	82.4
Bankfull Cross-Sectional Area:	14.3
Bankfull Width:	13.4
Flood Prone Area Elevation:	84.2
Flood Prone Width:	24
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	1.1
W / D Ratio:	12.6
Entrenchment Ratio:	1.9
Bank Height Ratio:	1.0



Stream Type B5c

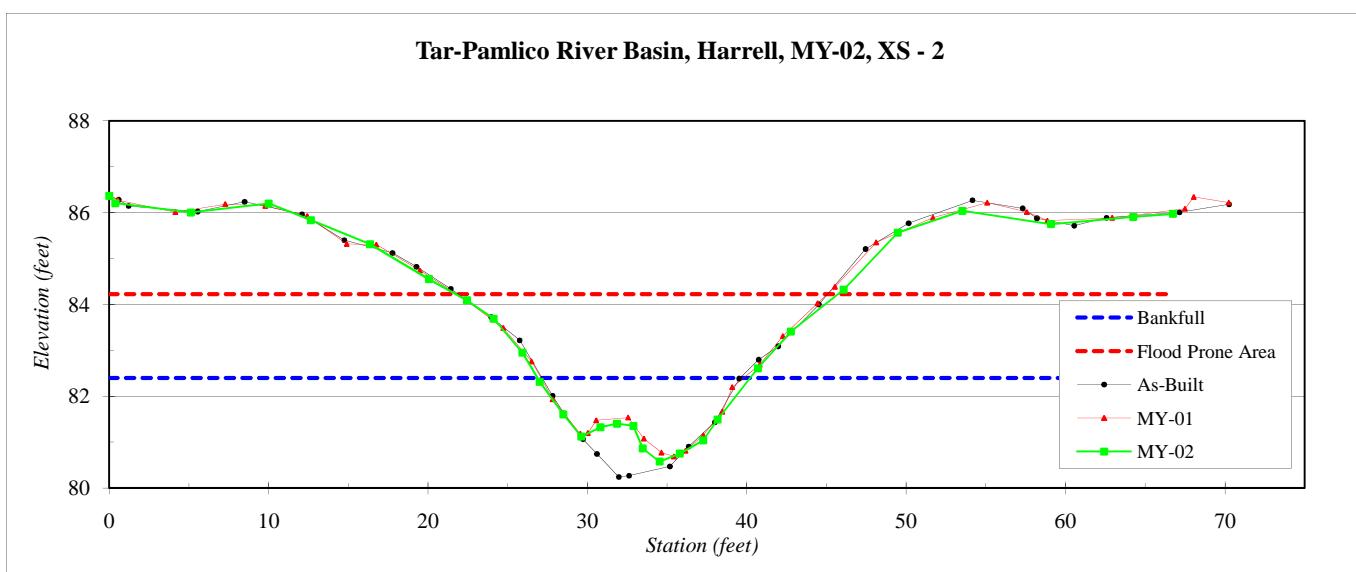

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 3
Drainage Area (sq mi):	0.23
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	81.89
1.2	81.91
3.5	81.65
5.6	81.19
7.5	80.81
10.3	80.95
13.0	80.83
16.1	80.73
18.7	80.55
21.0	80.50
22.4	80.25
23.7	80.05
24.9	79.42
26.0	78.92
26.8	78.60
27.7	78.57
28.8	78.84
30.3	79.16
32.0	79.82
33.7	80.43
35.8	80.57
39.2	80.37
43.0	80.50
46.5	80.59
50.8	80.76
53.5	80.82
54.7	80.91

SUMMARY DATA


Bankfull Elevation:	80.4
Bankfull Cross-Sectional Area:	11.9
Bankfull Width:	12.4
Flood Prone Area Elevation:	82.3
Flood Prone Width:	>55
Max Depth at Bankfull:	1.9
Mean Depth at Bankfull:	1.0
W / D Ratio:	12.9
Entrenchment Ratio:	>5.0
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 3

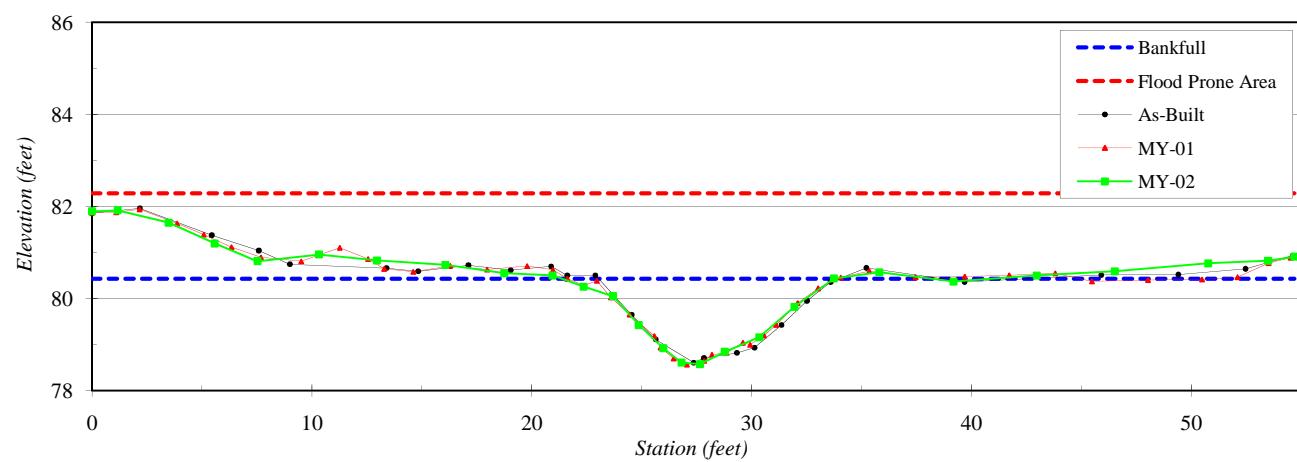

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 4
Drainage Area (sq mi):	0.23
Date:	6/8/2009
Field Crew:	A. French, A. Davis


Station	Elevation
0.0	79.54
3.4	79.49
7.3	79.35
10.7	79.65
14.4	79.55
19.2	79.63
22.3	79.51
26.0	79.43
29.2	79.47
30.2	78.97
31.1	78.51
33.0	78.02
34.4	78.05
35.1	78.11
36.0	78.51
37.4	79.25
38.9	79.82
40.6	80.00
43.0	79.53
47.9	79.73
51.7	79.75
55.1	79.85
57.8	79.86
61.3	79.74
65.2	79.75
66.7	79.93

SUMMARY DATA

Bankfull Elevation:	79.5
Bankfull Cross-Sectional Area:	8.1
Bankfull Width:	8.8
Flood Prone Area Elevation:	80.9
Flood Prone Width:	>67
Max Depth at Bankfull:	1.5
Mean Depth at Bankfull:	0.9
W / D Ratio:	9.6
Entrenchment Ratio:	>7.0
Bank Height Ratio:	1.0



Stream Type C5

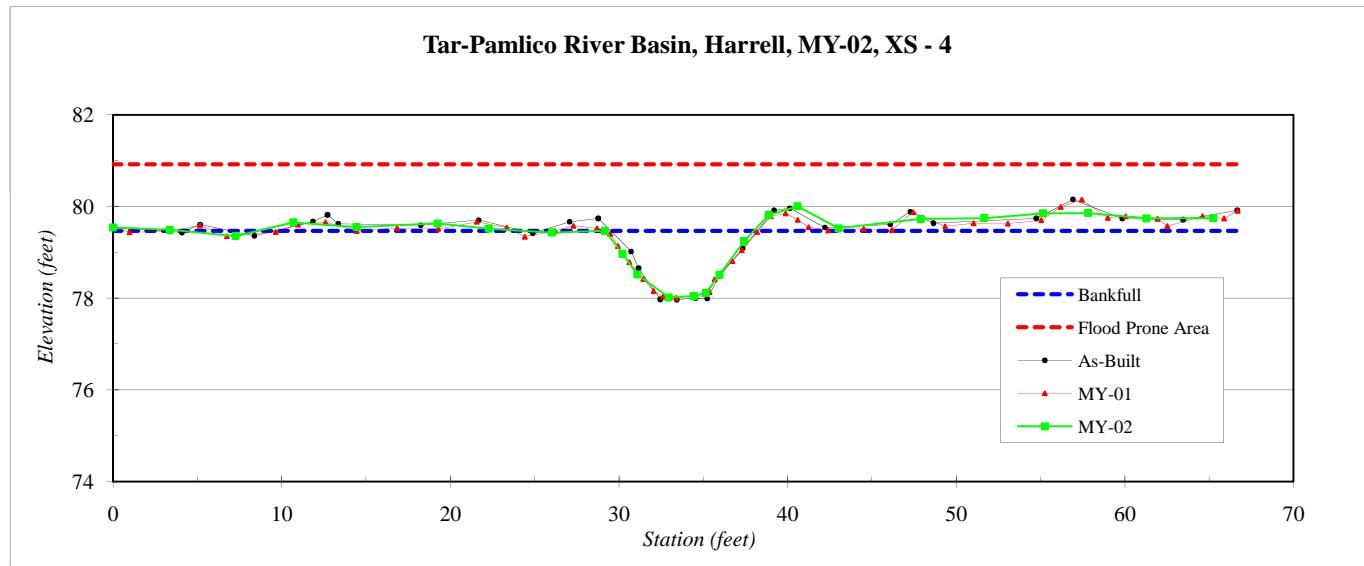

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 5
Drainage Area (sq mi):	0.23
Date:	6/8/2009
Field Crew:	A. French, A. Davis


Station	Elevation
0.0	77.35
0.9	77.18
4.3	76.53
7.1	77.09
10.3	76.01
13.2	75.41
14.6	74.93
16.9	74.55
19.8	74.16
22.8	74.47
25.8	74.75
29.8	74.48
32.0	74.51
32.8	74.09
33.4	73.54
34.5	73.22
35.3	72.84
35.5	72.66
36.5	72.67
37.1	72.87
37.7	72.88
38.4	73.60
39.2	74.15
40.3	74.54
41.2	74.86
44.6	74.52
47.9	74.13
51.3	73.91
55.9	73.72
59.9	74.02
62.3	74.66
65.2	75.84
69.2	77.19
71.4	77.75
77.3	77.81
83.6	77.92
84.4	78.16

SUMMARY DATA

Bankfull Elevation:	74.5
Bankfull Cross-Sectional Area:	8.8
Bankfull Width:	8.2
Flood Prone Area Elevation:	76.4
Flood Prone Width:	57
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	1.1
W / D Ratio:	7.6
Entrenchment Ratio:	7.0
Bank Height Ratio:	1.0



Stream Type C5

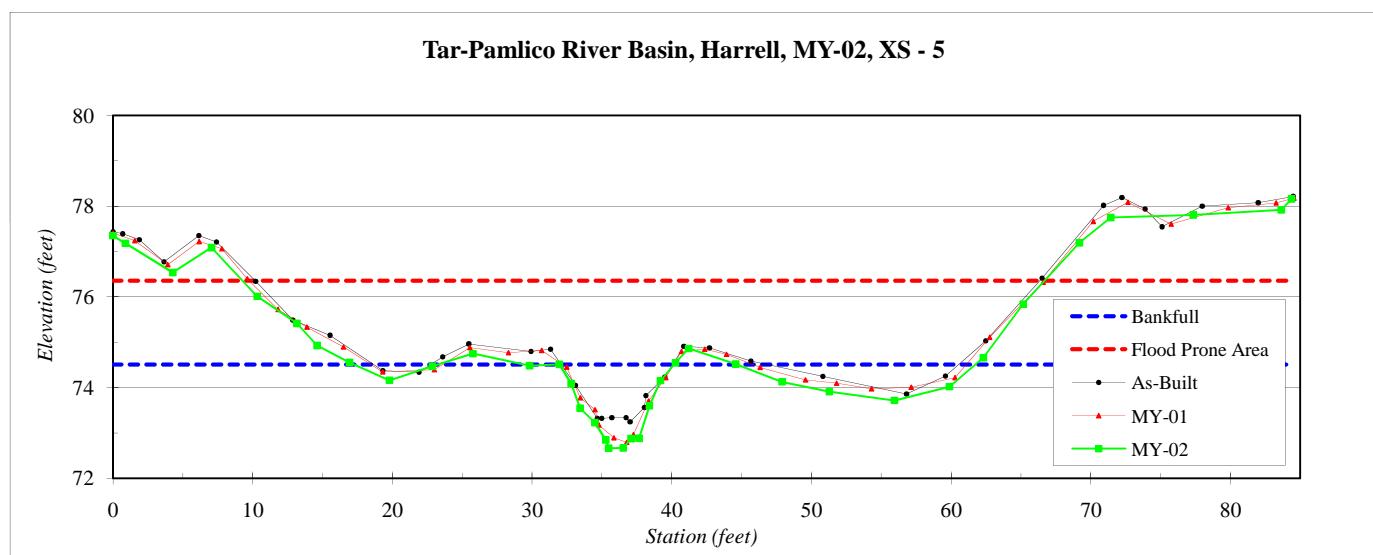

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 6
Drainage Area (sq mi):	0.42
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	73.24
4.3	73.38
9.0	73.37
14.0	73.45
18.3	73.31
23.1	73.62
27.7	73.42
30.1	73.20
31.8	72.48
33.3	71.85
34.5	71.40
35.3	70.98
36.2	70.66
37.3	70.56
38.0	70.66
38.9	71.08
39.4	71.31
39.5	71.27
40.9	72.33
41.9	72.88
43.1	73.07
44.2	73.39
45.9	73.39
47.7	73.02
49.2	73.22
50.7	73.66
52.6	74.43
55.0	75.38
58.2	76.50
59.2	76.65
60.1	76.80

SUMMARY DATA


Bankfull Elevation:	73.2
Bankfull Cross-Sectional Area:	18.6
Bankfull Width:	13.4
Flood Prone Area Elevation:	75.8
Flood Prone Width:	56.3
Max Depth at Bankfull:	2.6
Mean Depth at Bankfull:	1.4
W / D Ratio:	9.7
Entrenchment Ratio:	4.2
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 6

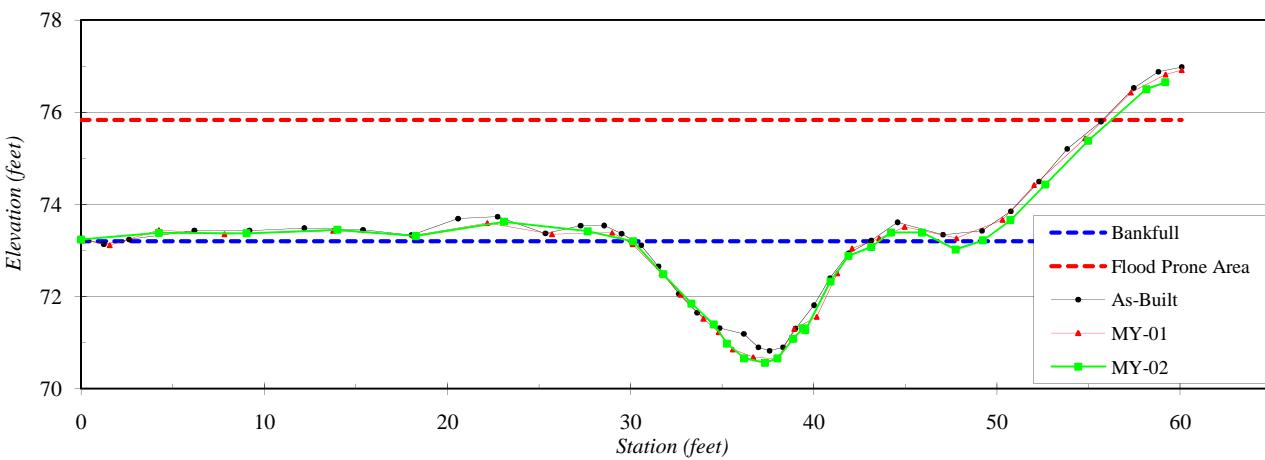

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 7
Drainage Area (sq mi):	0.42
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	72.07
0.8	72.01
10.0	72.11
19.8	72.10
24.3	72.09
26.4	72.09
28.4	71.35
30.3	70.52
31.8	70.04
32.8	69.49
33.2	69.48
33.8	69.34
34.7	69.51
35.7	70.33
37.1	71.04
38.9	71.82
39.8	72.29
44.9	72.29
53.1	72.29
60.0	72.09
60.9	72.11

SUMMARY DATA


Bankfull Elevation:	72.1
Bankfull Cross-Sectional Area:	18.5
Bankfull Width:	13.0
Flood Prone Area Elevation:	74.8
Flood Prone Width:	>61
Max Depth at Bankfull:	2.8
Mean Depth at Bankfull:	1.4
W / D Ratio:	9.1
Entrenchment Ratio:	>5.0
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 7

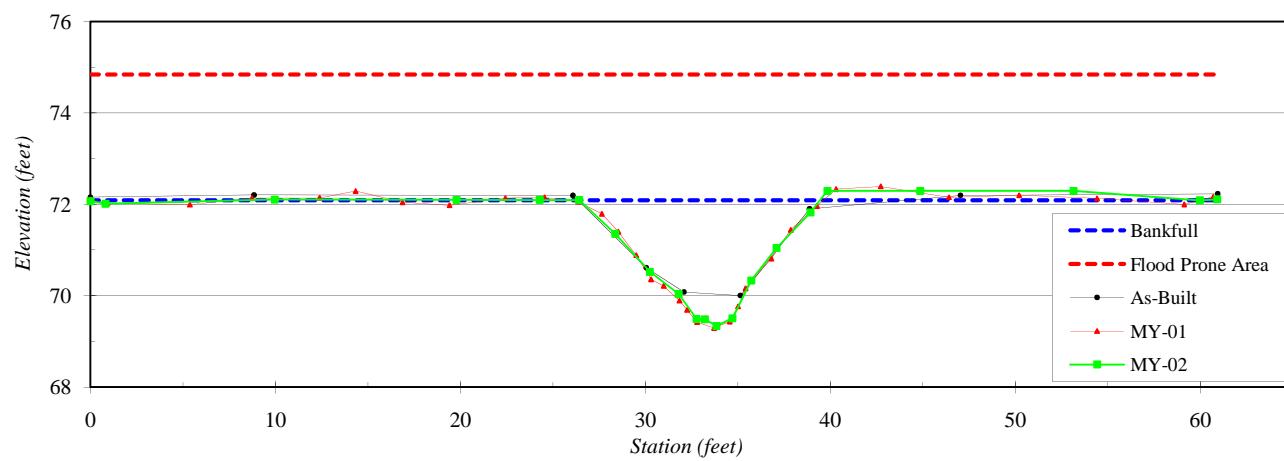

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 8
Drainage Area (sq mi):	0.42
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	71.54
0.8	71.31
4.8	70.26
6.8	69.49
9.1	69.13
11.2	69.30
12.6	69.84
14.1	69.30
15.2	68.61
15.9	67.99
16.9	67.42
17.8	67.39
18.4	67.22
19.5	67.39
20.1	67.69
20.4	67.59
21.9	67.56
23.2	67.99
24.2	68.26
25.4	69.06
29.9	69.09
39.4	69.20
52.2	69.10

SUMMARY DATA


Bankfull Elevation:	69.1
Bankfull Cross-Sectional Area:	13.2
Bankfull Width:	11.0
Flood Prone Area Elevation:	70.9
Flood Prone Width:	>50
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	1.2
W / D Ratio:	9.2
Entrenchment Ratio:	>5.0
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 8

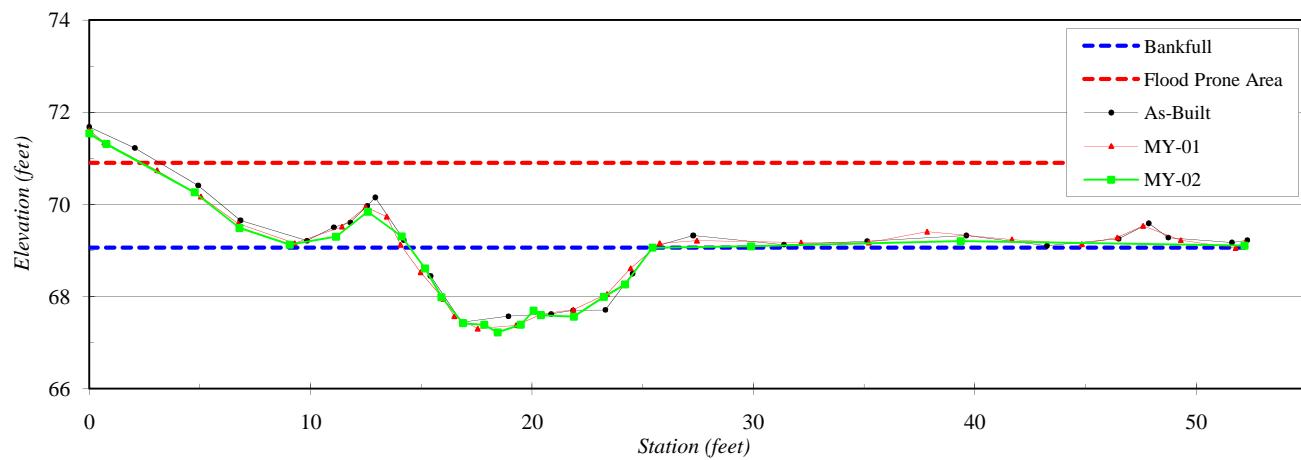

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 9
Drainage Area (sq mi):	0.42
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	68.29
0.3	68.23
2.3	67.92
5.4	67.51
9.2	68.16
13.4	68.63
21.2	68.63
27.3	68.47
28.8	67.79
30.0	67.20
31.0	66.72
32.6	66.57
33.7	66.68
34.8	66.73
36.0	66.98
37.7	67.82
39.3	68.49
46.4	68.34
56.2	68.33
58.1	68.42


SUMMARY DATA

Bankfull Elevation:	68.5
Bankfull Cross-Sectional Area:	14.3
Bankfull Width:	11.9
Flood Prone Area Elevation:	70.4
Flood Prone Width:	>58
Max Depth at Bankfull:	1.9
Mean Depth at Bankfull:	1.2
W / D Ratio:	9.9
Entrenchment Ratio:	>5.0
Bank Height Ratio:	1.0



Stream Type

C5

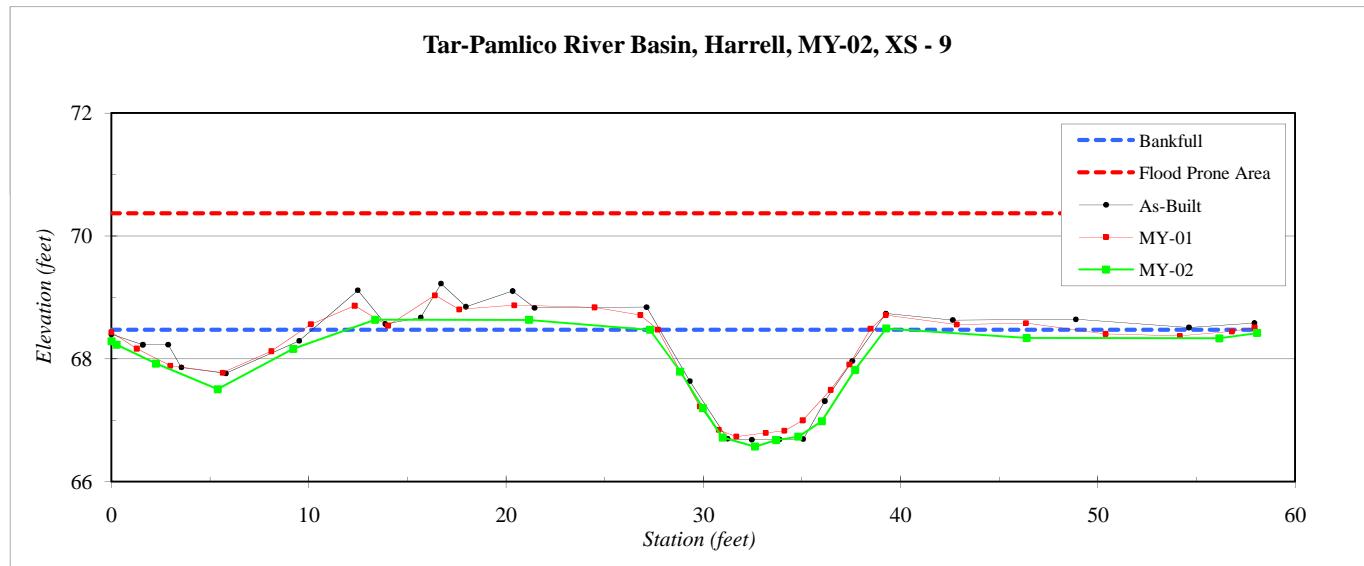

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 10
Drainage Area (sq mi):	0.61
Date:	6/8/2009
Field Crew:	A. French, A. Davis




Station	Elevation
0.0	68.26
1.5	67.97
4.9	67.41
7.5	67.12
11.1	66.94
14.6	67.35
19.2	67.68
23.1	67.56
26.8	67.34
29.2	66.68
30.8	65.92
32.3	65.19
33.5	64.98
35.7	65.20
37.7	65.43
39.7	66.03
41.5	66.79
45.0	66.92
50.0	66.63
54.3	66.80
57.0	67.34
61.7	67.12
65.7	67.29
67.2	67.43

SUMMARY DATA

Bankfull Elevation:	66.8
Bankfull Cross-Sectional Area:	14.2
Bankfull Width:	12.7
Flood Prone Area Elevation:	68.6
Flood Prone Width:	>67
Max Depth at Bankfull:	1.8
Mean Depth at Bankfull:	1.1
W / D Ratio:	11.4
Entrenchment Ratio:	>5.0
Bank Height Ratio:	1.0

Stream Type

C5

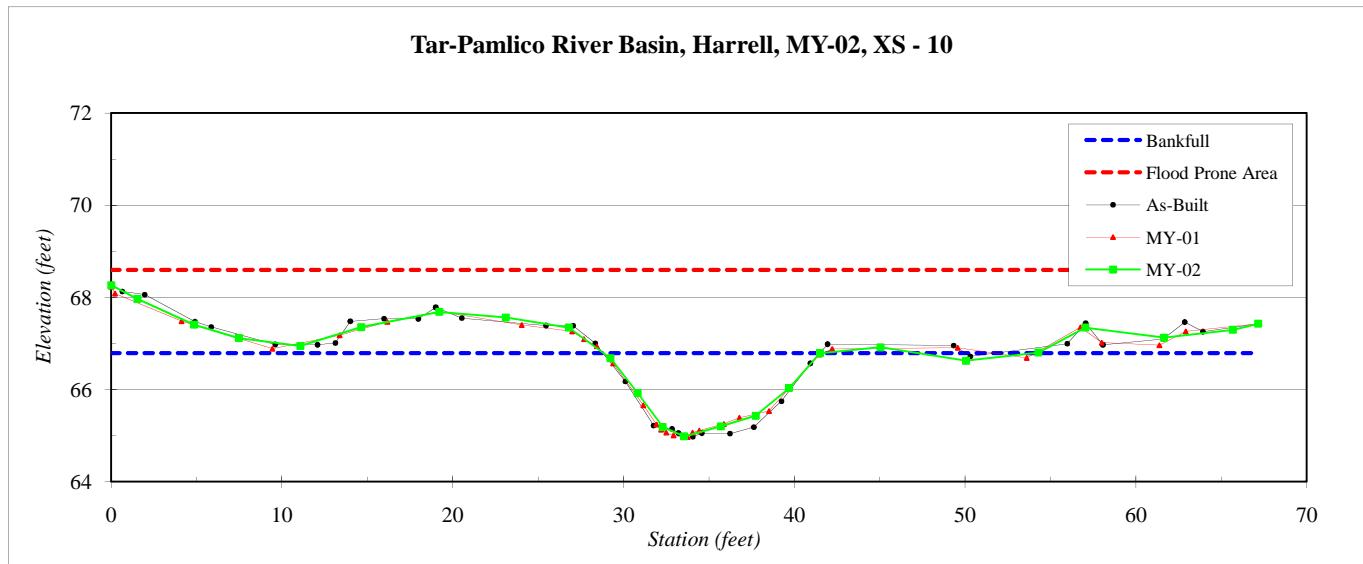

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 11
Drainage Area (sq mi):	0.61
Date:	6/8/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	66.19
0.9	66.20
5.6	65.57
9.3	66.06
14.8	66.02
19.3	65.90
22.5	65.89
23.6	65.31
25.0	64.45
26.4	64.14
27.4	63.66
28.3	63.71
29.8	63.71
31.2	63.91
32.3	64.33
33.1	64.88
34.4	65.66
35.2	65.88
39.2	66.10
45.5	66.01
52.7	66.09
56.4	66.18
56.7	66.34

SUMMARY DATA


Bankfull Elevation:	65.9
Bankfull Cross-Sectional Area:	18.0
Bankfull Width:	12.8
Flood Prone Area Elevation:	68.1
Flood Prone Width:	>57
Max Depth at Bankfull:	2.2
Mean Depth at Bankfull:	1.4
W / D Ratio:	9.1
Entrenchment Ratio:	>4.0
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 11

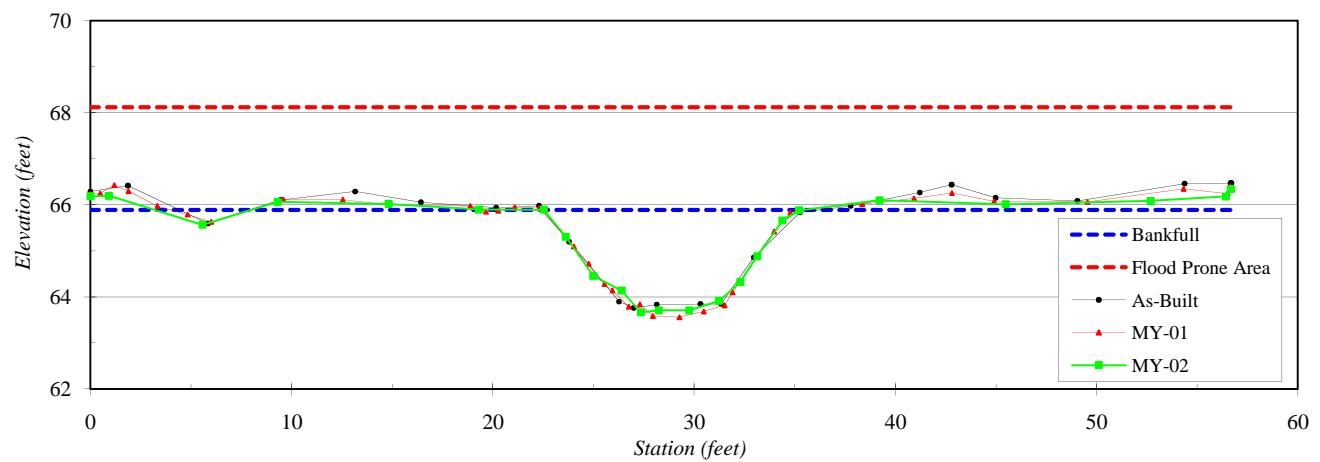

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 12
Drainage Area (sq mi):	0.61
Date:	6/8/2009
Field Crew:	A. French, A.Davis

Station	Elevation
0.0	65.45
2.0	65.17
4.1	65.17
7.3	64.92
10.5	64.95
17.2	65.08
20.3	64.98
21.9	63.91
23.1	63.14
24.6	62.69
25.8	62.89
27.4	63.14
28.5	62.73
29.2	62.98
29.9	62.95
31.8	63.09
32.9	63.44
34.1	63.84
35.1	64.28
36.6	64.86
41.4	64.98
46.8	64.62
52.8	64.50
59.0	64.74
60.6	64.81

SUMMARY DATA


Bankfull Elevation:	64.9
Bankfull Cross-Sectional Area:	23.4
Bankfull Width:	16.1
Flood Prone Area Elevation:	67.0
Flood Prone Width:	>61
Max Depth at Bankfull:	2.2
Mean Depth at Bankfull:	1.5
W / D Ratio:	11.1
Entrenchment Ratio:	>4.0
Bank Height Ratio:	1.0



Stream Type

C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 12

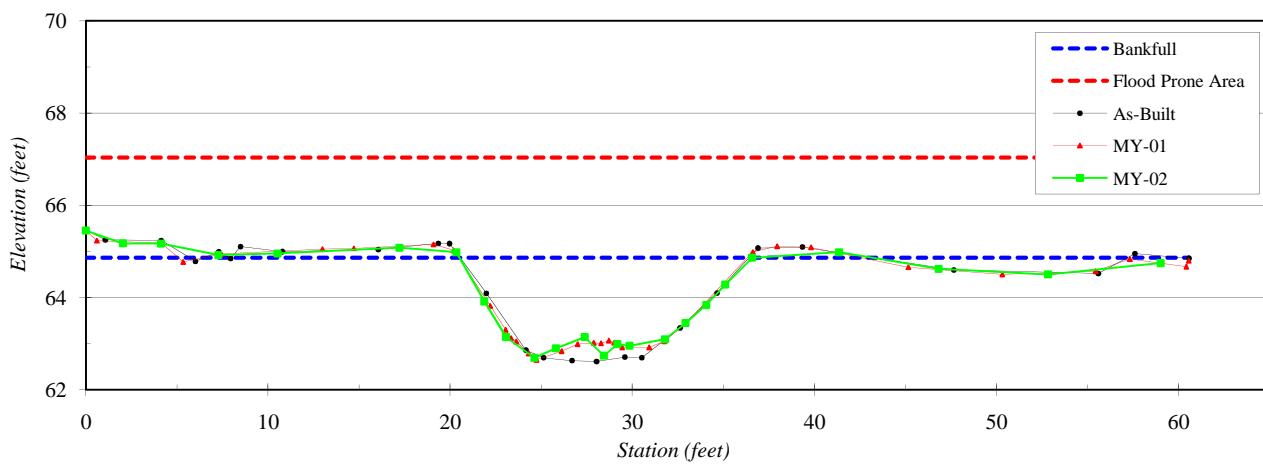

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 13
Drainage Area (sq mi):	0.61
Date:	7/1/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	63.54
3.8	63.47
8.0	63.72
13.4	63.96
19.4	63.73
24.9	63.78
25.8	63.38
27.5	62.64
29.2	61.92
30.4	61.73
32.0	61.71
33.1	61.73
33.1	61.50
33.6	61.63
34.1	61.78
34.9	62.09
37.1	63.25
38.6	63.96
43.1	63.93
50.5	63.84
59.4	64.13
60.1	64.24


SUMMARY DATA

Bankfull Elevation:	63.8
Bankfull Cross-Sectional Area:	18.4
Bankfull Width:	13.3
Flood Prone Area Elevation:	66.1
Flood Prone Width:	>60
Max Depth at Bankfull:	2.3
Mean Depth at Bankfull:	1.4
W / D Ratio:	9.6
Entrenchment Ratio:	>4.0
Bank Height Ratio:	1.0



Stream Type	C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 13

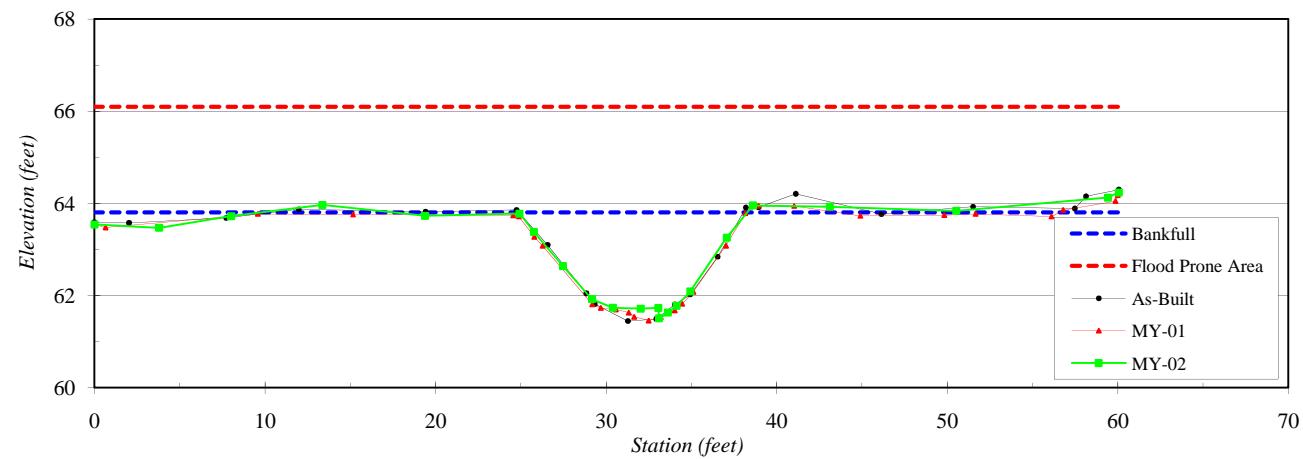

River Basin:	Tar-Pamlico
Watershed:	Harrell, MY-02
XS ID	XS - 14
Drainage Area (sq mi):	0.61
Date:	7/1/2009
Field Crew:	A. French, A. Davis

Station	Elevation
0.0	62.77
1.5	62.59
6.1	62.91
11.4	62.85
19.1	62.88
22.7	62.92
23.9	62.43
25.5	61.62
26.7	61.20
27.3	60.65
28.7	60.70
30.2	60.67
31.5	60.80
33.1	61.07
33.9	61.49
35.1	62.06
36.6	62.85
38.6	63.00
44.2	62.75
48.7	62.50
54.9	62.37
59.1	62.78
61.5	62.62
62.0	62.78

SUMMARY DATA


Bankfull Elevation:	62.9
Bankfull Cross-Sectional Area:	19.1
Bankfull Width:	13.8
Flood Prone Area Elevation:	65.1
Flood Prone Width:	>62
Max Depth at Bankfull:	2.2
Mean Depth at Bankfull:	1.4
W / D Ratio:	10.0
Entrenchment Ratio:	>4.0
Bank Height Ratio:	1.0



Stream Type


C5

Tar-Pamlico River Basin, Harrell, MY-02, XS - 14

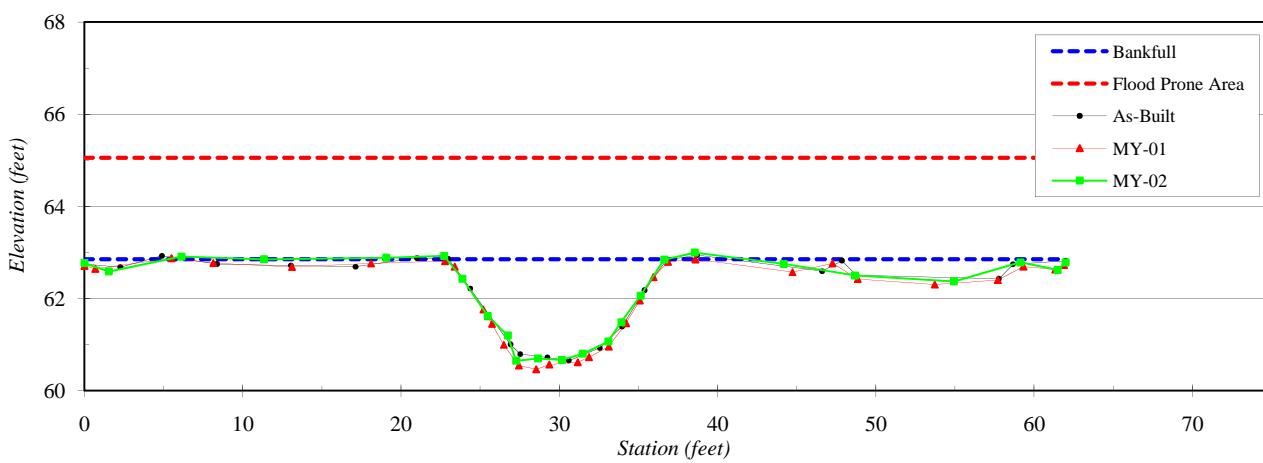

C2 - Stream Longitudinal Profiles

Longitudinal Profile
Harrell Stream Restoration MY-02
Reach 1 - Station 16+00 - 22+35

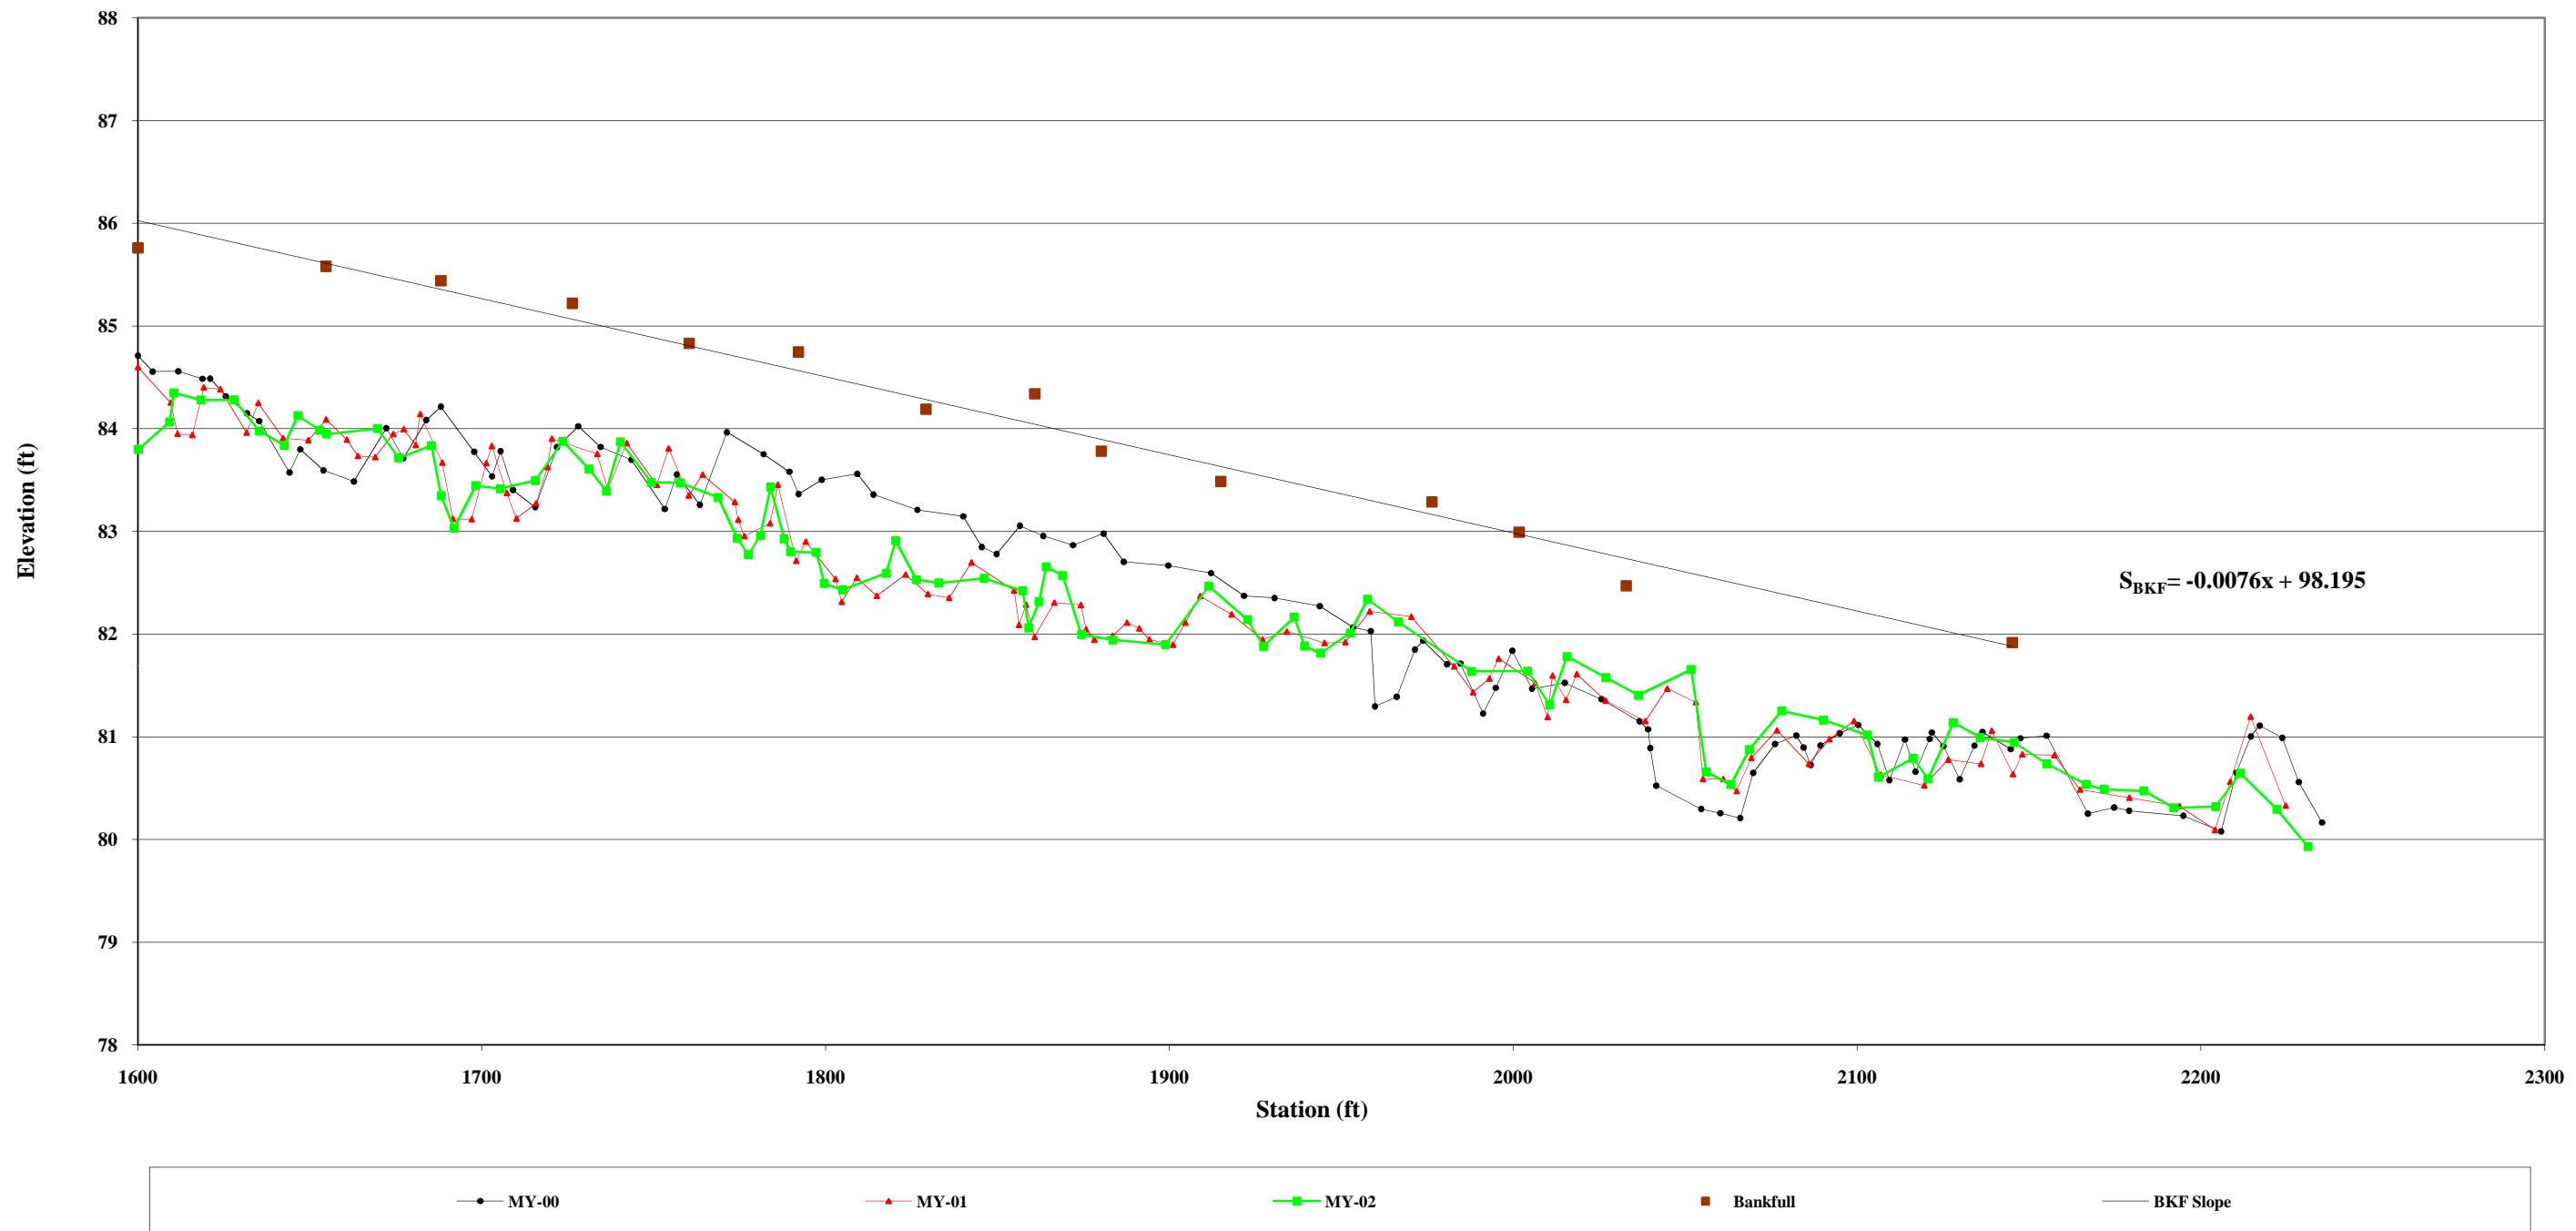


*Due to no flowing water in the channel, water surface and water surface slope were not recorded.

Longitudinal Profile
Harrell Stream Restoration MY-02
Reach 2 - Station 25+00 - 29+90




*Due to no flowing water in the channel, water surface and water surface slope were not recorded.

Longitudinal Profile
Harrell Stream Restoration MY-02
Reach 3 - Station 38+60 - 48+50

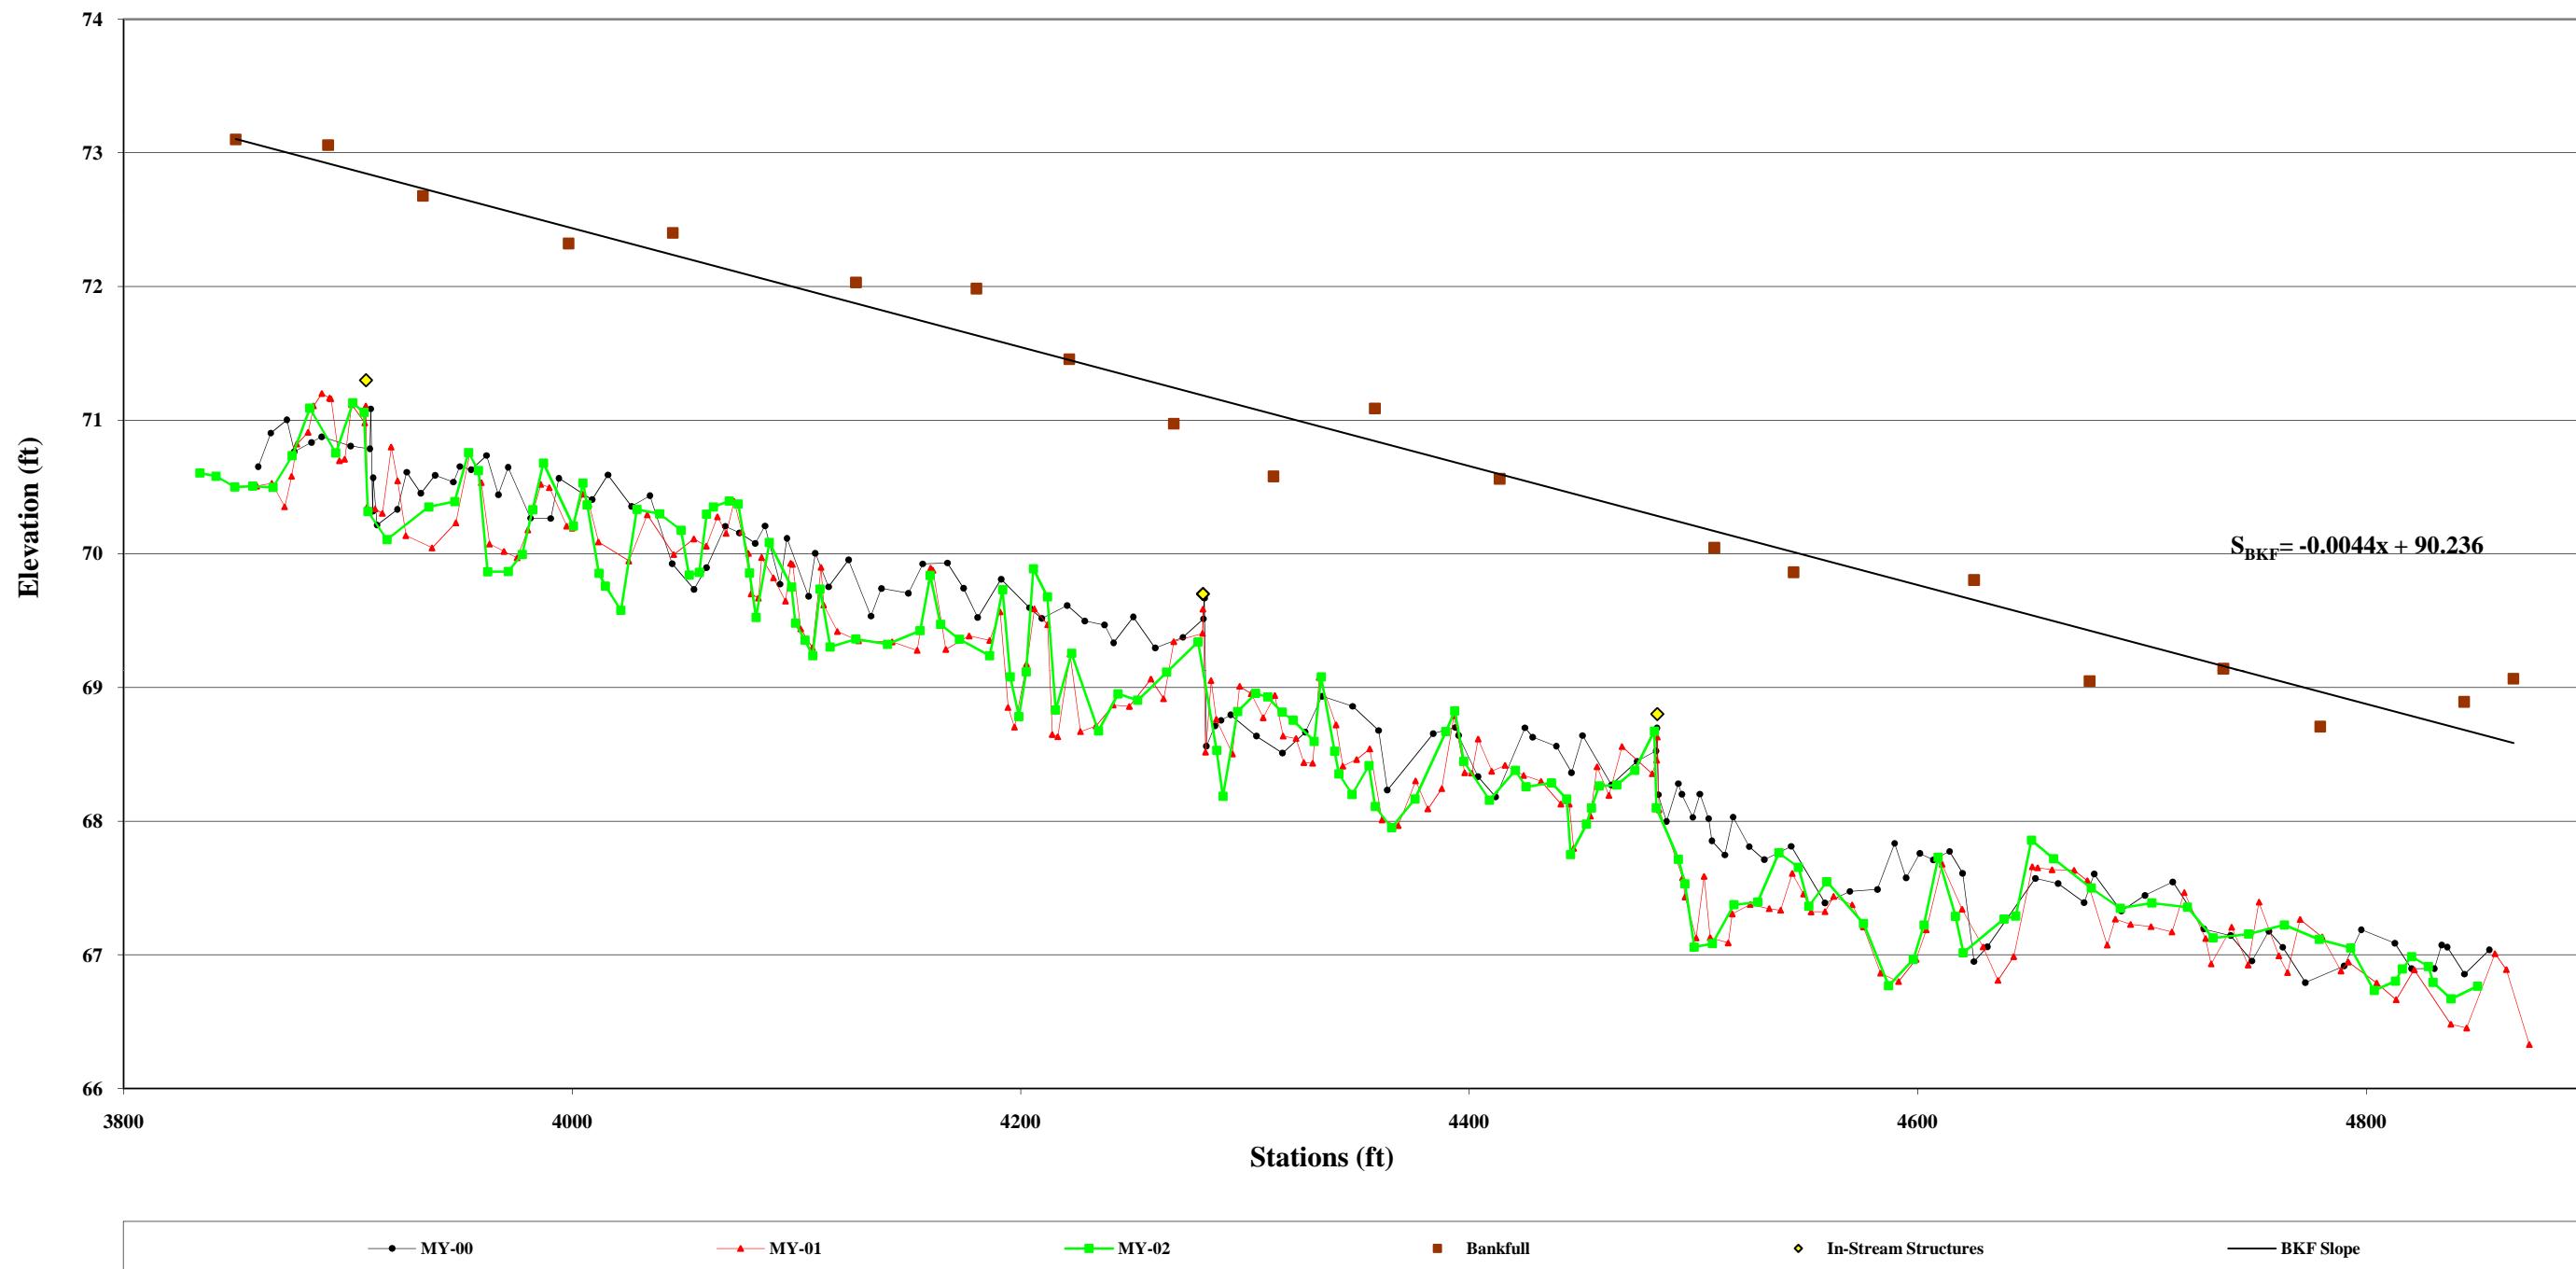


Longitudinal Profile
Harrell Stream Restoration MY-02
Reach 4 - Station 62+50 - 71+80

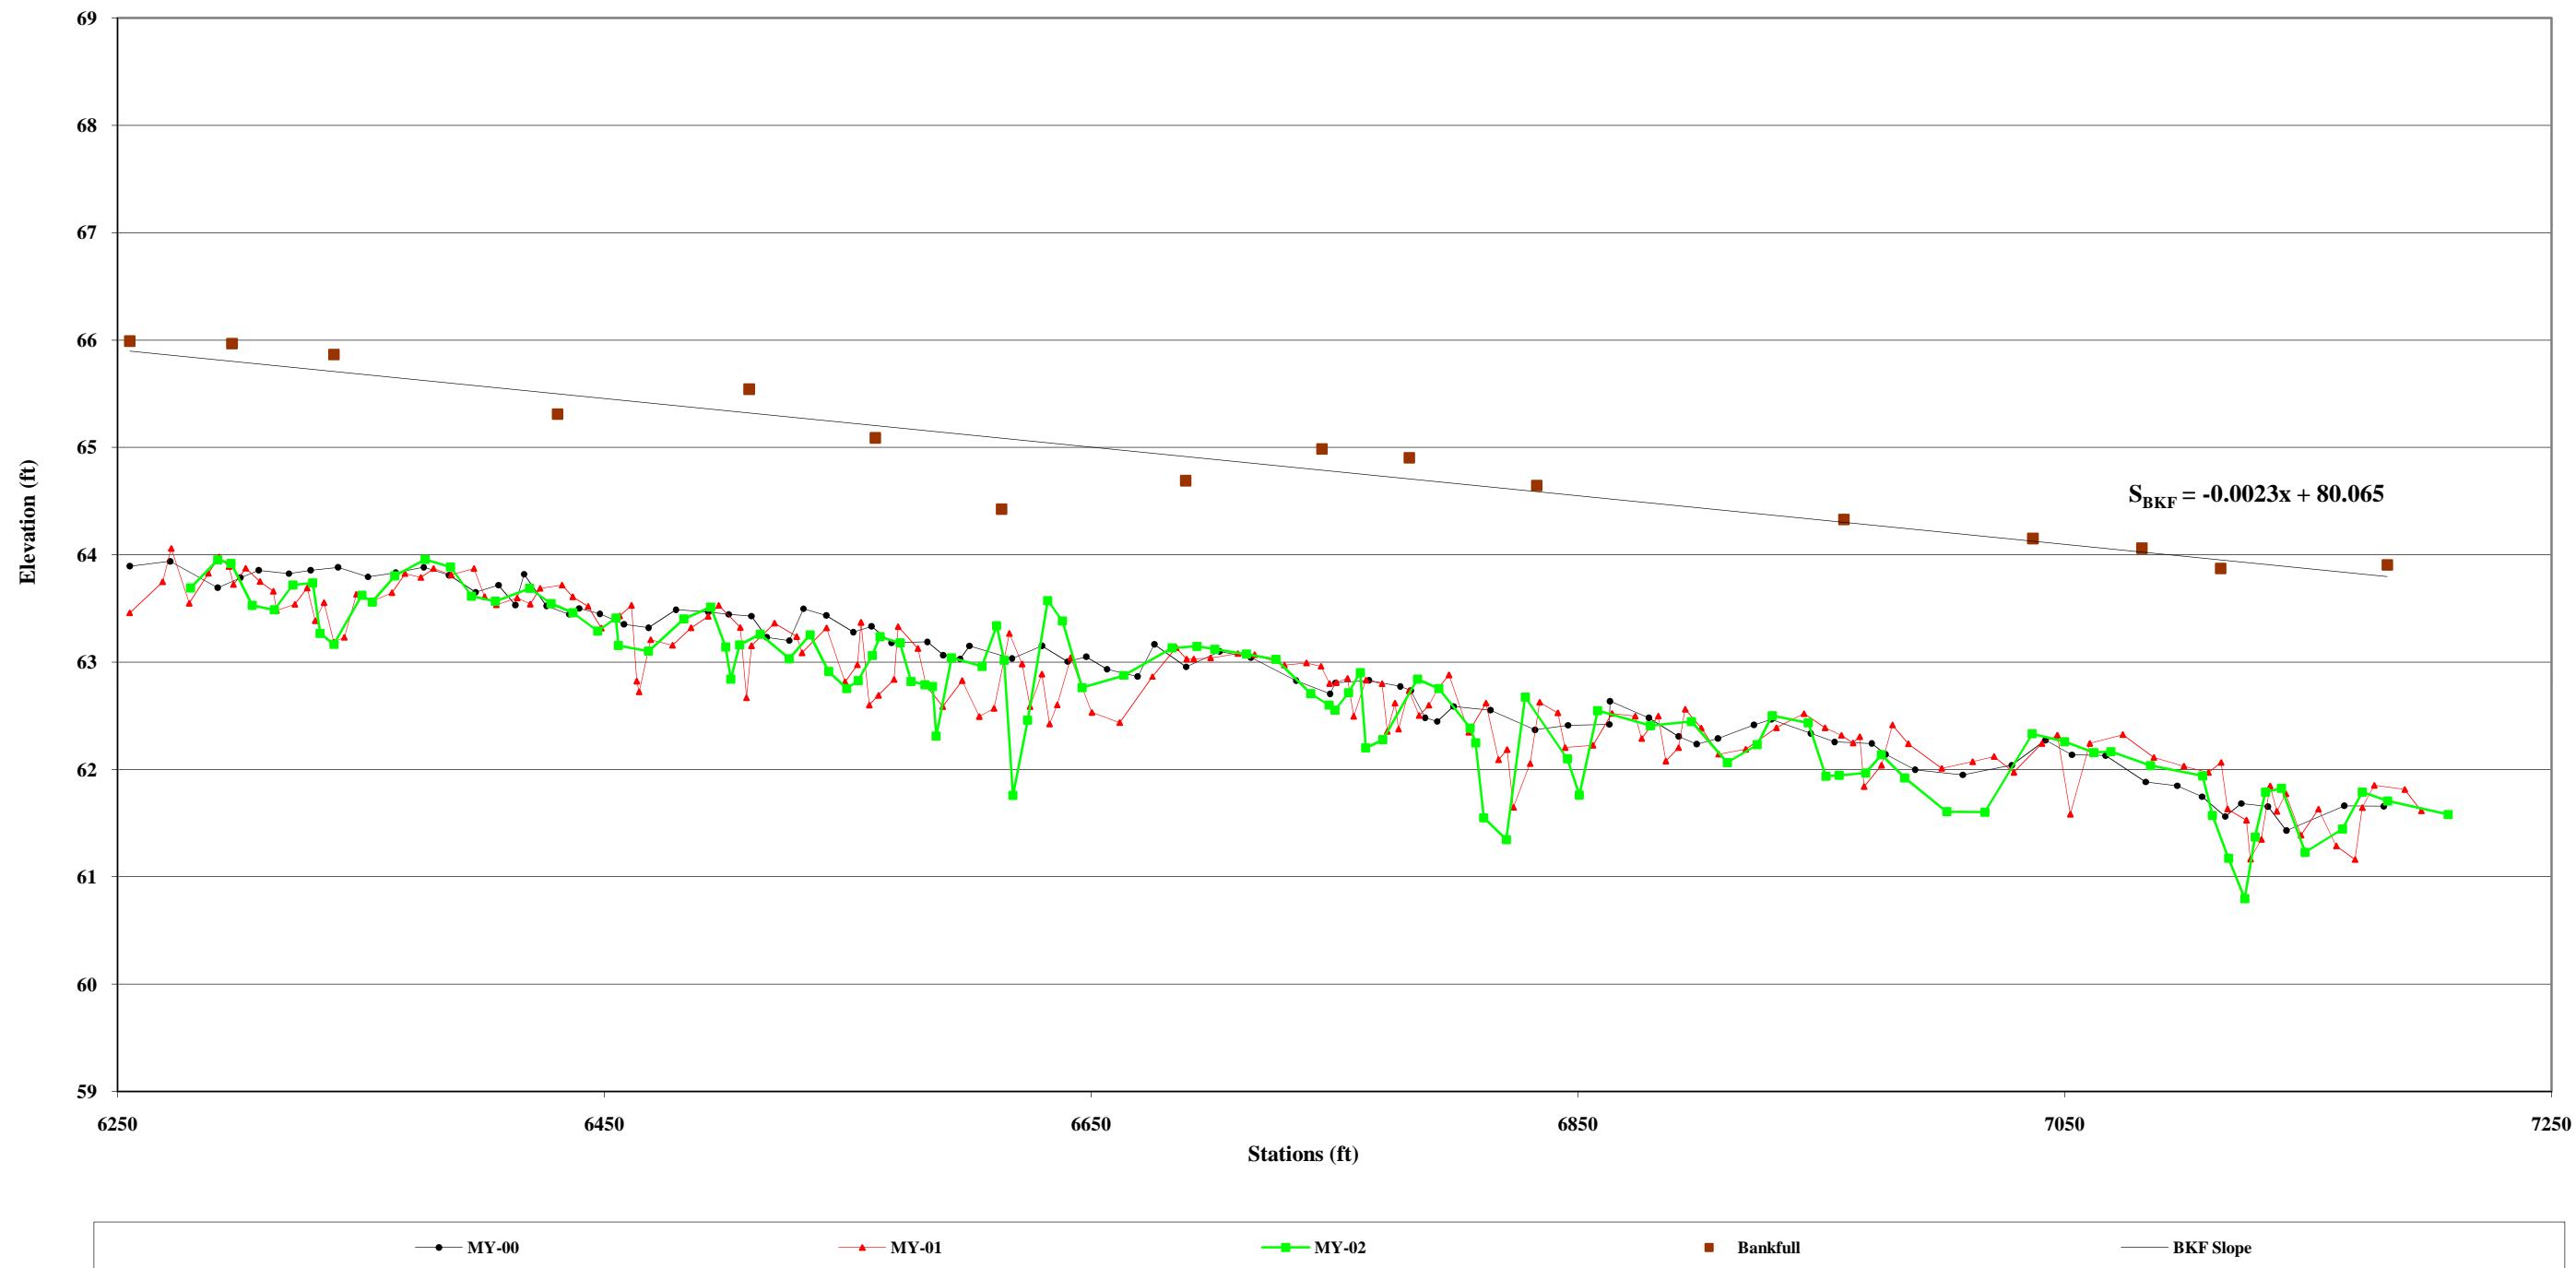


C3 - Stream Pebble Counts


Cross-Section 1 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	50
Very Fine	.062 - .125	S	2
Fine	.125 - .25	A	7
Medium	.25 - .50	N	6
Coarse	.50 - 1	D	11
Very Coarse	1 - 2	S	10
Very Fine	2 - 4	G	6
Fine	4 - 5.7		
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	4
Medium	11.3 - 16	V	3
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	101
Note:			

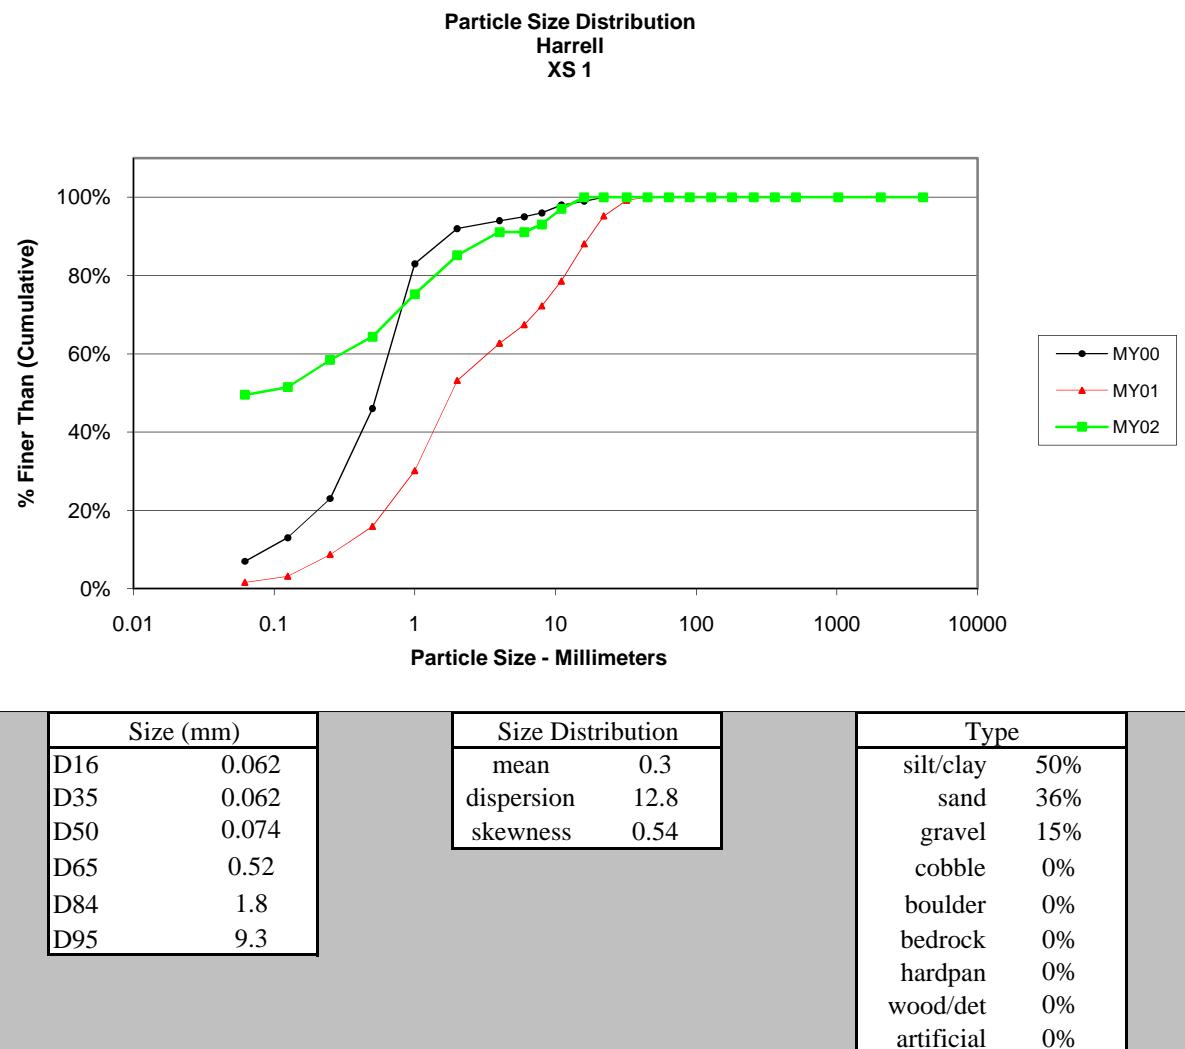


Cross-Section 2 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	68
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	4
Medium	.25 - .50	N	7
Coarse	.50 - 1	D	9
Very Coarse	1 - 2	S	6
Very Fine	2 - 4		5
Fine	4 - 5.7	G	2
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	103
Note:			

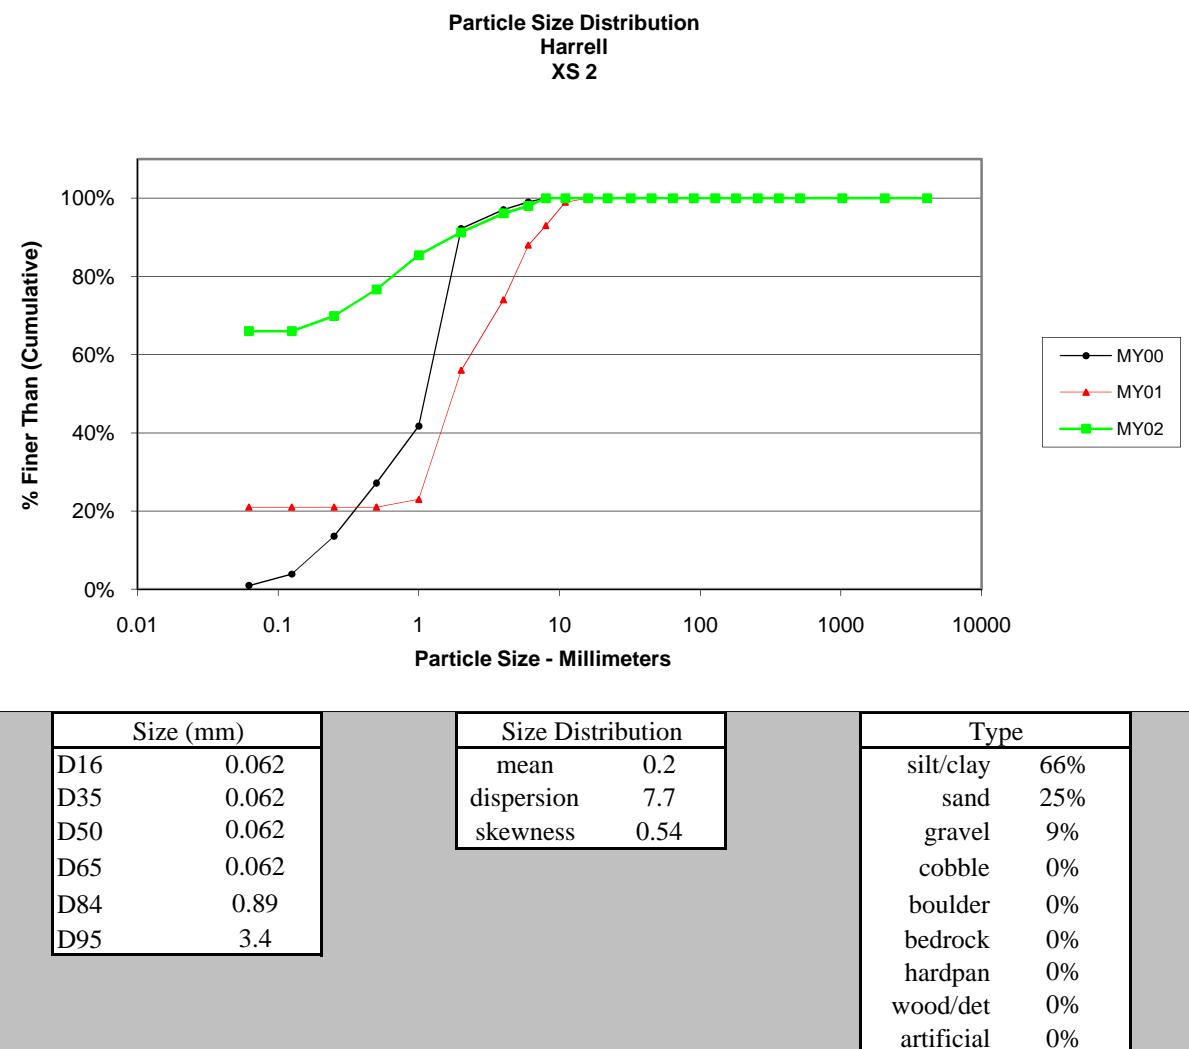


Cross-Section 3 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	28
Very Fine	.062 - .125	S	1
Fine	.125 - .25	A	6
Medium	.25 - .50	N	31
Coarse	.50 - 1	D	15
Very Coarse	1 - 2	S	9
Very Fine	2 - 4	G	3
Fine	4 - 5.7		1
Fine	5.7 - 8	R	1
Medium	8 - 11.3	A	4
Medium	11.3 - 16	V	1
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

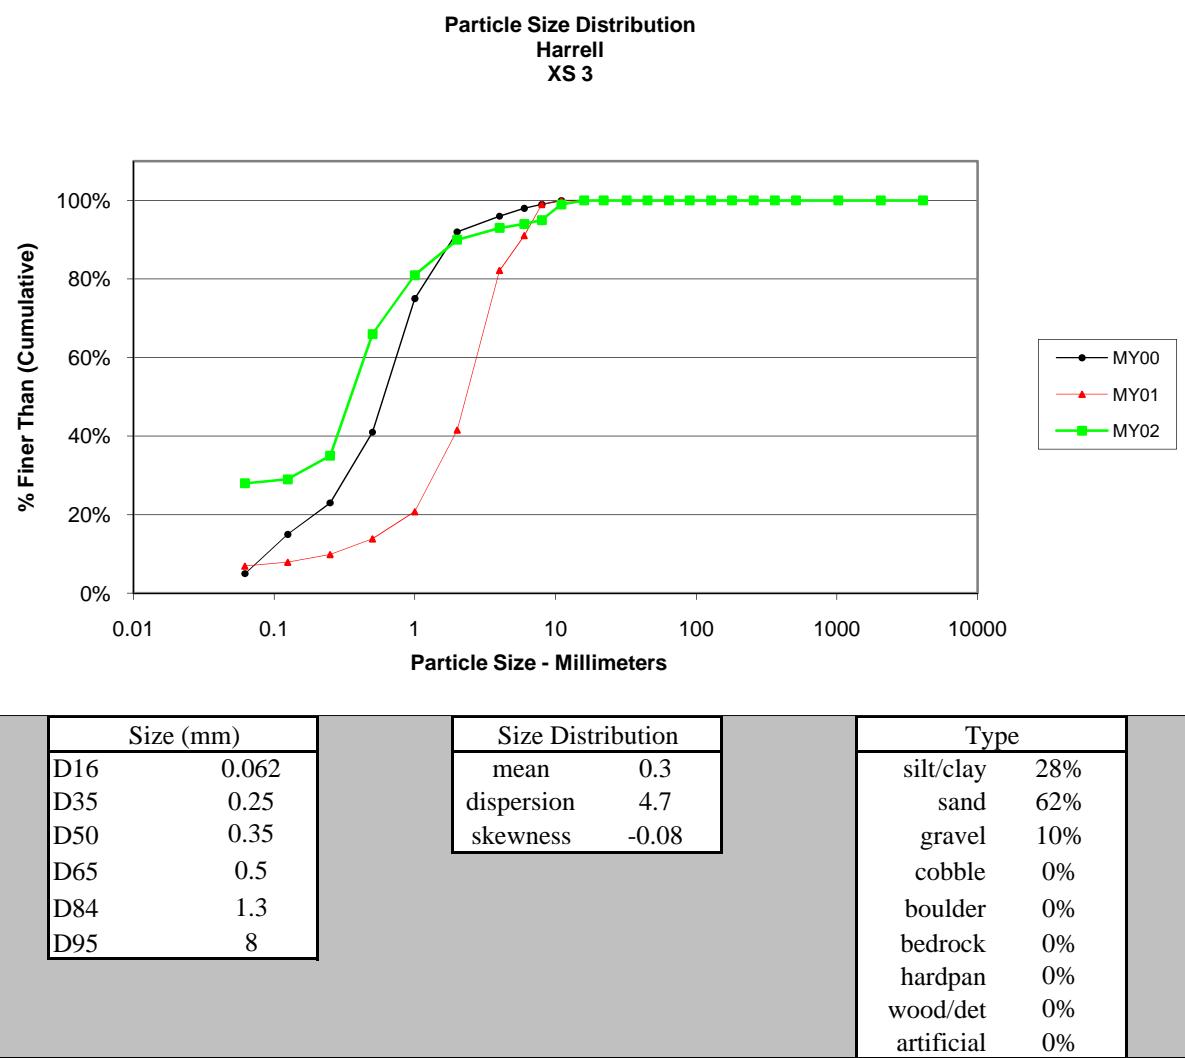


Cross-Section 4 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	78
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	3
Very Coarse	1 - 2	S	12
Very Fine	2 - 4		6
Fine	4 - 5.7	G	1
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

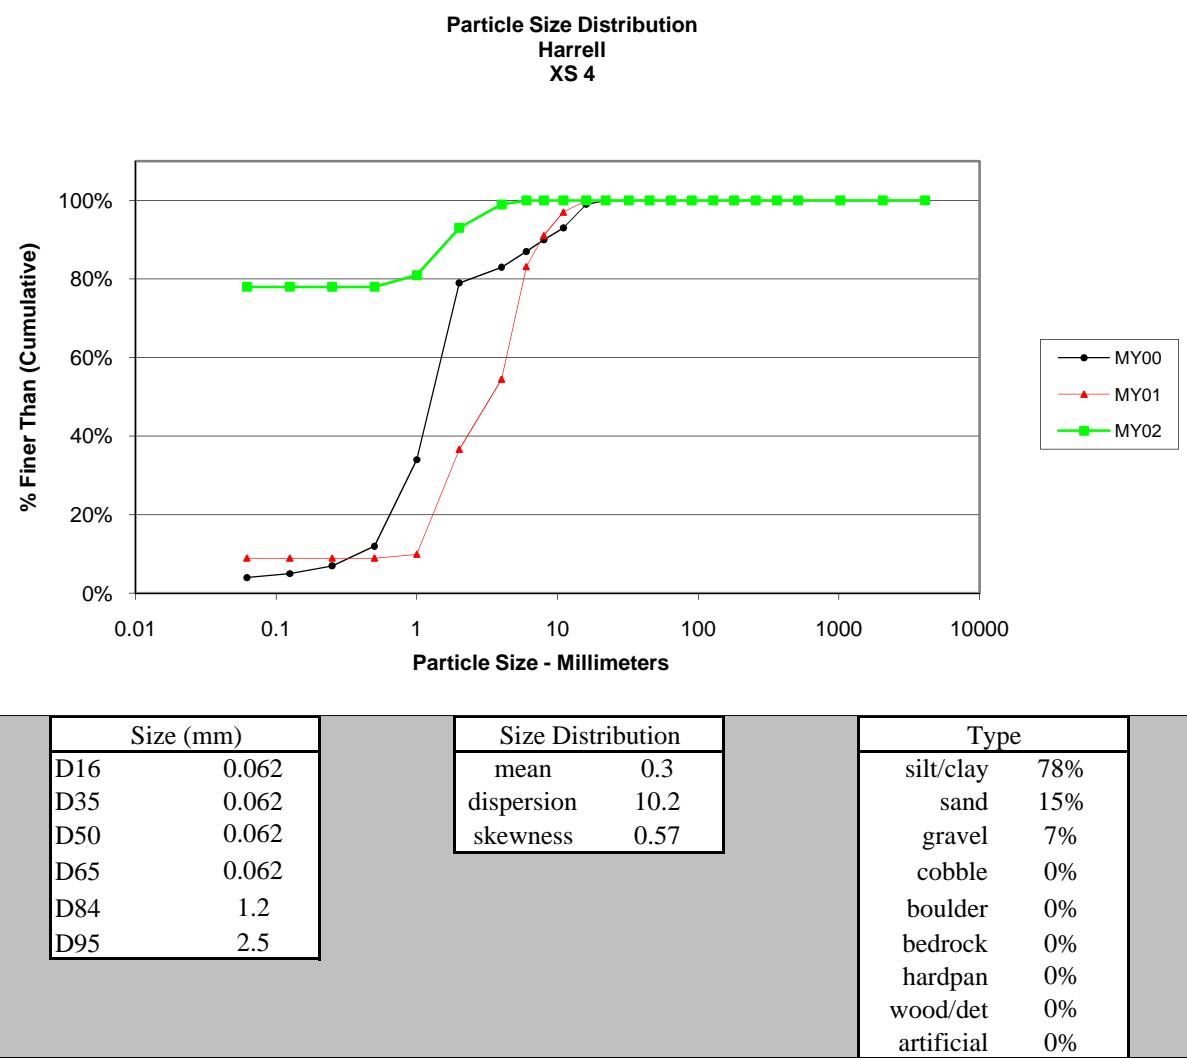


Cross-Section 5 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	53
Very Fine	.062 - .125	S	7
Fine	.125 - .25	A	23
Medium	.25 - .50	N	7
Coarse	.50 - 1	D	2
Very Coarse	1 - 2	S	
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	3
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	4
Coarse	16 - 22.6	E	1
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	102
Note:			

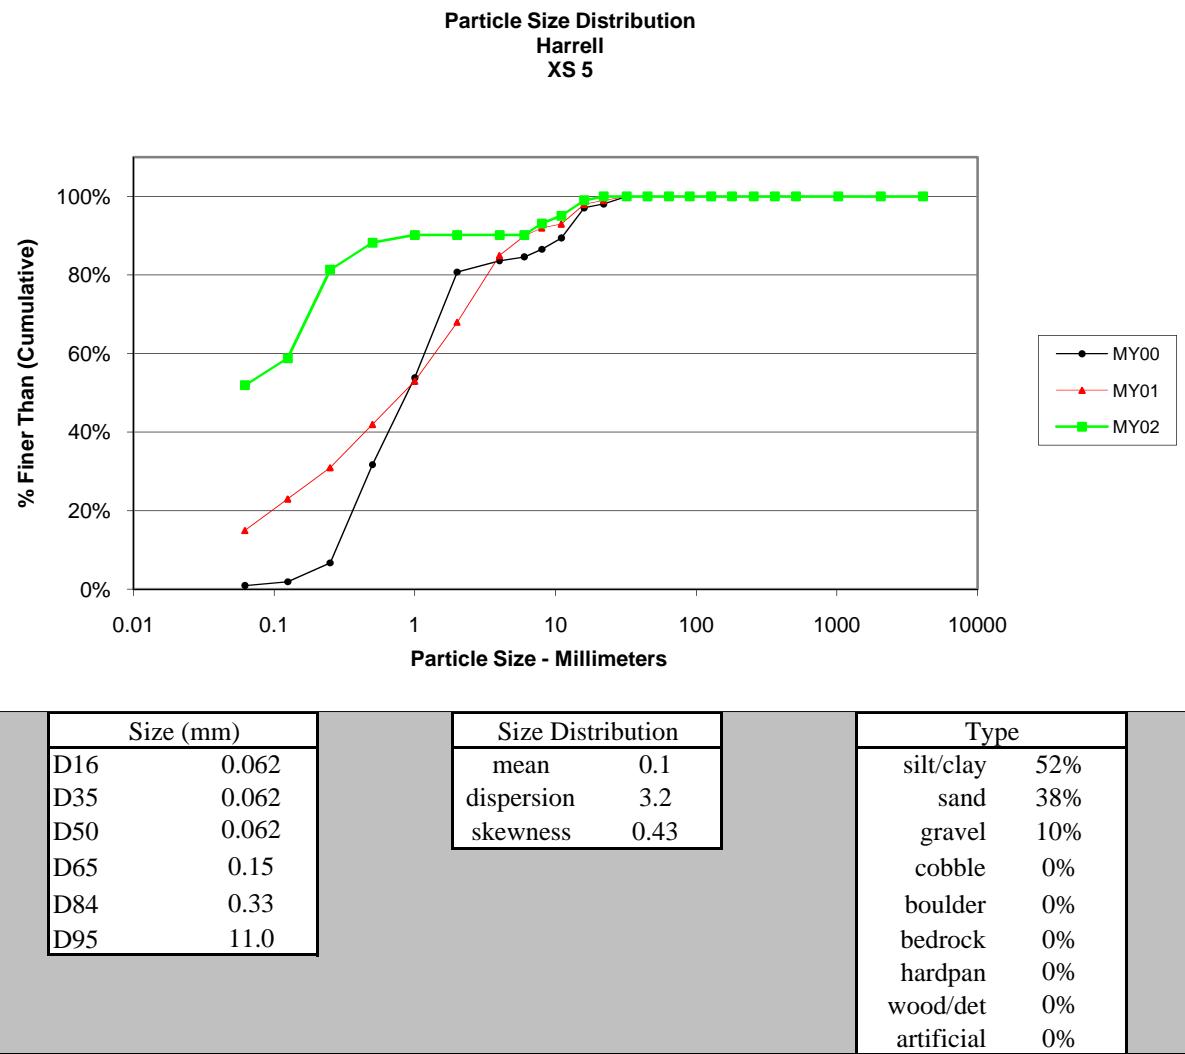


Cross-Section 6 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	64
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	2
Medium	.25 - .50	N	11
Coarse	.50 - 1	D	11
Very Coarse	1 - 2	S	6
Very Fine	2 - 4		1
Fine	4 - 5.7	G	1
Fine	5.7 - 8	R	4
Medium	8 - 11.3	A	3
Medium	11.3 - 16	V	1
Coarse	16 - 22.6	E	1
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	105
Note:			

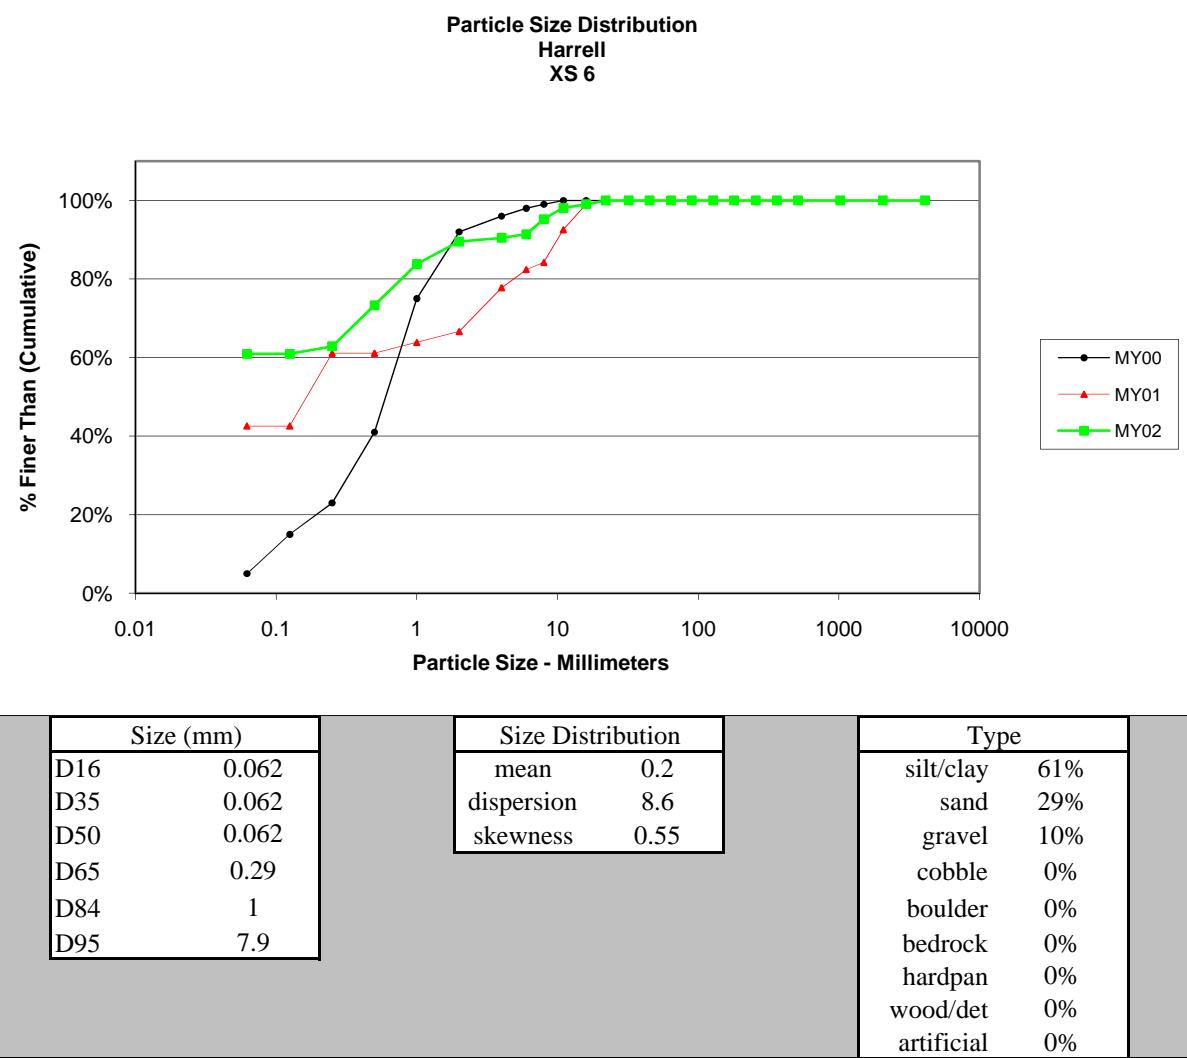


Cross-Section 7 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	70
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	11
Coarse	.50 - 1	D	7
Very Coarse	1 - 2	S	7
Very Fine	2 - 4		1
Fine	4 - 5.7	G	1
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	1
Coarse	16 - 22.6	E	2
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

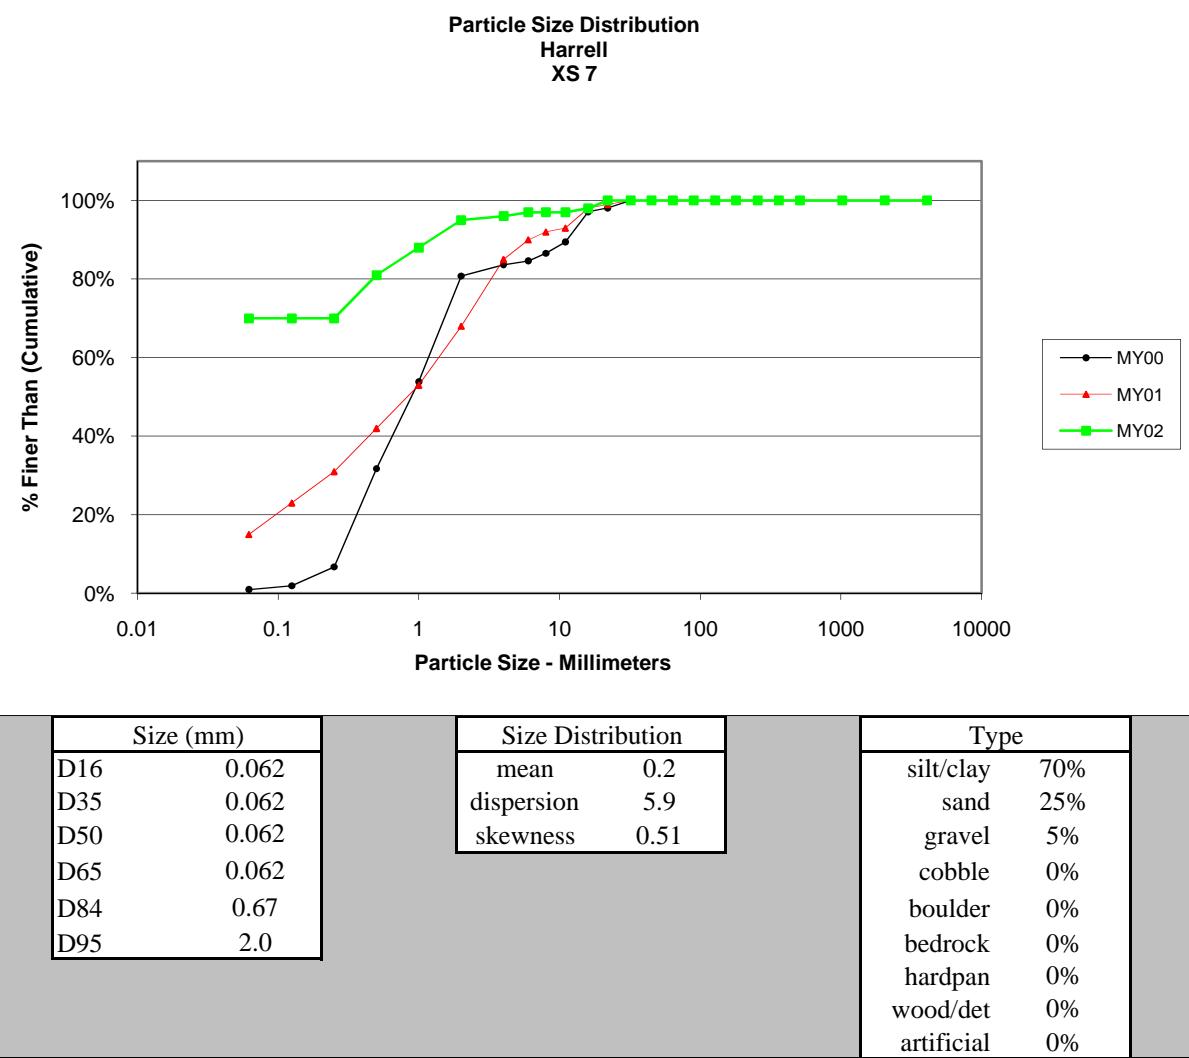


Cross-Section 8 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	30
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	6
Coarse	.50 - 1	D	12
Very Coarse	1 - 2	S	28
Very Fine	2 - 4		14
Fine	4 - 5.7	G	2
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	6
Medium	11.3 - 16	V	2
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	102
Note:			

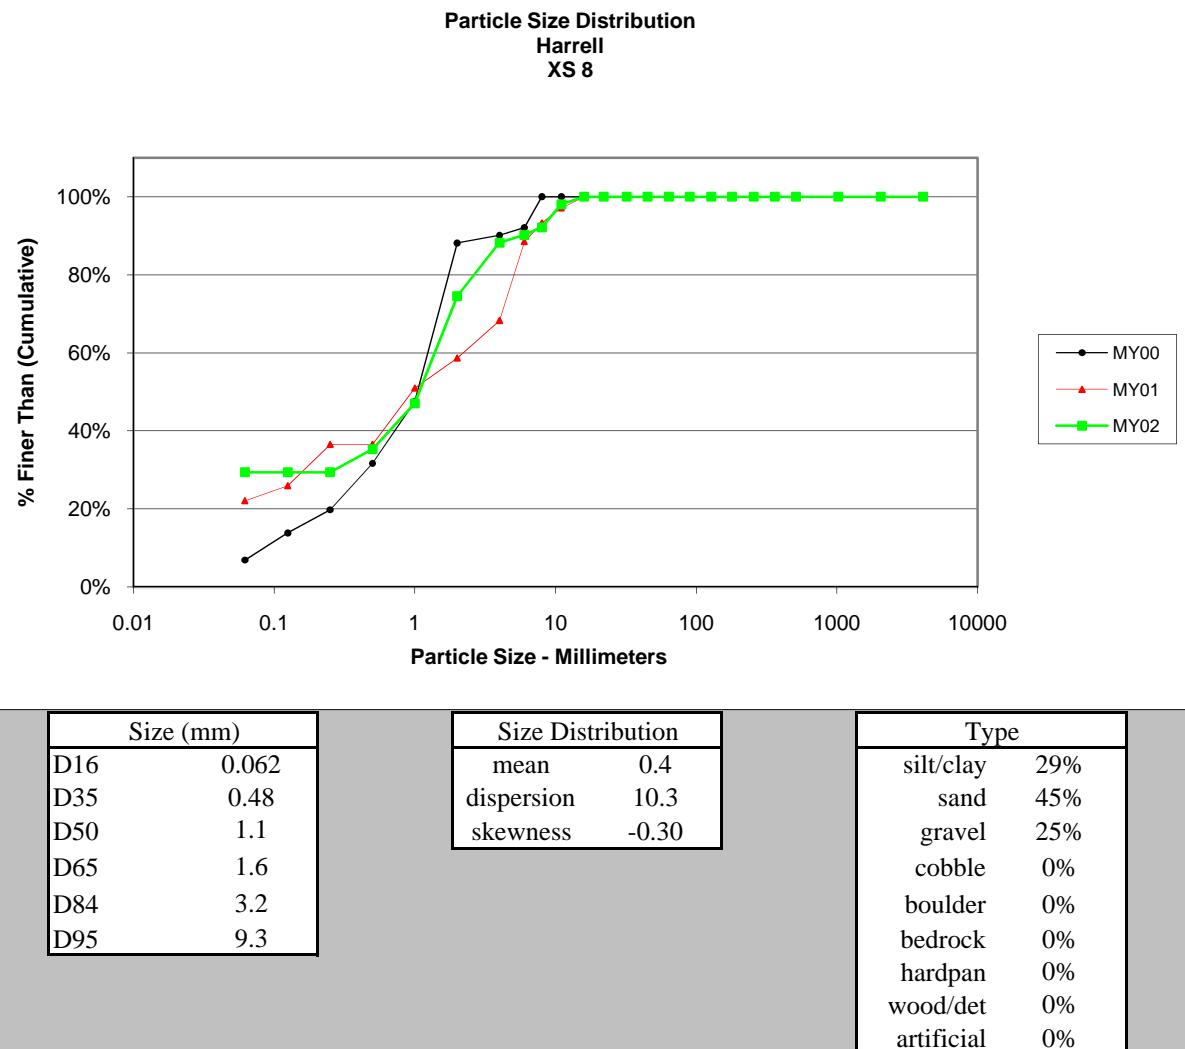


Cross-Section 9 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	37
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	7
Coarse	.50 - 1	D	42
Very Coarse	1 - 2	S	16
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	102
Note:			

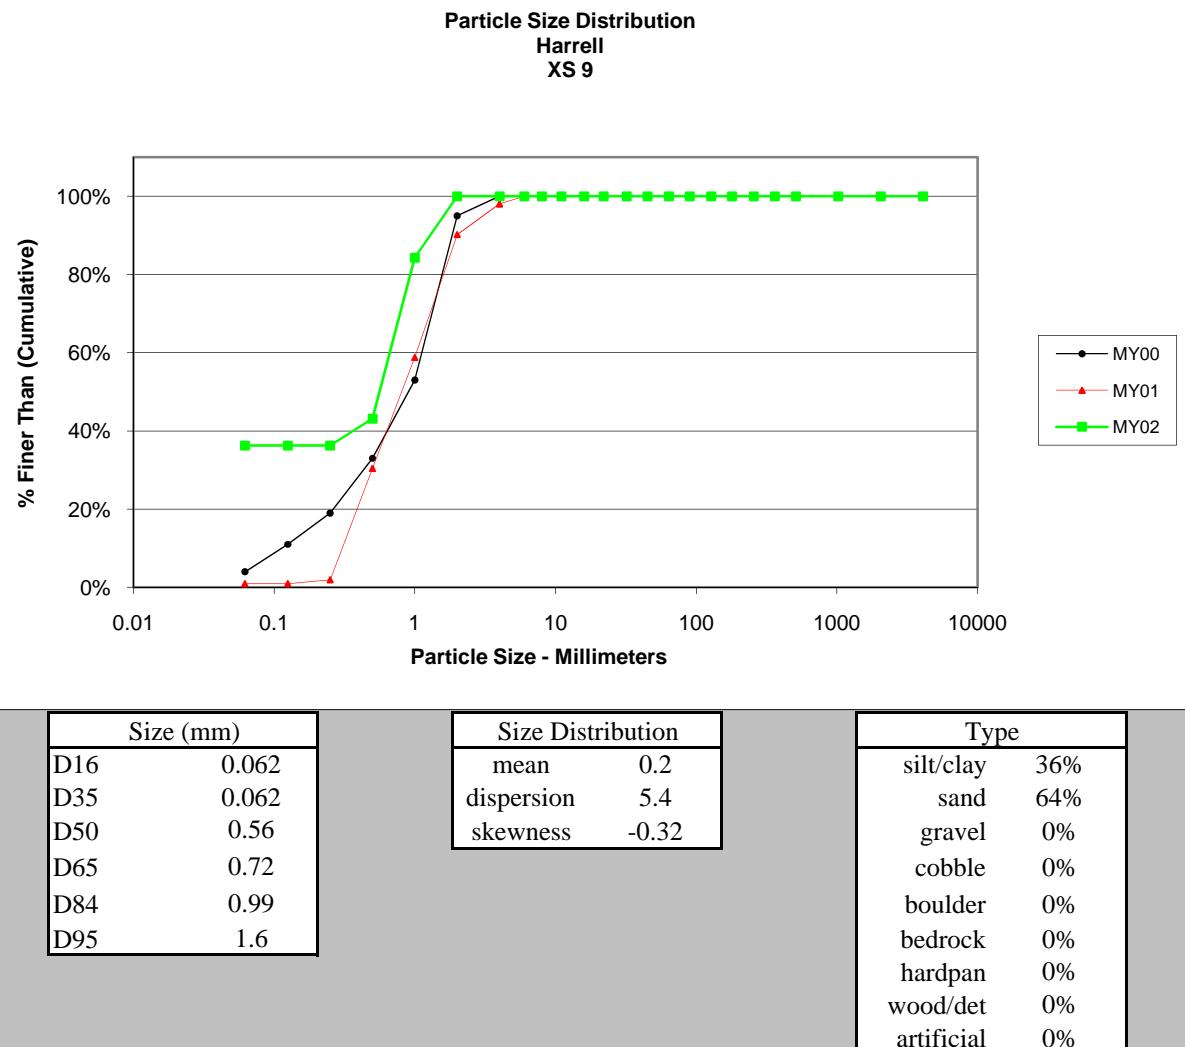


Cross-Section 10 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	61
Very Fine	.062 - .125	S	1
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	
Very Coarse	1 - 2	S	15
Very Fine	2 - 4	G	12
Fine	4 - 5.7		7
Fine	5.7 - 8	R	2
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

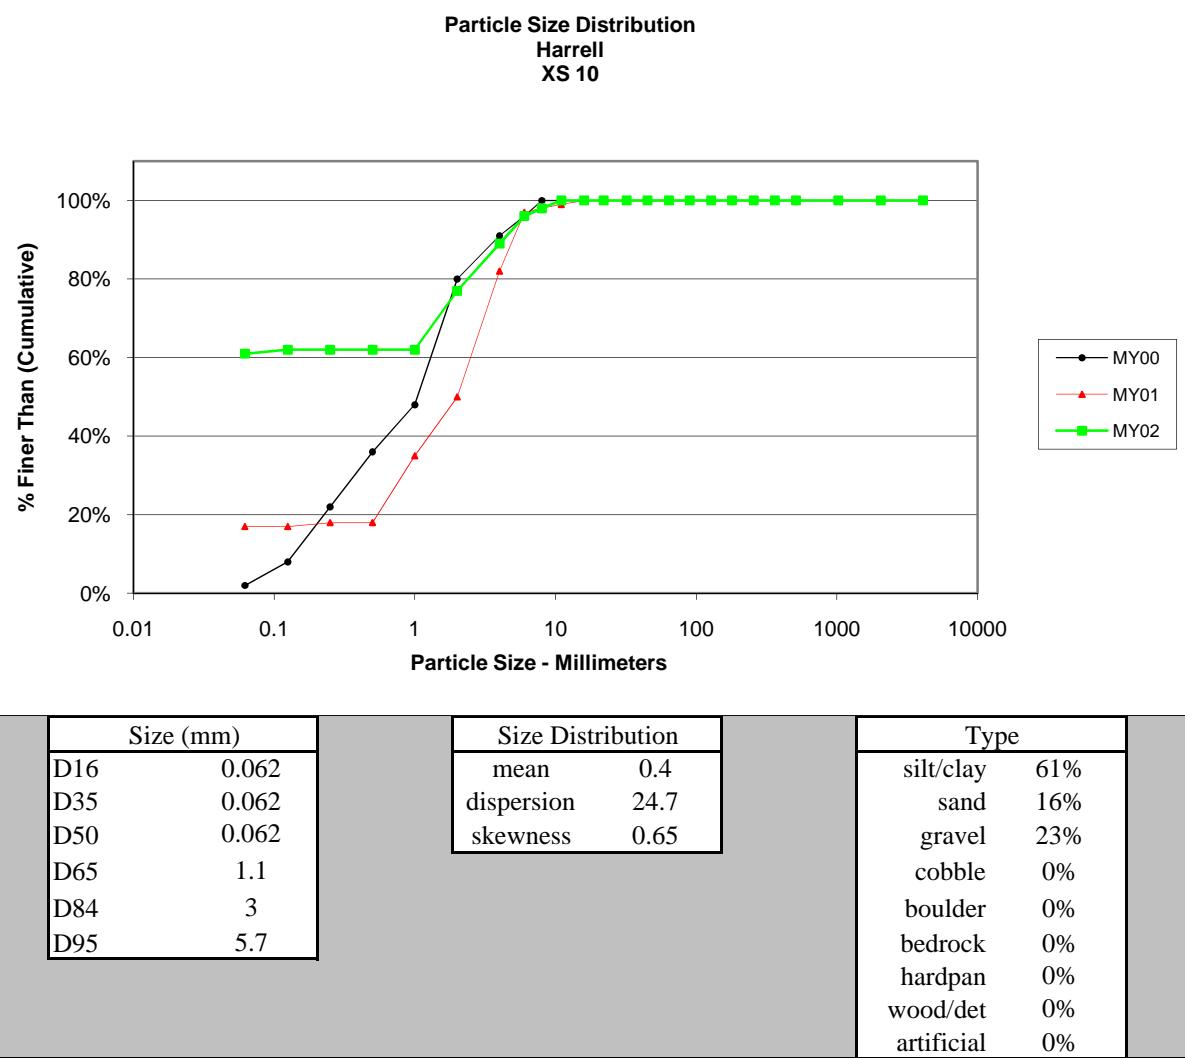


Cross-Section 11 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	51
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	3
Coarse	.50 - 1	D	3
Very Coarse	1 - 2	S	42
Very Fine	2 - 4		
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	1
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

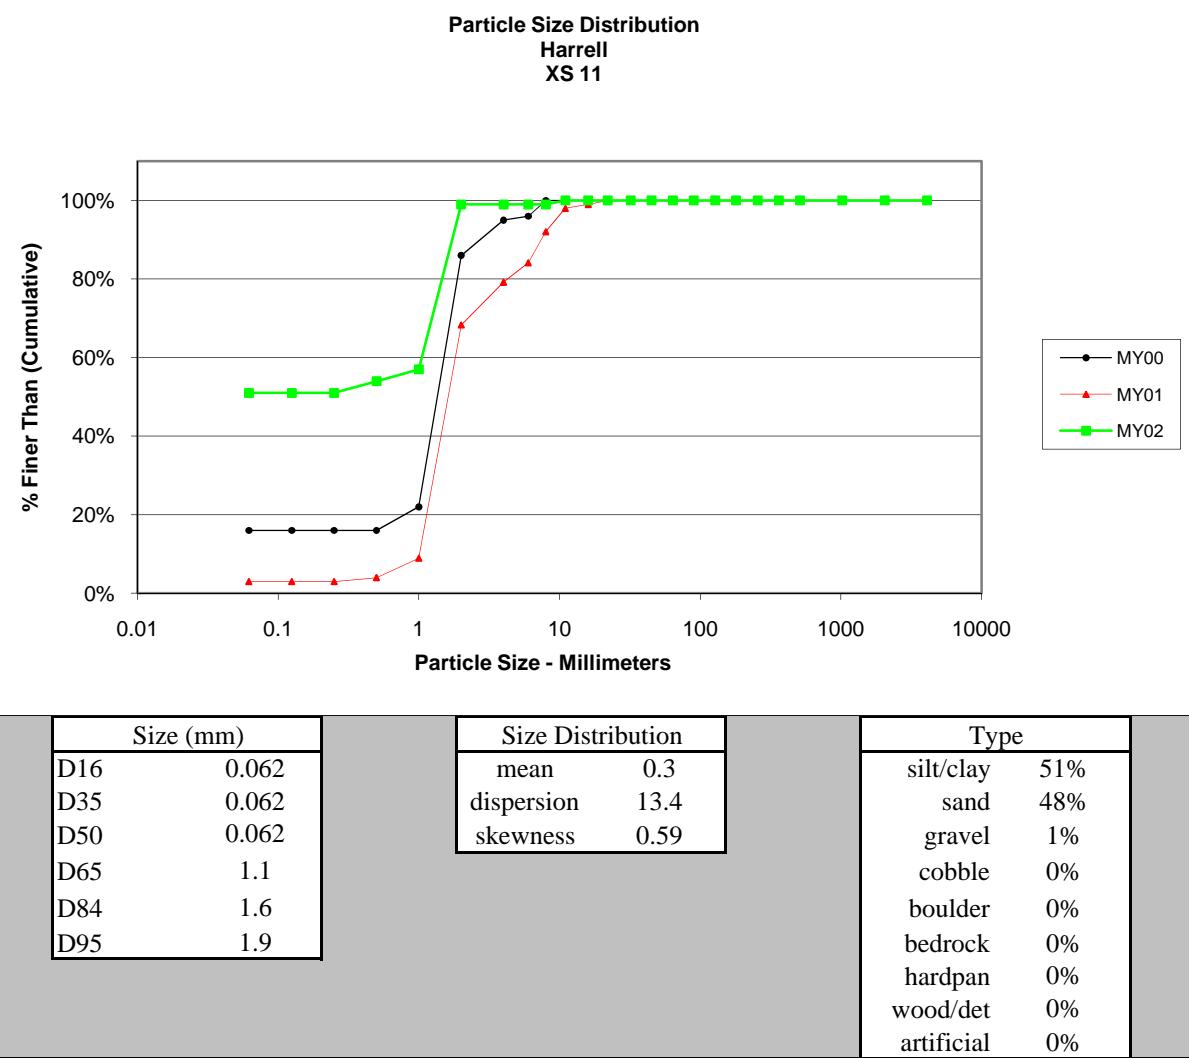


Cross-Section 12 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	1
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	13
Coarse	.50 - 1	D	17
Very Coarse	1 - 2	S	47
Very Fine	2 - 4		14
Fine	4 - 5.7	G	4
Fine	5.7 - 8	R	1
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	2
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	101
Note:			

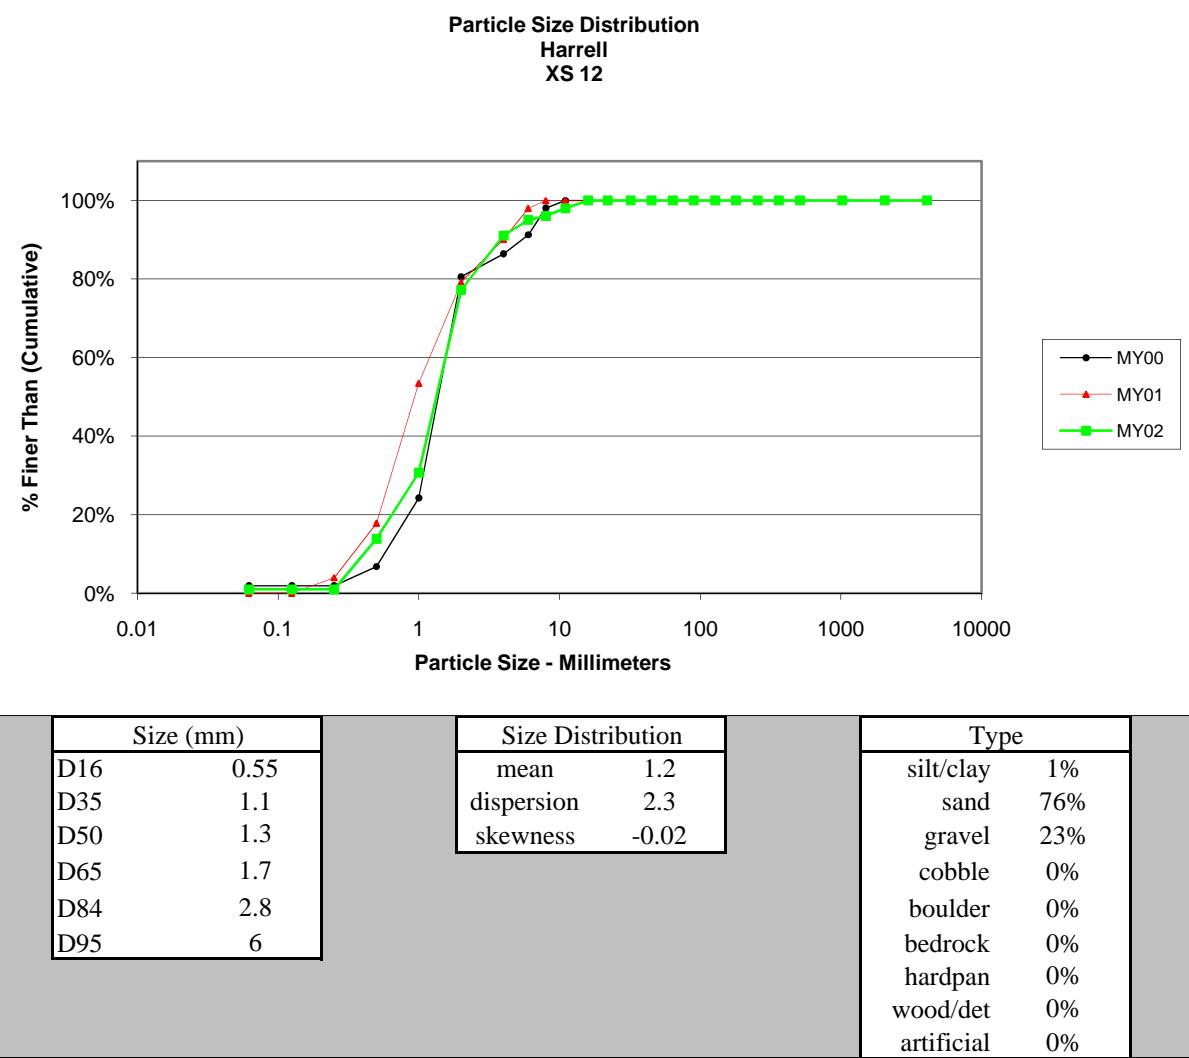


Cross-Section 13 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	15
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	4
Coarse	.50 - 1	D	24
Very Coarse	1 - 2	S	49
Very Fine	2 - 4		3
Fine	4 - 5.7	G	1
Fine	5.7 - 8	R	1
Medium	8 - 11.3	A	2
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	1
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

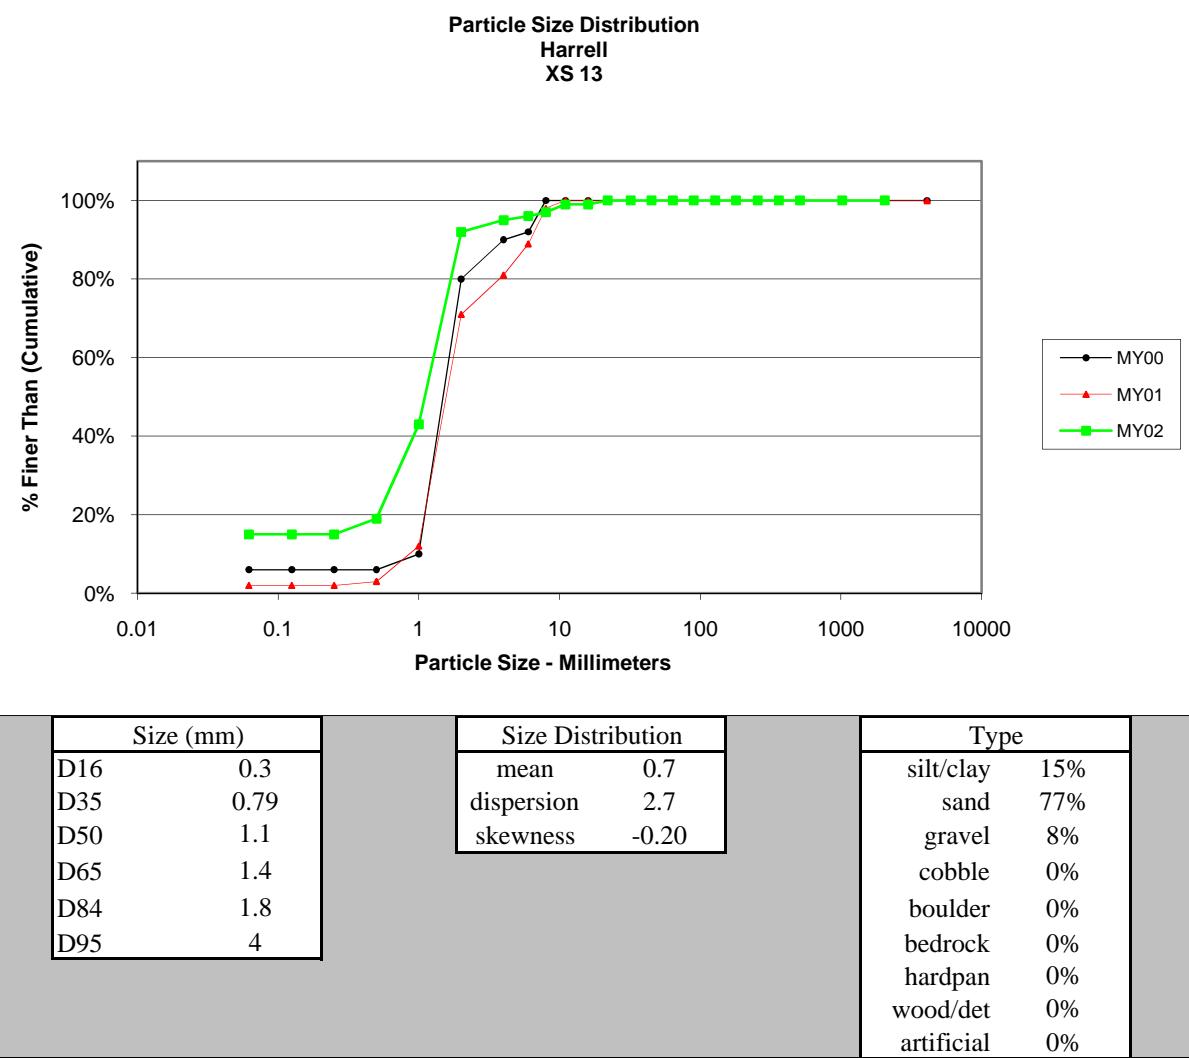


Cross-Section 14 - MY02			
Particle	Millimeter		Count
Silt/Clay	< 0.062	S/C	94
Very Fine	.062 - .125	S	
Fine	.125 - .25	A	
Medium	.25 - .50	N	
Coarse	.50 - 1	D	3
Very Coarse	1 - 2	S	2
Very Fine	2 - 4		1
Fine	4 - 5.7	G	
Fine	5.7 - 8	R	
Medium	8 - 11.3	A	
Medium	11.3 - 16	V	
Coarse	16 - 22.6	E	
Coarse	22.6 - 32	L	
Very Coarse	32 - 45	S	
Very Coarse	45 - 64		
Small	64 - 90	C	
Small	90 - 128	O	
Large	128 - 180	B	
Large	180 - 256	L	
Small	256 - 362	B	
Small	362 - 512	L	
Medium	512 - 1024	D	
Lrg- Very Lrg	1024 - 2048	R	
Bedrock	>2048	BDRK	
		Total	100
Note:			

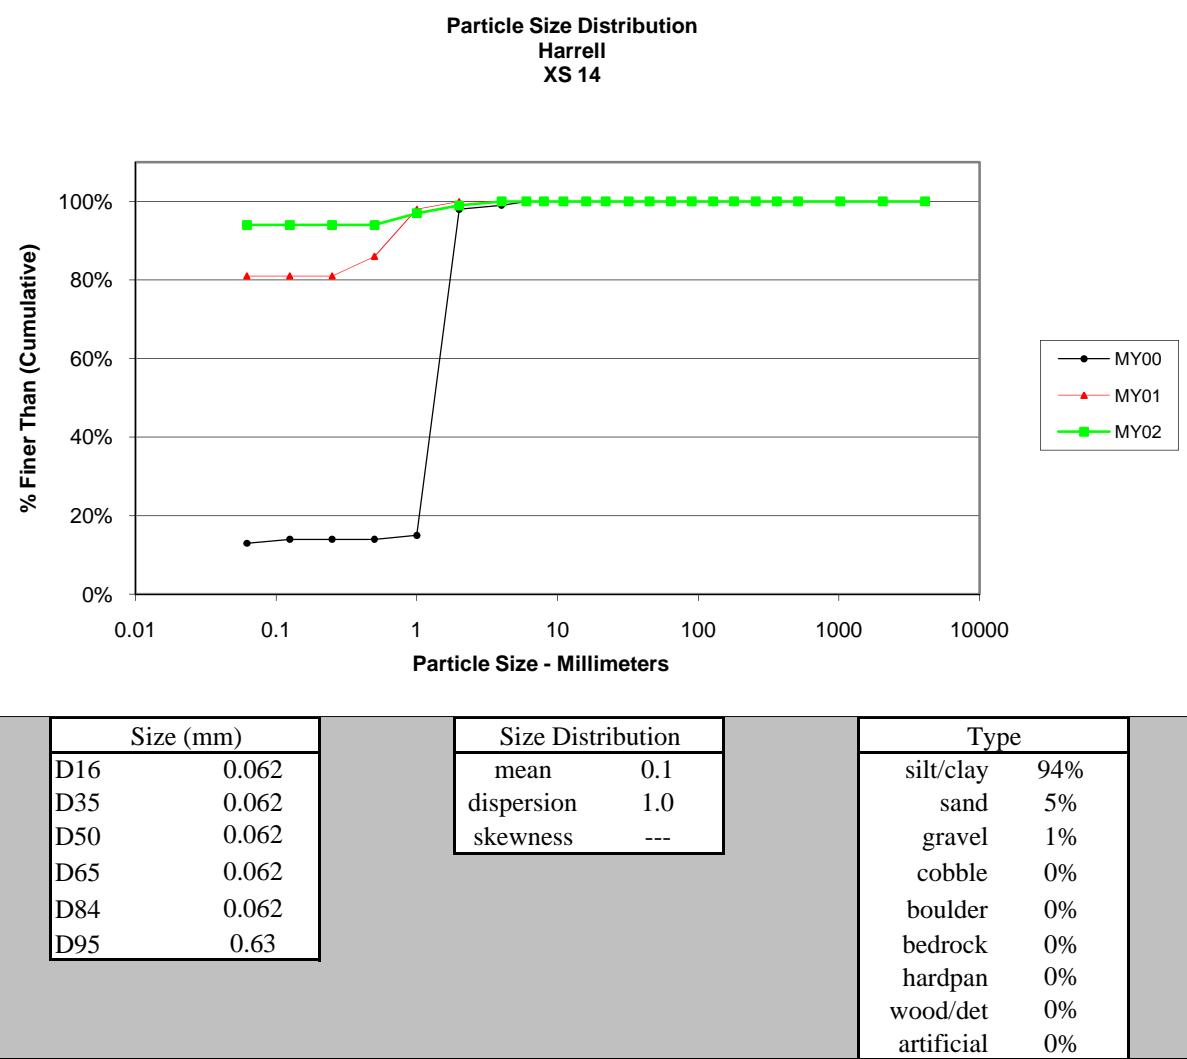


Harrell Stream and Wetland Restoration
Stream Gauge 1 Hydrograph
1/1/09 to 11/19/09

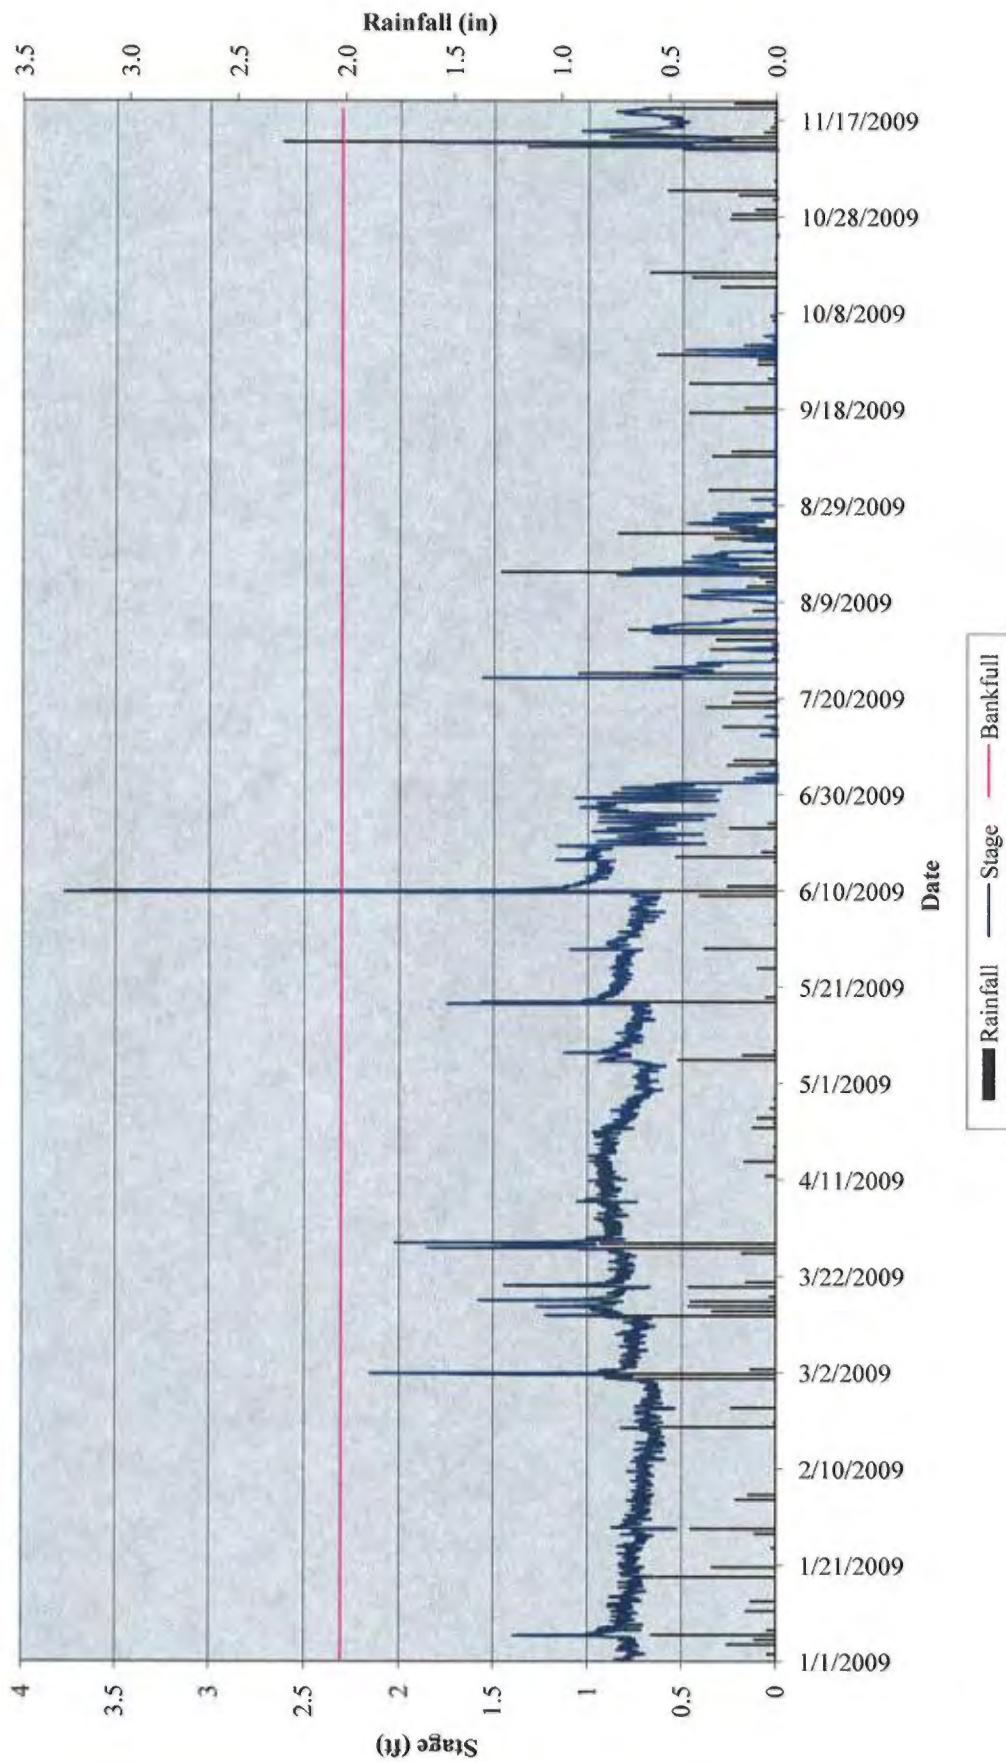


Harrell Stream and Wetland Restoration
Stream Gauge 2 Hydrograph
1/1/09 to 11/19/09

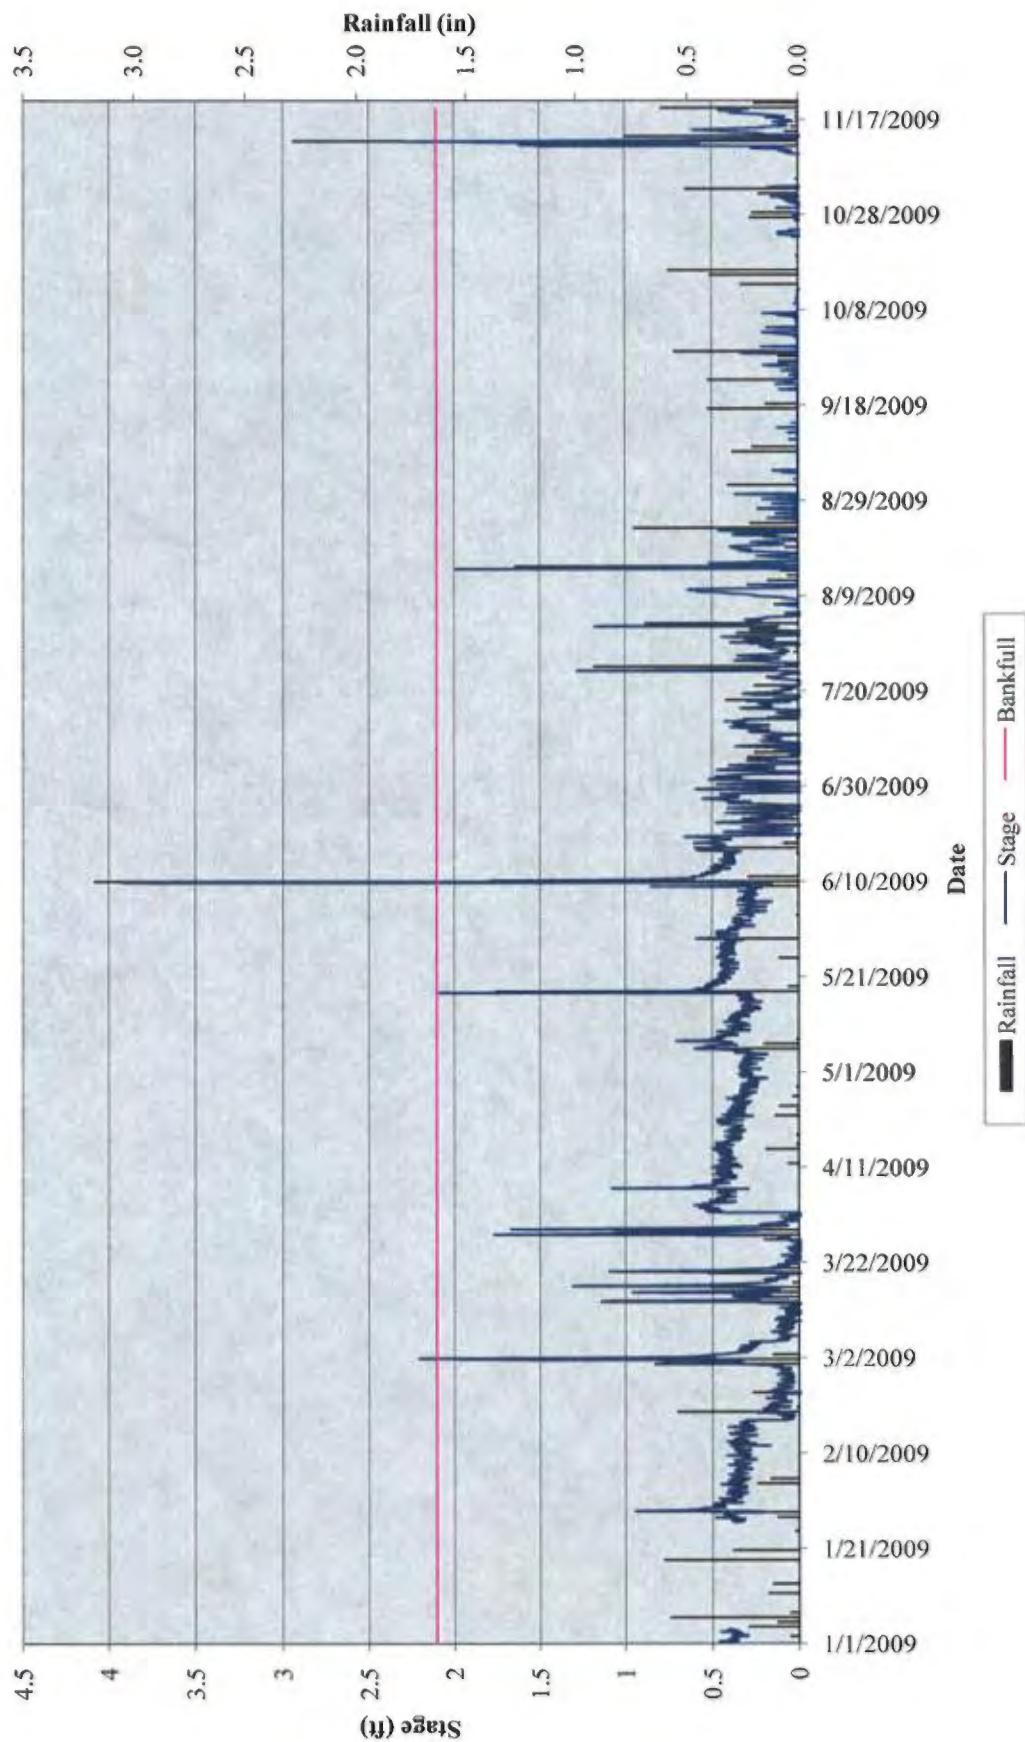

Harrell Farm Gauge 1 Wetland Hydrograph
1/1/09 to 11/19/09

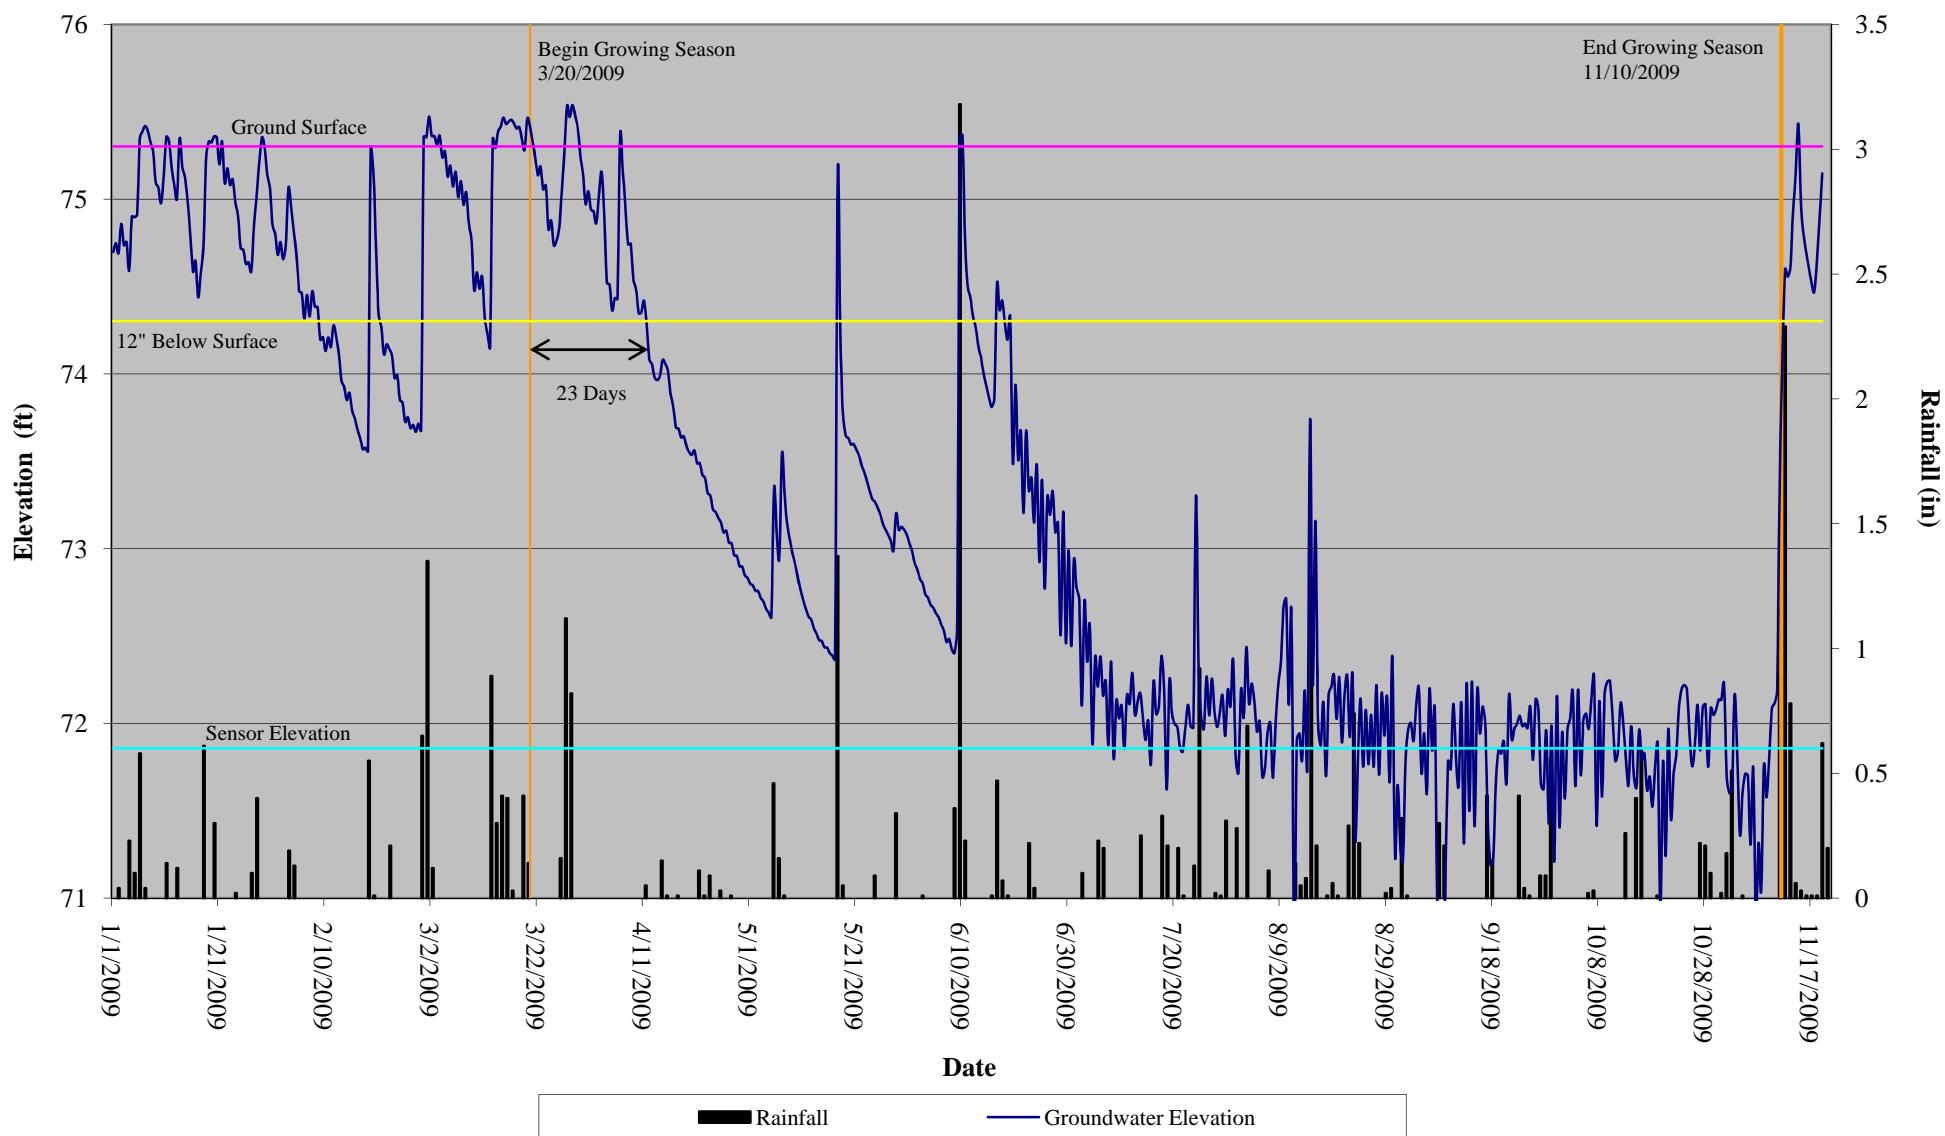


Harrell Farm Gauge 2 Wetland Hydrograph
1/1/09 to 11/19/09

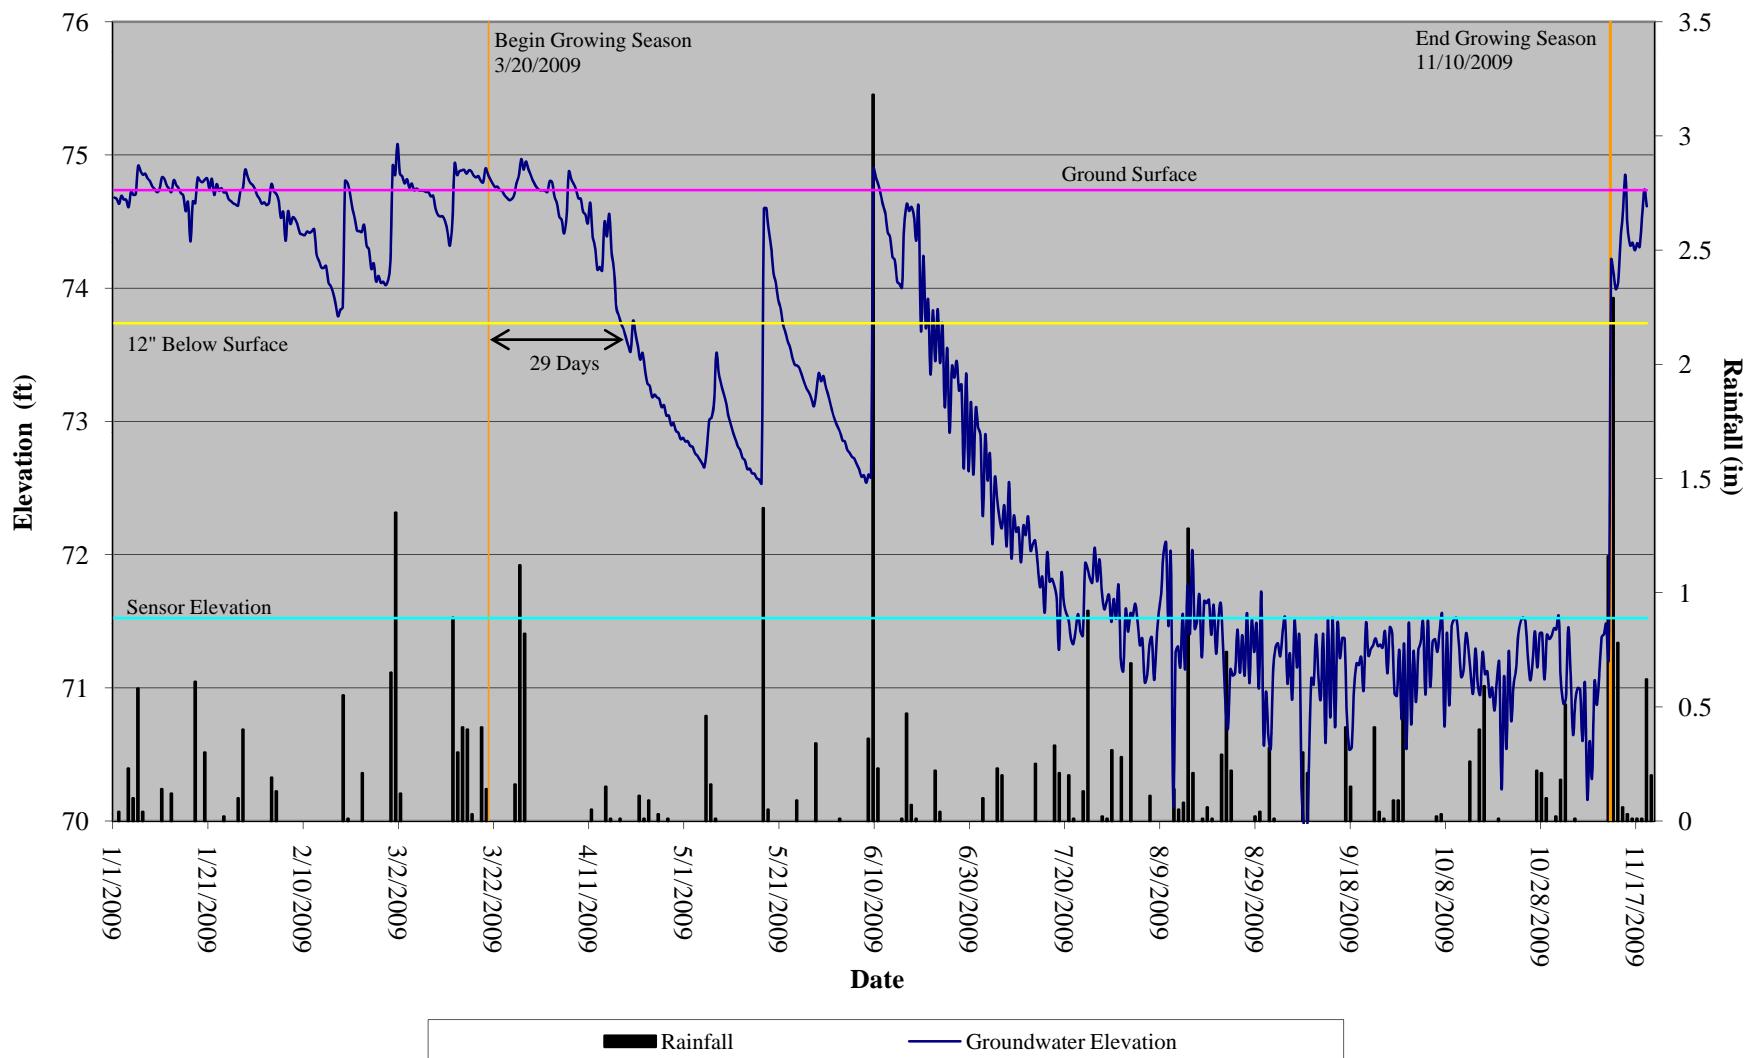


Harrell Farm Gauge 3 Wetland Hydrograph

1/1/09 to 11/19/09

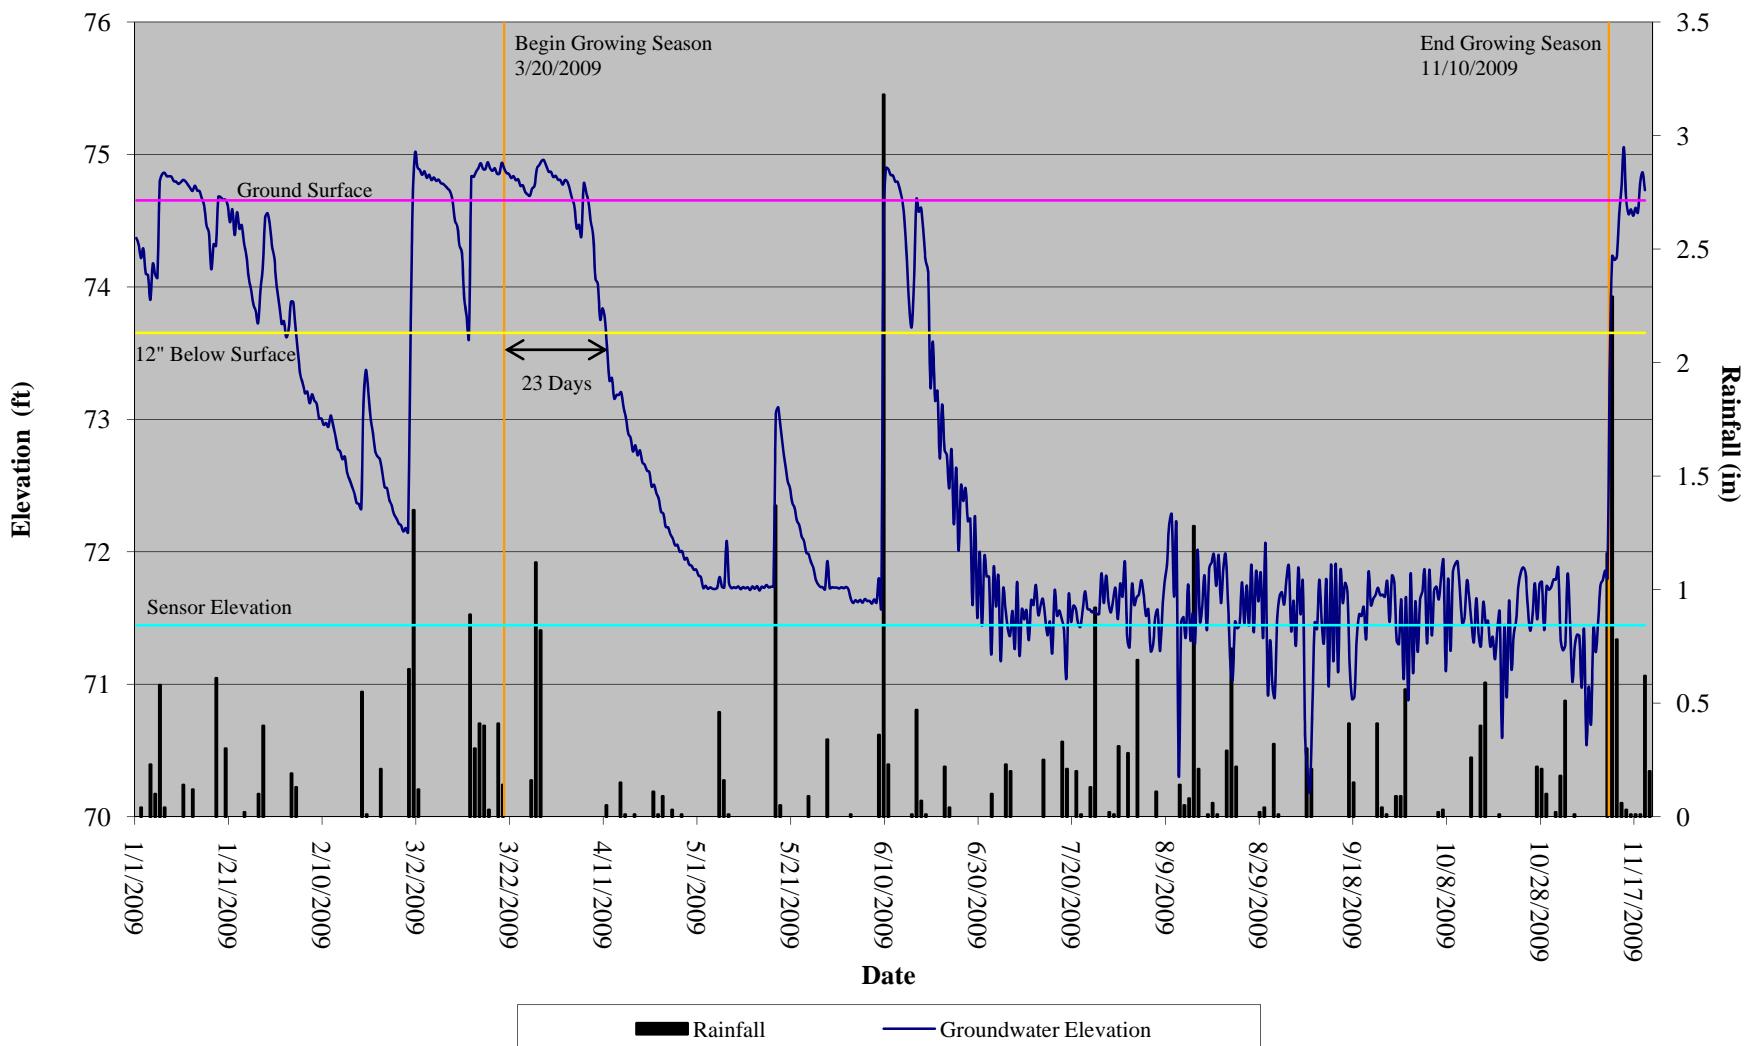

Harrell Farm Gauge 4 Wetland Hydrograph

1/1/09 to 11/19/09

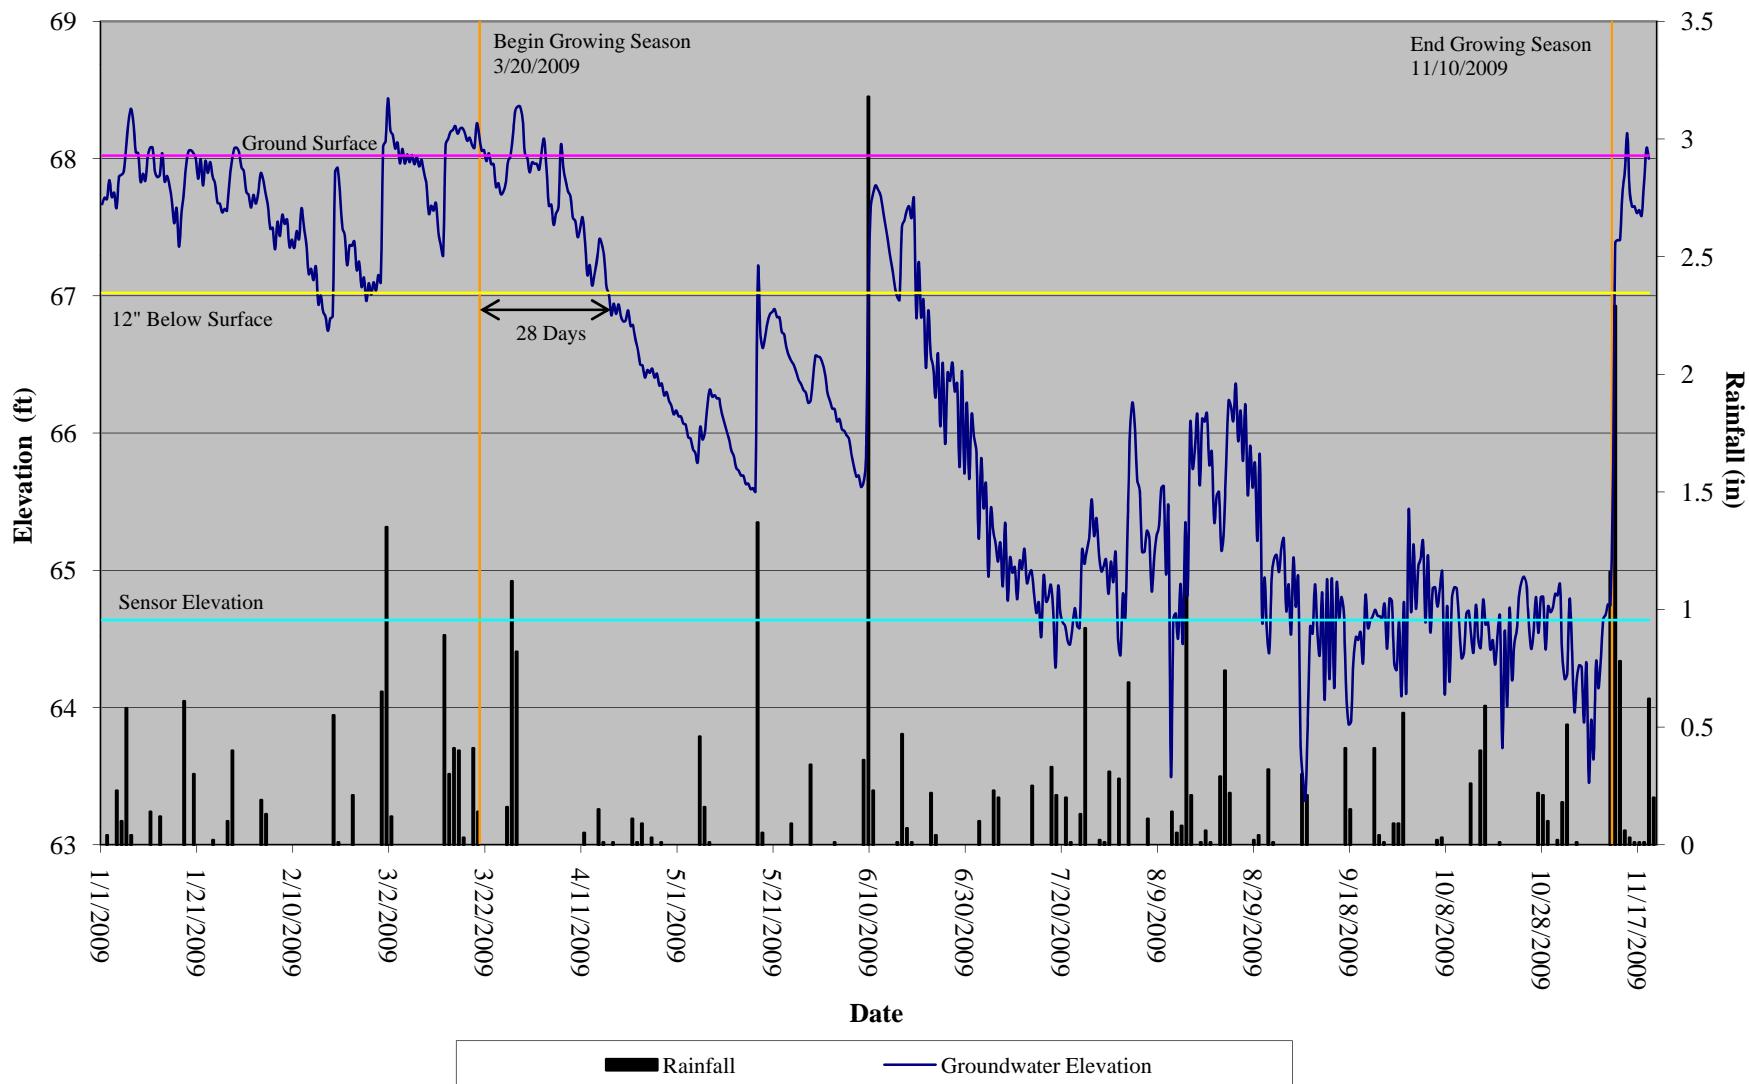

Harrell 30-70 Percentile Graph 2008-2009
Rocky Mount, NC Monthly Rainfall

