

Annual Monitoring Report

Monitoring Year 2 of 7

FINAL

Project Name: Pee Dee Stream Restoration Site

NCDMS Contract No.: 004644

NCDMS Project No.: 95350

Montgomery County, North Carolina

Data Collected: January – October 2016

Date Submitted: October 2016



Submitted to:

North Carolina Division of Mitigation Services

NCDENR-DMS, 1652 Mail Service Center Raleigh NC 27699-1652

This Page Intentionally Left Blank

Prepared for:



302 Jefferson Street, Suite 110
Raleigh, North Carolina 27605

Prepared by:



EQUINOX

balance through proper planning

37 Haywood Street, Suite 100
Asheville, NC 28801

This Page Intentionally Left Blank

Contents

1.0	Project Summary.....	1
2.0	Methods.....	4
3.0	References.....	4
	Appendix A General Tables and Figures.....	6
	Appendix B Visual Assessment Data	17
	Appendix C Vegetation Plot Data.....	37
	Appendix D Stream Geomorphology Data.....	51
	Appendix E Hydrologic Data.....	120

This Page Intentionally Left Blank

1.0 PROJECT SUMMARY

1.1. Goals and Objectives

The project goals address stressors identified in the TLW and include the following:

- Improve water quality within the restored channel reaches and downstream watercourses by reducing sediment and nutrient inputs and increasing dissolved oxygen levels
- Improve local aquatic and terrestrial ecological function via stream shading, habitat complexities, and organic/woody material introduction
- Improve aquatic and benthic macroinvertebrate habitat and associated stream bed form
- Improve site hydrology and attenuate flood flows on-site and downstream
- Provide approximately 18.6 acres of riparian area restoration with a native plant community
- Protect stream and riparian improvements with livestock best management practices
- Protect the site in perpetuity with a permanent conservation easement

The project goals will be addressed through the following project objectives:

- Implement Priority I or II restoration of 5,992 feet of stream and enhancement of 625 feet of stream
- Implement appropriate changes in dimension, pattern and/or profile to create geomorphologically stable conditions along project area reaches
- Modify degraded stream channels to enable proper sediment transport capacity and improved stream bed character
- Construct a floodplain bench that is accessible at the proposed bankfull channel elevation.
- Remove a major impoundment
- Integrate in-stream structures and native bank vegetation
- Plant native woody and herbaceous riparian vegetation with a minimum width of 50 feet from the edge of the restored channels
- Eradicate invasive, exotic or undesirable plant species
- Install cattle exclusion fencing, two new wells, two new cattle drinking stations, and upgrade eight existing cattle drinking stations

1.2. Success Criteria

The success criteria for the Pee Dee Stream Restoration Site follows accepted and approved success criteria presented in the USACE Stream Mitigation Guidelines and subsequent NCDMS and agency guidance. Specific success criteria components are presented below.

1.2.1. Stream Restoration

Dimension – Cross-section measurements should indicate little change from the as-built cross-sections. If changes do occur, they will be evaluated to determine whether the adjustments are associated with increased stability or whether they indicate movement towards an unstable condition.

Pattern and Profile – Measurements and calculated values should indicate stability with little deviation from as-built conditions and established morphological ranges for the restored stream type. Pool depths may vary from year to year, but the majority should maintain depths sufficient to be observed as distinct features in the profile. The pools should maintain their depth with flatter water surface slopes, while the riffles should remain shallower and steeper. Pattern measurements will not be collected unless conditions seem to indicate that a detectable change appears to have occurred based on profile and/or dimension measurements.

Substrate – Calculated D₅₀ and D₈₄ values should indicate coarser size class distributions of bed materials in riffles and finer size class distributions in pools. The majority of riffle pebble counts should indicate maintenance or coarsening of substrate distributions. Generally, it is anticipated that the bed material will coarsen over time.

Sediment Transport – Depositional features should be consistent with a stable stream that is effectively managing its sediment load. Point bar and inner berm features, if present, should develop without excessive encroachment of the channel. Isolated development of robust (i.e. comprised of coarse material and/or vegetation actively diverting flow) mid-channel or lateral bars will be acceptable. Likewise, development of a higher number of mid-channel or lateral bars that are minor in terms of their permanency such that profile measurements do not indicate systemic aggradation will be acceptable, but trends in the development of robust mid-channel or alternating bar features will be considered a destabilizing condition and may require intervention or have success implications.

1.2.2. Surface Water Hydrology

Monitoring of stream surface water stages should indicate recurrence of bankfull flows on average every 1 to 2 years. At a minimum, throughout the monitoring period, the surface water stage should achieve bankfull or greater elevations at least twice. The bankfull events must occur during separate monitoring years.

1.2.3. Vegetation

Riparian vegetation monitoring shall be conducted for a minimum of seven years to ensure that success criteria are met per USACE guidelines. Accordingly, success criteria will consist of a minimum survival of 320 stems per acre by the end of the Year 3 monitoring period, a minimum of 260 stems per acre at the end of Year 5, and a minimum of 210 stems per acre in Year 7. If monitoring indicates either that the specified survival rate is not being met or the development of detrimental conditions (i.e., invasive species, diseased vegetation), appropriate corrective actions will be developed and implemented.

1.3. Project Setting and Background

The Pee Dee Stream Restoration Site (Site) encompasses approximately 21.0 acres of predominately agricultural land and includes three tributaries to Clarks Creek – Thompson Creek, Dale Branch, and Jerry Branch. The Site is located in the Yadkin River Watershed (NCDWR sub-basin 03-07-10 and HUC 03040104020020) approximately 1 mile south of the town of Pee Dee, NC in Montgomery County (Figure 1). Clarks Creek is listed as Class C water (NCDWR) and flows into the Pee Dee River. The Site is located within a NCDMS targeted local watershed.

1.4. Project Performance

Monitoring Year 2 (MY2) data was collected from January to October 2016. Monitoring activities included visual assessment of all reaches and the surrounding easement, 16 permanent photo stations, 14 permanent vegetation monitoring plots, 22 cross-sections, 12 pebble counts, and 6 bank pin arrays.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly Restoration Plan) documents available on the NCDMS website (<http://portal.ncdenr.org/web/eep>). All raw data supporting the tables and figures in the appendices is available from NCDMS upon request.

1.4.1. Vegetation

Visual assessment of the easement (Appendix B - Table 6, Figure 2) indicates that herbaceous vegetation has become well established throughout the project. Data collection from the permanent vegetation monitoring plots ($n = 14$) was completed during June 2016. Summary tables and photographs associated with MY2 monitoring efforts are located in Appendix C. Monitoring data collected during MY2 indicate that all vegetation monitoring plots are on track to meet the MY3 interim success criteria of 320 planted stems per acre. Stem densities ranged from 486 to 1,052 stems per acre with a mean of 743 stems per acre across all plots. A total of 16 woody plant species were documented within the monitoring plots. When volunteer stems are included, densities ranged between 809 and 30,554 stems per acre with a mean of 5,414 stems per acre across all plots. Additionally, invasive exotic vegetation is becoming abundant throughout the Site. 19 areas of invasive exotic vegetation, covering a total of 3.50, were noted within the easement (Table 6, Figure 2). A majority of the invasive exotic vegetation consists of previously cut privet (*Lingustrum sinense*), that is now re-sprouting, which is in the three to five foot range. Treatment will be scheduled during MY3 to combat the invasive exotic species.

1.4.2. Stream Geomorphology

Visual assessment of the stream was performed to document signs of channel instability, such as eroding banks, structural instability, or excessive sedimentation. No indication of instability was observed during the visual assessment (Table 5 and Figure 2). Structures are intact and performing as designed.

Geomorphic data for MY2 was collected during January 2016. Summary tables and cross-section plots related to stream morphology are located in Appendix D. MY2 stream morphology data indicate that, in general, the stream is stable and lacking in any significant change.

A few small deviations were noted in the cross-section dimensions; however, these are relatively minor and do not exceed expectations of adjustment within the channel. Cross-sections 5 and 16 showed increases in bankfull width of 0.5 and 0.4 feet, respectively. These changes are considered small. Deposition occurring at cross-section 19 decreased maximum pool depth by 0.2 feet. This change resulted in an increase in the width/depth ratio from 10.4 to 12.1. Additionally, deposition in the pool at cross-section 14, which decreased maximum depth by 1.0 feet during MY1, is beginning to stabilize, increasing to 1.3 feet in MY2. Bank pin arrays indicate that erosion occurred during MY2 at cross-sections 1, 19, and 21 at a rate of 0.01, 0.04, and 0.06 feet/year (Table 12). These rates are considered minor and do not exceed natural rates of erosion.

Substrate monitoring was also performed during MY2. Riffle D_{50} ranged from silt/clay to medium gravel on Jerry Branch, fine gravel to coarse gravel on Dale Branch, and medium gravel to coarse gravel on Thompson Branch. Substrate will be monitored in future years for shifts in particle size composition.

Overall, documented shifts in stream morphology were minimal, and do not exceed expectations between MY1 and MY2. The project is meeting success criteria with regards to channel dimensions as well as substrate particle size distributions, and sediment transport.

1.4.3. Stream Hydrology

Since project completion in April 2015 five bankfull events have been documented on Jerry Branch and four on both Dale and Thompson Branch (Table 13). The project has received multiple heavy precipitation events during October and November with no degradation to the channel or structures.

Summary information/data related to the occurrence of items such as beaver or easement encroachment and statistics related to performance of various project and monitoring elements can be found in the tables and figures in the report appendices. Narrative background and supporting information formerly found in these reports can be found in the Baseline Monitoring Report (formerly Mitigation Plan) and in the Mitigation Plan (formerly Restoration Plan) documents available on NCDMS' website. All raw data supporting the tables and figures in the appendices is available from NCDMS upon request.

2.0 METHODS

Visual assessments of the project were performed at the beginning and end of the monitoring year. Permanent photo station photos were collected during the initial visual assessment during leaf-off conditions. Additional vegetation or stream problem areas within the project area were photo-documented.

Geomorphic measurements were taken during low flow conditions using a Nikon NPR 332 Total Station. Three-dimensional coordinates associated with cross-section and profile data were collected in the field and geo-referenced (NAD83 State Plane feet FIPS 3200). Morphological data was limited to 22 cross-sections. Survey data was imported into CAD, ArcGIS, and Excel for data processing and analysis. Channel substrate was characterized using a Wolman Pebble Count as outlined in Harrelson et al. (1994) and processed using Microsoft Excel.

Vegetation success is being monitored using 14 permanent monitoring plots. Vegetation monitoring followed CVS-EEP Level 1 Protocol for MY1 and is following Level 2 Protocol Version 4.2 for monitoring years 2-7 (Lee et al. 2008). Level 2 Protocol includes analysis of species composition and density of planted species. Data is processed using the CVS data entry tool. In the field, the four corners of each plot were permanently marked with rebar and photos of each plot taken from the origin each monitoring year.

Precipitation data was reported from the NCCRONOS station Uwharrie (Troy). Three crest gauges were installed to document bankfull events, one each on Jerry, Dale, and Thompson branches. During quarterly visits to the site, the height of the corkline was recorded and cross-referenced with known bankfull elevations at each crest gauge.

3.0 REFERENCES

Harrelson, Cheryl, C. Rawlins and J. Potyondy. 1994. Stream Channel Reference Sites: An Illustrated Guide to Field Technique. Gen. Tech. Rep. RM-245. Rocky Mountain Forest and Range Experiment Station. USDA Forest Service. Fort Collins, Colorado

Lee, M.T., R.K. Peet, S.D. Roberts, and T.R. Wentworth. 2008. CVS-EEP Protocol for Recording Vegetation. Version 4.2. <http://cvs.bio.unc.edu/methods.htm>; accessed November 2008.

Appendix A

General Tables and Figures

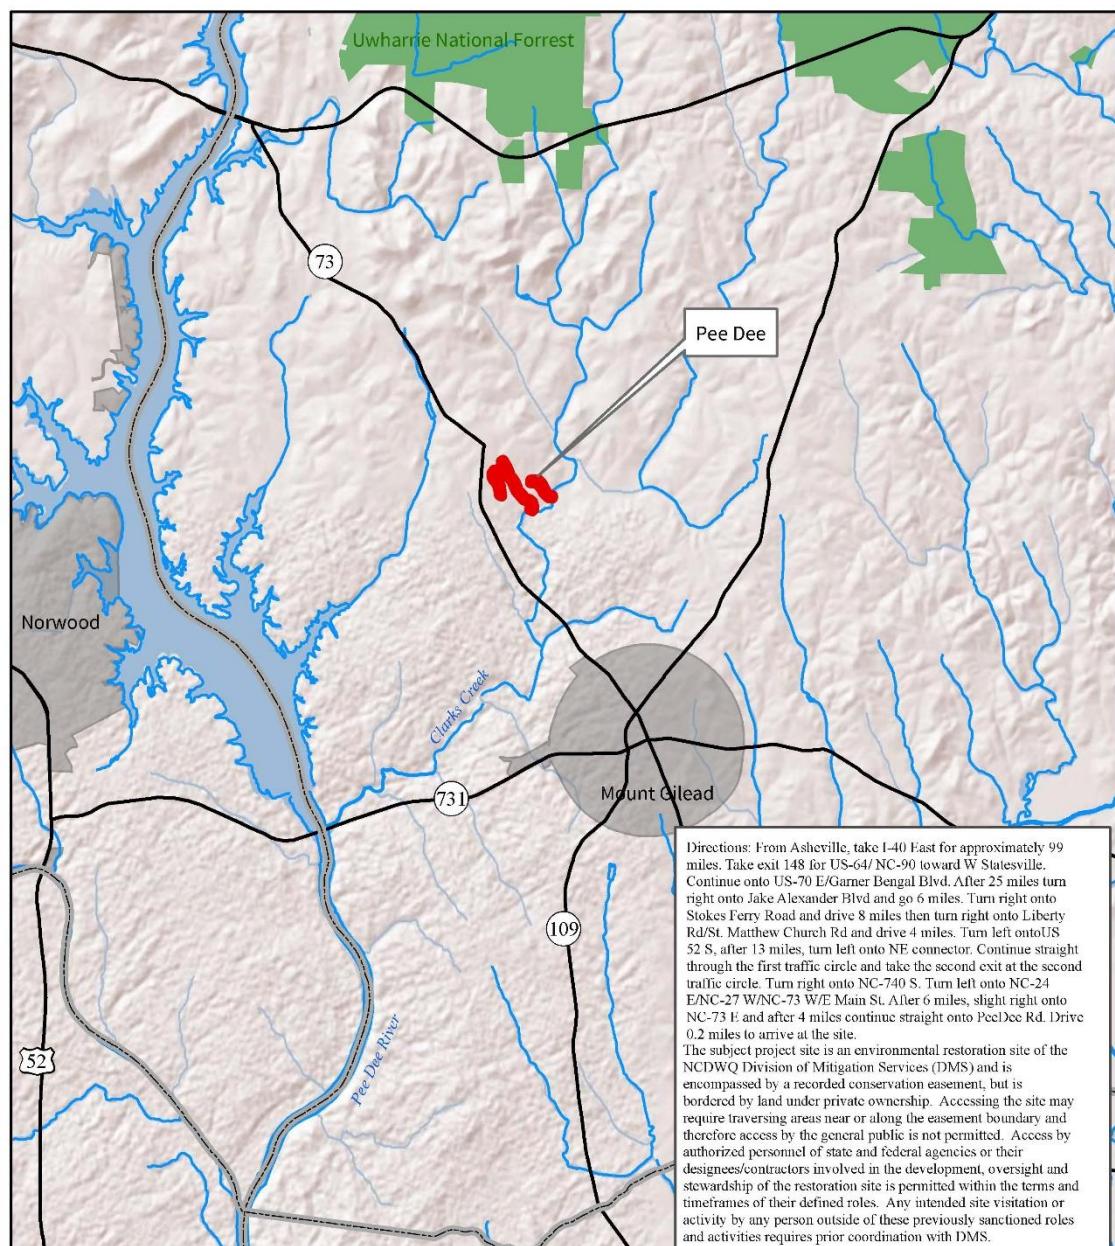



Figure 1: Vicinity Map
Pee Dee Stream Restoration Site
Project No. 95350
Montgomery County, North Carolina



Notes: Conservation Easement from Key
 Mapping & Survey, P.A.

0 0.5 1 2 3 Miles

This Page Intentionally Left Blank

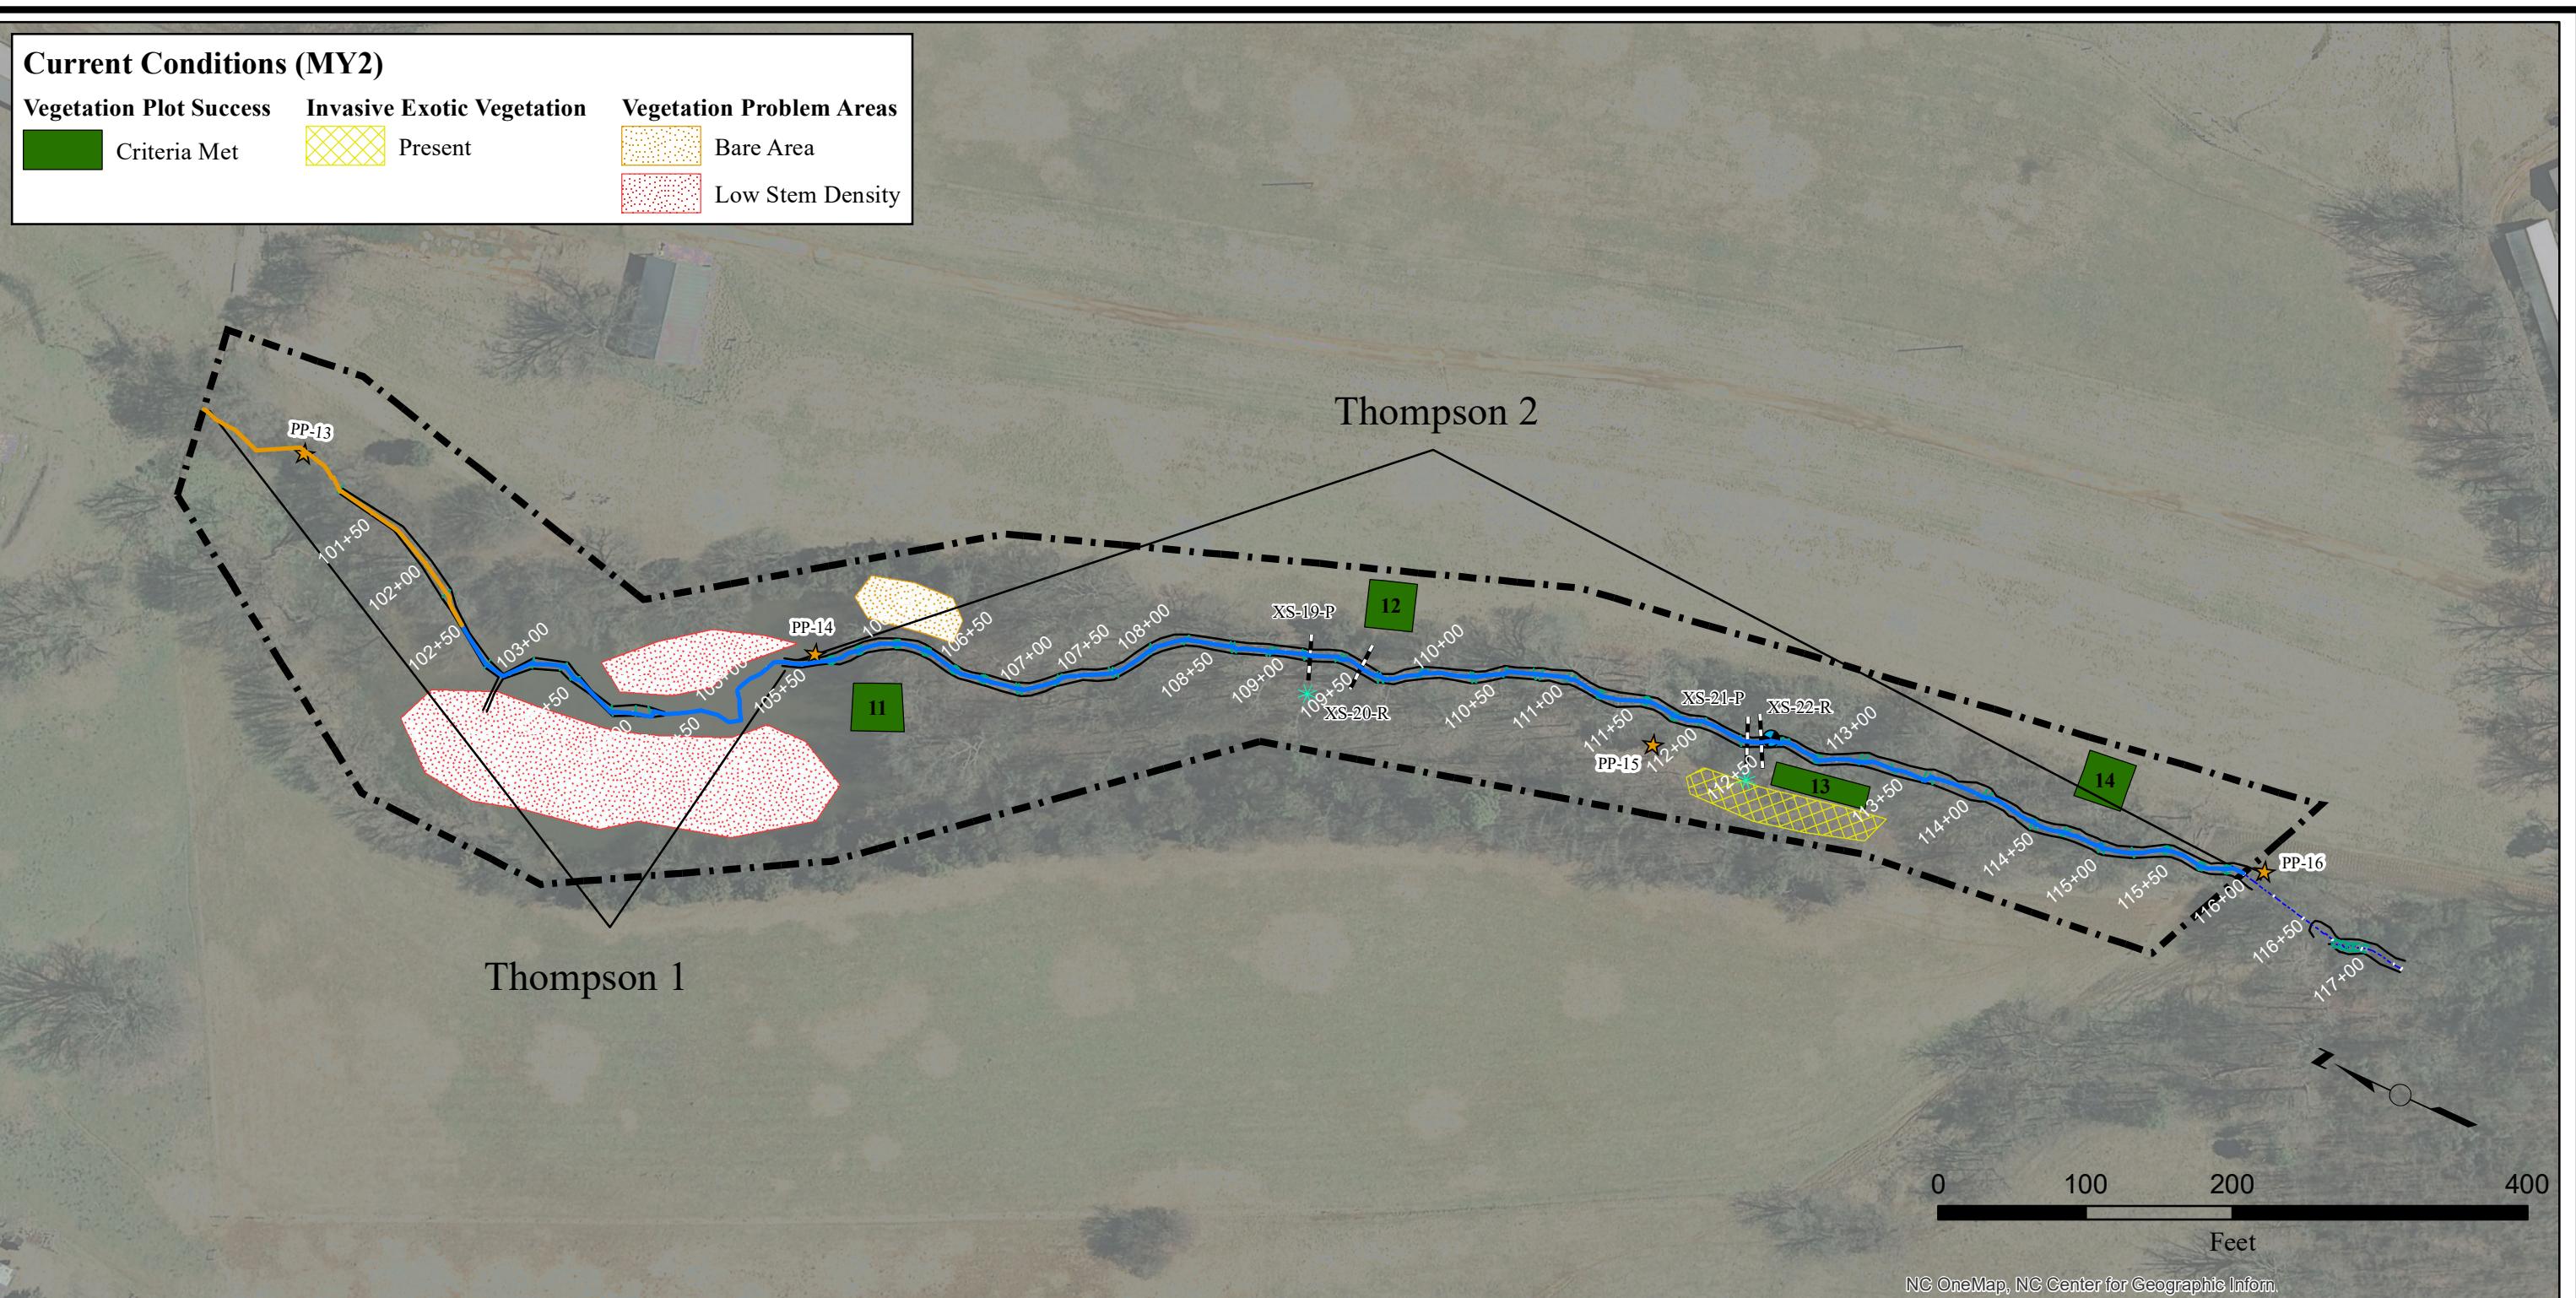

Prepared for:



Figure 3. Baseline Monitoring Features Map (Sheet 1 of 3)
Pee Dee Stream Restoration Project
Montgomery County, NC
NCDMS Contract No. 004644
NCDMS Project No.: 95350
October 2016

- Crest Gauge
- Rain Gauge
- ★ Photo Points
- * Bank Pin Array
- Cross-Section
- As-Built Centerline

- ~~~~~ Top of Bank
- ~~~~~ Contour (1 ft.)
- ████████ Conservation Easement
- ~~~~~ Boulder Arch
- ~~~~~ Log Sill


- Asset Type**
- Enhancement 1
 - Restoration

Notes:

- 1) This is not a survey and should not be construed as such.
- 2) Baseline Data Provided by Kee Mapping
- 3) Orthoimagery provided by NOneMap (2010)

Prepared by:



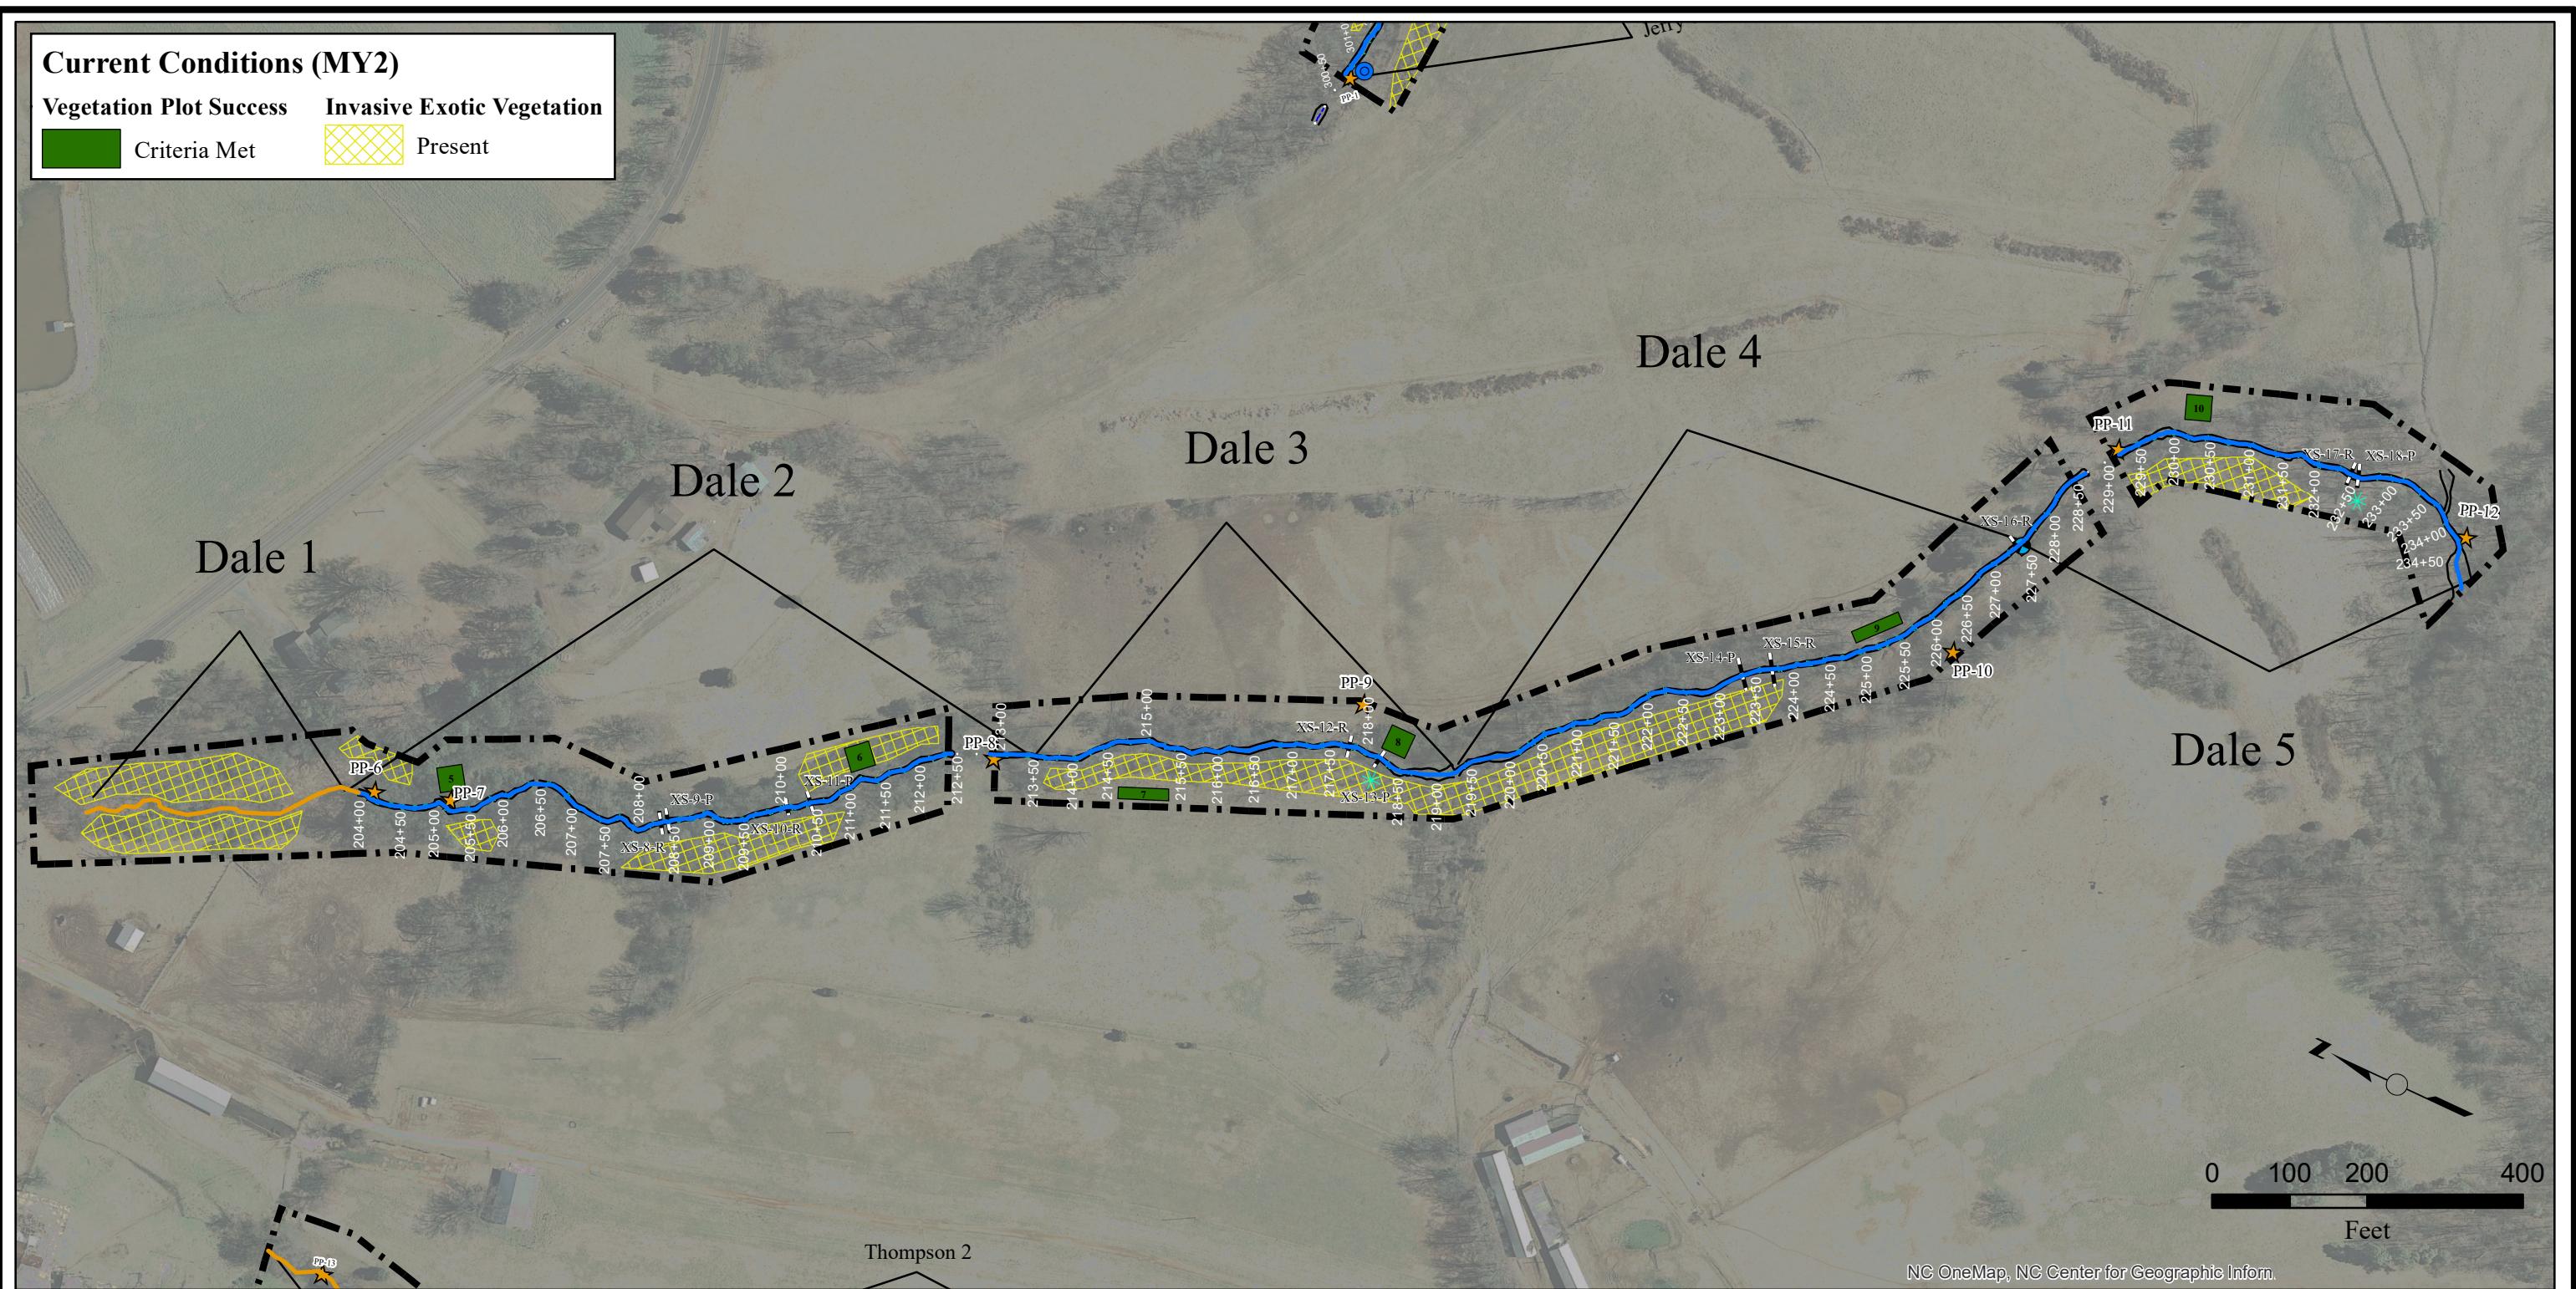

Prepared for:



Figure 3. Baseline Monitoring Features
Map (Sheet 2 of 3)

Pee Dee Stream Restoration Project
Montgomery County, NC
NCDMS Contract No. 004644
NCDMS Project No.: 95350
October 2016

-  Crest Gauge
 -  Rain Gauge
 -  Photo Points
 -  Bank Pin Array
 -  Cross-Section
 -  As-Built Centerline

Asset Type


- Enhancement 1
 - Restoration

Note

- 1) This is not a survey and should not be construed as such.
 - 2) Baseline Data Provided by Kee Mapping
 - 3) Orthoimagery provided by NCOneMap (2010)

Prepared by:



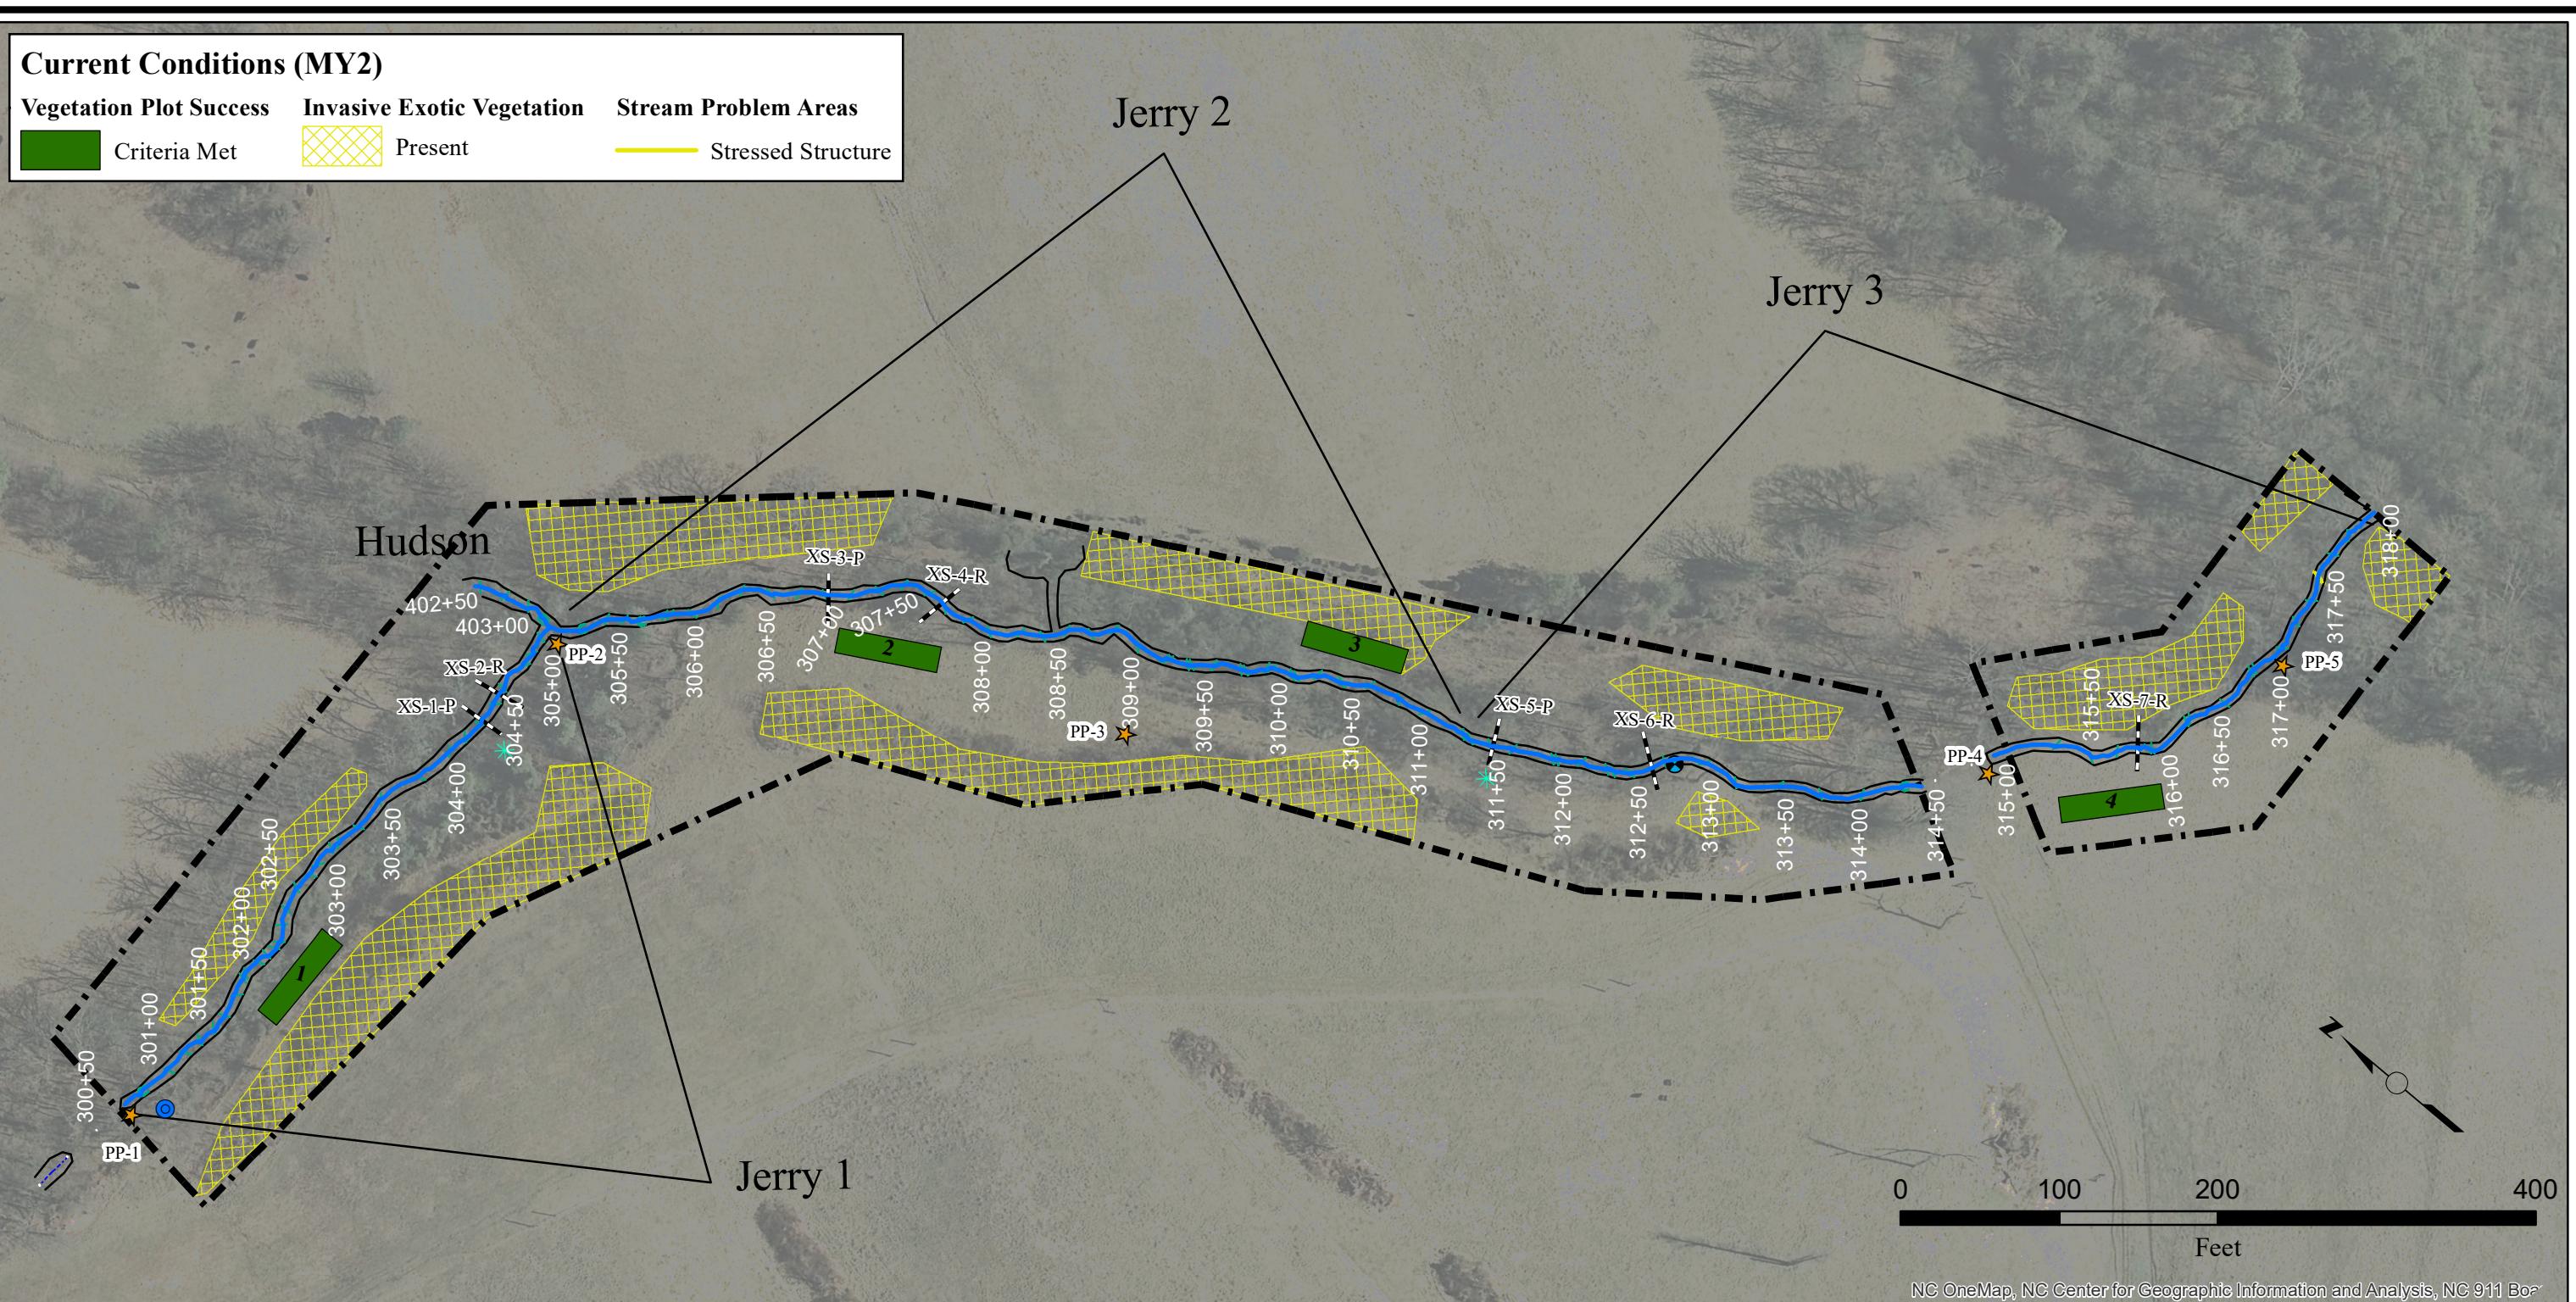

Prepared for:



Figure 3. Baseline Monitoring Features Map (Sheet 3 of 3)
Pee Dee Stream Restoration Project
Montgomery County, NC
NCDMS Contract No. 004644
NCDMS Project No.: 95350
October 2016

- Crest Gauge
- Rain Gauge
- ★ Photo Points
- * Bank Pin Array
- Cross-Section
- As-Built Centerline

- ~~~~~ Top of Bank
- ~~~~~ Contour (1 ft.)
- Conservation Easement
- ~~~~~ Boulder Arch
- ~~~~~ Log Sill

Asset Type

— Restoration

Notes:

- 1) This is not a survey and should not be construed as such.
- 2) Baseline Data Provided by Kee Mapping
- 3) Orthoimagery provided by NOneMap (2010)

Prepared by:



This Page Intentionally Left Blank

Table 1. Project Components and Mitigation Credits									
Pee Dee Stream Restoration Site									
Mitigation Credits									
	Stream		Riparian Wetland		Non-riparian Wetland		Buffer	Nitrogen	Phosphorous Nutrient Offset
Type	R	RE	R	RE	R	RE	Buffer	Nutrient Offset	Nutrient Offset
Totals	6,504						-	-	-
Project Components									
Project Component -or- Reach ID		Stationing/Location			Existing Footage/Acreage		Approach (PI, PII etc.)	Restoration - or- Restoration Equivalent	Restoration Footage or Acreage ¹
Thompson Creek 1	100+7 - 102 + 50			250		PI	EI	243	1.5
Thompson Creek 1 - 2	102+50 - 117+05			1,346		PI	R	1,349	1
Dale Branch 1	200+00 - 203+95			375		PI	EI	375	1.5
Dale Branch 2 - 5	203+95 - 234+86			2,407		PI	R	2,993	1
Jerry Branch	300+74 - 318+15			1,832		PI	R	1,691	1
Hudson Branch	402+48 - 403+07			53		PI	R	59	1
Component Summation									
Restoration Level	Stream	Riparian Wetland			Non-riparian Wetland		Buffer	Upland	
	(linear feet)	(acres)		(acres)		(square feet)		(acres)	
		Riverine	Non-Riverine						
Restoration	6,092	-	-	-	-	-	-	-	-
Enhancement	-	-	-	-	-	-	-	-	-
Enhancement I	618	-	-	-	-	-	-	-	-
Enhancement II	-	-	-	-	-	-	-	-	-
Creation	-	-	-	-	-	-	-	-	-
Preservation	-	-	-	-	-	-	-	-	-
High Quality Preservation	-	-	-	-	-	-	-	-	-
BMP Elements									
Element ²	Location	Purpose/Function			Notes				
FB	Entire Site	Protect Stream							

¹Restoration footage accounts for crossings and exclusions.

²BR = Bioretention Cell; SF = Sand Filter; SW = Stormwater Wetland; WDP = Wet Detention Pond; DDP = Dry Detention Pond; FS = Filter Strip; S = Grassed Swale; LS = Level Spreader; NI = Natural Infiltration Area; FB = Forested Buffer

**Table 2. Project Activity and Reporting History
Pee Dee Stream Restoration Site**

Activity or Report	Data Collection Complete	Completion or Delivery
Mitigation Plan	Dec - 2013	Dec - 2013
Final Design - Construction Plans	N/A	Jan - 2014
Construction	N/A	April - 2015
Temporary S&E Mix Applied to Entire Project Area	N/A	April - 2015
Live Stakes and Bare Root Plantings for Entire Project Area	N/A	April - 2015
Baseline Monitoring Document (Year 0 Monitoring - Baseline)	April - 2015	July 2015
Year 1 Monitoring	Oct - 2015	Dec - 2015
Year 2 Monitoring	Jan - 2016	Oct - 2016
Year 3 Monitoring		
Year 4 Monitoring		
Year 5 Monitoring		
Year 6 Monitoring		
Year 7 Monitoring		

Table 3. Project Contacts

Pee Dee Stream Restoration Site	
Prime Contractor	Resource Environmental Solutions, LLC 302 Jefferson Street; Suite 110 Raleigh, North Carolina 27605 David Godley (919) 209-1053
Designer	Wolf Creek Engineering 12-1/2 Wall St., Suite C Asheville, North Carolina 28801 Grant Ginn (828) 449-1930 ext 102
Construction Contractor	Northstate Environmental 2889 Lowery Street Winston Salem, North Carolina 27101 Darrell Westmoreland (336) 725-2010
Seeding Contractor	Northstate Environmental 2889 Lowery Street Winston Salem, North Carolina 27101 Darrell Westmoreland (336) 725-2010
Planting Contractor	Resource Environmental Solutions, LLC 302 Jefferson Street; Suite 110 Raleigh, North Carolina 27605 David Godley (919) 209-1053
As-built Surveys	Kee Mapping and Surveying PO Box 2566 Asheville, North Carolina 28802 Phillip B. Key (828) 575-9021
Seeding Mix Source	Green Resource 5204 Highgreen Court Colfax, NC 27235 (336) 855-6363
Bare Root Seedlings	ArborGen Inc. 2011 Broadbank Court Ridgeville, SC 29472 (888) 888-7158
	North Carolina Forest Service 762 Claridge Nursery Road Goldsboro, NC 27350 (888) 628-7337
Live Stakes	Bear Duck Farms, LLC 105 Dobbs Place Goldsboro, NC 27350
Monitoring Performers (Y0-Y2) 2015 - 2016	Equinox Environmental 37 Haywood St. Asheville, North Carolina 28802 Drew Alderman (828) 253-6856

Table 4. Project Baseline Information and Attributes

Project Information				
Project Name	Pee Dee Stream Restoration			
County	Montgomery County			
Project Area (acres)	21			
Project Coordinates (latitude and longitude)	35°15'26.95" N, 80°01'47.83" W			
Project Watershed Summary Information				
Physiographic Province	Piedmont			
River Basin	Yadkin			
USGS Hydrologic Unit 8-digit	03040104	USGS Hydrologic Unit 14-Digit	03040104020020	
DWQ Sub-basin	03-07-10			
Project Drainage Area (acres)	286			
Project Drainage Area Percentage of Impervious Area	<10%			
CGIA Land Use Classification	2.01.03 Hay and Pasture Land			
Reach Summary Information				
Parameters	Thompson Creek	Dale Branch	Jerry Branch	Hudson Branch
Length of reach (linear feet)	1,596	2,782	1,832	56
Valley classification (Rosgen)	II	II	II	II
Drainage area (acres)	102	58	83	19
NCDWQ stream identification score	30.5	34	30.5	21.5
NCDWQ Water Quality Classification	C	C	C	C
Morphological Description (stream type) (Rosgen)	B4	B4	B4	B4
Evolutionary trend (Rosgen)	IV	IV	IV	IV
Underlying mapped soils	GoE, BeC2, BaC2	GoE, CnA	GoE, BaC2, BaB2	BaC2
Drainage class	Well-drained	Well-drained	Well-drained	Well-drained
Soil Hydric status	Non-Hydric	Non-Hydric	Non-Hydric	Non-Hydric
Slope	2%	2%	2%	2%
FEMA classification	N/A	N/A	N/A	N/A
Native vegetation community	Agricultural	Agricultural	Agricultural	Agricultural
Percent composition of exotic invasive vegetation	5%	5%	5%	5%
Wetland Summary Information				
Parameters	-	-	-	-
Size of Wetland (acres)	-	-	-	-
Wetland Type (non-riparian, riparian riverine or riparian non-riverine)	-	-	-	-
Mapped Soil Series	-	-	-	-
Drainage class	-	-	-	-
Soil Hydric Status	-	-	-	-
Source of Hydrology	-	-	-	-
Hydrologic Impairment	-	-	-	-
Native vegetation community	-	-	-	-
Percent composition of exotic invasive vegetation	-	-	-	-
Regulatory Considerations				
Regulation	Applicable?	Resolved?	Supporting Documentation	
Waters of the United States – Section 404	Yes	Yes	NWP	
Waters of the United States – Section 401	Yes	Yes	401 Certification	
Endangered Species Act	N/A		ERTR	
Historic Preservation Act	N/A		ERTR	
Coastal Zone Management Act (CZMA)/ Coastal Area Management Act (CAMA)	N/A			
FEMA Floodplain Compliance	N/A			
Essential Fisheries Habitat	N/A		ERTR	

Appendix B

Visual Assessment Data

This Page Intentionally Left Blank

Table 5. Visual Stream Morphology Stability Assessment
Pee Dee Stream Restoration Site - Jerry Branch
Assessed Length 1,832 feet

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	90	90			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	90	90			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	90	90			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	N/A	N/A			N/A			
		2. Thalweg centering at downstream of meander bend (Glide).	90	90			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals				0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	91	91			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	91	91			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	91	91			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	91	91			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	91	91			100%			

N/A - Item does not apply.

Table 5 cont'd. Visual Stream Morphology Stability Assessment
Pee Dee Stream Restoration Site - Dale Branch
Assessed Length 2,782 feet

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	120	120			100%			
		1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	119	119			100%			
	3. Meander Pool Condition	2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	119	119			100%			
		1. Thalweg centering at upstream of meander bend (Run).	N/A	N/A			N/A			
	4. Thalweg Position	2. Thalweg centering at downstream of meander bend (Glide).	119	119			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
					Totals	0	0	100%	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	122	122			N/A			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	122	122			N/A			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	122	122			N/A			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	122	122			N/A			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	122	122			N/A			

N/A - Item does not apply.

Table 5 cont'd. Visual Stream Morphology Stability Assessment
Pee Dee Stream Restoration Site - Thompson Branch
Assessed Length 1,596 feet

Major Channel Category	Channel Sub-Category	Metric	Number Stable, Performing as Intended	Total Number in As-built	Number of Unstable Segments	Amount of Unstable Footage	% Stable, Performing as Intended	Number with Stabilizing Woody Vegetation	Footage with Stabilizing Woody Vegetation	Adjusted % for Stabilizing Woody Vegetation
1. Bed	1. Vertical Stability (Riffle and Run Units)	1. <u>Aggradation</u> - Bar formation/growth sufficient to significantly deflect flow laterally (not to include point bars).			0	0	100%			
		2. <u>Degradation</u> - Evidence of downcutting.			0	0	100%			
	2. Riffle Condition	1. <u>Texture/Substrate</u> - Riffle maintains coarser substrate.	50	50			100%			
	3. Meander Pool Condition	1. <u>Depth</u> Sufficient (Max Pool Depth : Mean Bankfull Depth \geq 1.6).	50	50			100%			
		2. <u>Length</u> appropriate (>30% of centerline distance between tail of upstream riffle and head of downstream riffle).	50	50			100%			
	4. Thalweg Position	1. Thalweg centering at upstream of meander bend (Run).	N/A	N/A			N/A			
		2. Thalweg centering at downstream of meander bend (Glide).	50	50			100%			
2. Bank	1. Scoured / Eroding	Bank lacking vegetative cover resulting simply from poor growth and/or scour and erosion.			0	0	100%	0	0	100%
	2. Undercut	Banks undercut/overhanging to the extent that mass wasting appears likely. Does <u>NOT</u> include undercuts that are modest, appear sustainable and are providing habitat.			0	0	100%	N/A	N/A	N/A
	3. Mass Wasting	Bank slumping, calving, or collapse.			0	0	100%	N/A	N/A	N/A
	Totals				0	0	100%	N/A	N/A	N/A
3. Engineered Structures	1. Overall Integrity	Structures physically intact with no dislodged boulders or logs.	51	51			100%			
	2. Grade Control	Grade control structures exhibiting maintenance of grade across the sill.	51	51			100%			
	2a. Piping	Structures lacking any substantial flow underneath sills or arms.	51	51			100%			
	3. Bank Protection	Bank erosion within the structures extent of influence does <u>NOT</u> exceed 15%.	51	51			100%			
	4. Habitat	Pool forming structures maintaining ~ Max Pool Depth : Mean Bankfull Depth Ratio \geq 1.6. Rootwads/logs providing some cover at base-flow.	51	51			100%			

N/A - Item does not apply.

Table 6. Vegetation Condition Assessment
Pee Dee Stream Restoration Site
Planted Acreage 21.0

Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Planted Acreage
1. Bare Areas	Very limited cover of both woody and herbaceous material.	N/A	1	0.05	0%
2. Low Stem Density Areas	Woody stem densities clearly below target levels based on MY3, 4, or 5 stem count criteria.	N/A	2	0.50	2%
			Totals	3	0.55
3. Areas of Poor Growth Rates or Vigor	Areas with woody stems of a size class that are obviously small given the monitoring year.	N/A	0	0.00	0%
			Cumulative Totals	3	0.55
Easement Acreage 21.0 acres					
Vegetation Category	Definitions	CCPV Depiction	Number of Polygons	Combined Acreage	% of Easement Acreage
4. Invasive Areas of Concern	Areas or points (if too small to render as polygons at map scale).	Cross Hatch (Red - Dense/Yellow - Present)	19	3.50	17%
5. Easement Encroachment Areas	Areas or points (if too small to render as polygons at map scale).	N/A	0	0.00	0%

N/A - Item does not apply.



Jerry Branch – Permanent Photo Station 1
Station 300+25 - Downstream



Jerry Branch – Permanent Photo Station 2
Station 305+04 - Upstream



Jerry Branch – Permanent Photo Station 2
Station 305+04 - Downstream



Hudson Branch – Permanent Photo Station 2
Station 305+04 – Looking Upstream from Confluence with Jerry Branch



Jan-21-2016

Jerry Branch – Permanent Photo Station 3
Looking North Northwest/Upstream Jerry Branch



Jan-21-2016

Jerry Branch – Permanent Photo Station 4
Station 304+80 - Upstream



Jan 21 2016

Jerry Branch – Permanent Photo Station 4
Station 304+80 - Downstream



Jerry Branch – Permanent Photo Station 5
Station 316+95 - Upstream



Dale Branch – Permanent Photo Station 6
Station 204+15 - Upstream



Dale Branch – Permanent Photo Station 7
Station 205+15 - Upstream



Dale Branch – Permanent Photo Station 8
Station 212+95 - Upstream



Dale Branch – Permanent Photo Station 8
Station 212+95 - Downstream



Jan-21-2016

Dale Branch – Permanent Photo Station 9
Looking North-Northwest – Upstream Dale



Jan-21-2016

Dale Branch – Permanent Photo Station 9
Looking South-Southeast- Downstream



Dale Branch – Permanent Photo Station 10
Looking North-Northeast – Upstream



Dale Branch – Permanent Photo Station 10
Looking South-Southwest – Downstream



Dale Branch – Permanent Photo Station 11
Station 229+20 – Upstream



Dale Branch – Permanent Photo Station 11
Station 229+20 – Downstream



Dale Branch – Permanent Photo Station 12
Station 234+25 – Upstream



Dale Branch – Permanent Photo Station 12
Station 234+25 – Downstream



Thompson Branch – Permanent Photo Station 13
Station 101+15 – Downstream



Thompson Branch – Permanent Photo Station 14
Station 105+25 – Upstream



Thompson Branch – Permanent Photo Station 14
Station 105+25 – Downstream



Thompson Branch – Permanent Photo Station 15
Station 115+50 – Upstream



Thompson Branch – Permanent Photo Station 15
Station 111+50 – Downstream



Thompson Branch – Permanent Photo Station 16
Station 115+85 – Upstream

This Page Intentionally Left Blank

Appendix C

Vegetation Plot Data

This Page Intentionally Left Blank

Table 7. Vegetation Plot Criteria Attainment

Pee Dee Stream Restoration Site		
Vegetation Plot ID	Vegetation Survival Threshold Met?	Tract Mean
1	Yes	100%
2	Yes	
3	Yes	
4	Yes	
5	Yes	
6	Yes	
7	Yes	
8	Yes	
9	Yes	
10	Yes	
11	Yes	
12	Yes	
13	Yes	
14	Yes	

**Table 8. CVS Vegetation Plot Metadata
Pee Dee Stream Restoration Site**

Report Prepared By	Owen Carson
Date Prepared	6/16/2016 13:23
database name	Equinox_2016_A_Pee_Dee.mdb
database location	Z:\ES\NRI&M\EBX Monitoring\Pee_Dee\Pee Dee-MY2-2016\Data\Veg
computer name	FIELD-PC
file size	61739008
DESCRIPTION OF WORKSHEETS IN THIS DOCUMENT-----	
Metadata	Description of database file, the report worksheets, and a summary of project(s) and project data.
Proj, planted	Each project is listed with its PLANTED stems per acre, for each year. This excludes live stakes.
Proj, total stems	Each project is listed with its TOTAL stems per acre, for each year. This includes live stakes, all planted stems, and all natural/volunteer stems.
Plots	List of plots surveyed with location and summary data (live stems, dead stems, missing, etc.).
Vigor	Frequency distribution of vigor classes for stems for all plots.
Vigor by Spp	Frequency distribution of vigor classes listed by species.
Damage	List of most frequent damage classes with number of occurrences and percent of total stems impacted by each.
Damage by Spp	Damage values tallied by type for each species.
Damage by Plot	Damage values tallied by type for each plot.
Planted Stems by Plot and Spp	A matrix of the count of PLANTED living stems of each species for each plot; dead and missing stems are excluded.
ALL Stems by Plot and spp	A matrix of the count of total living stems of each species (planted and natural volunteers combined) for each plot; dead and missing stems are excluded.
PROJECT SUMMARY-----	
Project Code	95350
project Name	Pee Dee
Description	
River Basin	
length(ft)	
stream-to-edge width (ft)	
area (sq m)	
Required Plots (calculated)	
Sampled Plots	14

Table 9. Total Planted Stem Counts (Species by Plot)
Pee Dee Stream Restoration Project

		Current Plot Data (MY2 2016)																																										
Scientific Name	Common Name	Species Type	Plot 1			Plot 2			Plot 3			Plot 4			Plot 5			Plot 6			Plot 7			Plot 8			Plot 9			Plot 10			Plot 11			Plot 12			Plot 13			Plot 14		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T																					
<i>Betula nigra</i>	River Birch	Tree	10	10	10	5	5	5	2	2	2	6	6	6	2	2	2	9	9	9	6	6	6	2	2	3	3	3	3	3	3	3	3	3	3									
<i>Broussonetia papyrifera</i>	Paper Mulberry	Exotic																																										
<i>Carya</i>	Hickory	Tree																																3										
<i>Carya alba</i>	Mockernut Hickory	Tree																																										
<i>Celtis occidentalis</i>	Common Hackberry	Tree				27			46			17			42			22			275			35			1			645			32			11								
<i>Cephalanthus occidentalis</i>	Common Buttonbush	Shrub																																										
<i>Diospyros virginiana</i>	Common Persimmon	Tree																	1																									
<i>Fraxinus pennsylvanica</i>	Green Ash	Tree	2	2	2	1	1	1	1	2	2	2	1	1	1	3	3	3	7	7	17	1	1	1	5	5	5	2	2	2	1	1	1	1	1									
<i>Juglans nigra</i>	Black Walnut	Tree				4			1			1																					3		1									
<i>Liquidambar styraciflua</i>	Sweetgum	Tree				13			1											24			3			9			5			4			25			3						
<i>Liriodendron tulipifera var. tulipifera</i>	Tulip-tree, Yellow Poplar, Whitewood	Tree	3	3	3											1	1	1																										
<i>Platanus occidentalis</i>	American Sycamore	Tree																																										
<i>Platanus occidentalis var. occidentalis</i>	Sycamore, Plane-tree	Tree	4	4	4	9	9	9	1	1	1	1	1	2	3	3	3	1	1	11	5	5	5	1	3	3	33	7	7	10	18	18	43	8	8	8	9	9	11	11	13			
<i>Quercus</i>	Oak	Tree																2	2	2																								
<i>Quercus michauxii</i>	Swamp Chestnut Oak	Tree				2	2	2	3	3	3	1	1	1					2	2	2	5	5	5	1	1	1				2	2	2				6	6	6	4	4	4		
<i>Quercus nigra</i>	Water Oak	Tree	4	4	4	3	3	3	3	3	3	2	2	2	2	2	2	2	2	2	5	5	5	1	1	1																		
<i>Quercus phellos</i>	Willow Oak	Tree	3	3	3	1	1	1	7	7	7	7	7	7	6	6	6	5	5	5	2	9	9	9	7	7	7	1	1	1	10	7	7	7			2	2	2					
<i>Rhus copallina</i>	Flameleaf sumac	shrub																																										
<i>Rhus copallina var. copallina</i>	Flameleaf sumac	shrub				2													4																	30								
<i>Rhus glabra</i>	Smooth Sumac	shrub																																										
<i>Ulmus alata</i>	Winged Elm	Tree																																					5					
Stem count			26	26	72	21	21	69	18	18	36	15	15	58	20	20	71	19	19	314	15	15	20	14	14	60	23	23	288	12	12	20	20	20	755	18	18	54	18	18	34			
size (ares)			1			1			1			1			1			1		1			1			1			1			1			1			1						
size (ACRES)			0.02			0.02			0.02			0.02			0.02			0.02		0.02			0.02			0.02			0.02			0.02			0.02									
Species count			6	6	10	6	6	9	6	6	8	7	7	8	5	5	9	6	6	7	3	3	5	2	2	6	6	6	10	4	4	6	2	2	6	4	4	6	3	3	5	4	4	6
Stems per ACRE			1,052	1,052	2,914	850	850	2,792	728	728	1,457	607	607	2,347	809	809	2,873	769	769	12,707	607	607	809	567	567	2,428	931	931	11,655	486	486	809	809	30,554	728	728	2,185	728	728	890	728	728	1,376	

¹PnoLS: No livestock included in tally; P-all: All planted stems included in tally; T: Total stems including recruitment.

Table 9. Total Planted Stem Counts (Annual Means)
Pee Dee Stream Restoration Site

Table 9. Total Planted Stem Counts (Annual Means) Pee Dee Stream Restoration Site											
Scientific Name	Common Name	Species Type	Annual Means								
			MY2 (2016)			MY1 (2015)			MY0 (2015)		
			PnoLS	P-all	T	PnoLS	P-all	T	PnoLS	P-all	T
<i>Betula nigra</i>	River Birch	Tree	45	45	46	42	42	42	51	51	51
<i>Broussonetia papyrifera</i>	Paper Mulberry	Exotic							1		
<i>Carya</i>	Hickory	Tree			3				3		
<i>Carya alba</i>	Mockernut Hickory	Tree							1		
<i>Celtis occidentalis</i>	Common Hackberry	Tree			1153				325		
<i>Cephalanthus occidentalis</i>	Common Buttonbush	Shrub			220						
<i>Diospyros virginiana</i>	Common Persimmon	Tree			1				1		
<i>Fraxinus pennsylvanica</i>	Green Ash	Tree	26	26	36	29	29	29	33	33	33
<i>Juglans nigra</i>	Black Walnut	Tree			10				2		
<i>Liquidambar styraciflua</i>	Sweetgum	Tree			87				47		
<i>Liriodendron tulipifera var. tulipifera</i>	Tulip-tree, Yellow Poplar, Whitewood	Tree	7	7	7	6	6	6	16	16	16
<i>Platanus occidentalis</i>	American Sycamore	Tree							1	1	1
<i>Platanus occidentalis var. occidentalis</i>	Sycamore, Plane-tree	Tree	80	80	152	79	79	81	86	86	86
<i>Quercus</i>	Oak	Tree	2	2	2	1	1	1	83	83	83
<i>Quercus michauxii</i>	Swamp Chestnut Oak	Tree	26	26	26	27	27	27	14	14	14
<i>Quercus nigra</i>	Water Oak	Tree	16	16	16	16	16	16	17	17	17
<i>Quercus phellos</i>	Willow Oak	Tree	55	55	67	55	55	56	18	18	18
<i>Rhus copallina</i>	Flameleaf sumac	shrub							3		
<i>Rhus copallina</i> var. <i>copallina</i>	Flameleaf sumac	shrub			42						
<i>Rhus glabra</i>	Smooth Sumac	shrub							9		
<i>Ulmus alata</i>	Winged Elm	Tree			5						
Stem count			257	257	1873	255	255	650	319	319	319
size (ares)			14			14			14		
size (ACRES)			0.35			0.35			0.35		
Species count			8	8	16	8	8	17	9	9	9
Stems per ACRE			743	743	5,414	737	737	1,879	922	922	922

¹PnoLS: No livestakes included in tally; P-all: All planted stems included in tally; T: Total stems including recruitment.

Color for Density

Exceeds requirements by 10%

Exceeds requirements, but by less than 10%

Fails to meet requirements, by less than 10%

Fails to meet requirements by more than 10%

Recruit Stems

This Page Intentionally Left Blank



Pee Dee - Vegetation Monitoring Plot 1
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 2
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 3
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 4
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 5
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 6
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 7
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 8
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 9
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 10
June 15, 2016




Pee Dee - Vegetation Monitoring Plot 11
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 12
June 15, 2016



Pee Dee - Vegetation Monitoring Plot 13
June 15, 2016

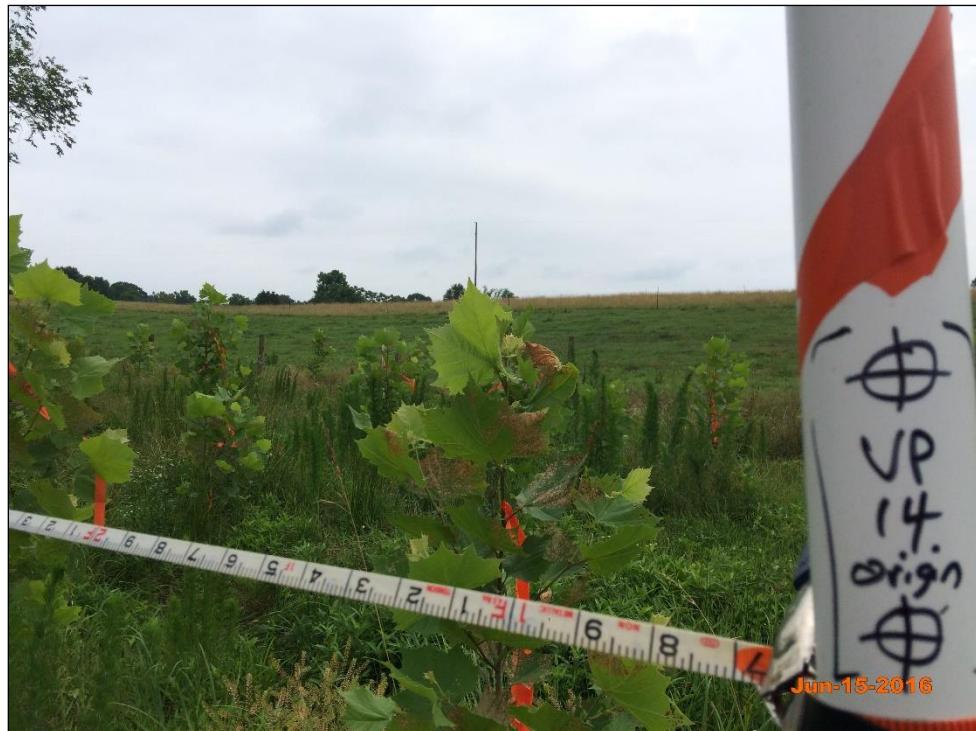

Pee Dee - Vegetation Monitoring Plot 14
June 15, 2016

This Page Intentionally Left Blank

Appendix D

Stream Geomorphology Data

This Page Intentionally Left Blank

Table 10. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Jerry Branch 1 (430 feet)

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline							
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	3.79	3.5	5.3	5.3	7.0	2.5	2	9.8	11.7	-	13.1	-	-	7.9	-	8.1	8.1	8.1	8.1	-	1			
Floodprone Width (ft)				3.3	6.2	6.2	9.0	4.0	2	16.0	18.0	-	21	-	-	-	-	31.8	31.8	31.8	31.8	-	1			
Bankfull Mean Depth (ft)	-	-	0.64	0.6	0.6	0.6	0.6	0.0	2	0.5	0.62	-	0.8	-	-	-	0.42	-	0.5	0.5	0.5	0.5	-	1		
Bankfull Max Depth (ft)				0.7	0.8	0.8	0.9	0.1	2	0.8	0.9	-	1.2	-	-	-	0.65	-	1.0	1.0	1.0	1.0	-	1		
Bankfull Cross Sectional Area (ft ²)		3.5		2.0	2.9	2.9	3.8	1.3	2	5.4	7.3	-	8	-	-	-	3.3	-	3.7	3.7	3.7	3.7	-	1		
Width/Depth Ratio				6.0	9.4	9.4	12.8	4.8	2	12.3	18.8	-	19.6	-	-	-	18.6	-	17.7	17.7	17.7	17.7	-	1		
Entrenchment Ratio				0.5	1.6	1.6	2.6	1.5	2	1.4	1.5	-	1.8	-	-	-	2.5	-	3.9	3.9	3.9	3.9	-	1		
Bank Height Ratio				2.4	7.7	7.7	12.9	7.4	2	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	-	1		
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-		
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	2.6	6.2	6.2	16.4	2.8	26		
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.003	-	0.001	0.010	0.009	0.026	0.008	26		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	2.3	5.9	5.4	16.0	2.9	26		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	0.97	-	0.7	1.5	1.5	2.3	0.4	26		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	22.5	-	6.1	15.0	14.2	27.8	5.1	25		
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	14.0	19.2	19.2	24.4	7.3	2		
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	12.0	-	17.0	11.6	13.6	13.1	16.5	2.2	4	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.4	1.7	1.6	2.0	0.3	2		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	23.8	44.4	47.1	55.0	11.9	6		
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	2	-	1.7	2.4	2.4	3.0	0.9	2		
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / S%				-															42%	0%	40%	7%	11%			
SC% / Sa% / G% / C% / B% / Be%				-							4%	2%	49%	38%	1%	6%										
d16 / d35 / d50 / d84 / d95 / di ^p / di ^s (mm)				--/5/6/13/22						14	36	52	110	170	/-/											
Reach Shear Stress (Competency) lb/ft ²				-							0.562															
Max Part Size (mm) Mobilized at Bankfull				-							947							32								
Stream Power (Transport Capacity) W/m ²				-							-						-									
Additional Reach Parameters																										
Drainage Area (mi ²)				0.07						0.42																
Impervious Cover Estimate (%)				-						-																
Rosgen Classification				-						B4c			B4				B4									
Bankfull Velocity (fps)		-		-						3.8			-													
Bankfull Discharge (cfs)	13.12			G						28.0			13													
Valley Length (ft)				-						260.0			406													
Channel Thalweg Length (ft)				-						-			435				430									
Sinuosity				-						1.50			1.0				1.06									
Water Surface Slope (ft/ft)				-						-			0.037				0.0265									
Bankfull Slope (ft/ft)				-						-			-				-		0.0267							
Bankfull Floodplain Area (acres)				-						-			-				-									
Proportion Over Wide (%)				-						-			-				-									
Entrenchment Class (ER Range)				-						-			-				-									
Incision Class (BHR Range)				-						-			-				-									
BEHI				24.03						-			-				-									
Channel Stability or Habitat Metric				-						-			-				-									
Biological or Other				-						-			-				-									

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Jerry Branch 2 (625 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline					
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N
Dimension & Substrate - Riffle																								
Bankfull Width (ft)	-	-	4.78	3.5	6.0	6.6	8.0	2.3	3	9.8	11.7	-	13.1	-	-	-	7.1	-	7.1	7.1	7.1	7.1	-	1
Floodprone Width (ft)				2.5	10.8	15.0	15.0	7.2	2	16.0	18.0	-	21	-	-	-	-	-	16.0	16.0	16.0	16.0	-	1
Bankfull Mean Depth (ft)	-	-	0.76	0.4	0.6	0.7	0.8	0.2	3	0.5	0.62	-	0.8	-	-	-	0.53	-	0.4	0.4	0.4	0.4	-	1
Bankfull Max Depth (ft)				0.5	0.7	0.8	1.0	0.2	3	0.8	0.9	-	1.2	-	-	-	0.75	-	0.7	0.7	0.7	0.7	-	1
Bankfull Cross Sectional Area (ft ²)		5.1		2.4	2.7	2.7	3.0	0.3	3	5.4	7.3	-	8	-	-	-	3.7	-	3.1	3.1	3.1	3.1	-	1
Width/Depth Ratio				4.6	15.2	14.6	26.3	10.9	3	12.3	18.8	-	19.6	-	-	-	13.4	-	16.4	16.4	16.4	16.4	-	1
Entrenchment Ratio				0.7	1.6	1.9	2.3	0.8	3	1.4	1.5	-	1.8	-	-	-	3.5	-	2.3	2.3	2.3	2.3	-	1
Bank Height Ratio				1.0	3.5	1.5	7.9	3.8	3	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	-	1
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-
Profile																								
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	3.1	9.0	8.7	26.5	4.5	29
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.002	-	0.005	0.019	0.018	0.042	0.010	29
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	2.3	4.8	4.7	7.8	1.5	31
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	1.13	-	0.9	1.5	1.5	2.2	0.3	29
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	21.7	-	12.0	18.0	16.8	36.2	5.1	30
Pattern																								
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	13.4	20.3	22.4	25.6	5.1	6
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	11.0	-	17.0	12.1	13.4	12.7	16.5	1.8
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.7	1.9	1.8	2.3	0.2	2
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	18.5	30.0	30.6	38.1	6.6	6
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	2	-	1.9	2.9	3.2	3.6	0.7	6
Substrate, Bed and Transport Parameters																								
Ri% / Ru% / P% / G% / S%				-															47%	0%	27%	12%	14%	
SC% / Sa% / G% / C% / B% / Be%				-							4%	2%	49%	38%	1%	6%								
d16 / d35 / d50 / d84 / d95 / di ^p / di ^s (mm)				-/5/6/13/22						14	36	52	110	170	/-/									
Reach Shear Stress (Competency) lb/ft ²				-							0.562													
Max Part Size (mm) Mobilized at Bankfull				-							947							32						
Stream Power (Transport Capacity) W/m ²				-							-						-							
Additional Reach Parameters																								
Drainage Area (mi ²)											0.42													
Impervious Cover Estimate (%)											-													
Rosgen Classification											B4c			B4				B4						
Bankfull Velocity (fps)				-							3.8			-										
Bankfull Discharge (cfs)	19.35			G							28.0			19										
Valley Length (ft)				-							260.0			485										
Channel Thalweg Length (ft)				-							-			625				625						
Sinuosity				-							1.50			1.1				1.29						
Water Surface Slope (ft/ft)				-							-			0.024				0.024						
Bankfull Slope (ft/ft)				-							-			-				-						
Bankfull Floodplain Area (acres)				-							-			-				-						
Proportion Over Wide (%)				-							-			-				-						
Entrenchment Class (ER Range)				-							-			-				-						
Incision Class (BHR Range)				-							-			-				-						
BEHI				26.67							-			-				-						
Channel Stability or Habitat Metric				-							-			-				-						
Biological or Other				-							-			-				-						

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Jerry Branch 3 (636 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline						
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N	
Dimension & Substrate - Riffle																									
Bankfull Width (ft)	-	-	4.95	-	4.0	-	-	-	1	9.8	11.7	-	13.1	-	-	-	7.3	-	7.2	7.3	7.3	7.4	0.141	2	
Floodprone Width (ft)				-	6.5	-	-	-	1	16.0	18.0	-	21	-	-	-	-	-	24.7	29.3	29.3	33.8	6.435	2	
Bankfull Mean Depth (ft)	-	-	0.78	-	0.9	-	-	-	1	0.5	0.62	-	0.8	-	-	-	0.54	-	0.4	0.4	0.4	0.4	0	2	
Bankfull Max Depth (ft)				-	1.1	-	-	-	1	0.8	0.9	-	1.2	-	-	-	0.77	-	0.8	0.9	0.9	0.9	0.071	2	
Bankfull Cross Sectional Area (ft ²)			5.4	-	3.3	-	-	-	1	5.4	7.3	-	8	-	-	-	4.0	-	3.0	3.2	3.2	3.3	0.212	2	
Width/Depth Ratio				-	4.8	-	-	-	1	12.3	18.8	-	19.6	-	-	-	13.5	-	16.6	17.2	17.2	17.7	0.778	2	
Entrenchment Ratio				-	1.6	-	-	-	1	1.4	1.5	-	1.8	-	-	-	3.4	-	3.4	4.0	4.0	4.6	0.849	2	
Bank Height Ratio				-	2.9	-	-	-	1	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	0.0	2	
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-		
Profile																									
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	3.1	9.0	8.7	26.5	4.5	29	
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.002	-	0.005	0.019	0.018	0.042	0.010	29	
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	2.3	4.8	4.7	7.8	1.5	31	
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	1.15	-	0.9	1.5	1.5	2.2	0.3	29	
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	23.9	-	12.0	18.0	16.8	36.2	5.1	30	
Pattern																									
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	20.0	24.2	26.0	26.5	3.6	3	
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	12.0	-	17.0	9.2	12.1	10.6	17.0	2.8	7
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.3	1.7	1.5	2.3	0.4	1	
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	34.1	43.9	44.8	54.4	8.1	6	
Meander Width Ratio				-	-	-	-	-	-	-	1.8	-	-	-	-	-	-	-	2	-	2.7	3.3	3.6	0.5	3
Substrate, Bed and Transport Parameters																									
Ri% / Ru% / P% / G% / S%				-																					
SC% / Sa% / G% / C% / B% / Be%				-																					
d16 / d35 / d50 / d84 / d95 / d10 ^p / d13 ^p (mm)				--/5/6/13/22																					
Reach Shear Stress (Competency) lb/ft ²				-													0.562	-	-	-	-	-	-	-	
Max Part Size (mm) Mobilized at Bankfull				-													947	32							
Stream Power (Transport Capacity) W/m ²				-													-	-							
Additional Reach Parameters																									
Drainage Area (mi ²)																	0.42								
Impervious Cover Estimate (%)																	-								
Rosgen Classification										G			B4c			B4									
Bankfull Velocity (fps)				-									3.8				-								
Bankfull Discharge (cfs)				20.49									28.0			20									
Valley Length (ft)				-									260.0			624									
Channel Thalweg Length (ft)				-									-			670									
Sinuosity				-									1.50			1.00									
Water Surface Slope (ft/ft)				-									-			0.0240									
Bankfull Slope (ft/ft)				-									-			-									
Bankfull Floodplain Area (acres)				-									-			-									
Proportion Over Wide (%)				-									-			-									
Entrenchment Class (ER Range)				-									-			-									
Incision Class (BHR Range)				-									-			-									
BEHI				-	21.4								-			-									
Channel Stability or Habitat Metric				-									-			-									
Biological or Other				-									-			-									

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Hudson Branch (59 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline ¹							
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	2.63	-	4.5	-	-	-	1	9.8	11.7	-	13.1	-	-	-	-	7.3	-							
Floodprone Width (ft)				-	8.0	-	-	-	1	16.0	18.0	-	21	-	-	-	-									
Bankfull Mean Depth (ft)	-	-	0.49	-	0.5	-	-	-	1	0.5	0.62	-	0.8	-	-	-	-	0.34	-							
Bankfull Max Depth (ft)				-	0.7	-	-	-	1	0.8	0.9	-	1.2	-	-	-	-	0.52	-							
Bankfull Cross Sectional Area (ft ²)			2.0	-	2.1	-	-	-	1	5.4	7.3	-	8	-	-	-	-	2.1	-							
Width/Depth Ratio				-	9.5	-	-	-	1	12.3	18.8	-	19.6	-	-	-	-	18.7	-							
Entrenchment Ratio				-	1.8	-	-	-	1	1.4	1.5	-	1.8	-	-	-	-	4.8	-							
Bank Height Ratio				-	3.6	-	-	-	1	0.9	1	-	1.4	-	-	-	-									
d50 (mm)				-	-	-	-	-	-	52	-	-	-	-	-	-	-									
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	8.89	10.2	10.2	11.5	1.86	2			
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	-	0.003	-	0.017	0.017	0.017	0.018	0.001	2	
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	5.4	7.33	7.1	9.51	2.07	3			
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	-	0.77	-	1.37	1.77	1.82	2.14	0.39	3	
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	-	15.9	-	11.5	16.6	16.6	21.8	7.26	2	
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	10.2	10.2	10.2	10.2	-	1		
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	-	9.0	-	14.0	-	-	-	-		
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	-	2	-	1.4	1.4	1.4	1.4	-	1	
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / S%					-						-															
SC% / Sa% / G% / C% / B% / Be%					-						4% / 2% / 49% / 38% / 1% / 6%															
d16 / d35 / d50 / d84 / d95 / di ^{sp} (mm)					-						14 / 36 / 52 / 110 / 170 / - / -															
Reach Shear Stress (Competency) lb/ft ²					-						0.562															
Max Part Size (mm) Mobilized at Bankfull					-						947								32							
Stream Power (Transport Capacity) W/m ²					-						-							-								
Additional Reach Parameters																										
Drainage Area (mi ²)											0.42															
Impervious Cover Estimate (%)						-					-															
Rosgen Classification						G					B4c			B4												
Bankfull Velocity (fps)				-		-					3.8			-												
Bankfull Discharge (cfs)				7.13		-					28.0			7												
Valley Length (ft)					-						260.0			55												
Channel Thalweg Length (ft)					-						-			102					59							
Sinuosity					-						1.50			1.10					1.08							
Water Surface Slope (ft/ft)					-						-			0.0120					0.030							
Bankfull Slope (ft/ft)					-						-			-					0.043							
Bankfull Floodplain Area (acres)					-						-			-												
Proportion Over Wide (%)					-						-			-												
Entrenchment Class (ER Range)					-						-			-												
Incision Class (BHR Range)					-						-			-												
BEHI					-						-			-												
Channel Stability or Habitat Metric					-						-			-												
Biological or Other					-						-			-												

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

¹This reach limited to visual assessment since it is less than 500 feet

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Dale Branch 1 (250 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline ¹							
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	2.63	4.8	7.1	8.0	8.5	2.0	3	9.8	11.7	-	13.1	-	-	-	-	6.3	-							
Floodprone Width (ft)				7.0	15.0	18.0	20.0	7.0	2	16.0	18.0	-	21	-	-	-	-									
Bankfull Mean Depth (ft)	-	-	0.49	0.4	0.5	0.5	0.6	0.1	3	0.5	0.62	-	0.8	-	-	-	-	0.34	-							
Bankfull Max Depth (ft)				0.5	0.6	0.6	0.7	0.1	3	0.8	0.9	-	1.2	-	-	-	-	0.52	-							
Bankfull Cross Sectional Area (ft ²)		2.0		2.5	2.9	2.9	3.4	0.5	3	5.4	7.3	-	8	-	-	-	-	2.1	-							
Width/Depth Ratio				8.0	18.4	21.4	25.7	9.2	3	12.3	18.8	-	19.6	-	-	-	-	18.7	-							
Entrenchment Ratio				1.5	2.0	2.1	2.5	0.5	3	1.4	1.5	-	1.8	-	-	-	-	5.6	-							
Bank Height Ratio				1.0	1.8	1.2	3.1	1.2	3	0.9	1	-	1.4	-	-	-	-									
d50 (mm)				-	-	-	-	-	-	-	-	52	-	-	-	-	-									
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-								
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	-	-								
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-								
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	-	0.77	-							
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	-	20.5	-							
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-								
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	-	9.0	-	14.0						
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-						
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-						
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	-	4	-							
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / S%								-																		
SC% / Sa% / G% / C% / B% / Be%								-										4% / 2% / 49% / 38% / 1% / 6%								
d16 / d35 / d50 / d84 / d95 / di ³⁹ (mm)								-/5/6/11/15										14 / 36 / 52 / 110 / 170 / - / -								
Reach Shear Stress (Competency) lb/ft ²								-										0.562								
Max Part Size (mm) Mobilized at Bankfull								-										947								
Stream Power (Transport Capacity) W/m ³								-										-								
Additional Reach Parameters																										
Drainage Area (m ²)								-										0.42								
Impervious Cover Estimate (%)								-										-								
Rosgen Classification								C										B4c								
Bankfull Velocity (fps)		-						-										3.8								
Bankfull Discharge (cfs)		7.13						-										28.0								
Valley Length (ft)								-										260.0								
Channel Thalweg Length (ft)								-										-								
Sinuosity								-										1.50								
Water Surface Slope (ft/ft)								-										-								
Bankfull Slope (ft/ft)								-										-								
Bankfull Floodplain Area (acres)								-										-								
Proportion Over Wide (%)								-										-								
Entrenchment Class (ER Range)								-										-								
Incision Class (BHR Range)								-										-								
BEHI								25.64										-								
Channel Stability or Habitat Metric								-										-								
Biological or Other								-										-								

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

¹This reach received minor bank work with no adjustments to profile. No cross-sections set in this reach.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Dale Branch 2 (920 feet)**

Parameter	Regional Curve				Pre-Existing Condition					Reference Reach Data					Design ¹			As-Built / Baseline								
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	2.98	-	5.0	-	-	-	1	9.8	11.7	-	13.1	-	-	-	5.4	-	6.4	6.7	6.7	7.0	0.42	2		
Floodprone Width (ft)				-	7.0	-	-	-	1	16.0	18.0	-	21	-	-	-	-	-	15.1	19.5	19.5	23.9	6.22	2		
Bankfull Mean Depth (ft)	-	-	0.54	-	0.6	-	-	-	1	0.5	0.62	-	0.8	-	-	-	0.37	-	0.3	0.3	0.3	0.3	0	2		
Bankfull Max Depth (ft)				-	0.7	-	-	-	1	0.8	0.9	-	1.2	-	-	-	0.56	-	0.5	0.6	0.6	0.7	0.14	2		
Bankfull Cross Sectional Area (ft ²)			2.4	-	2.8	-	-	-	1	5.4	7.3	-	8	-	-	-	2.0	-	1.8	1.9	1.9	2.0	0.14	2		
Width/Depth Ratio				-	9.0	-	-	-	1	12.3	18.8	-	19.6	-	-	-	14.6	-	22.6	23.6	23.6	24.6	1.41	2		
Entrenchment Ratio				-	1.4	-	-	-	1	1.4	1.5	-	1.8	-	-	-	8.2	-	2.4	2.9	2.9	3.4	0.71	2		
Bank Height Ratio				-	7.9	-	-	-	1	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	0.0	2		
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-		
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	3.2	10.1	9.0	21.3	4.8	28		
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.003	-	0.007	0.027	0.027	0.046	0.011	28		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	1.5	3.2	2.9	9.6	1.6	29		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	0.84	-	1.1	1.6	1.4	2.8	0.5	28		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	20.7	-	9.4	19.7	19.3	31.4	4.9	28		
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	18.0	20.6	19.0	24.4	3.1	5	
Radius of Curvature (ft)				-	-	-	-	-	-	-	18.0	-	-	-	-	-	-	-	-	10.0	15.0	8.2	13.8	14.7	3.4	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.2	2.1	2.2	2.5	0.5	5	
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	33.1	38.9	39.6	41.5	3.1	6		
Meander Width Ratio				-	-	-	-	-	-	-	1.8	-	-	-	-	-	-	-	4	-	2.7	3.1	2.8	3.6	0.9	6
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / S%						-																				
SC% / Sa% / G% / C% / B% / Be%						-																				
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)						-/5/6/11/15																				
Reach Shear Stress (Competency) lb/ft ²						-											0.562	-	-	-	-					
Max Part Size (mm) Mobilized at Bankfull						-											947	-	32	-	-					
Stream Power (Transport Capacity) W/m ²						-											-	-	-	-	-					
Additional Reach Parameters																										
Drainage Area (mi ²)						0.04											0.42									
Impervious Cover Estimate (%)						-											-									
Rosgen Classification						G											B4c		B4			B4				
Bankfull Velocity (fps)				-		-											3.8	-								
Bankfull Discharge (cfs)				8.77		-											28.0	-	9	-						
Valley Length (ft)				-		-											260.0	-	896	-						
Channel Thalweg Length (ft)				-		-											-	-	975	-	920	-				
Sinuosity				-		-											1.50	-	1.00	-	1.03	-				
Water Surface Slope (ft/ft)				-		-											-	-	0.0420	-	0.029	-				
Bankfull Slope (ft/ft)				-		-											-	-	-	-	0.028	-				
Bankfull Floodplain Area (acres)				-		-											-	-	-	-	-	-				
Proportion Over Wide (%)				-		-											-	-	-	-	-	-				
Entrenchment Class (ER Range)				-		-											-	-	-	-	-	-				
Incision Class (BHR Range)				-		-											-	-	-	-	-	-				
BEHI				-		25.2											-	-	-	-	-	-	-	-		
Channel Stability or Habitat Metric				-		-											-	-	-	-	-	-	-	-		
Biological or Other				-		-											-	-	-	-	-	-	-	-		

¹Based on average design values for Subreaches 2b-2e

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Dale Branch 3 (559 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design			As-Built / Baseline							
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	3.28	3.0	3.3	3.3	3.6	0.4	2	9.8	11.7	-	13.1	-	-	-	7.2	-	7.3	7.3	7.3	7.3	-	1		
Floodprone Width (ft)				9.0	12.0	12.0	15.0	4.2	2	16.0	18.0	-	21	-	-	-	-	-	18.5	18.5	18.5	18.5	-	1		
Bankfull Mean Depth (ft)	-	-	0.58	0.6	0.7	0.7	0.7	0.1	2	0.5	0.62	-	0.8	-	-	-	0.39	-	0.3	0.3	0.3	0.3	-	1		
Bankfull Max Depth (ft)				0.7	0.8	0.8	0.9	0.1	2	0.8	0.9	-	1.2	-	-	-	0.59	-	0.7	0.7	0.7	0.7	-	1		
Bankfull Cross Sectional Area (ft ²)	2.8			3.0	3.6	3.6	4.1	0.8	2	5.4	7.3	-	8	-	-	-	2.8	-	2.5	2.5	2.5	2.5	-	1		
Width/Depth Ratio				8.8	10.4	10.4	11.9	2.2	2	12.3	18.8	-	19.6	-	-	-	18.7	-	21.1	21.1	21.1	21.1	-	1		
Entrenchment Ratio				1.5	2.0	2.0	2.5	0.7	2	1.4	1.5	-	1.8	-	-	-	4.2	-	2.5	2.5	2.5	2.5	-	1		
Bank Height Ratio				1.6	1.9	1.9	2.2	0.4	2	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	-	1		
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-		
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	0.5	12.6	10.7	60.6	10.9	24		
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.008	-	0.005	0.026	0.025	0.061	0.014	24		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	1.3	3.3	2.9	9.0	1.5	23		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	0.89	-	0.8	1.3	1.3	1.7	0.2	23		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	21.9	-	13.3	21.0	18.5	63.1	10.1	23		
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	17.8	26.7	27.9	33.4	7.4	4		
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	11.0	-	16.0	8.7	10.2	9.8	12.1	1.4	6	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.2	1.4	1.3	1.7	0.2	1		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	29.6	39.9	37.4	55.7	10.0	6		
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	2	-	2.4	3.7	3.8	4.6	1.0	4		
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / %				-															62%	/ 0%	/ 16%	/ 11%	/ 11%			
SC% / Sa% / G% / C% / B% / Be%				-															4%	/ 2%	/ 49%	/ 38%	/ 1%	/ 6%		
d16 / d35 / d50 / d84 / d95 / di ^{sp} (mm)				-/5/6/11/15						14	36	52	110	170	/ -	/ -										
Reach Shear Stress (Competency) lb/ft ²				-									0.562				-									
Max Part Size (mm) Mobilized at Bankfull				-									947				32									
Stream Power (Transport Capacity) W/m ³				-									-				-									
Additional Reach Parameters																										
Drainage Area (mi ²)				0.05									0.42													
Impervious Cover Estimate (%)				-									-													
Rosgen Classification				G									B4c				B4				B4					
Bankfull Velocity (fps)	-			-									3.8				-									
Bankfull Discharge (cfs)	10.3			-									28.0				10									
Valley Length (ft)				-									260.0				531									
Channel Thalweg Length (ft)				-									-				550				559					
Sinuosity				-									1.50				1.0				1.05					
Water Surface Slope (ft/ft)				-									-				0.027				0.024					
Bankfull Slope (ft/ft)				-									-				-				0.026					
Bankfull Floodplain Area (acres)				-									-				-									
Proportion Over Wide (%)				-									-													
Entrenchment Class (ER Range)				-									-													
Incision Class (BHR Range)				-									-													
BEHI				20.47									-													
Channel Stability or Habitat Metric				-									-													
Biological or Other				-									-													

- Information unavailable.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Dale Branch 4 (835 feet)**

Parameter	Regional Curve				Pre-Existing Condition						Reference Reach Data						Design				As-Built / Baseline						
	LL	UL	Eq.		Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																											
Bankfull Width (ft)	-	-	4.01		5.5	6.0	6.0	6.5	0.7	2	9.8	11.7	-	13.1	-	-	-	6.1	-	6.3	6.4	6.4	6.5	0.14	2		
Floodprone Width (ft)					6.5	7.8	7.8	9.0	1.8	2	16.0	18.0	-	21	-	-	-	-	-	22.0	33.1	33.1	44.2	15.7	2		
Bankfull Mean Depth (ft)	-	-	0.67		0.8	0.8	0.8	0.8	0.0	2	0.5	0.62	-	0.8	-	-	-	0.47	-	0.3	0.4	0.4	0.5	0.14	2		
Bankfull Max Depth (ft)					1.0	1.0	1.0	1.0	0.0	2	0.8	0.9	-	1.2	-	-	-	0.67	-	0.7	0.8	0.8	0.9	0.14	2		
Bankfull Cross Sectional Area (ft ²)		3.9			4.1	4.6	4.6	5.0	0.6	2	5.4	7.3	-	8	-	-	-	2.9	-	1.9	2.5	2.5	3.1	0.85	2		
Width/Depth Ratio					7.3	7.9	7.9	8.4	0.8	2	12.3	18.8	-	19.6	-	-	-	13.0	-	13.8	17.4	17.4	21.0	5.09	2		
Entrenchment Ratio					1.2	1.3	1.3	1.4	0.1	2	1.4	1.5	-	1.8	-	-	-	4.1	-	3.5	5.2	5.2	6.8	2.33	2		
Bank Height Ratio					3.3	3.5	3.5	3.7	0.3	2	0.9	1	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	0.0	2		
d50 (mm)					-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-			
Profile																											
Riffle Length (ft)					-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	7.8	17.8	14.5	68.7	12.3	31		
Riffle Slope (ft/ft)					-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.002	-	0.003	0.018	0.016	0.048	0.009	31		
Pool Length (ft)					-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	1.5	3.2	2.9	12.5	2.1	30		
Pool Max Depth (ft)					-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	1.01	-	0.1	1.4	1.4	2.1	0.3	33		
Pool Spacing (ft)					-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	19.6	-	14.4	26.0	22.2	77.4	13.7	31		
Pattern																				16.7	18.7	18.0	22.2	2.5	4		
Channel Belt Width (ft)					-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	16.7	18.7	18.0	22.2	2.5	4		
Radius of Curvature (ft)					-	-	-	-	-	-	18.0	-	-	-	-	-	-	9.0	-	14.0	9.3	13.1	13.6	16.4	2.9	6	
Rc: Bankfull Width (ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.4	2.1	2.1	2.6	0.5	2		
M eander Wavelength (ft)					-	-	-	-	-	-	-	-	-	-	-	-	-	-	34.4	45.9	39.9	62.7	12.5	6			
Meander Width Ratio					-	-	-	-	-	-	1.8	-	-	-	-	-	-	2	-	2.6	2.9	2.8	3.5	0.4	4		
Substrate, Bed and Transport Parameters																											
Ri% / Ru% / P% / G% / S%					-																						
SC% / Sa% / G% / C% / B% / Be%					-							4%	2%	49%	38%	1%	6%										
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)					-/5/6/11/15						14	36	52	110	170	-/-											
Reach Shear Stress (Competency) lb/ft ²					-							0.562															
Max Part Size (mm) Mobilized at Bankfull					-							947							32								
Stream Power (Transport Capacity) W/m ³					-							-						-									
Additional Reach Parameters																											
Drainage Area (mi ²)					0.08							0.42															
Impervious Cover Estimate (%)					-							-															
Rosgen Classification					G							B4c						B4				B4					
Bankfull Velocity (fps)				-								3.8						-									
Bankfull Discharge (cfs)		14.45		-								28.0						14									
Valley Length (ft)				-								260.0						810									
Channel Thalweg Length (ft)				-								-						825				835					
Sinuosity				-								1.50						1.00				1.03					
Water Surface Slope (ft/ft)				-								-						0.028				0.024					
Bankfull Slope (ft/ft)				-								-						-				0.020					
Bankfull Floodplain Area (acres)				-								-						-									
Proportion Over Wide (%)				-								-															
Entrenchment Class (ER Range)				-								-															
Incision Class (BHR Range)				-								-															
BEHI				24.25								-															
Channel Stability or Habitat Metric				-								-															
Biological or Other				-								-															

- Information unavailable.

N/A - Item does not apply.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Dale Branch 5 (679 feet)**

Parameter	Regional Curve				Pre-Existing Condition					Reference Reach Data					Design ¹			As-Built / Baseline							
Dimension & Substrate - Riffle	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N	
Bankfull Width (ft)	-	-	4.2	-	8.0	-	-	-	1	9.8	11.7	-	13.1	-	-	6.4	-	7.1	7.1	7.1	7.1	-	1		
Floodprone Width (ft)				-	9.0	-	-	-	1	16.0	18.0	-	21	-	-	-	-	23.9	23.9	23.9	23.9	-	1		
Bankfull Mean Depth (ft)	-	-	0.7	-	0.8	-	-	-	1	0.5	0.62	-	0.8	-	-	0.49	-	0.5	0.5	0.5	0.5	-	1		
Bankfull Max Depth (ft)				-	1.0	-	-	-	1	0.8	0.9	-	1.2	-	-	0.69	-	0.7	0.7	0.7	0.7	-	1		
Bankfull Cross Sectional Area (ft ²)	4.2	-	5.0	-	-	-	1	5.4	7.3	-	8	-	-	-	3.1	-	3.3	3.3	3.3	3.3	-	1			
Width/Depth Ratio				-	12.9	-	-	-	1	12.3	18.8	-	19.6	-	-	13.1	-	15.2	15.2	15.2	15.2	-	1		
Entrenchment Ratio				-	1.1	-	-	-	1	1.4	1.5	-	1.8	-	-	3.1	-	3.4	3.4	3.4	3.4	-	1		
Bank Height Ratio				-	2.6	-	-	-	1	0.9	1	-	1.4	-	-	-	-	1.0	1.0	1.0	1.0	-	1		
d50 (mm)				-	-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-		
Profile																									
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	7.2	18.3	20.3	25.1	6.0	11		
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	0.002	-	0.005	0.022	0.024	0.044	0.011	11		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	1.8	3.0	3.1	4.0	0.7	12		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	1.04	-	1.1	1.5	1.4	2.2	0.4	11		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	29.9	-	12.1	26.4	28.4	35.2	6.8	11		
Pattern																									
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	13.2	15.3	15.6	17.1	1.9	3		
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	7.0	-	12.0	8.7	14.1	15.6	16.7	3.6	4	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.2	2.0	2.2	2.4	0.5	2		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	47.9	56.4	54.8	67.7	7.2	6		
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	2	-	1.9	2.2	2.2	2.4	0.3	3		
Substrate, Bed and Transport Parameters																									
Ri% / Ru% / P% / G% / S%					-														68%	/ 0%	/ 12%	/ 13%	/ 7%		
SC% / Sa% / G% / C% / B% / Be%					-						4%	/ 2%	/ 49%	/ 38%	/ 1%	/ 6%									
d16 / d35 / d50 / d84 / d95 / di ^p / di ^{sp} (mm)					--/5/6/11/15					14	/ 36	/ 52	/ 110	/ 170	/ -	-									
Reach Shear Stress (Competency) lb/ft ²					-						0.562						-								
Max Part Size (mm) Mobilized at Bankfull					-						947						32								
Stream Power (Transport Capacity) W/m ²					-						-						-								
Additional Reach Parameters																									
Drainage Area (mi ²)					0.09					0.42															
Impervious Cover Estimate (%)					-					-															
Rosgen Classification					F					B4c				B4			B4								
Bankfull Velocity (fps)				-	-					3.8				-											
Bankfull Discharge (cfs)		15.73		-	-					28.0				16											
Valley Length (ft)				-	-					260.0				695											
Channel Thalweg Length (ft)				-	-					-				725			679								
Sinuosity				-	-					1.50				1.0			0.977								
Water Surface Slope (ft/ft)				-	-					-				0.023			0.024								
Bankfull Slope (ft/ft)				-	-					-				-			-		0.024						
Bankfull Floodplain Area (acres)				-	-					-				-											
Proportion Over Wide (%)				-	-					-				-											
Entrenchment Class (ER Range)				-	-					-				-											
Incision Class (BHR Range)				-	-					-				-											
BEHI				23.1						-				-											
Channel Stability or Habitat Metric				-	-					-				-											
Biological or Other				-	-					-				-											

¹Values taken from Subreach 5b

- Information unavailable.

Non-Applicable.

Table 10 con't. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Thompson Branch 1 (530 feet)

Parameter	Regional Curve			Pre-Existing Condition					Reference Reach Data					Design			As-Built / Baseline								
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N	
Dimension & Substrate - Riffle																									
Bankfull Width (ft)	-	-	4.6	-	5.0	-	-	-	1	9.8	11.7	-	13.1	-	-	8.8	-	-	-	-	-	-	-	-	
Floodprone Width (ft)				-	20.0	-	-	-	1	16.0	18.0	-	21.0	-	-	-	-	-	-	-	-	-	-	-	
Bankfull Mean Depth (ft)	-	-	0.7	-	1.0	-	-	-	1	0.5	0.6	-	0.8	-	-	0.48	-	-	-	-	-	-	-	-	
Bankfull Max Depth (ft)				-	1.3	-	-	-	1	0.8	0.9	-	1.2	-	-	0.73	-	-	-	-	-	-	-	-	
Bankfull Cross Sectional Area (ft ²)			4.8	-	4.6	-	-	-	1	5.4	7.3	-	8.0	-	-	4.2	-	-	-	-	-	-	-	-	
Width/Depth Ratio				-	5.5	-	-	-	1	12.3	18.8	-	19.6	-	-	18.6	-	-	-	-	-	-	-	-	
Entrenchment Ratio				-	4.0	-	-	-	1	1.4	1.5	-	1.8	-	-	3.4	-	-	-	-	-	-	-	-	
Bank Height Ratio				-	1.2	-	-	-	1	0.9	1.0	-	1.4	-	-	-	-	-	-	-	-	-	-	-	
d50 (mm)				-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-	-	
Profile																									
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	44.7	44.7	44.7	44.7	-	1	
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	-	0.006	0.006	0.006	0.006	-	1		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	9.6	20.6	17.0	35.0	11.6	6		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	1.1	-	1.6	2.0	1.9	2.3	0.3	7		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	28.6	-	11.0	22.3	18.3	36.5	11.2	6		
Pattern																									
Channel Belt Width (ft)				-	-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	19.0	26.1	22.9	36.4	9.1	3	
Radius of Curvature (ft)				-	-	-	-	-	-	-	18.0	-	-	-	-	13.0	-	19.0	12.3	13.1	13.2	13.7	0.7	3	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.4	1.5	1.5	1.6	0.1	1		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	60.7	94.7	81.4	155.2	44.0	4		
Meander Width Ratio				-	-	-	-	-	-	-	1.8	-	-	-	-	-	3	-	2.2	3.0	2.6	4.1	1.0	3	
Substrate, Bed and Transport Parameters																									
Ri% / Ru% / P% / G% / S%						-						-							25%	/ 0%	/ 69%	/ 0%	/ 6%		
SC% / Sa% / G% / C% / B% / Be%						-						4%	/ 2%	/ 49%	/ 38%	/ 1%	/ 6%								
d16 / d35 / d50 / d84 / d95 / di ^{sp} / di ^{sp} (mm)						4 / 6 / 8 / 15 / 24					14 / 36 / 52 / 110 / 170 / - / -														
Reach Shear Stress (Competency) lb/ft ²						-					0.562					-									
Max Part Size (mm) Mobilized at Bankfull						-					947					37									
Stream Power (Transport Capacity) W/m ²						-					-					-									
Additional Reach Parameters																									
Drainage Area (mi ²)						0.11					0.42														
Impervious Cover Estimate (%)						-					-														
Rosgen Classification						G					B4c			B4			B4								
Bankfull Velocity (fps)				-		-					3.8			-											
Bankfull Discharge (cfs)				18.2		-					28.0			18											
Valley Length (ft)						-					260.0			294											
Channel Thalweg Length (ft)						-					-			511			530								
Sinuosity						-					1.50			1.0			1.06								
Water Surface Slope (ft/ft)						-					-			0.030			0.031								
Bankfull Slope (ft/ft)						-					-			-			0.030								
Bankfull Floodplain Area (acres)						-					-			-											
Proportion Over Wide (%)						-					-														
Entrenchment Class (ER Range)						-					-														
Incision Class (BHR Range)						-					-														
BEHI						30.9					-														
Channel Stability or Habitat Metric						-					-														
Biological or Other						-					-														

- Information unavailable.

Non-Applicable.

**Table 10 cont'd. Baseline Stream Data Summary
Pee Dee Stream Restoration Site - Thompson Branch 2 (1,061 feet)**

Parameter	Regional Curve			Pre-Existing Condition						Reference Reach Data						Design				As-Built / Baseline						
	LL	UL	Eq.	Min	Mean	Med	Max	SD	N	Min	Mean	Med	Max	SD	N	Min	Mean	Max	Min	Mean	Med	Max	SD	N		
Dimension & Substrate - Riffle																										
Bankfull Width (ft)	-	-	5.11	7.0	7.7	7.0	9.0	1.2	3	9.8	11.7	-	13.1	-	-	-	7.5	-	7.5	7.6	7.6	7.6	0.07	2		
Floodprone Width (ft)				9.0	14.7	15.0	20.0	5.5	2	16.0	18.0	-	21.0	-	-	-	-	-	31.1	32.7	32.7	34.3	2.26	2		
Bankfull Mean Depth (ft)	-	-	0.8	0.9	0.9	0.9	1.0	0.1	3	0.5	0.6	-	0.8	-	-	-	0.6	-	0.6	0.6	0.6	0.6	0	2		
Bankfull Max Depth (ft)				1.1	1.1	1.1	1.2	0.1	3	0.8	0.9	-	1.2	-	-	-	0.78	-	1.1	1.2	1.2	1.2	0.07	2		
Bankfull Cross Sectional Area (ft ²)		5.6		5.7	6.7	6.0	8.4	1.5	3	5.4	7.3	-	8.0	-	-	-	4.2	-	4.2	4.3	4.3	4.3	0.07	2		
Width/Depth Ratio				8.1	8.8	8.5	9.7	0.8	3	12.3	18.8	-	19.6	-	-	-	13.5	-	13.3	13.4	13.4	13.4	0.07	2		
Entrenchment Ratio				1.3	2.0	1.7	2.9	0.8	3	1.4	1.5	-	1.8	-	-	-	4.0	-	4.1	4.3	4.3	4.5	0.28	2		
Bank Height Ratio				1.4	2.2	2.4	2.9	0.8	3	0.9	1.0	-	1.4	-	-	-	-	-	1.0	1.0	1.0	1.0	0.0	2		
d50 (mm)				-	-	-	-	-	-	52	-	-	-	-	-	-	-	-	-	-	-	-	-			
Profile																										
Riffle Length (ft)				-	-	-	-	-	-	4.0	14.0	-	30.0	-	-	-	-	-	10.0	15.8	15.2	25.4	3.9	32		
Riffle Slope (ft/ft)				-	-	-	-	-	-	0.017	0.027	-	0.059	-	-	-	0.008	-	0.005	0.014	0.013	0.023	0.005	32		
Pool Length (ft)				-	-	-	-	-	-	7.0	13.0	-	30.0	-	-	-	-	-	1.8	5.0	4.6	18.3	3.0	32		
Pool Max Depth (ft)				-	-	-	-	-	-	1.8	1.9	-	2.7	-	-	-	1.17	-	1.4	2.1	2.0	2.6	0.3	32		
Pool Spacing (ft)				-	-	-	-	-	-	18.0	39.0	-	53.0	-	-	-	26.2	-	19.5	27.5	25.9	54.0	7.4	32		
Pattern																										
Channel Belt Width (ft)				-	-	-	-	-	-	21.0	-	-	-	-	-	-	-	-	14.4	22.4	19.5	37.8	8.2	6		
Radius of Curvature (ft)				-	-	-	-	-	-	18.0	-	-	-	-	-	-	12.0	-	18.0	10.5	18.3	18.5	25.9	6.7	4	
Rc: Bankfull Width (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1.4	2.4	2.5	3.5	0.9	2		
Meander Wavelength (ft)				-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	34.3	48.7	50.5	60.9	9.8	6		
Meander Width Ratio				-	-	-	-	-	-	1.8	-	-	-	-	-	-	3	-	2.2	3.0	2.6	4.1	1.0	3		
Substrate, Bed and Transport Parameters																										
Ri% / Ru% / P% / G% / S%				-																						
SC% / Sa% / G% / C% / B% / Be%				-																						
d16 / d35 / d50 / d84 / d95 / di ^p / di ^s (mm)				4 / 6 / 8 / 15 / 24						14 / 36 / 52 / 110 / 170 / - / -																
Reach Shear Stress (Competency) lb/ft ²				-						0.562			-				-									
Max Part Size (mm) Mobilized at Bankfull				-						947			37													
Stream Power (Transport Capacity) W/m ²				-						-			-				-									
Additional Reach Parameters																										
Drainage Area (mi ²)				0.14						0.42																
Impervious Cover Estimate (%)				-						-																
Rosgen Classification				G						B4c			B4				B4									
Bankfull Velocity (fps)		-		-						3.8			-				-									
Bankfull Discharge (cfs)	21.6			-						28.0			22													
Valley Length (ft)				-						260.0			1,010													
Channel Thalweg Length (ft)				-						-			1,150				1,061									
Sinuosity				-						1.50			1.1				1.05									
Water Surface Slope (ft/ft)				-						-			0.020				0.020									
Bankfull Slope (ft/ft)				-						-			0.022				0.022									
Bankfull Floodplain Area (acres)				-						-			-				-									
Proportion Over Wide (%)				-						-			-				-									
Entrenchment Class (ER Range)				-						-			-				-									
Incision Class (BHR Range)				-						-			-				-									
BEHI				29.8						-			-				-									
Channel Stability or Habitat Metric				-						-			-				-									
Biological or Other				-						-			-				-									

- Information unavailable.

Non-Applicable.

This Page Intentionally Left Blank

Table 11a. Monitoring Data - Dimensional Morphology Summary

(Dimensional Parameters - Cross-Sections)

Pee Dee Stream Restoration Site - Jerry Branch

Dimension	Reach 1 Cross-Section 1 Pool							Reach 1 Cross-Section 2 Riffle							Reach 2 Cross-Section 3 Pool							Reach 2 Cross-Section 4 Riffle									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6
Record Elevation (datum) Used	320.1	320.1	320.1						319.6	319.6	319.6					312.9	312.9	312.9						310.6	310.6	310.6					
Bankfull Width (ft)	9.1	8.3	8.3						8.1	7.0	6.7					7.8	8.1	8.1						7.1	7.2	7.2					
Floodprone Width (ft)	>25	>25	>25						>30	>30	>30					>30	>30	>30						>25	>25	>25					
Bankfull Mean Depth (ft)	0.9	0.8	0.8						0.5	0.3	0.4					1.1	1.0	1.1						0.4	0.4	0.4					
Bankfull Max Depth (ft)	1.7	1.3	1.2						1.0	0.5	0.6					2.3	2.0	2.2						0.7	0.6	0.6					
Bankfull Cross Sectional Area (ft ²)	8.5	6.8	6.9						3.7	2.4	2.6					8.3	7.7	8.7						3.1	3.0	2.7					
Bankfull Width/Depth Ratio	9.8	10.1	9.9						17.7	20.3	17.5					7.4	8.4	7.6						16.4	17.0	19.4					
Bankfull Entrenchment Ratio ¹	>2.7	>3.0	>3.0						>3.7	>4.3	>4.5					>3.8	>3.7	>3.7						>3.5	>3.5	>3.5					
Bankfull Bank Height Ratio	1.0	1.0	1.0						1.0	1.0	1.0					1.0	1.0	1.0						1.0	1.0	1.0					
d50 (mm)	N/A	N/A	N/A						N/A	0.2	0.062					N/A	N/A	N/A						N/A	22.0	5.2					
	Reach 3 Cross-Section 5 Pool							Reach 3 Cross-Section 6 Riffle							Reach 3 Cross-Section 7 Riffle																
Dimension	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7							
Record Elevation (datum) Used	301.7	301.7	301.7						298.8	298.8	298.8					290.2	290.2	290.2													
Bankfull Width (ft)	8.1	9.2	9.7						7.4	7.5	7.3					7.2	6.7	6.4													
Floodprone Width (ft)	>25	>25	>25						>30	>30	>30					>25	>25	>25													
Bankfull Mean Depth (ft)	1.0	0.7	0.7						0.4	0.4	0.4					0.4	0.3	0.4													
Bankfull Max Depth (ft)	1.8	1.3	1.3						0.9	0.6	0.6					0.8	0.5	0.5													
Bankfull Cross Sectional Area (ft ²)	7.9	6.3	6.8						3.3	3.3	2.9					3.0	2.3	2.4													
Bankfull Width/Depth Ratio	8.3	13.25	13.7						16.6	16.7	18.7					17.7	19.4	17.0													
Bankfull Entrenchment Ratio ¹	>3.1	>2.7	>2.6						>4.1	>4.0	>4.1					>3.4	>3.7	>3.9													
Bankfull Bank Height Ratio	1.0	1.0	1.0						1.0	1.0	1.0					1.0	1.0	1.0													
d50 (mm)	N/A	N/A	N/A						N/A	5.5	14.0					N/A	34.0	15.0													

N/A- Information Not Available

¹ MY0 Bankfull Entrenchment Ratios Updated to Reflect Calculated Values

Table 11a cont'd. Monitoring Data - Dimensional Morphology Summary

(Dimensional Parameters - Cross-Sections)

Pee Dee Stream Restoration Site - Dale Branch

Dimension	Reach 2 Cross-Section 8 Riffle								Reach 2 Cross-Section 9 Pool								Reach 2 Cross-Section 10 Riffle								Reach 2 Cross-Section 11 Pool							
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Record Elevation (datum) Used	354.9	354.9	354.9						354.7	354.7	354.7					348.1	348.1	348.1						347.4	347.4	347.4						
Bankfull Width (ft)	7.0	7.3	7.2						7.7	8.0	8.1					6.4	6.2	6.2						7.6	8.0	8.3						
Floodprone Width (ft)	>25	>25	>25						>25	>25	>25					>25	>25	>25						>20	>20	>20						
Bankfull Mean Depth (ft)	0.3	0.2	0.3						0.6	0.6	0.6					0.3	0.3	0.3						0.8	0.7	0.7						
Bankfull Max Depth (ft)	0.7	0.5	0.5						1.7	1.5	1.7					0.5	0.5	0.5						1.6	1.2	1.3						
Bankfull Cross Sectional Area (ft ²)	2.0	1.7	2.0						4.8	4.8	5.0					1.8	1.6	1.7						6.1	5.9	6.0						
Bankfull Width/Depth Ratio	24.6	30.6	26.0						12.3	13.5	13.3					22.6	23.7	21.7						9.5	10.9	11.5						
Bankfull Entrenchment Ratio ¹	>3.6	>3.4	>3.5						>3.1	>3.1	>3.1					>3.9	>4.0	>4.1						>2.6	>2.5	>2.4						
Bankfull Bank Height Ratio	1.0	1.0	1.0						1.0	1.0	1.0					1.0	1.0	1.0						1.0	1.0	1.0						
d50 (mm)	N/A	8.0	8.3						N/A	N/A	N/A					N/A	19.0	4.3						N/A	N/A	N/A						
	Reach 3 Cross-Section 12 Riffle								Reach 3 Cross-Section 13 Pool								Reach 4 Cross-Section 14 Pool								Reach 4 Cross-Section 15 Riffle							
Dimension	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Record Elevation (datum) Used	327.8	327.8	327.8						326.1	326.1	326.1					315.3	315.3	315.3						314.1	314.1	314.1						
Bankfull Width (ft)	7.3	7.1	7.1						7.8	7.6	7.7					6.7	7.2	7.0						6.5	6.2	6.5						
Floodprone Width (ft)	>20	>20	>20						>20	>20	>20					>30	>30	>30						>40	>40	>40						
Bankfull Mean Depth (ft)	0.3	0.3	0.4						0.5	0.5	0.4					0.9	0.6	0.7						0.5	0.5	0.5						
Bankfull Max Depth (ft)	0.7	0.6	0.8						1.3	1.1	1.0					2.0	1.0	1.3						0.9	0.8	0.8						
Bankfull Cross Sectional Area (ft ²)	2.5	2.2	2.7						3.9	3.5	3.0					6.2	4.3	5.2						3.1	2.9	3.0						
Bankfull Width/Depth Ratio	21.1	23.1	18.7						15.7	16.7	19.7					7.1	12.1	9.5						13.8	13.2	14.2						
Bankfull Entrenchment Ratio ¹	>2.8	>2.8	>2.8						>2.6	>2.6	>2.6					>4.5	>4.2	>4.3						>6.1	>6.5	>6.2						
Bankfull Bank Height Ratio	1.0	1.0	1.0						1.0	1.0	1.0					1.0	1.0	1.0						1.0	1.0	1.0						
d50 (mm)	N/A	2.1	4.4						N/A	N/A	N/A					N/A	N/A	N/A						N/A	16.0	5.8						
	Reach 4 Cross-Section 16 Riffle								Reach 5 Cross-Section 17 Riffle								Reach 5 Cross-Section 18 Pool															
Dimension	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7								
Record Elevation (datum) Used	303.5	305.5	305.5						286.8	286.8	286.8					286.6	286.6	286.6														
Bankfull Width (ft)	6.3	7.2	7.6						7.1	7.9	7.9					7.2	8.0	7.7														
Floodprone Width (ft)	>25	>25	>25						>25	>25	>25					>25	>25	>25														
Bankfull Mean Depth (ft)	0.3	0.3	0.4						0.5	0.5	0.5					0.8	0.7	0.7														
Bankfull Max Depth (ft)	0.7	0.6	0.7						0.7	0.8	0.8					1.7	1.5	1.4														
Bankfull Cross Sectional Area (ft ²)	1.9	2.3	2.7						3.3	3.8	3.9					5.9	5.8	5.6														
Bankfull Width/Depth Ratio	21.0	23.0	20.9						15.2	16.2	16.3					8.7	11.0	10.7														
Bankfull Entrenchment Ratio ¹	>4.0	>3.5	>3.3						>3.5	>3.2	>3.2					>3.5	>3.1	>3.2														
Bankfull Bank Height Ratio	1.0	1.0	1.0						1.0	1.0	1.0					1.0	1.0	1.0														

Table 11a cont'd. Monitoring Data - Dimensional Morphology Summary

(Dimensional Parameters - Cross-Sections)

Pee Dee Stream Restoration Site - Thompson Branch

Dimension	Reach 2 Cross-Section 19 Pool							Reach 2 Cross-Section 20 Riffle							Reach 2 Cross-Section 21 Pool							Reach 2 Cross-Section 22 Riffle									
	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6	MY7	Base	MY1	MY2	MY3	MY4	MY5	MY6
Record Elevation (datum) Used	364.1	364.1	364.1					363.2	363.2	363.2					356.0	356.0	356.0						356.0	356.0	356.0						
Bankfull Width (ft)	8.4	9.2	9.2					7.5	7.7	7.6					8.6	9.1	9.2						7.6	7.7	7.7						
Floodprone Width (ft)	>30	>30	>30					>30	>30	>30					>30	>30	>30						>30	>30	>30						
Bankfull Mean Depth (ft)	1.0	0.9	0.8					0.6	0.6	0.6					1.0	0.8	0.8						0.6	0.6	0.6						
Bankfull Max Depth (ft)	2.1	1.7	1.5					1.2	0.9	0.9					2.3	1.7	1.7						1.1	1.0	1.1						
Bankfull Cross Sectional Area (ft ²)	8.8	8.1	7.0					4.2	4.4	4.4					8.5	7.5	7.8						4.3	4.4	4.4						
Bankfull Width/Depth Ratio	8.0	10.4	12.1					13.3	13.5	13.0					8.7	10.9	10.9						13.4	13.5	13.5						
Bankfull Entrenchment Ratio ¹	>3.6	>3.3	>3.3					>4.0	>3.9	>3.9					>3.5	>3.3	>3.2						>3.9	>3.9	>3.9						
Bankfull Bank Height Ratio	1.0	1.0	1.0					1.0	1.0	1.0					1.0	1.0	1.0						1.0	1.0	1.0						
d50 (mm)	N/A	N/A	N/A					N/A	0.2	9.9					N/A	N/A	N/A						N/A	29.0	30.0						

N/A- Information Not Available

¹ MY0 Bankfull Entrenchment Ratios Updated to Reflect Calculated Values

**Table 11b. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration - Jerry Branch 1 (430 feet)**

Parameter	Baseline					MY - 1					MY - 2					MY - 3					MY - 4					MY - 5					MY - 6					MY - 7				
	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n	Min	Mean	Med	Max	SD	n				
Dimension & Substrate - Riffle																																								
Bankfull Width (ft)	8.1	8.1	8.1	8.1	-	1	7.0	7.0	7.0	7.0	-	1	6.7	6.7	6.7	6.7	-	1																						
Floodprone Width (ft)	31.8	31.8	31.8	31.8	-	1	30.0	30.0	30.0	30.0	-	1	30.0	30.0	30.0	30.0	-	1																						
Bankfull Mean Depth (ft)	0.5	0.5	0.5	0.5	-	1	0.3	0.3	0.3	0.3	-	1	0.4	0.4	0.4	0.4	-	1																						
Bankfull Max Depth (ft)	1.0	1.0	1.0	1.0	-	1	0.5	0.5	0.5	0.5	-	1	0.6	0.6	0.6	0.6	-	1																						
Bankfull Cross-Sectional Area (ft ²)	3.7	3.7	3.7	3.7	-	1	2.4	2.4	2.4	2.4	-	1	2.6	2.6	2.6	2.6	-	1																						
Width/Depth Ratio	17.7	17.7	17.7	17.7	-	1	20.3	20.3	20.3	20.3	-	1	17.5	17.5	17.5	17.5	-	1																						
Entrenchment Ratio	3.9	3.9	3.9	3.9	-	1	4.3	4.3	4.3	4.3	-	1	4.5	4.5	4.5	4.5	-	1																						
Bank Height Ratio	1.0	1.0	1.0	1.0	-	1	1.0	1.0	1.0	1.0	-	1	1.0	1.0	1.0	1.0	-	1																						
Profile																																								
Riffle Length (ft)	2.6	6.2	6.2	16.4	2.8	26																																		
Riffle Slope (ft/ft)	0.001	0.010	0.009	0.026	0.0	26																																		
Pool Length (ft)	2.3	5.9	5.4	16.0	2.9	26																																		
Pool Max Depth (ft)	0.7	1.5	1.5	2.3	0.4	26																																		
Pool Spacing (ft)	6.1	15.0	14.2	27.8	5.1	25																																		
Pattern																																								
Channel Belt Width (ft)	14.0	19.2	19.2	24.4	7.3	2																																		
Radius of Curvature (ft)	11.6	13.6	13.1	16.5	2.2	4																																		
Rc: Bankfull Width (ft/ft)	1.4	1.7	1.6	2.0	0.3	2																																		
Meander Wavelength (ft)	23.8	44.4	47.1	55.0	11.9	6																																		
Meander Width Ratio	1.7	2.4	2.4	3.0	0.9	2																																		
Additional Reach Parameters																																								
Rosgen Classification	B4																																							
Channel Thalweg Length (ft)	430																																							
Sinuosity (ft)	1.06																																							
Water Surface Slope (Channel) (ft/ft)	0.0265																																							
Bankfull Slope (ft/ft)	0.0267																																							
Ri% / Ru% / P% / G% / S%	42%	0%	40%	7%	11%																																			

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration Site - Jerry Branch 2 (625 feet)**

Parameter	Baseline					MY - 1					MY - 2					MY - 3					MY - 4					MY - 5					MY - 6	
-----------	----------	--	--	--	--	--------	--	--	--	--	--------	--	--	--	--	--------	--	--	--	--	--------	--	--	--	--	--------	--	--	--	--	--------	--

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration Site - Jerry Branch 3 (636 feet)**

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

Pee Dee Stream Restoration Site - Dale Branch 2 (920 feet)

N/A - Information does not apply

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration Site - Dale Branch 3 (559 feet)**

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration Site - Dale Branch 4 (835 feet)**

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Pee Dee Stream Restoration Site - Dale Branch 5 (679 feet)**

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Lee Dee Stream Restoration Site - Thompson Branch 1 (530 feet)**

N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

**Table 11b cont'd. Monitoring Data - Stream Reach Data Summary
Lee Dee Stream Restoration Site - Thompson Branch 2 (1,061 feet)**


N/A - Information does not apply.

Ri = Riffle / Ru = Run / P = Pool / G = Glide / S = Step

Project Name: Pee Dee
Reach Name: Jerry Branch 1

XS Number: 1
XS Type: Pool

Station: 304+26

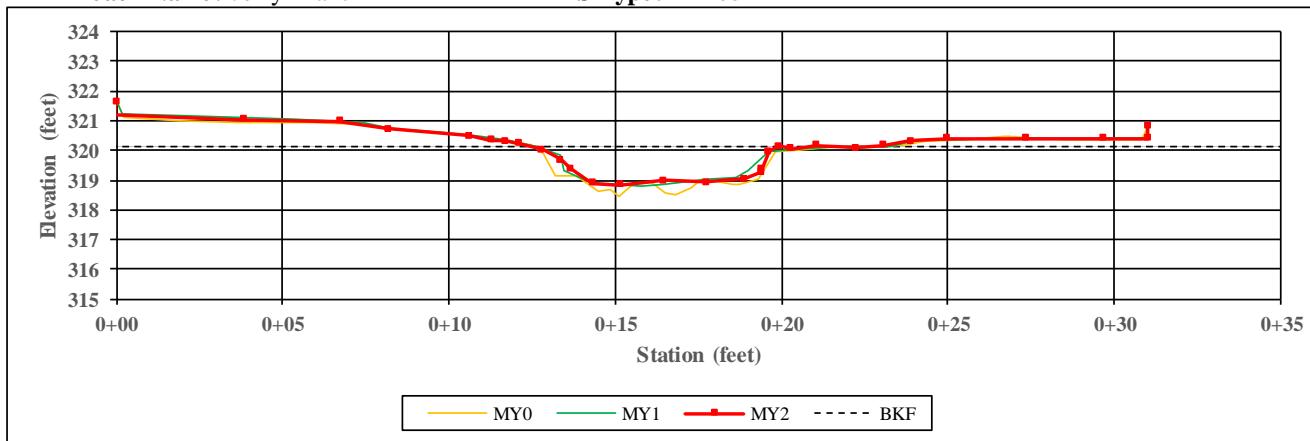

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	9.1	8.3	8.3	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.9	0.8	0.8	-	-	-	-	-
Bankfull Max Depth (ft)	1.7	1.3	1.2	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	8.5	6.8	6.9	-	-	-	-	-
Width/Depth Ratio	9.8	10.1	9.9	-	-	-	-	-
Entrenchment Ratio	2.7	3.0	3.0	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 1

XS Number: 2
XS Type: Riffle

Station: 304+47

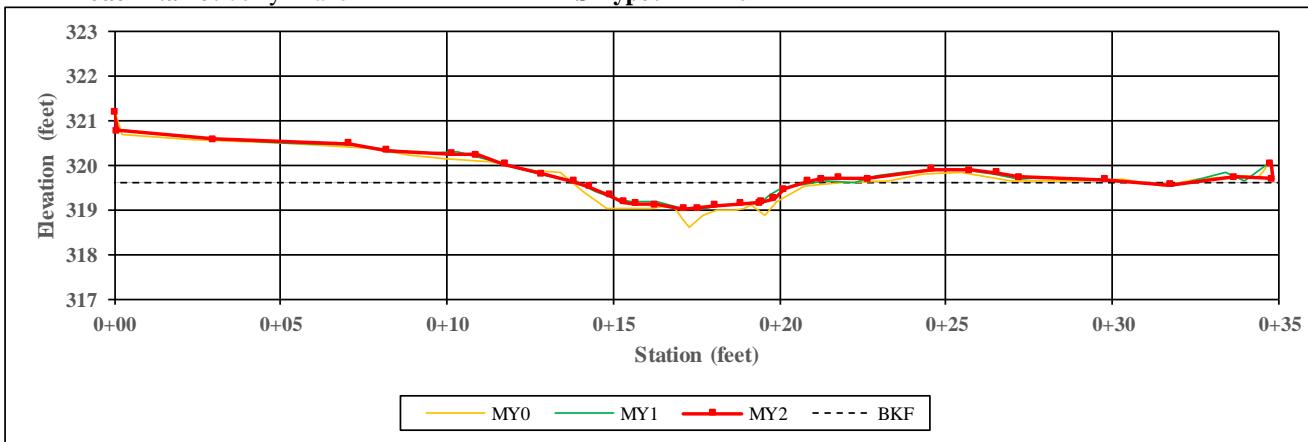

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	8.1	7.0	6.7	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.5	0.3	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	1.0	0.5	0.6	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.7	2.4	2.6	-	-	-	-	-
Width/Depth Ratio	17.7	20.3	17.5	-	-	-	-	-
Entrenchment Ratio	3.7	4.3	4.5	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 2

XS Number: 3
XS Type: Pool

Station: 306+91

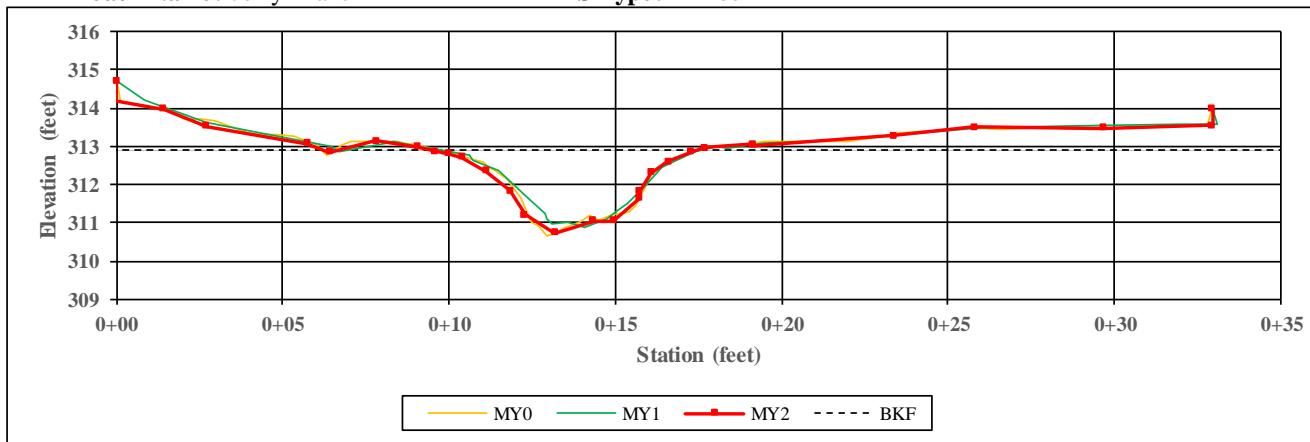

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.8	8.1	8.1	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	1.1	1.0	1.1	-	-	-	-	-
Bankfull Max Depth (ft)	2.3	2.0	2.2	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	8.3	7.7	8.7	-	-	-	-	-
Width/Depth Ratio	7.4	8.4	7.6	-	-	-	-	-
Entrenchment Ratio	3.8	3.7	3.7	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 2

XS Number: 4
XS Type: Riffle

Station: 307+69

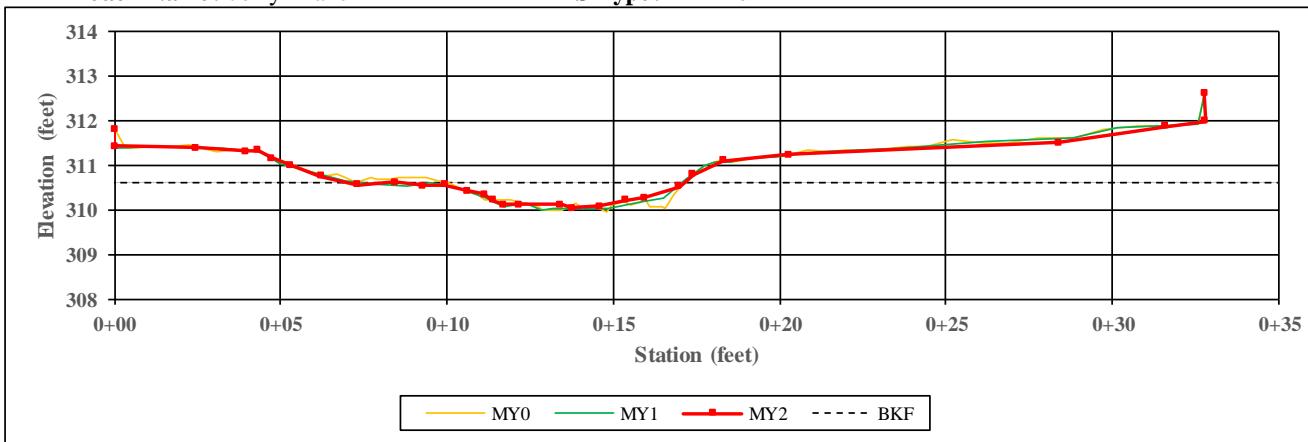

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	7.1	7.2	7.2	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.4	0.4	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	0.7	0.6	0.6	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.1	3.0	2.7	-	-	-	-	-
Width/Depth Ratio	16.4	17.0	19.4	-	-	-	-	-
Entrenchment Ratio	3.5	3.5	3.5	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 3

XS Number: 5
XS Type: Pool

Station: 311+52

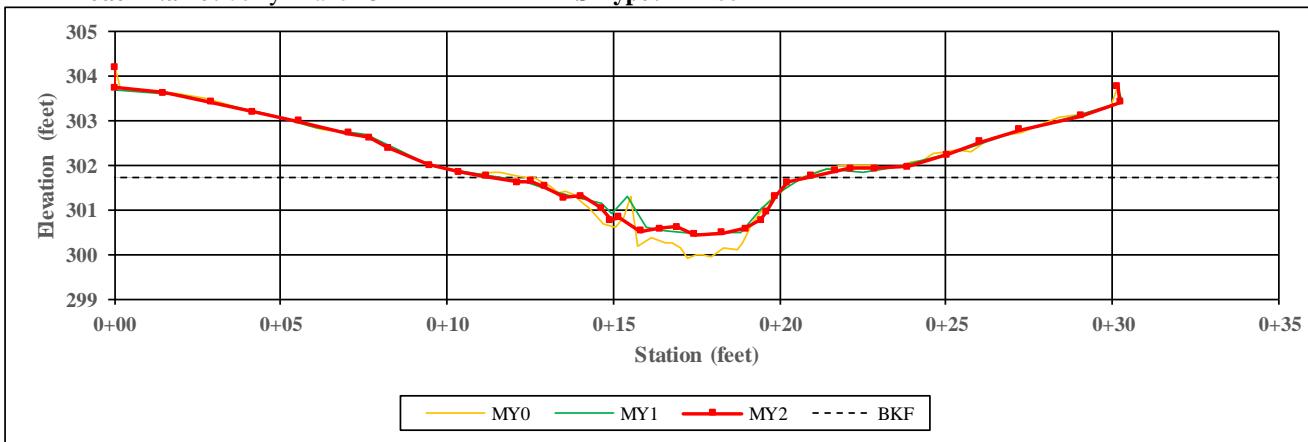

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	8.1	9.2	9.7	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	1.0	0.7	0.7	-	-	-	-	-
Bankfull Max Depth (ft)	1.8	1.3	1.3	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	7.9	6.3	6.8	-	-	-	-	-
Width/Depth Ratio	8.3	13.2	13.7	-	-	-	-	-
Entrenchment Ratio	3.1	2.7	2.6	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 3

XS Number: 6
XS Type: Riffle

Station: 312+60

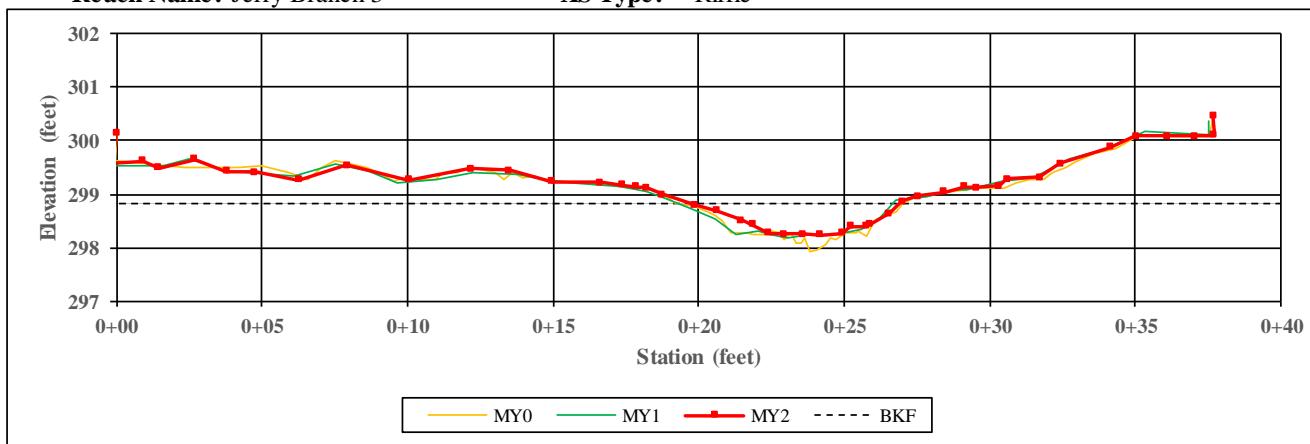

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.4	7.5	7.3	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.4	0.4	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	0.9	0.6	0.6	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.3	3.3	2.9	-	-	-	-	-
Width/Depth Ratio	16.6	16.7	18.7	-	-	-	-	-
Entrenchment Ratio	4.1	4.0	4.1	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Jerry Branch 3

XS Number: 7
XS Type: Riffle

Station: 315+86

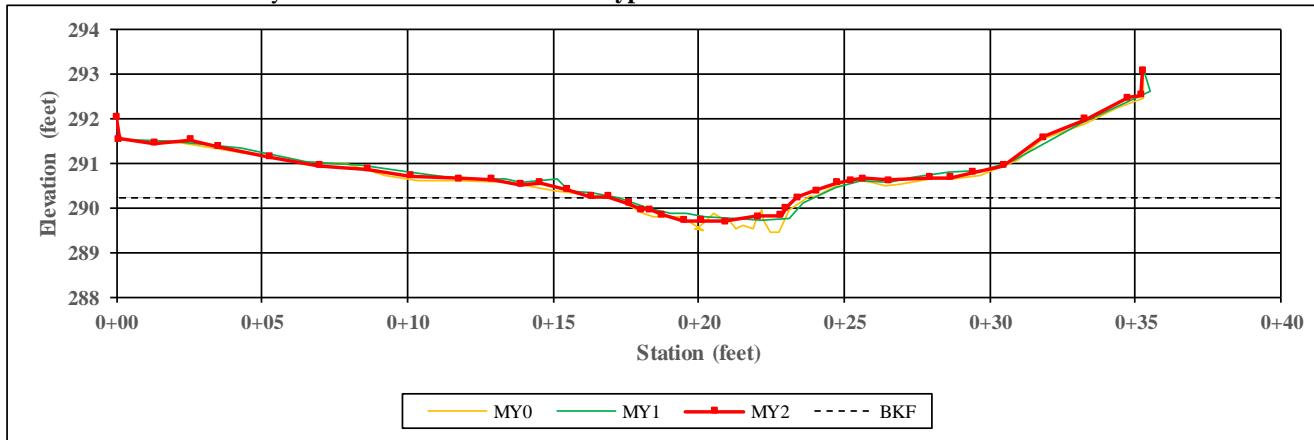

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	7.2	6.7	6.4	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.4	0.3	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	0.8	0.5	0.5	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.0	2.3	2.4	-	-	-	-	-
Width/Depth Ratio	17.7	19.4	17.0	-	-	-	-	-
Entrenchment Ratio	3.4	3.7	3.9	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 2

XS Number: 8
XS Type: Riffle

Station: 208+33

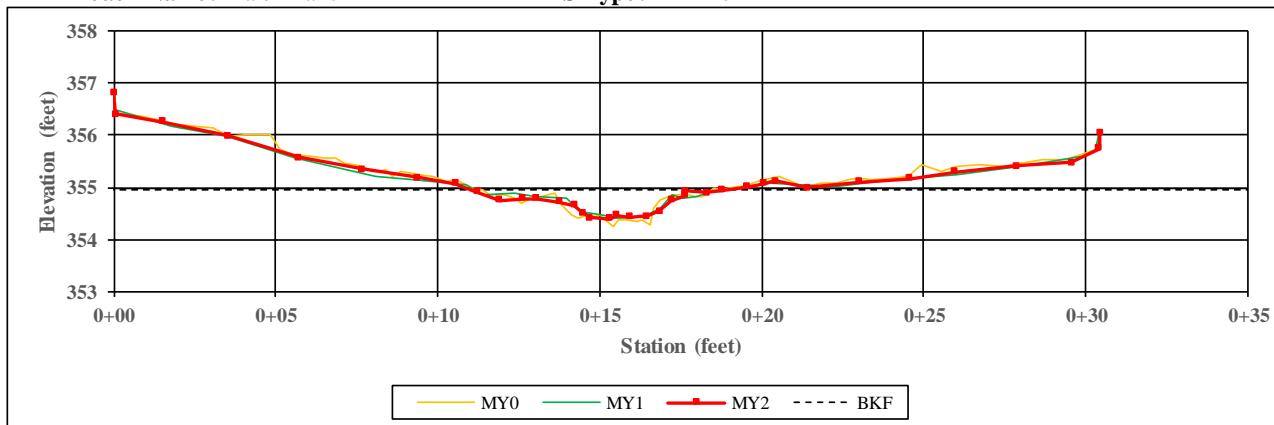

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	7.0	7.3	7.2	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.3	0.2	0.3	-	-	-	-	-
Bankfull Max Depth (ft)	0.7	0.5	0.5	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	2.0	1.7	2.0	-	-	-	-	-
Width/Depth Ratio	24.6	30.6	26.0	-	-	-	-	-
Entrenchment Ratio	3.6	3.4	3.5	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 2

XS Number: 9
XS Type: Pool

Station: 208+42

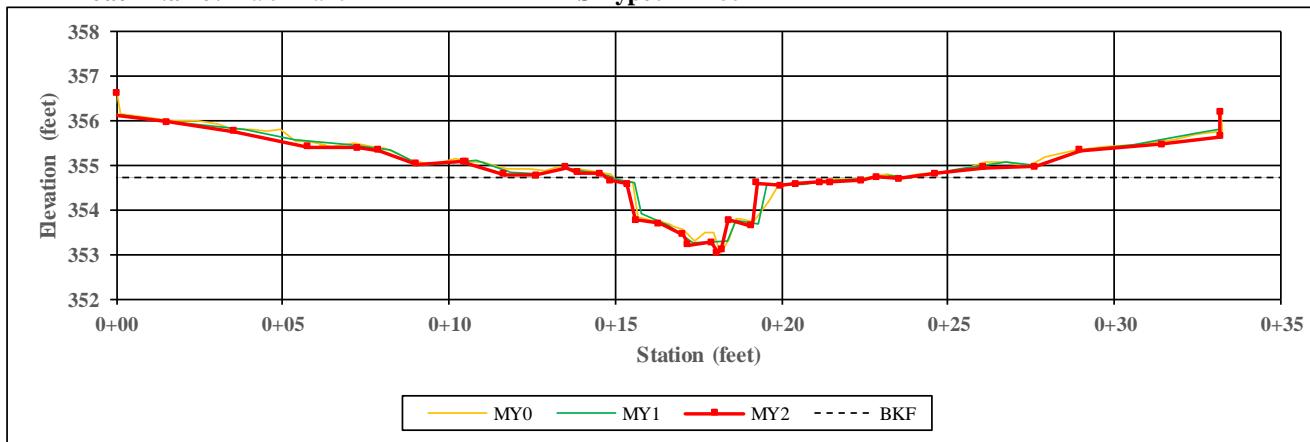

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.7	8.0	8.1	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.6	0.6	0.6	-	-	-	-	-
Bankfull Max Depth (ft)	1.7	1.5	1.7	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	4.8	4.8	5.0	-	-	-	-	-
Width/Depth Ratio	12.3	13.5	13.3	-	-	-	-	-
Entrenchment Ratio	3.3	3.1	3.1	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 2

XS Number: 10
XS Type: Riffle

Station: 210+09

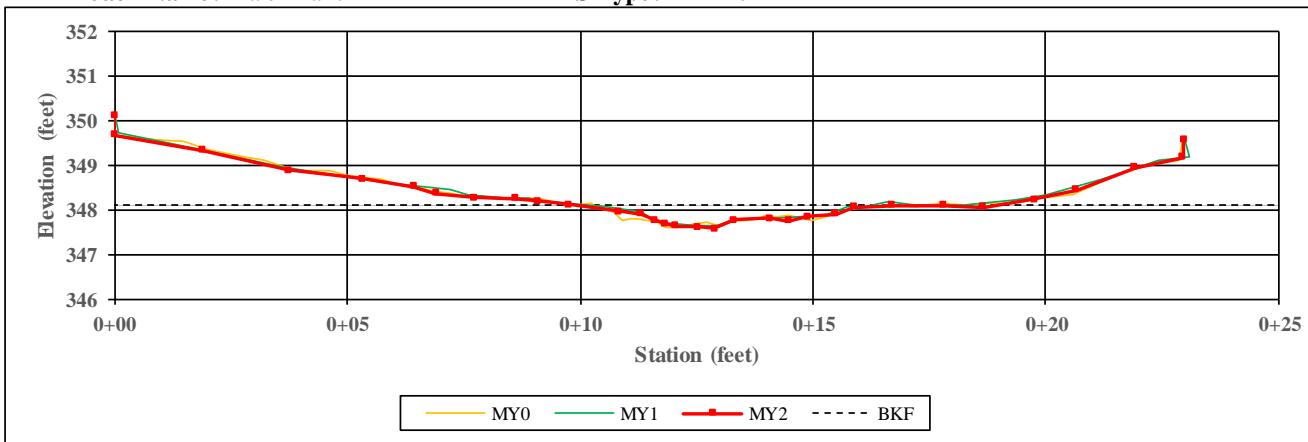

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	6.4	6.2	6.2	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.3	0.3	0.3	-	-	-	-	-
Bankfull Max Depth (ft)	0.5	0.5	0.5	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	1.8	1.6	1.7	-	-	-	-	-
Width/Depth Ratio	22.6	23.7	21.7	-	-	-	-	-
Entrenchment Ratio	3.9	4.0	4.1	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 2

XS Number: 11
XS Type: Pool

Station: 210+42

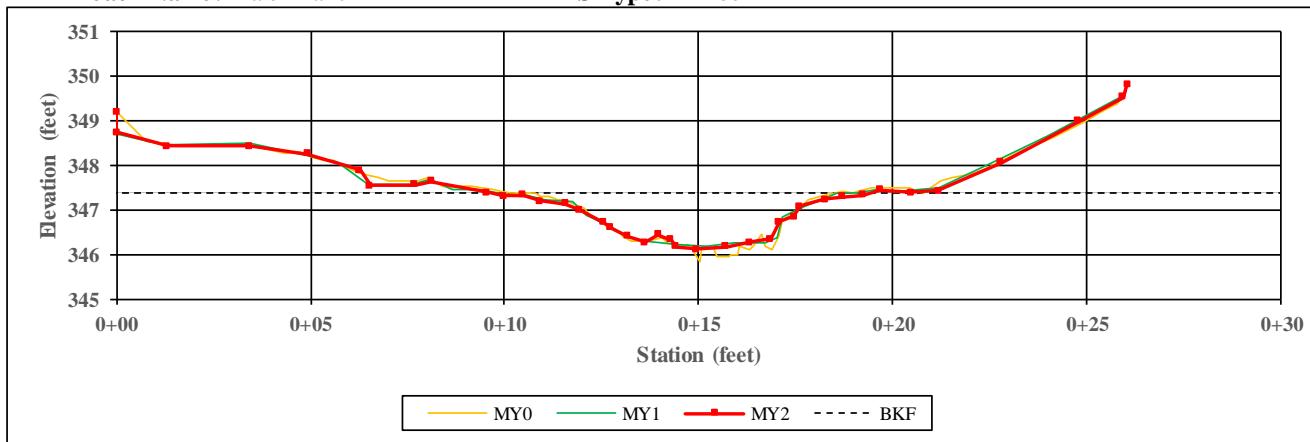

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.6	8.0	8.3	-	-	-	-	-
Floodprone Width (ft)	20.0	20.0	20.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.8	0.7	0.7	-	-	-	-	-
Bankfull Max Depth (ft)	1.6	1.2	1.3	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	6.1	5.9	6.0	-	-	-	-	-
Width/Depth Ratio	9.5	10.9	11.5	-	-	-	-	-
Entrenchment Ratio	2.6	2.5	2.4	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 3

XS Number: 12
XS Type: Riffle

Station: 217+76

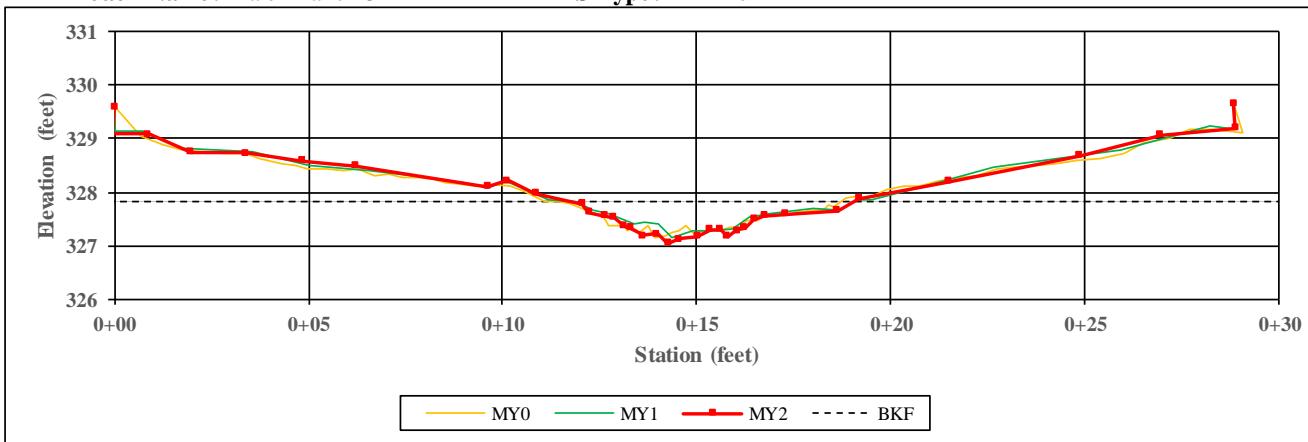

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.3	7.1	7.1	-	-	-	-	-
Floodprone Width (ft)	20.0	20.0	20.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.3	0.3	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	0.7	0.6	0.8	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	2.5	2.2	2.7	-	-	-	-	-
Width/Depth Ratio	21.1	23.1	18.7	-	-	-	-	-
Entrenchment Ratio	2.8	2.8	2.8	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 3

XS Number: 13
XS Type: Pool

Station: 218+20

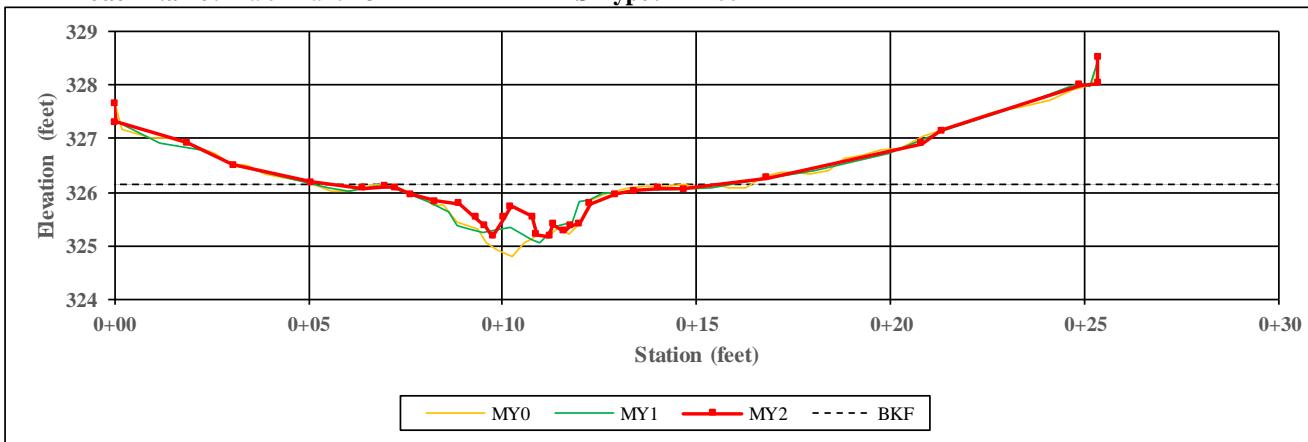

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.8	7.6	7.7	-	-	-	-	-
Floodprone Width (ft)	20.0	20.0	20.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.5	0.5	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	1.3	1.1	1.0	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.9	3.5	3.0	-	-	-	-	-
Width/Depth Ratio	15.7	16.7	19.7	-	-	-	-	-
Entrenchment Ratio	2.6	2.6	2.6	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 4

XS Number: 14
XS Type: Pool

Station: 223+32

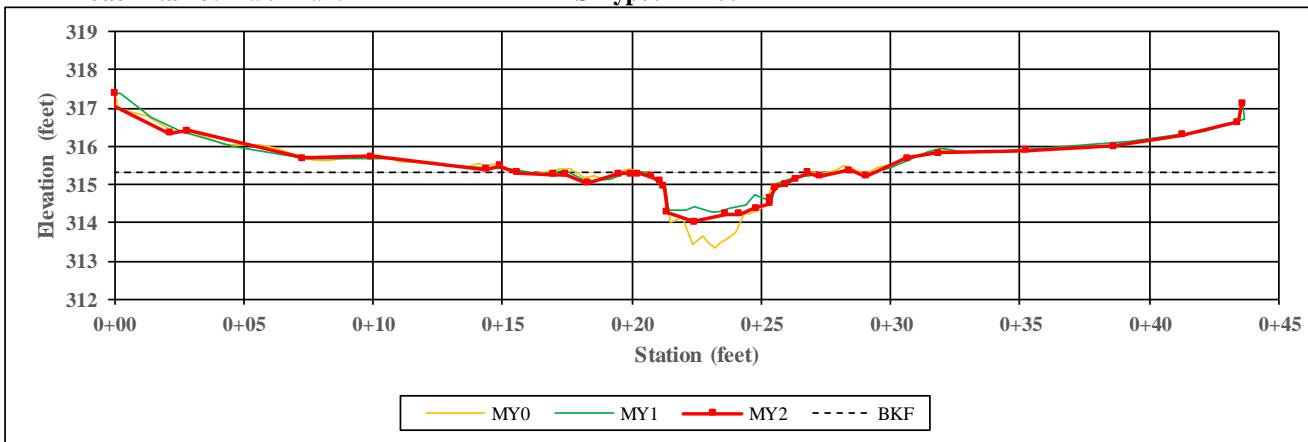

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	6.7	7.2	7.0	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.9	0.6	0.7	-	-	-	-	-
Bankfull Max Depth (ft)	2.0	1.0	1.3	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	6.2	4.3	5.2	-	-	-	-	-
Width/Depth Ratio	7.1	12.1	9.5	-	-	-	-	-
Entrenchment Ratio	4.5	4.2	4.3	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 4

XS Number: 15
XS Type: Riffle

Station: 223+72

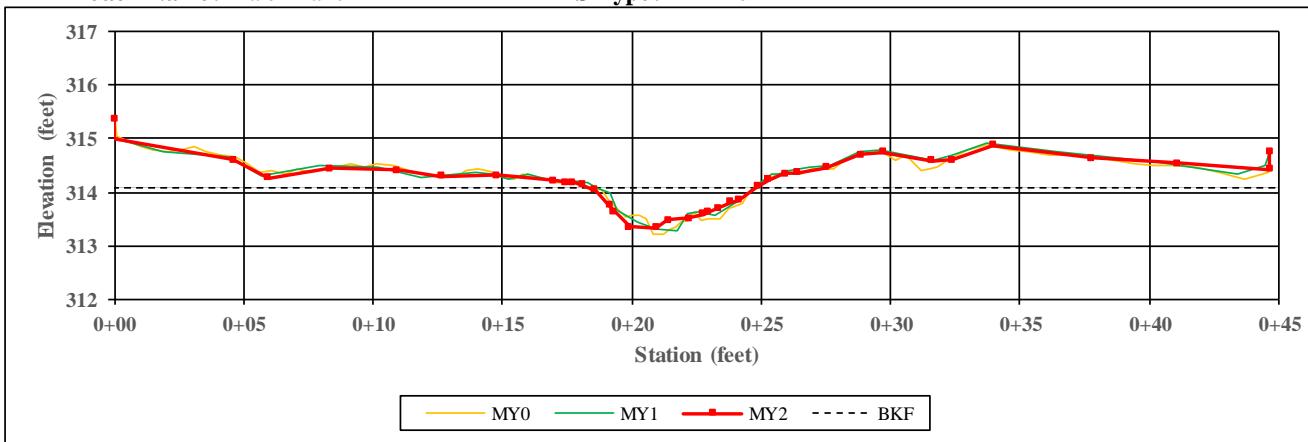

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	6.5	6.2	6.5	-	-	-	-	-
Floodprone Width (ft)	40.0	40.0	40.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.5	0.5	0.5	-	-	-	-	-
Bankfull Max Depth (ft)	0.9	0.8	0.8	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.1	2.9	3.0	-	-	-	-	-
Width/Depth Ratio	13.8	13.2	14.2	-	-	-	-	-
Entrenchment Ratio	6.1	6.5	6.2	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 4

XS Number: 16
XS Type: Riffle

Station: 227+39

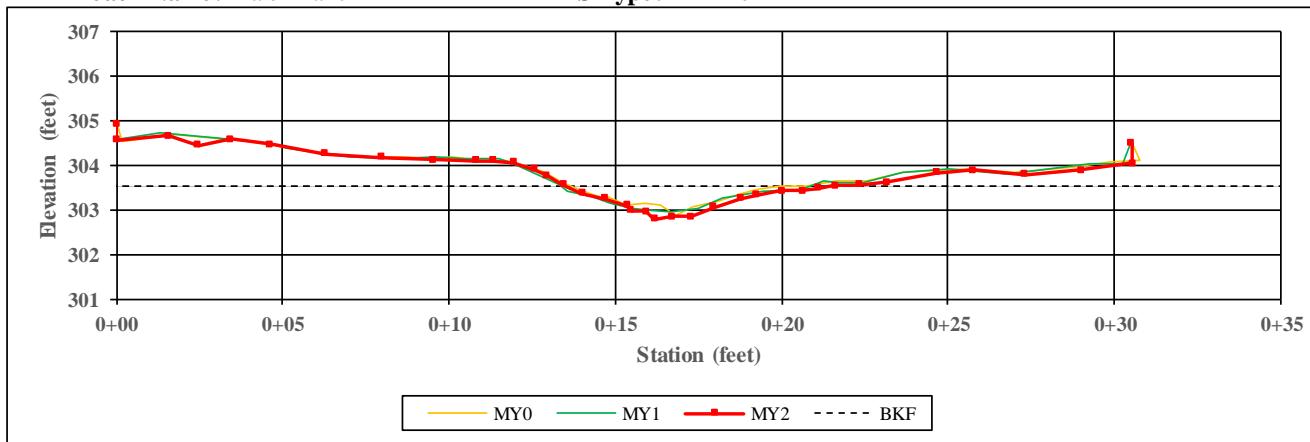

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankful Width (ft)	6.3	7.2	7.6	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.3	0.3	0.4	-	-	-	-	-
Bankfull Max Depth (ft)	0.7	0.6	0.7	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	1.9	2.3	2.7	-	-	-	-	-
Width/Depth Ratio	21.0	23.0	20.9	-	-	-	-	-
Entrenchment Ratio	4.0	3.5	3.3	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 5

XS Number: 17
XS Type: Riffle

Station: 232+43

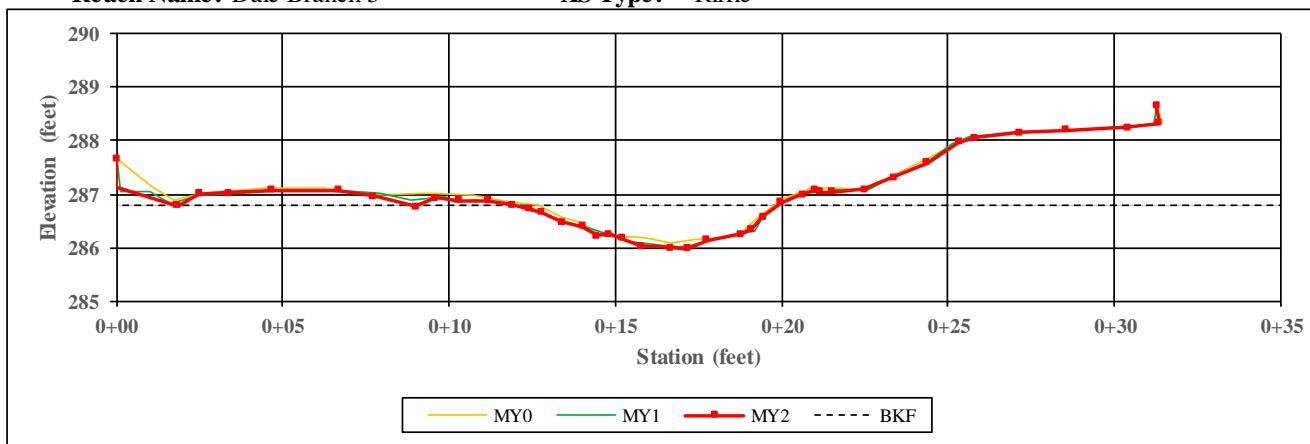

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.1	7.9	7.9	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.5	0.5	0.5	-	-	-	-	-
Bankfull Max Depth (ft)	0.7	0.8	0.8	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	3.3	3.8	3.9	-	-	-	-	-
Width/Depth Ratio	15.2	16.2	16.3	-	-	-	-	-
Entrenchment Ratio	3.5	3.2	3.2	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Dale Branch 5

XS Number: 18
XS Type: Pool

Station: 232+54

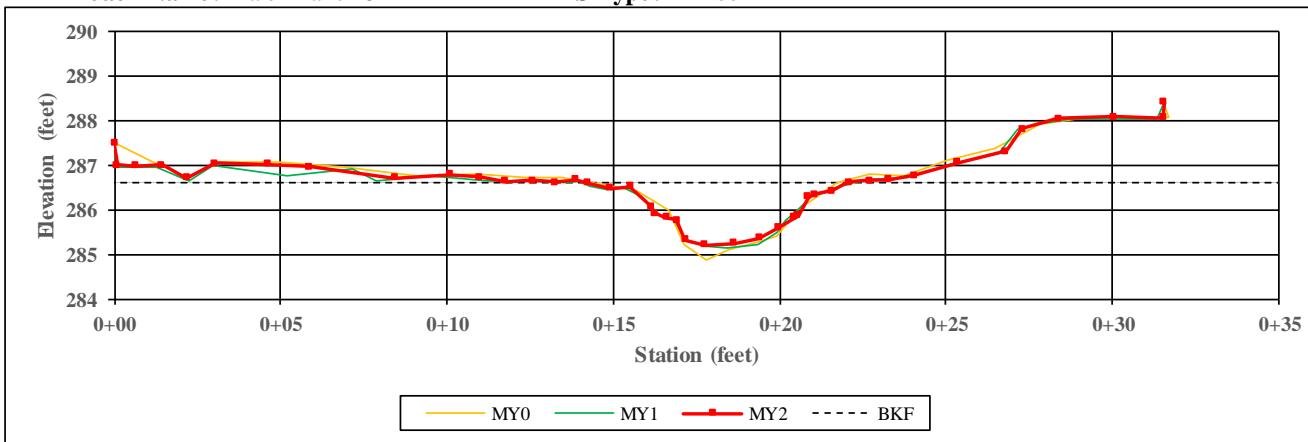

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.2	8.0	7.7	-	-	-	-	-
Floodprone Width (ft)	25.0	25.0	25.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.8	0.7	0.7	-	-	-	-	-
Bankfull Max Depth (ft)	1.7	1.5	1.4	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	5.9	5.8	5.6	-	-	-	-	-
Width/Depth Ratio	8.7	11.0	10.7	-	-	-	-	-
Entrenchment Ratio	3.5	3.1	3.2	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Thompson Branch 2

XS Number: 19
XS Type: Pool

Station: 108+93

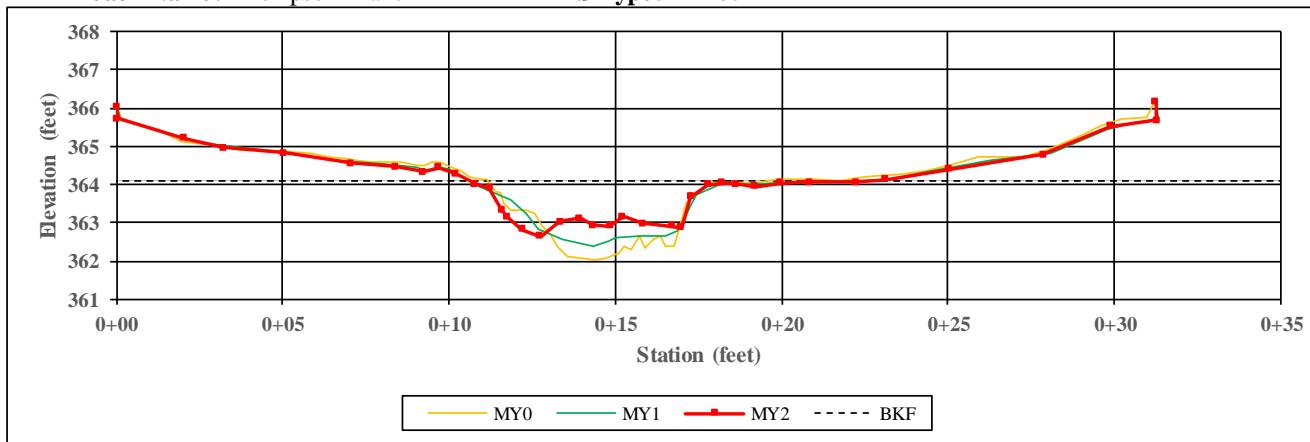

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	8.4	9.2	9.2	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	1.0	0.9	0.8	-	-	-	-	-
Bankfull Max Depth (ft)	2.1	1.7	1.5	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	8.8	8.1	7.0	-	-	-	-	-
Width/Depth Ratio	8.0	10.4	12.1	-	-	-	-	-
Entrenchment Ratio	3.6	3.3	3.3	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Thompson Branch 2

XS Number: 20
XS Type: Riffle

Station: 109+30

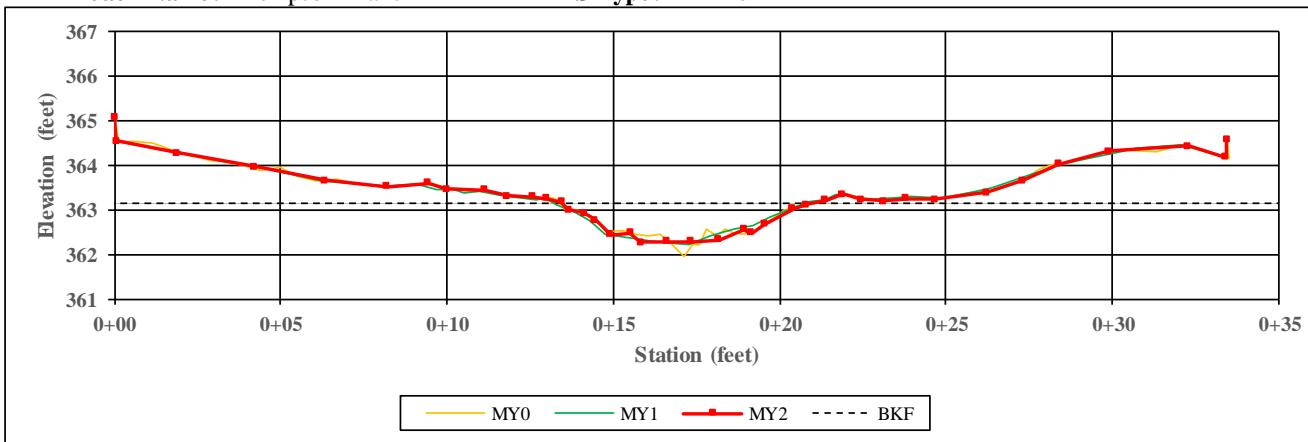

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.5	7.7	7.6	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.6	0.6	0.6	-	-	-	-	-
Bankfull Max Depth (ft)	1.2	0.9	0.9	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	4.2	4.4	4.4	-	-	-	-	-
Width/Depth Ratio	13.3	13.5	13.0	-	-	-	-	-
Entrenchment Ratio	4.0	3.9	3.9	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Thompson Branch 2

XS Number: 21
XS Type: Pool

Station: 112+09

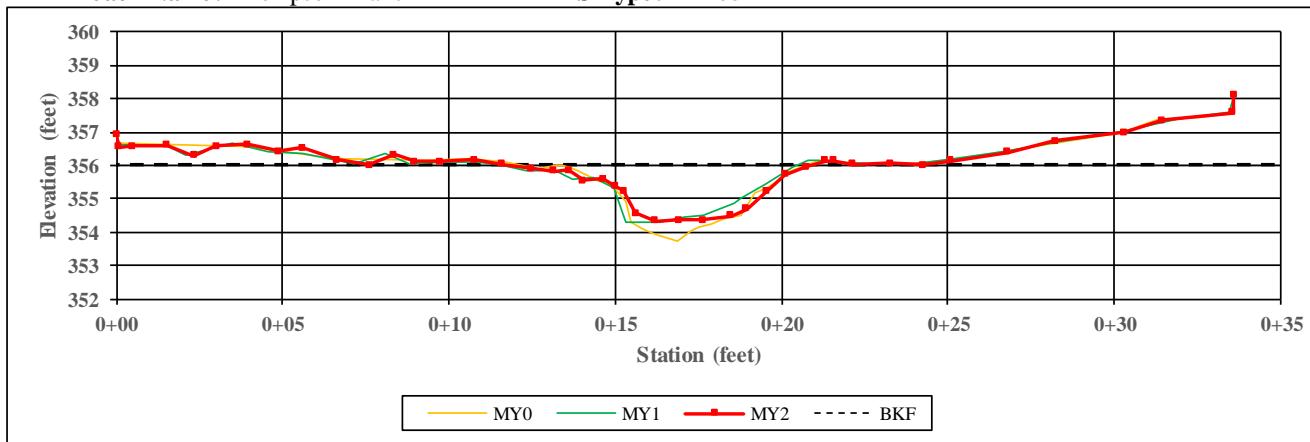

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	8.6	9.1	9.2	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	1.0	0.8	0.8	-	-	-	-	-
Bankfull Max Depth (ft)	2.3	1.7	1.7	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	8.5	7.5	7.8	-	-	-	-	-
Width/Depth Ratio	8.7	10.9	10.9	-	-	-	-	-
Entrenchment Ratio	3.5	3.3	3.2	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-



Left Descending Bank




Right Descending Bank

Project Name: Pee Dee
Reach Name: Thompson Branch 2

XS Number: 22
XS Type: Riffle

Station: 112+19

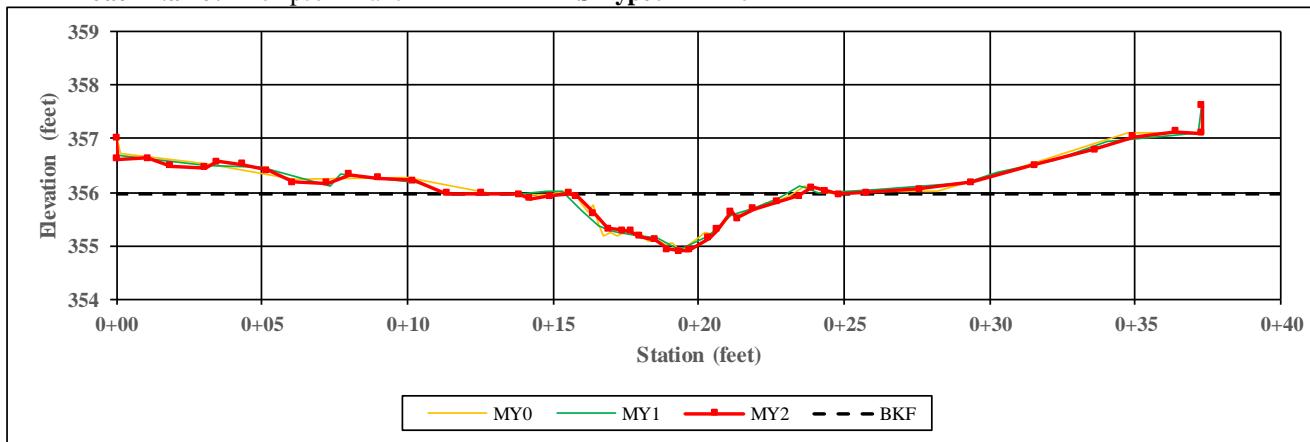

CHANNEL DIMENSIONS SUMMARY	MY0	MY1	MY2	MY3	MY4	MY5	MY6	MY7
Bankfull Width (ft)	7.6	7.7	7.7	-	-	-	-	-
Floodprone Width (ft)	30.0	30.0	30.0	-	-	-	-	-
Bankfull Mean Depth (ft)	0.6	0.6	0.6	-	-	-	-	-
Bankfull Max Depth (ft)	1.1	1.0	1.1	-	-	-	-	-
Bankfull Cross-Sectional Area (ft ²)	4.3	4.4	4.4	-	-	-	-	-
Width/Depth Ratio	13.4	13.5	13.5	-	-	-	-	-
Entrenchment Ratio	3.9	3.9	3.9	-	-	-	-	-
Bank Height Ratio	1.0	1.0	1.0	-	-	-	-	-




Left Descending Bank




Right Descending Bank


Pee Dee			
Cross Section 2 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	69	60.0%	60%
0.062 - 0.125	1	0.9%	61%
0.125 - 0.25	0	0.0%	61%
0.25 - 0.5	1	0.9%	62%
0.5 - 1.0	0	0.0%	62%
1 - 2	0	0.0%	62%
2 - 4	1	0.9%	63%
4 - 8	5	4.3%	67%
8 - 16	12	10.4%	77%
16 - 32	16	13.9%	91%
32 - 64	7	6.1%	97%
64-128	3	2.6%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	115	100%	100%
Summary Data			
	D50	0.062	
	D84	20	
	D95	50	

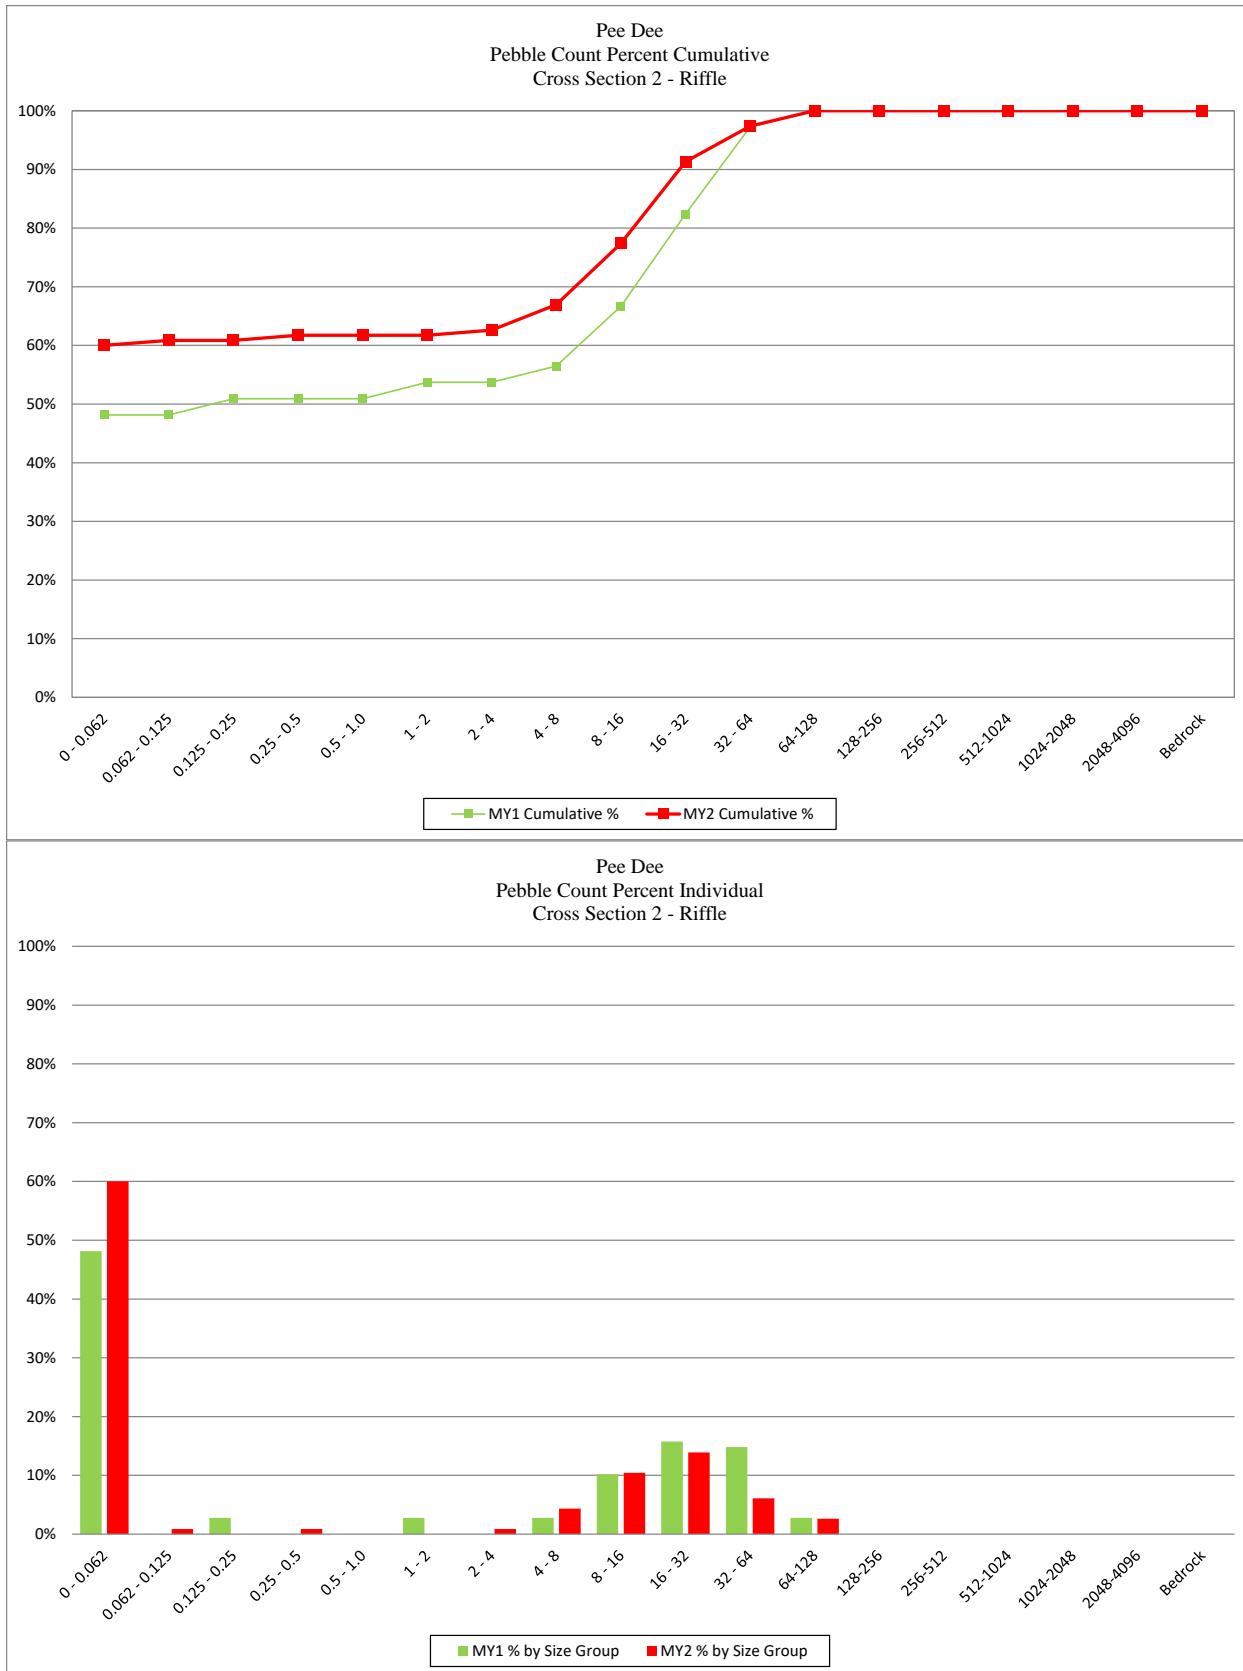


Pee Dee			
Cross Section 4 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	16	14.3%	14%
0.062 - 0.125	0	0.0%	14%
0.125 - 0.25	0	0.0%	14%
0.25 - 0.5	0	0.0%	14%
0.5 - 1.0	0	0.0%	14%
1 - 2	2	1.8%	16%
2 - 4	20	17.9%	34%
4 - 8	48	42.9%	77%
8 - 16	17	15.2%	92%
16 - 32	7	6.3%	98%
32 - 64	1	0.9%	99%
64-128	1	0.9%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	112	100%	100%
Summary Data			
	D50	5.2	
	D84	9.6	
	D95	21	

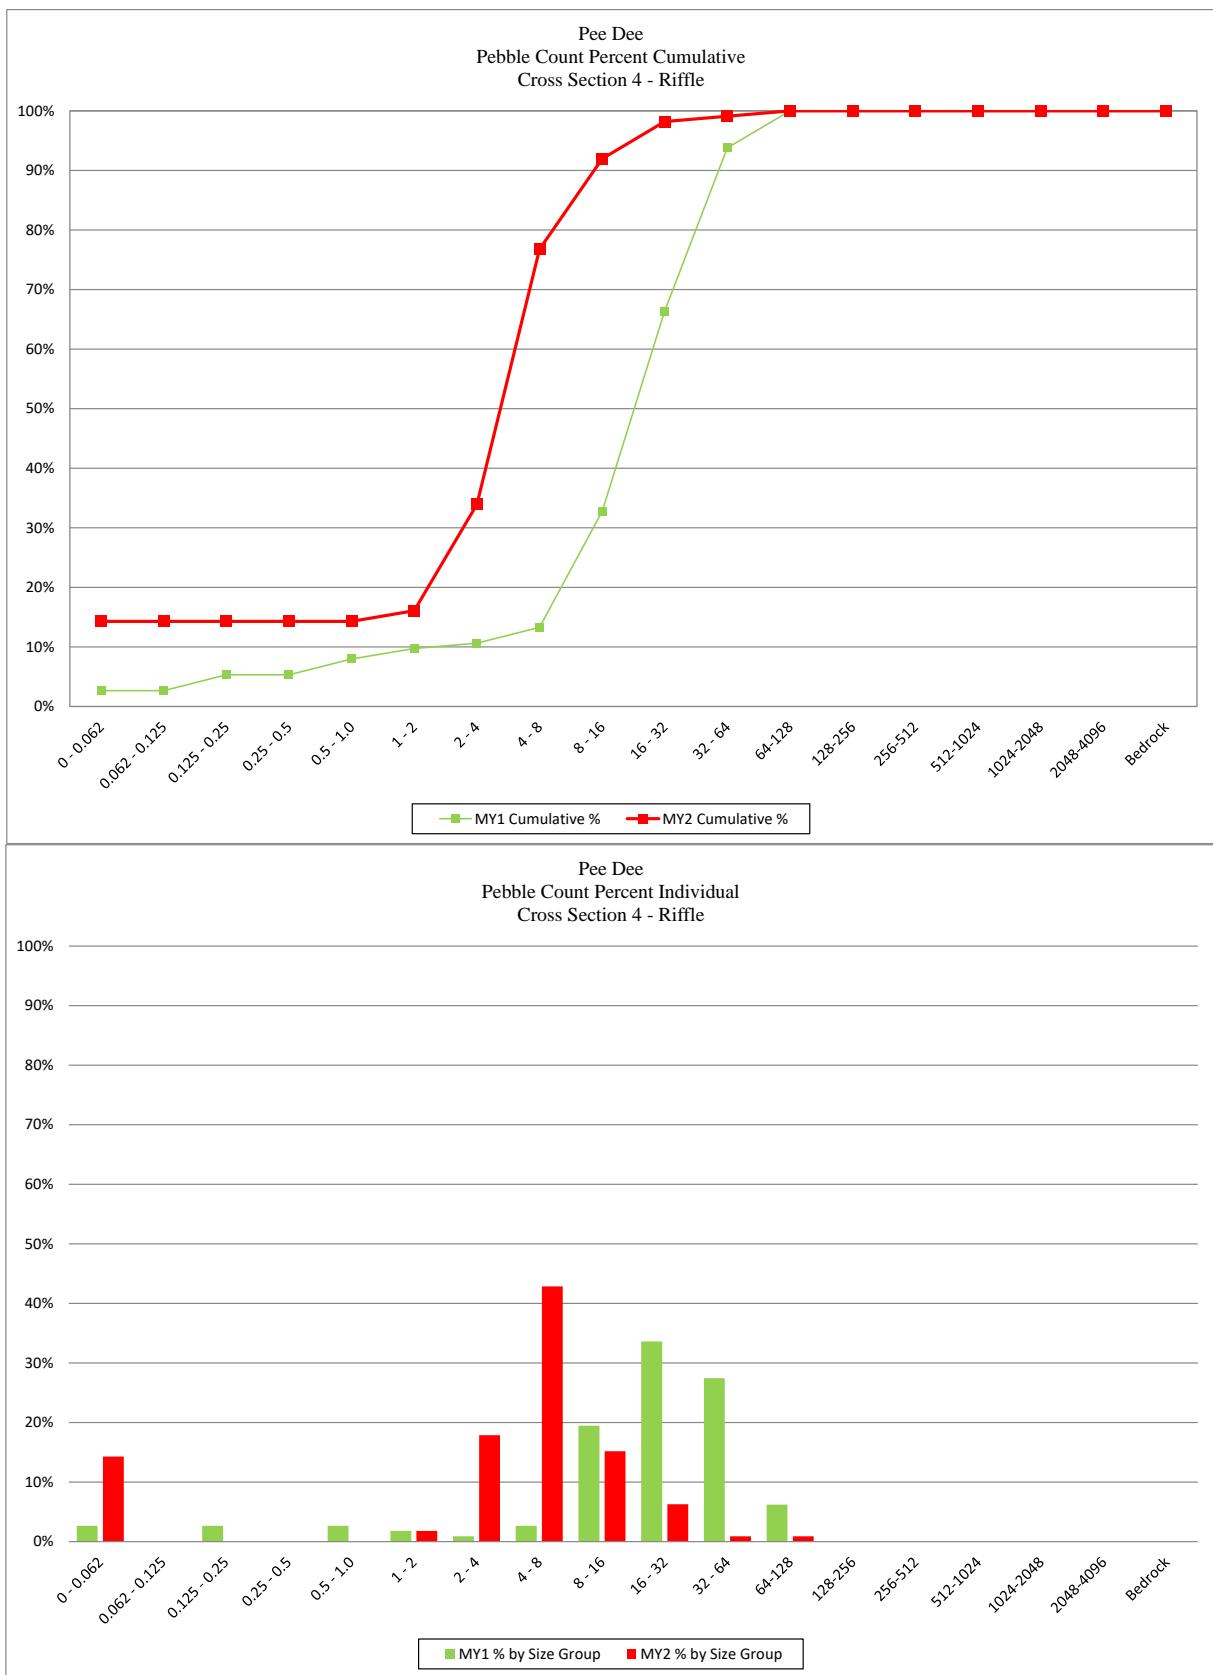


Pee Dee			
Cross Section 6 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	17	16.0%	16%
0.062 - 0.125	0	0.0%	16%
0.125 - 0.25	1	0.9%	17%
0.25 - 0.5	0	0.0%	17%
0.5 - 1.0	0	0.0%	17%
1 - 2	6	5.7%	23%
2 - 4	1	0.9%	24%
4 - 8	14	13.2%	37%
8 - 16	18	17.0%	54%
16 - 32	20	18.9%	73%
32 - 64	20	18.9%	92%
64-128	8	7.5%	99%
128-256	1	0.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	106	100%	100%
Summary Data			
	D50		14
	D84		52
	D95		79

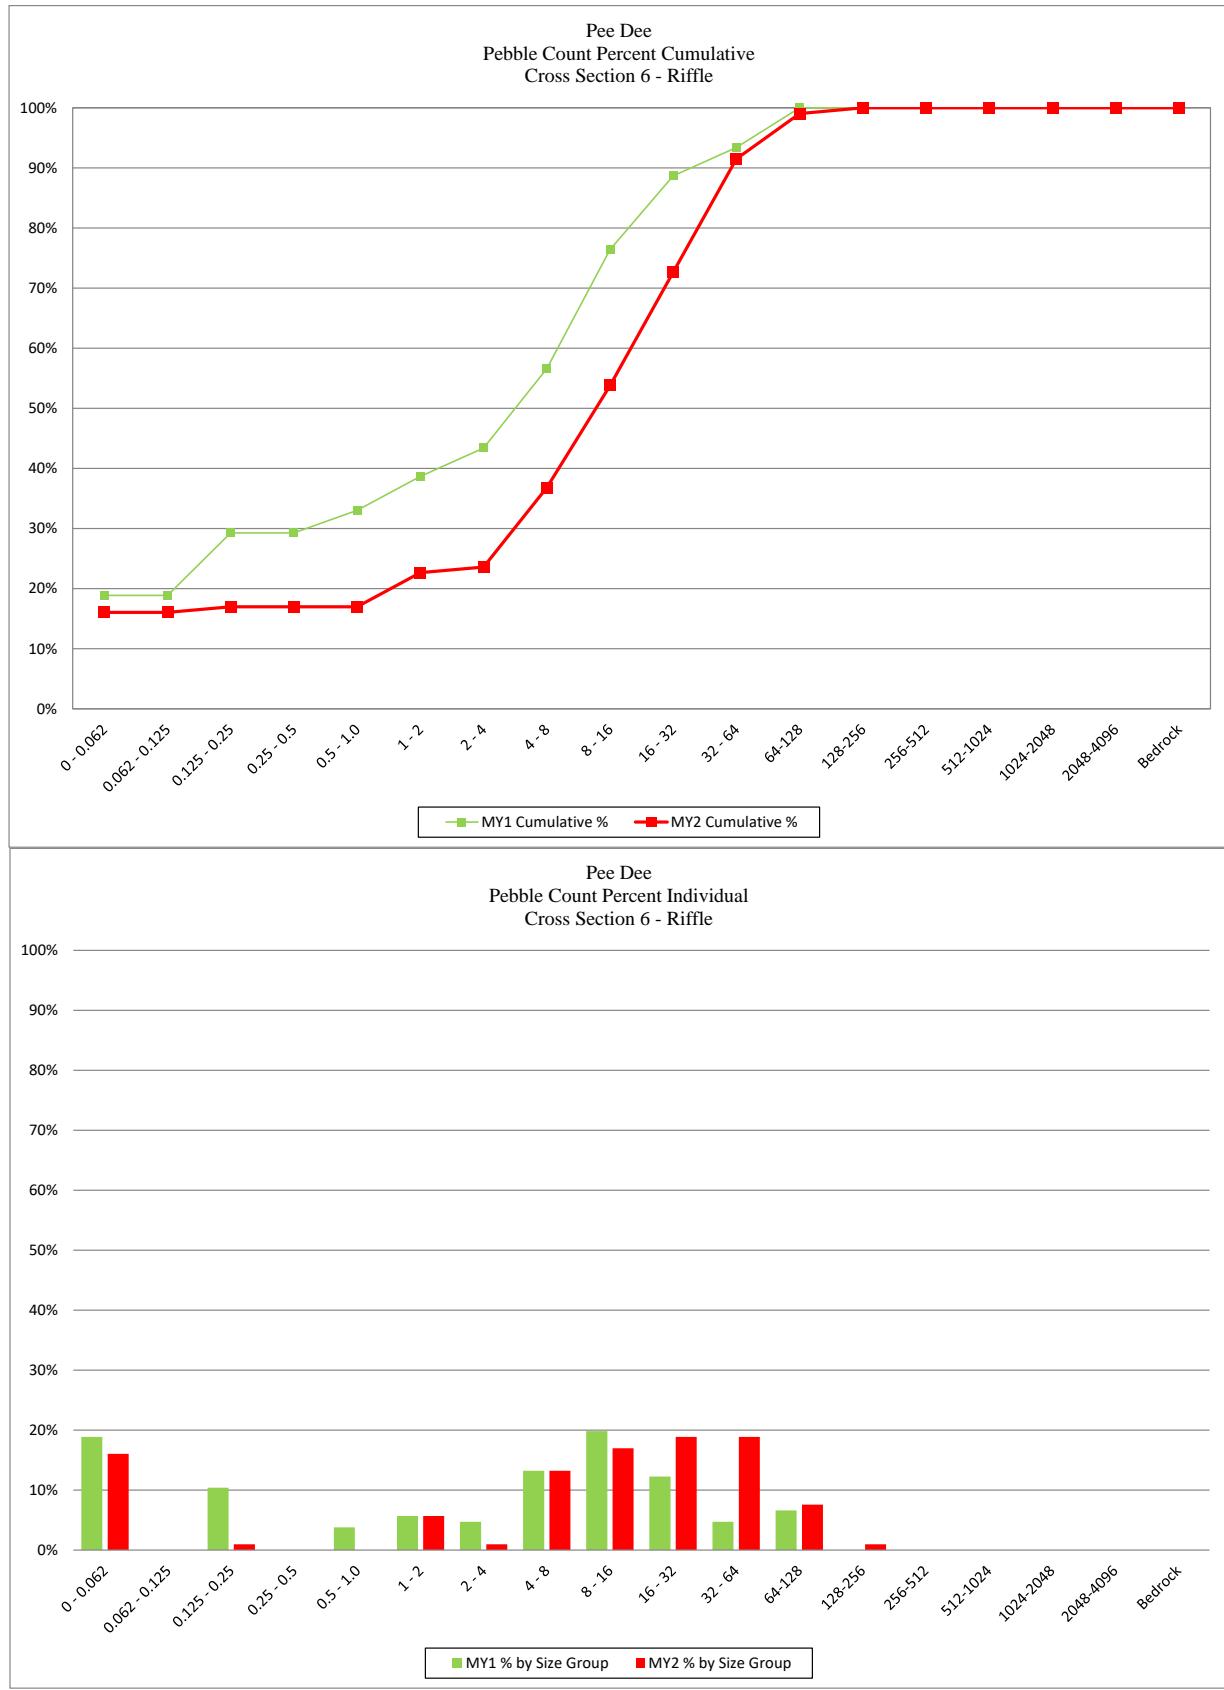


Pee Dee			
Cross Section 7 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	10	8.8%	9%
0.062 - 0.125	1	0.9%	10%
0.125 - 0.25	6	5.3%	15%
0.25 - 0.5	0	0.0%	15%
0.5 - 1.0	1	0.9%	16%
1 - 2	0	0.0%	16%
2 - 4	6	5.3%	21%
4 - 8	12	10.5%	32%
8 - 16	25	21.9%	54%
16 - 32	23	20.2%	74%
32 - 64	20	17.5%	91%
64-128	9	7.9%	99%
128-256	1	0.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	114	100%	100%
Summary Data			
	D50		15
	D84		50
	D95		77

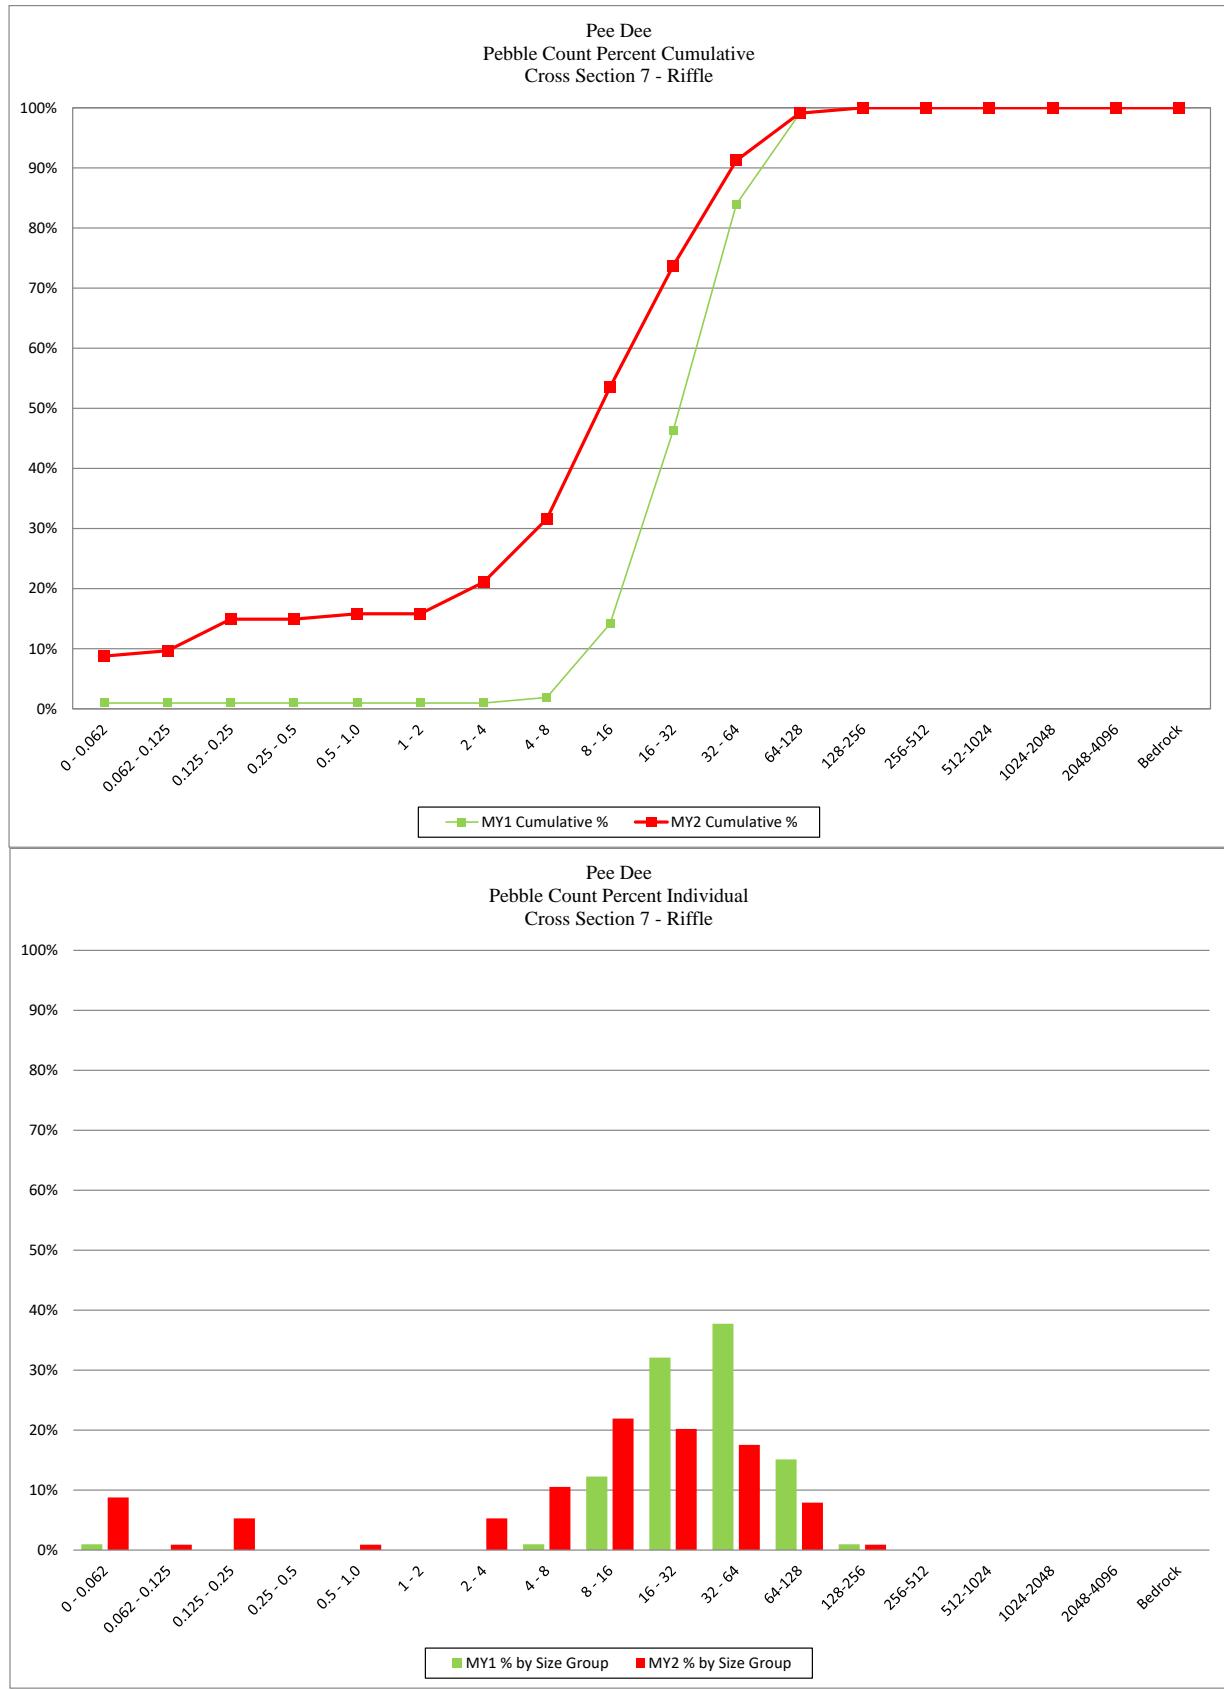


Pee Dee			
Cross Section 8 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	6	5.2%	5%
0.062 - 0.125	0	0.0%	5%
0.125 - 0.25	1	0.9%	6%
0.25 - 0.5	0	0.0%	6%
0.5 - 1.0	1	0.9%	7%
1 - 2	13	11.2%	18%
2 - 4	12	10.3%	28%
4 - 8	24	20.7%	49%
8 - 16	20	17.2%	66%
16 - 32	24	20.7%	87%
32 - 64	14	12.1%	99%
64-128	1	0.9%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	116	100%	100%
Summary Data			
	D50	8.3	
	D84	28	
	D95	43	

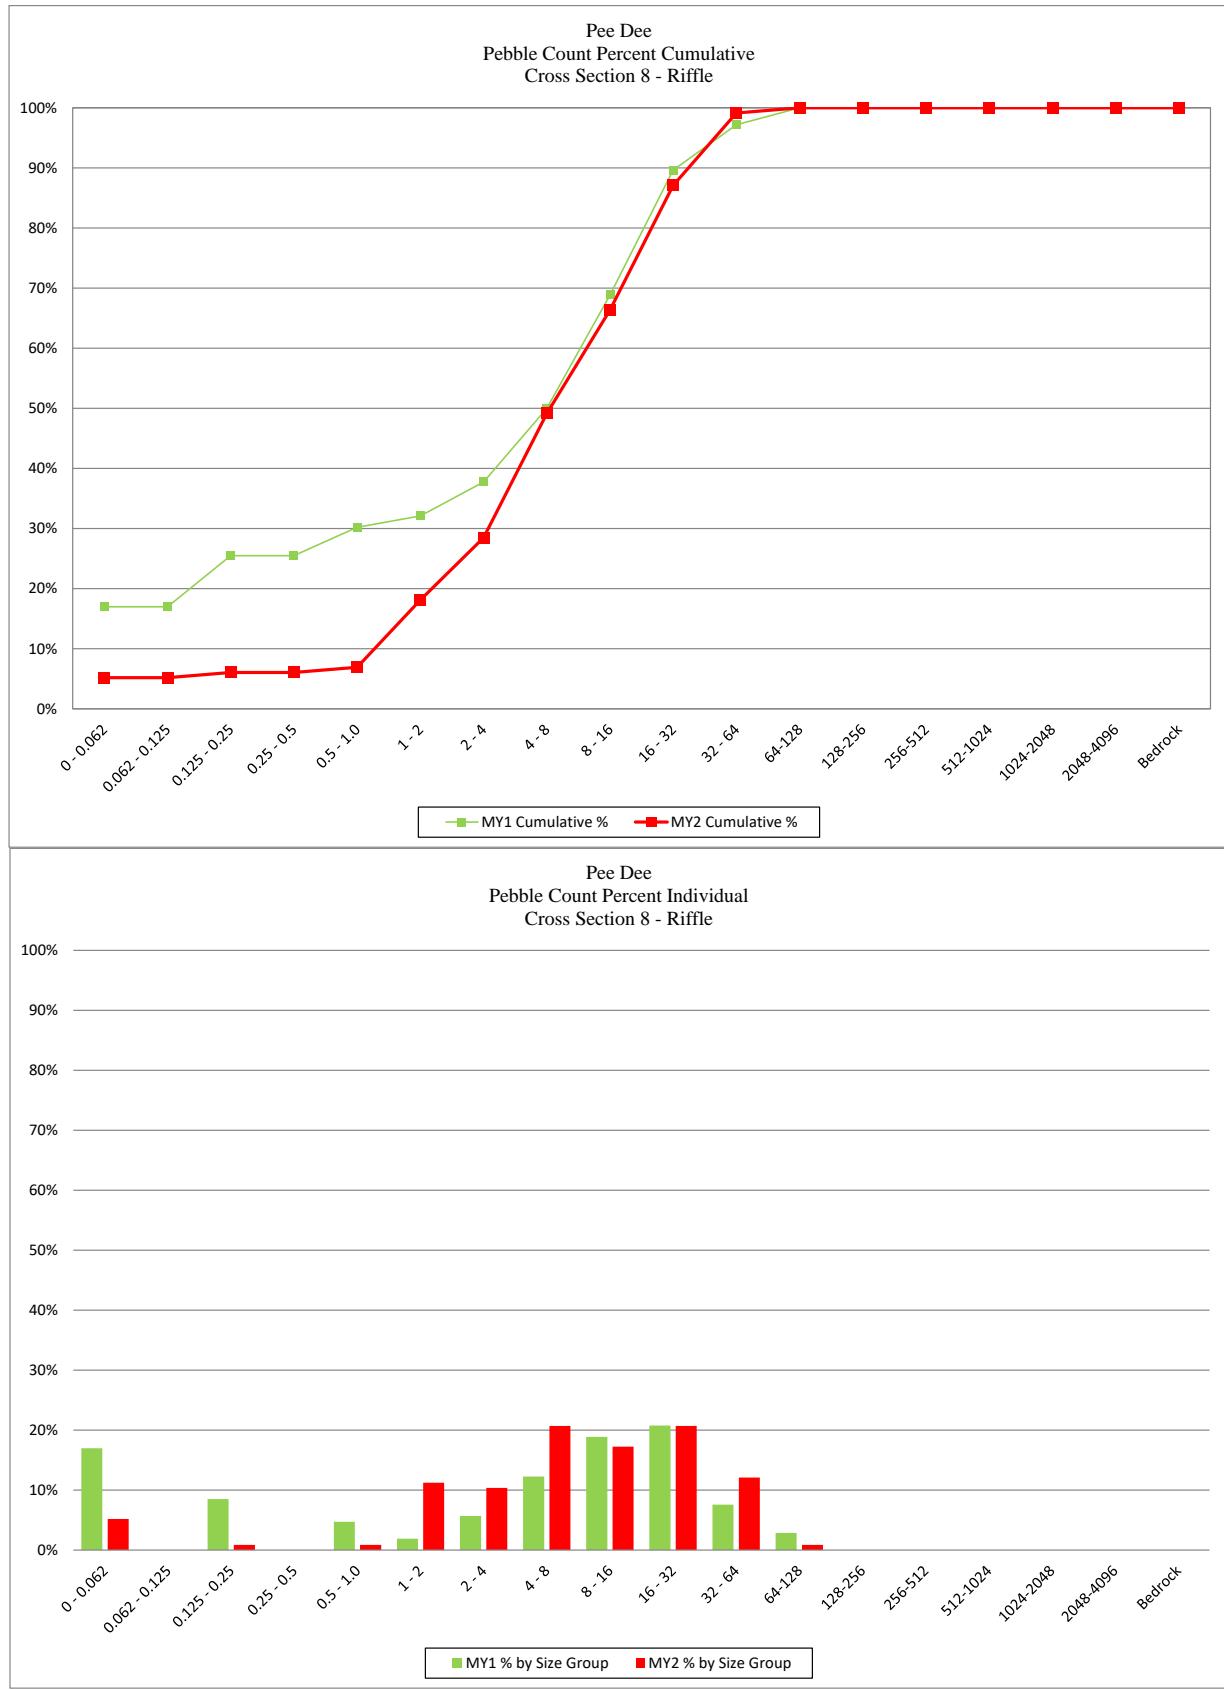


Pee Dee			
Cross Section 10 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	37	33.0%	33%
0.062 - 0.125	0	0.0%	33%
0.125 - 0.25	0	0.0%	33%
0.25 - 0.5	0	0.0%	33%
0.5 - 1.0	0	0.0%	33%
1 - 2	7	6.3%	39%
2 - 4	11	9.8%	49%
4 - 8	11	9.8%	59%
8 - 16	14	12.5%	71%
16 - 32	12	10.7%	82%
32 - 64	14	12.5%	95%
64-128	6	5.4%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	112	100%	100%
Summary Data			
	D50	4.3	
	D84	35	
	D95	66	

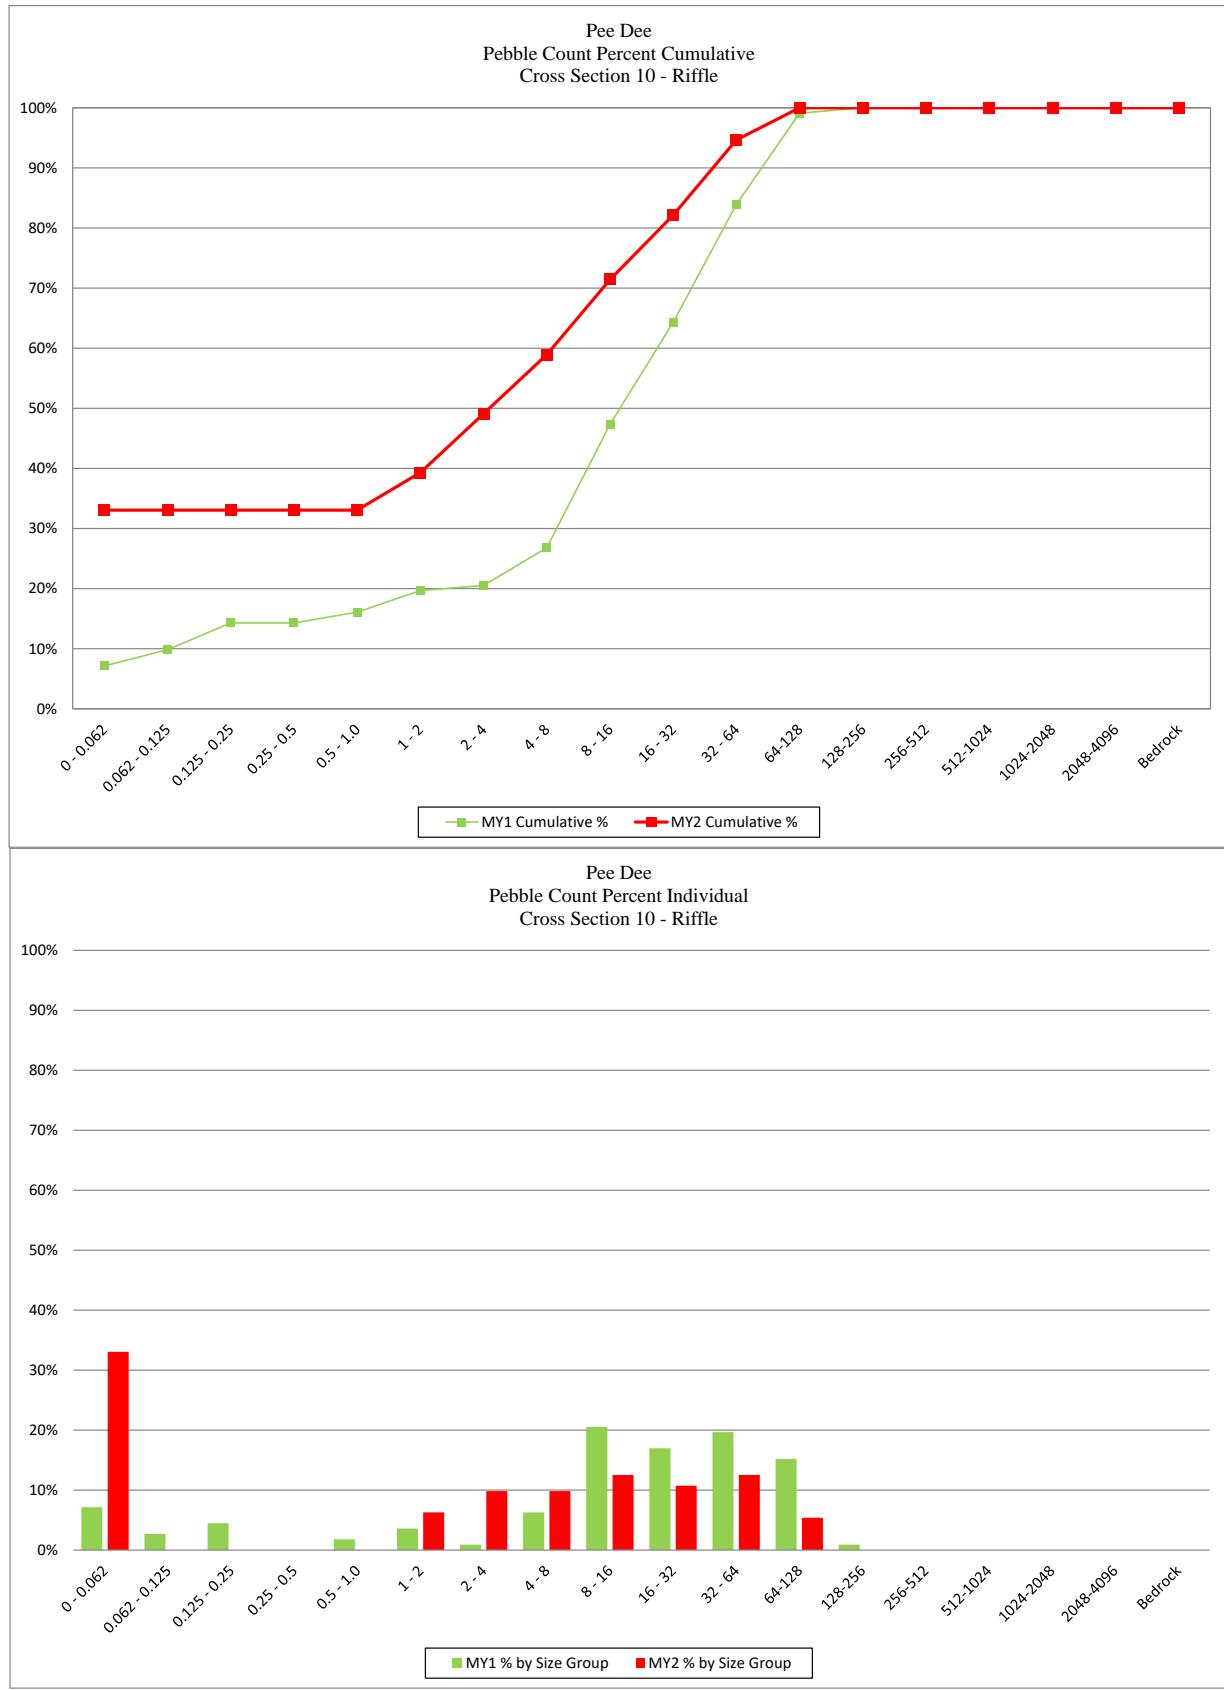


Pee Dee			
Cross Section 12 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	35	33.3%	33%
0.062 - 0.125	0	0.0%	33%
0.125 - 0.25	0	0.0%	33%
0.25 - 0.5	1	1.0%	34%
0.5 - 1.0	0	0.0%	34%
1 - 2	1	1.0%	35%
2 - 4	13	12.4%	48%
4 - 8	15	14.3%	62%
8 - 16	16	15.2%	77%
16 - 32	8	7.6%	85%
32 - 64	8	7.6%	92%
64-128	6	5.7%	98%
128-256	2	1.9%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	105	100%	100%
		Summary Data	
		D50	4.4
		D84	30
		D95	96

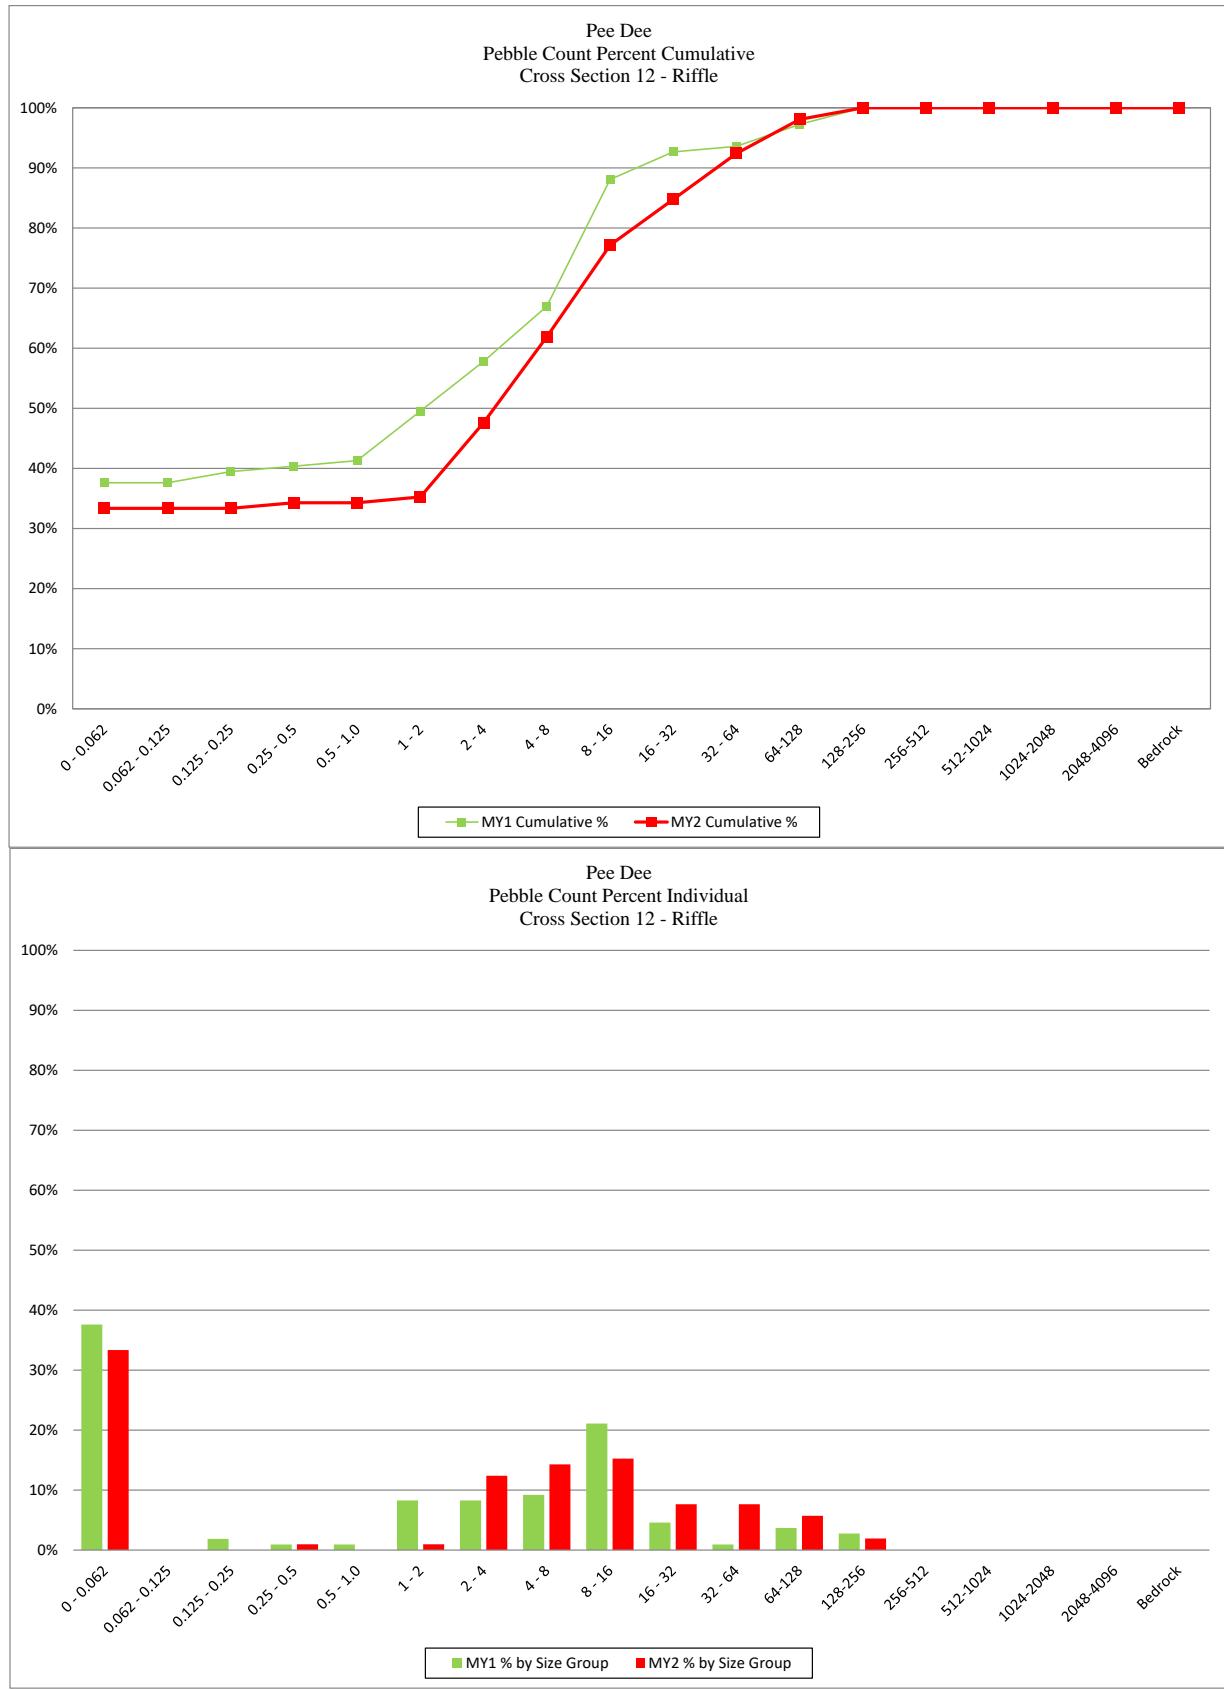


Pee Dee			
Cross Section 15 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	38	31.9%	32%
0.062 - 0.125	0	0.0%	32%
0.125 - 0.25	0	0.0%	32%
0.25 - 0.5	0	0.0%	32%
0.5 - 1.0	0	0.0%	32%
1 - 2	7	5.9%	38%
2 - 4	9	7.6%	45%
4 - 8	12	10.1%	55%
8 - 16	15	12.6%	68%
16 - 32	10	8.4%	76%
32 - 64	20	16.8%	93%
64-128	5	4.2%	97%
128-256	3	2.5%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	119	100%	100%
Summary Data			
	D50	5.8	
	D84	40	
	D95	81	

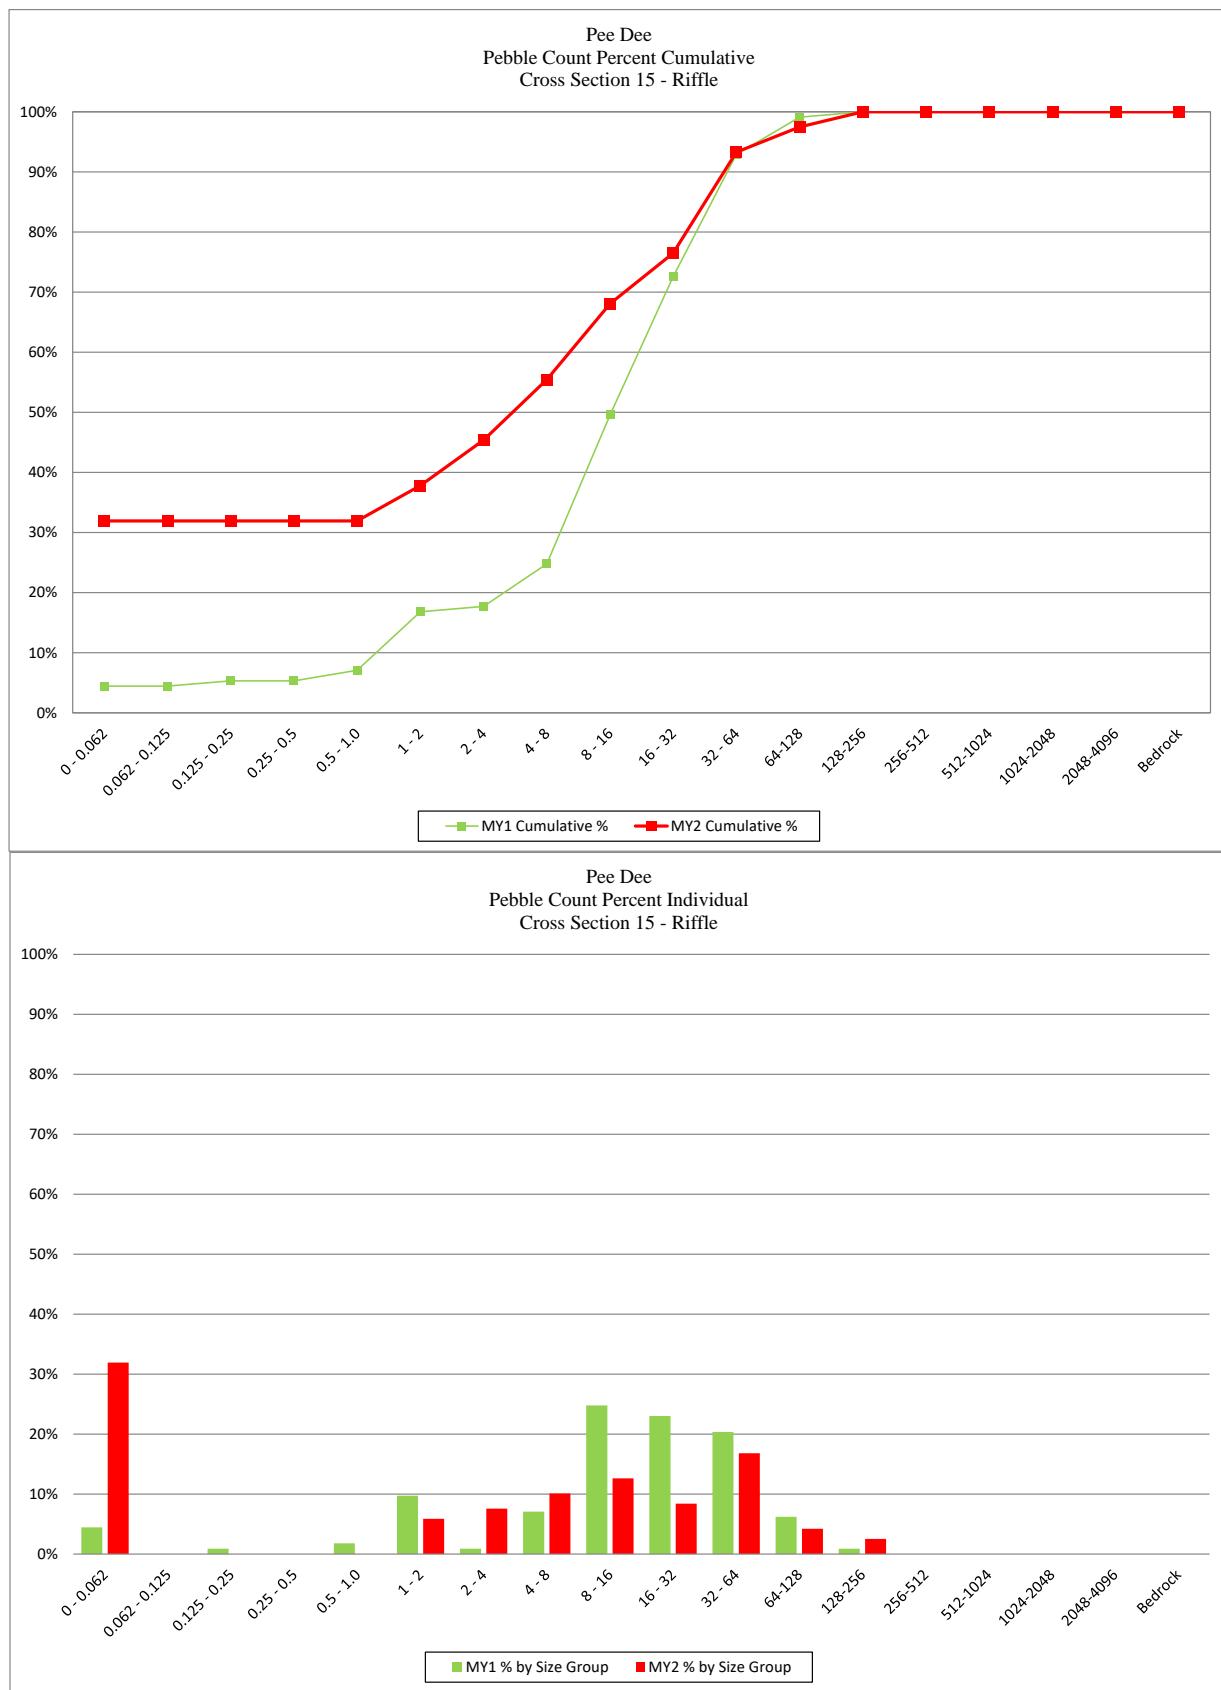


Pee Dee			
Cross Section 16 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	34	30.6%	31%
0.062 - 0.125	1	0.9%	32%
0.125 - 0.25	4	3.6%	35%
0.25 - 0.5	0	0.0%	35%
0.5 - 1.0	0	0.0%	35%
1 - 2	3	2.7%	38%
2 - 4	10	9.0%	47%
4 - 8	14	12.6%	59%
8 - 16	10	9.0%	68%
16 - 32	16	14.4%	83%
32 - 64	19	17.1%	100%
64-128	0	0.0%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	111	100%	100%
Summary Data			
	D50		4.7
	D84		33
	D95		48

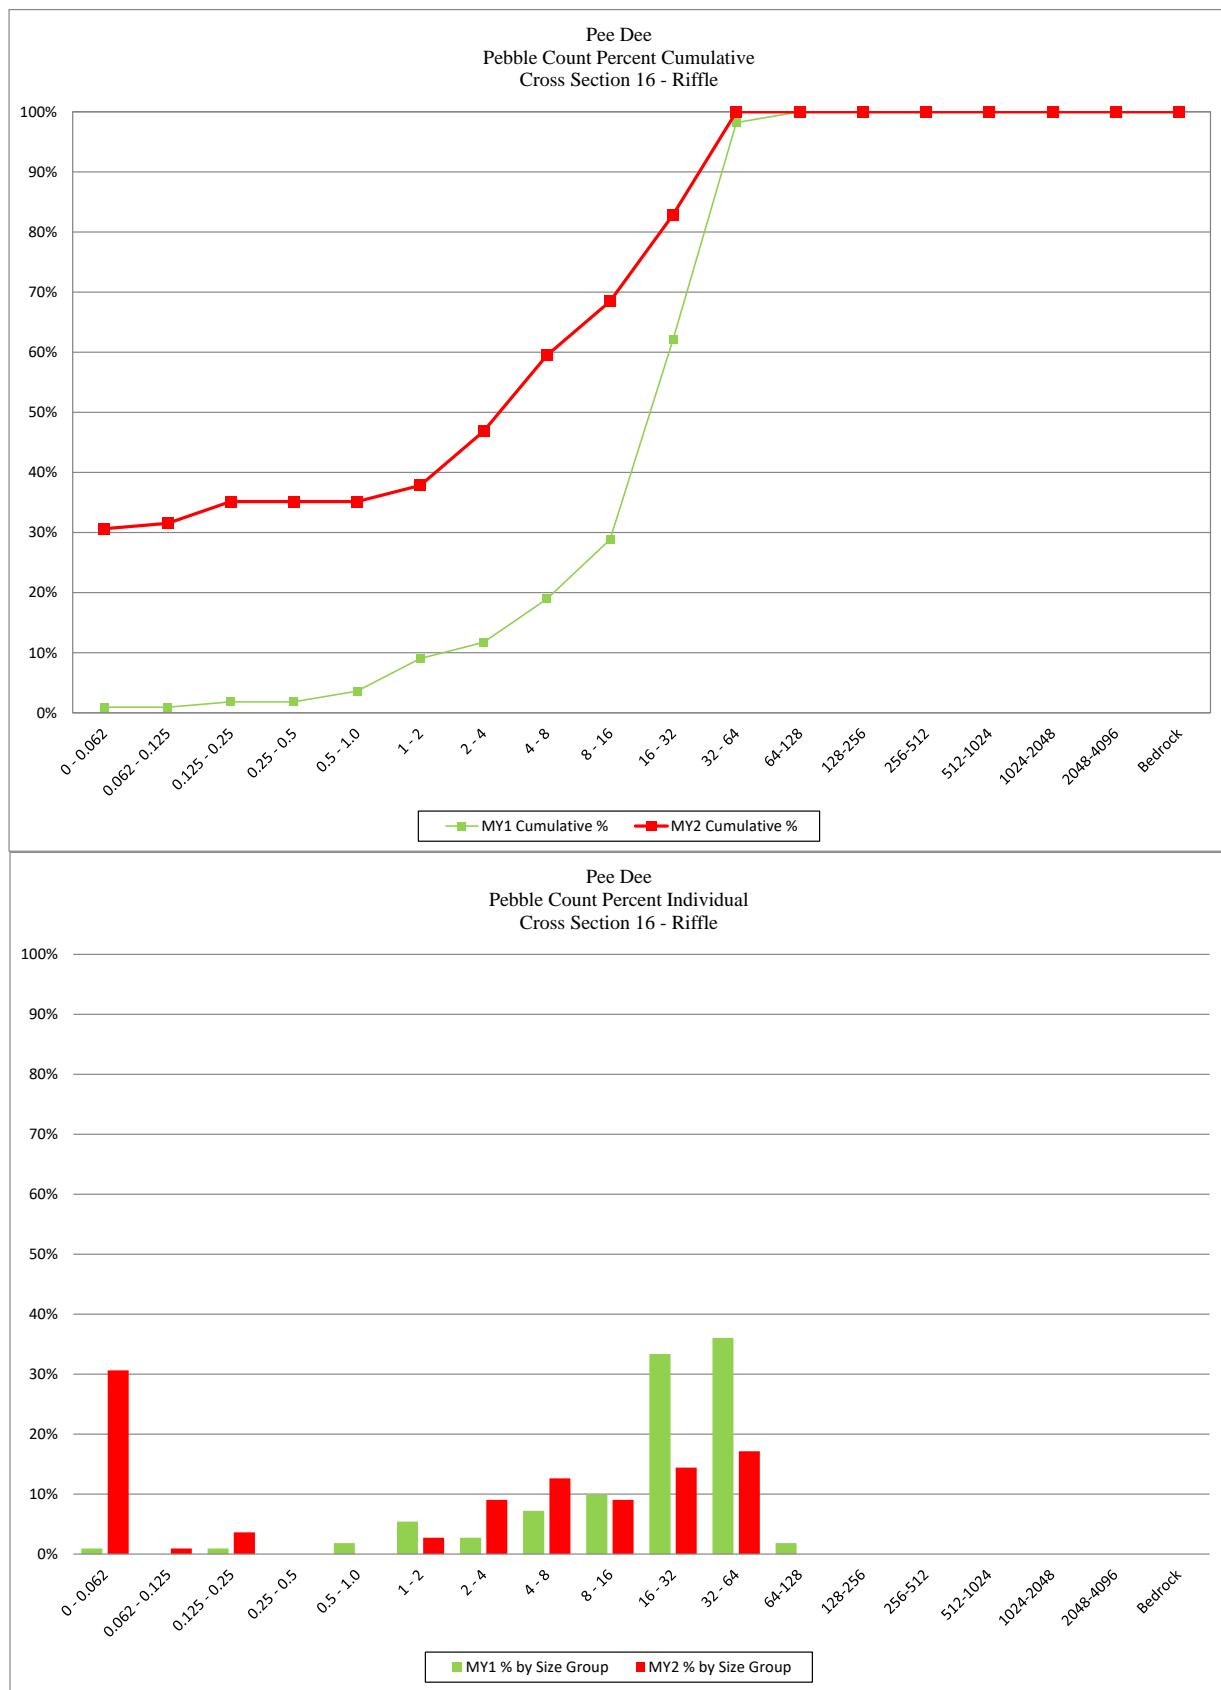


Pee Dee			
Cross Section 17 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	50	44.6%	45%
0.062 - 0.125	1	0.9%	46%
0.125 - 0.25	0	0.0%	46%
0.25 - 0.5	0	0.0%	46%
0.5 - 1.0	0	0.0%	46%
1 - 2	0	0.0%	46%
2 - 4	1	0.9%	46%
4 - 8	1	0.9%	47%
8 - 16	3	2.7%	50%
16 - 32	23	20.5%	71%
32 - 64	29	25.9%	96%
64-128	4	3.6%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	112	100%	100%
Summary Data			
	D50		16
	D84		41
	D95		60

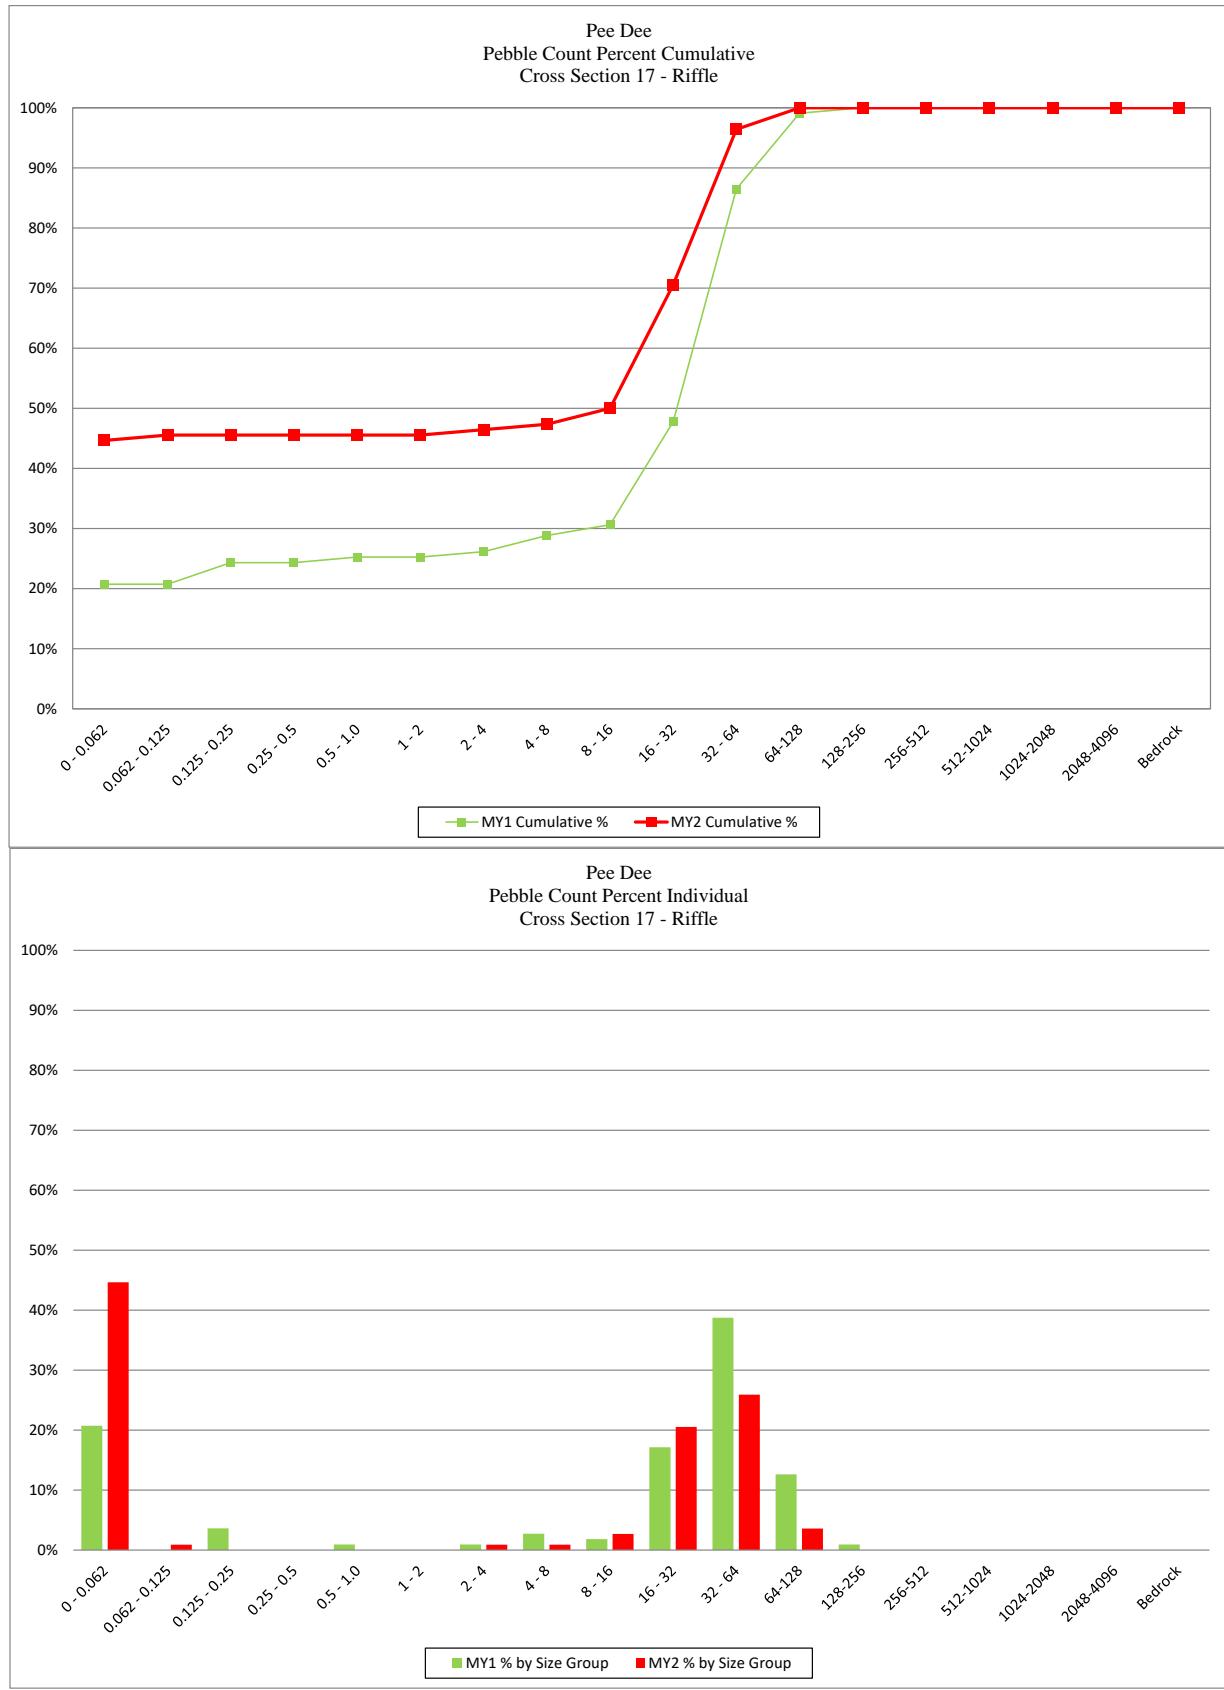

Pee Dee			
Cross Section 20 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	14	12.1%	12%
0.062 - 0.125	3	2.6%	15%
0.125 - 0.25	7	6.0%	21%
0.25 - 0.5	1	0.9%	22%
0.5 - 1.0	1	0.9%	22%
1 - 2	11	9.5%	32%
2 - 4	3	2.6%	34%
4 - 8	16	13.8%	48%
8 - 16	4	3.4%	52%
16 - 32	23	19.8%	72%
32 - 64	24	20.7%	92%
64-128	6	5.2%	97%
128-256	2	1.7%	99%
256-512	1	0.9%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	116	100%	100%
Summary Data			
	D50		9.9
	D84		43
	D95		92

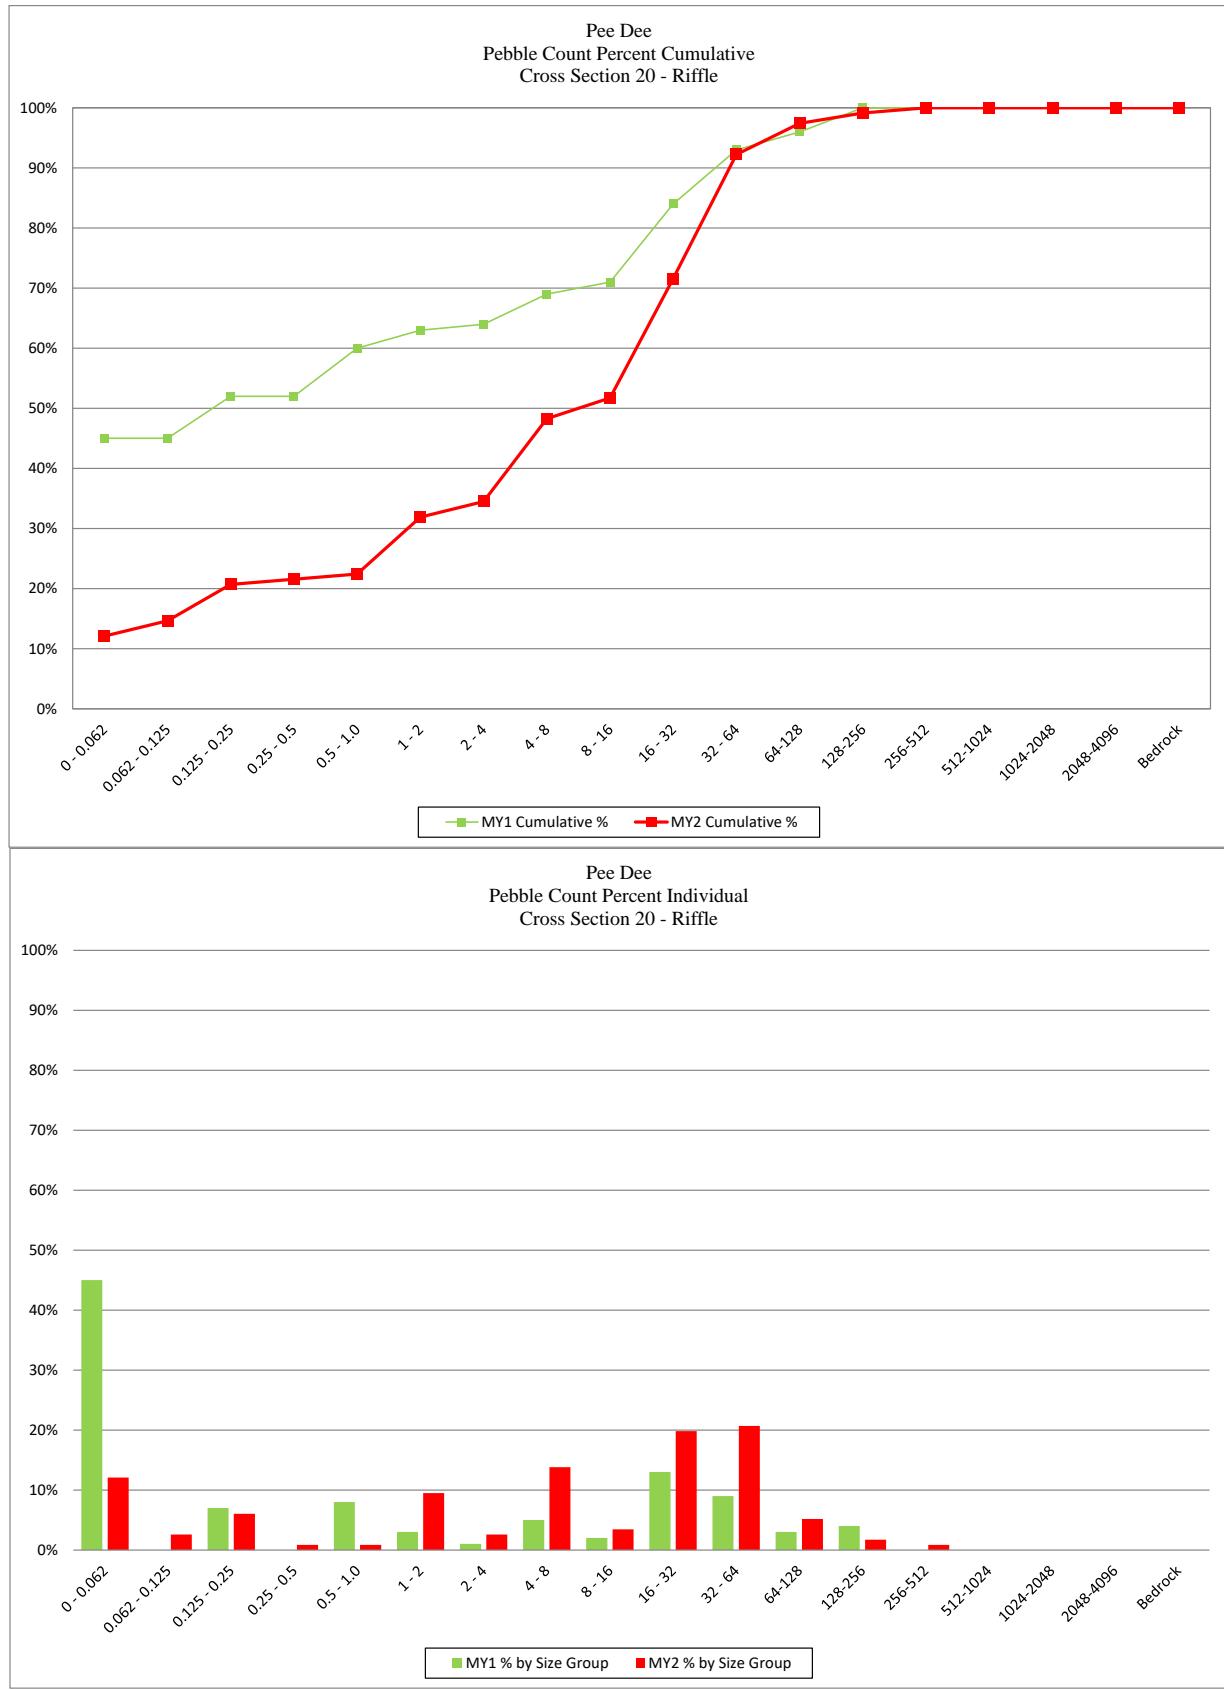

Pee Dee			
Cross Section 22 - Riffle			
Monitoring Year - 2016; MY2			
Bed Surface Material Particle Size Class (mm)	Number	% Individual	% Cumulative
0 - 0.062	12	11.1%	11%
0.062 - 0.125	1	0.9%	12%
0.125 - 0.25	0	0.0%	12%
0.25 - 0.5	0	0.0%	12%
0.5 - 1.0	0	0.0%	12%
1 - 2	0	0.0%	12%
2 - 4	0	0.0%	12%
4 - 8	1	0.9%	13%
8 - 16	9	8.3%	21%
16 - 32	37	34.3%	56%
32 - 64	34	31.5%	87%
64-128	14	13.0%	100%
128-256	0	0.0%	100%
256-512	0	0.0%	100%
512-1024	0	0.0%	100%
1024-2048	0	0.0%	100%
2048-4096	0	0.0%	100%
Bedrock	0	0.0%	100%
Total	108	100%	100%
Summary Data			
D50		30	
D84		59	
D95		93	

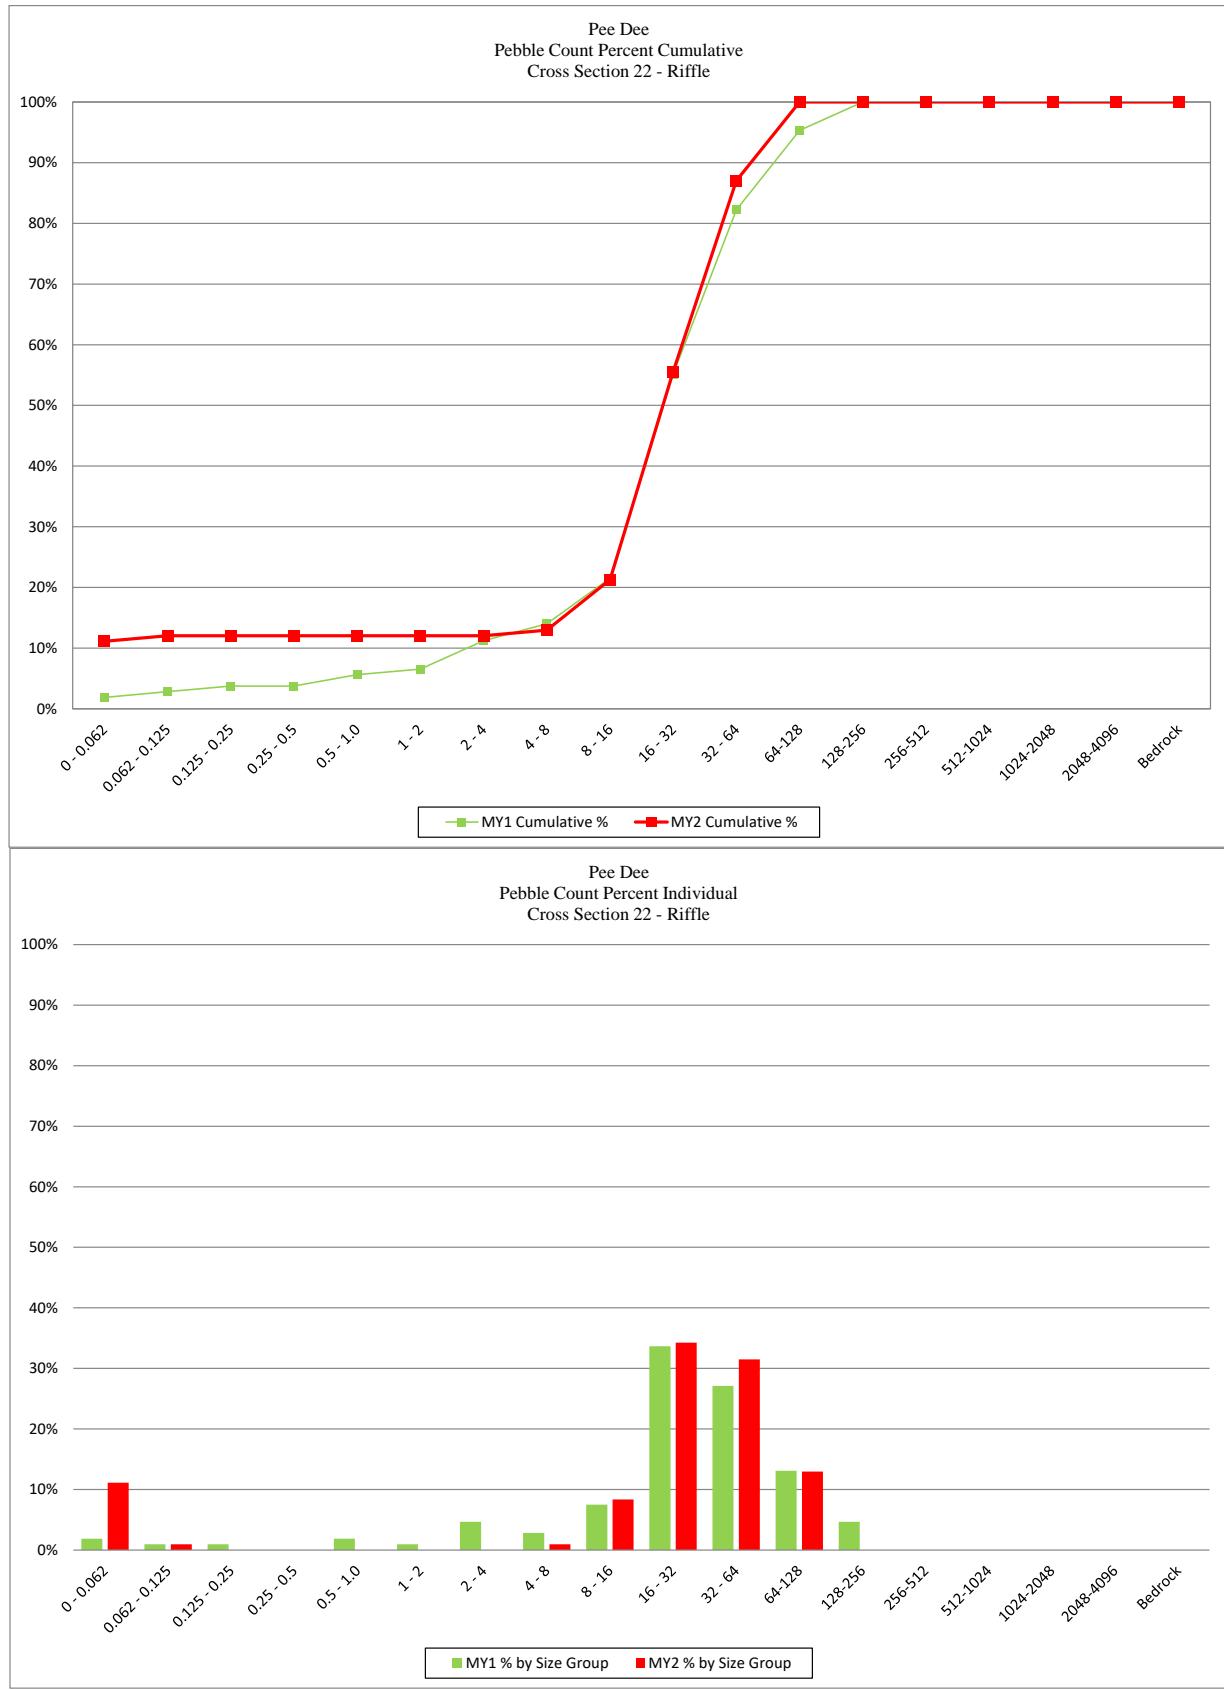

**Table 12. Pee Dee Stream Restoration Site
Bank Pin Arrays**

Cross Section #	Length of Exposed Pin (mm)				
	Upstream	At Cross Section	Downstream	Rate (mm/yr)	Rate (ft/yr)
1	0 ^B	0 ^B	6.35	2.15	0.01
5	0	0 ^B	0 ^B	0	0.00
13	0	0	0	0	0.00
18	0	0	0	0.0	0.00
19	19.05	19.05	0 ^B	12.70	0.04
21	0 ^B	0 ^B	50.80	16.93	0.06

Appendix E

Hydrologic Data

This Page Intentionally Left Blank

Table 13. Verification of Bankfull Events
Pee Dee Stream Restoration Site - Jerry Branch

Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
October - 2015	Unknown ¹	Crest Gauge	1.33	E Submission File
January - 2016	Unknown	Crest Gauge	1.50	E Submission File
June - 2016	Unknown	Crest Gauge	0.6	E Submission File
September - 2016	Unknown ²	Crest Gauge	0.48	E Submission File
October - 2016	Unknown ³	Crest Gauge	1.08	E Submission File

¹ Based on precipitation data, suggested date is 10/03/2015

² Based on precipitation date, suggested date is 09/02/2016

³ Based on precipitation data, suggested date is 10/08/2016

Table 13. Verification of Bankfull Events
Pee Dee Stream Restoration Site - Dale Branch

Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
October - 2015	Unknown ¹	Crest Gauge	0.95	E Submission File
January - 2016	Unknown	Crest Gauge	0.82	E Submission File
September - 2016	Unknown ²	Crest Gauge	0.21	E Submission File
October - 2016	Unknown ³	Crest Gauge	0.69	E Submission File

¹ Based on precipitation data, suggested date in 10/03/2015

² Based on precipitation date, suggested date is 09/02/2016

³ Based on precipitation data, suggested date is 10/08/2016

Table 13. Verification of Bankfull Events
Pee Dee Stream Restoration Site - Thompson Branch

Date of Data Collection	Date of Occurrence	Method	Feet Above Bankfull Elevation	Photo # (if available)
October - 2015	Unknown ¹	Crest Gauge	0.80	E Submission File
January - 2016	Unknown	Crest Gauge	0.65	E Submission File
June - 2016	Unknown	Crest Gauge	0.17	E Submission File
October - 2016	Unknown ³	Crest Gauge	0.88	E Submission File

¹ Based on precipitation data, suggested date in 10/03/2015

³ Based on precipitation data, suggested date is 10/08/2016

Jerry Branch – Photo Verification of Bankfull Events

January – 2016 Bankfull Photo Verification



June – 2016 Bankfull Photo Verification



September – 2016 Bankfull Photo Verification



October – 2016 Bankfull Photo Verification



Dale Branch – Photo Verification of Bankfull Events

January – 2016 Bankfull Photo Verification



September – 2016 Bankfull Photo Verification



October – 2016 Bankfull Photo Verification



Thompson Branch – Photo Verification of Bankfull Events

January – 2016 Bankfull Photo Verification



June – 2016 Bankfull Photo Verification



October – 2016 Bankfull Photo Verification



Figure 3. Daily Precipitation Totals for Troy, NC (CRONOS Station NUWH – Uwharrie)

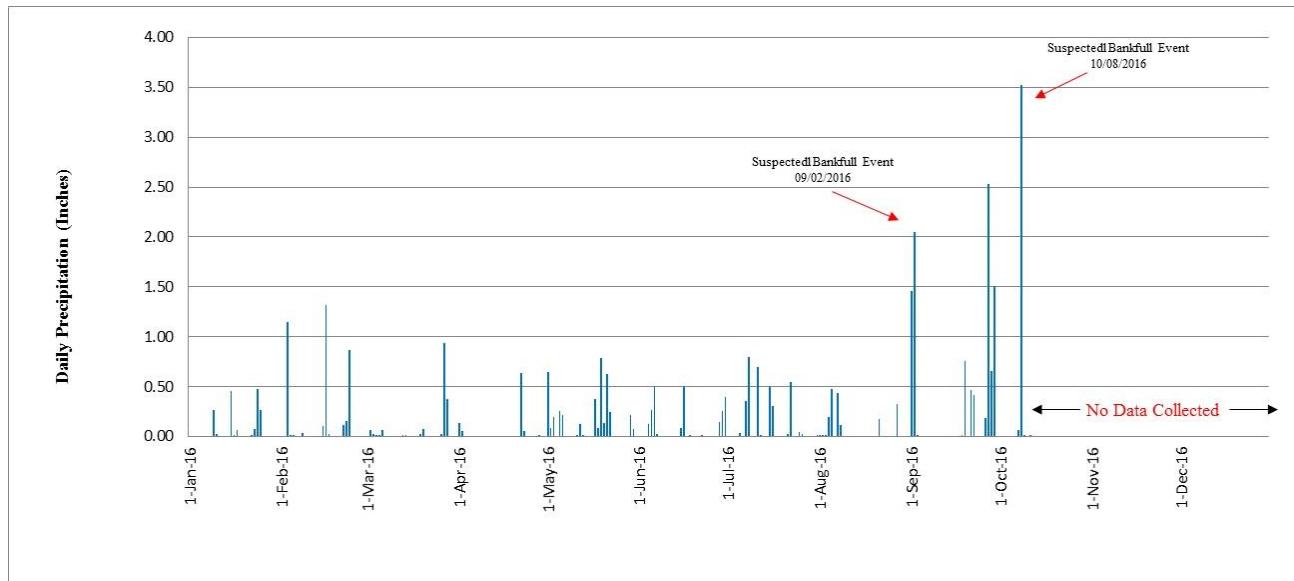


Figure 4. Monthly Precipitation Data Compared to the Average, 30th, and 70th Percentiles for Montgomery County

